

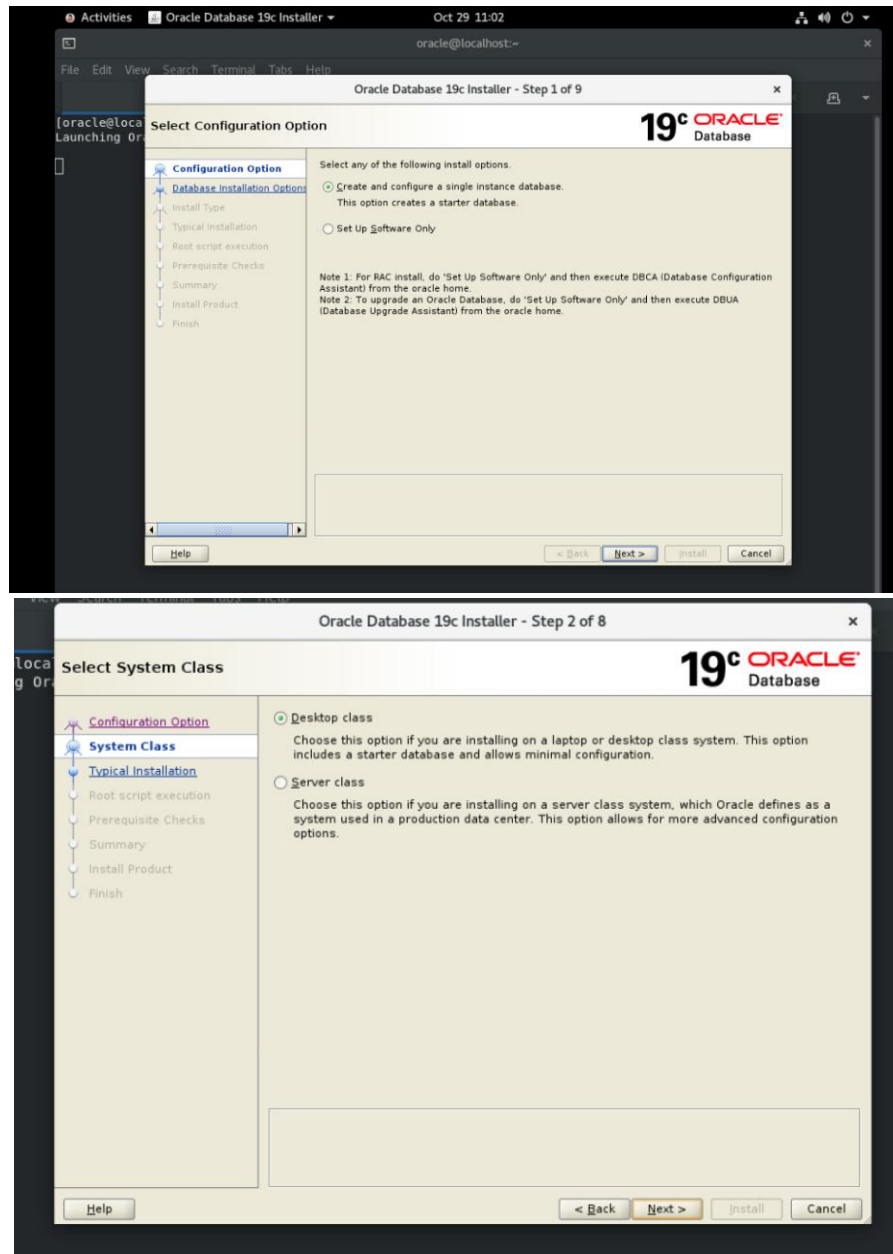



Instalacia

```
cd /u01/appl/oracle/product/19.0.0/dbhome_1
```

```
./runInstaller
```

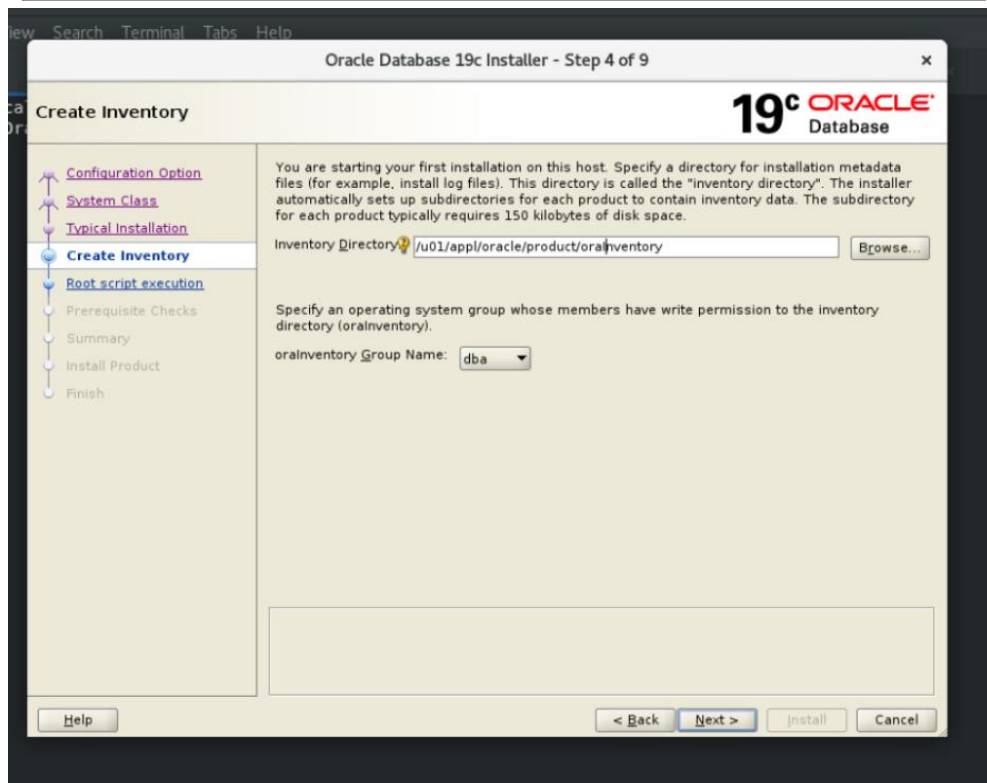

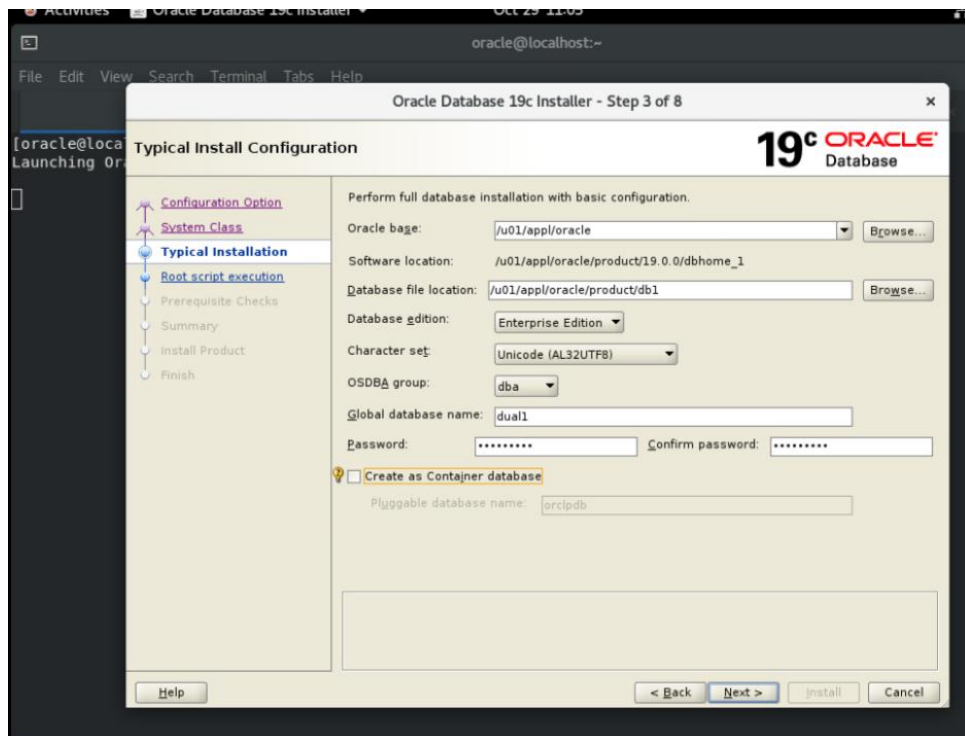

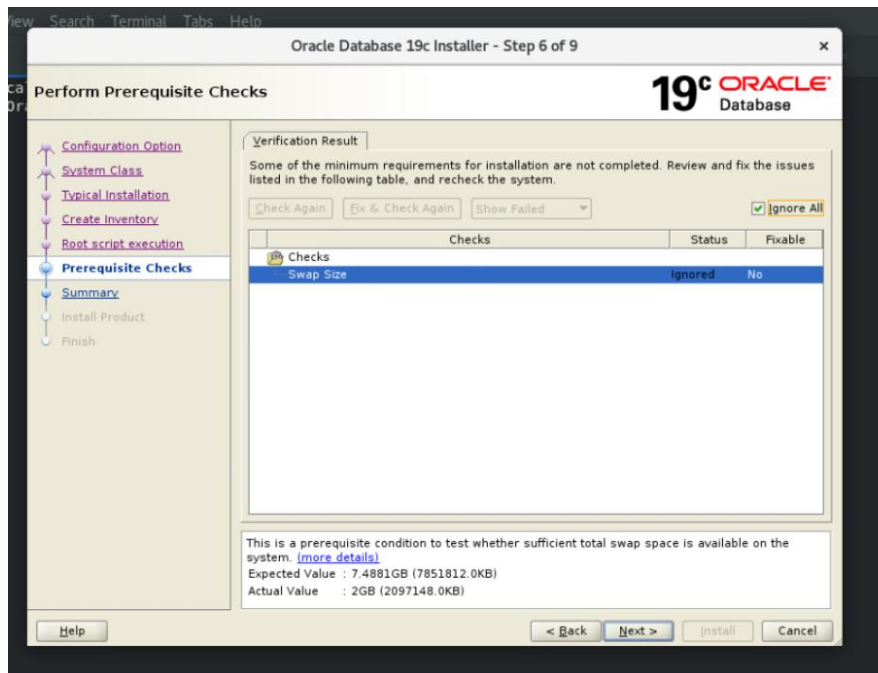

trž ako admin pomocou sudo alebo root vykoname skripty kt nam vyskocia dame tam done, pmt iba ides dalej a mas to

Praca s sql

Dostanie sa dnu

Nastavenie environmentu pre usera

```
[oracle@localhost ~]$ . oraenv
ORACLE_SID = [oracle] ? dual1
The Oracle base has been set to /u01/appl/oracle
```

Prihlasenie sa do konzole (bez usernamu ako systemovy a databazovy administrator)

```
[oracle@localhost ~]$ sqlplus / as sysdba

SQL*Plus: Release 19.0.0.0.0 - Production on Thu Nov 6 10:31:40 2025
Version 19.3.0.0.0

Copyright (c) 1982, 2019, Oracle. All rights reserved.

Connected to an idle instance.

SQL> █
```

Kontrola stavu

Kontrola stavu Oraclu (zistili sme že je offline)

```
SQL> select status from v$instance;
select status from v$instance
*
ERROR at line 1:
ORA-01034: ORACLE not available
Process ID: 0
Session ID: 0 Serial number: 0
```

Manipulacia s stavmi (zapnuta, vypnutie, nomount, mount...)

Naštartovanie DB servera

NOMOUNT → MOUNT → OPEN

```
SQL> startup;
ORACLE instance started.

Total System Global Area 2415917880 bytes
Fixed Size                  8899384 bytes
Variable Size               520093696 bytes
Database Buffers            1879048192 bytes
Redo Buffers                 7876608 bytes
Database mounted.
Database opened.
```

Startup open; = startup;

```
SQL> startup open;
ORA-01081: cannot start already-running ORACLE - shut it down first
SQL> alter database open;
alter database open
*
ERROR at line 1:
ORA-01507: database not mounted
```

Vypneme

```
SQL> shutdown;
Database closed.
Database dismounted.
ORACLE instance shut down.
```

shutdown; --> Waits for users/sessions to disconnect voluntarily, no new connections

shutdown transactional; --> Waits for active transactions to commit/rollback, rolls back uncommitted ones

shutdown immediate; --> Rolls back active transactions, disconnects sessions, closes cleanly

shutdown abort; --> Instant kill (like Ctrl+C), no cleanup

Startup nomount

OFFLINE -> NOMOUNT

Only creates the instance:

```
SQL> startup nomount;
ORACLE instance started.

Total System Global Area 2415917880 bytes
Fixed Size                  8899384 bytes
Variable Size               520093696 bytes
Database Buffers            1879048192 bytes
Redo Buffers                 7876608 bytes
```

Mountname db

nomount -> mount

```
SQL> alter database mount;

Database altered.
```

Dame do stavu open

mount -> online

```
SQL> alter database open;

Database altered.
```

Listener

Dostanie sa don

```
[oracle@localhost ~]$ lsnrctl

LSNRCTL for Linux: Version 19.0.0.0.0 - Production on 06-NOV-2025 10:50:19

Copyright (c) 1991, 2019, Oracle. All rights reserved.

Welcome to LSNRCTL, type "help" for information.

LSNRCTL> help
The following operations are available
An asterisk (*) denotes a modifier or extended command:

start          stop          status        services
servacl        version      reload        save_config
trace          spawn        quit          exit
set*           show*
```

Pozriet status

```
LSNRCTL> status
Connecting to (DESCRIPTION=(ADDRESS=(PROTOCOL=TCP)(HOST=localhost)(PORT=1521)))
TNS-12541: TNS:no listener
TNS-12560: TNS:protocol adapter error
TNS-00511: No listener
Linux Error: 111: Connection refused
Connecting to (DESCRIPTION=(ADDRESS=(PROTOCOL=IPC)(KEY=EXTPROC1521)))
TNS-12541: TNS:no listener
TNS-12560: TNS:protocol adapter error
TNS-00511: No listener
Linux Error: 111: Connection refused
```

Startnutie listenera

```
LSNRCTL> start
Starting /u01/appl/oracle/product/19.0.0/dbhome_1/bin/tnslsnr: please wait...

TNSLSNR for Linux: Version 19.0.0.0.0 - Production
System parameter file is /u01/appl/oracle/product/19.0.0/dbhome_1/network/admin/listener.ora
Log messages written to /u01/appl/oracle/diag/tnslsnr/localhost/listener/alert/log.xml
Listening on: (DESCRIPTION=(ADDRESS=(PROTOCOL=tcp)(HOST=localhost)(PORT=1521)))
Listening on: (DESCRIPTION=(ADDRESS=(PROTOCOL=ipc)(KEY=EXTPROC1521)))

Connecting to (DESCRIPTION=(ADDRESS=(PROTOCOL=TCP)(HOST=localhost)(PORT=1521)))
STATUS of the LISTENER
-----
Alias                LISTENER
Version              TNSLSNR for Linux: Version 19.0.0.0.0 - Production
Start Date           06-NOV-2025 10:52:14
Uptime               0 days 0 hr. 0 min. 0 sec
Trace Level          off
Security             ON: Local OS Authentication
SNMP                 OFF
Listener Parameter File /u01/appl/oracle/product/19.0.0/dbhome_1/network/admin/listener.ora
Listener Log File    /u01/appl/oracle/diag/tnslsnr/localhost/listener/alert/log.xml
Listening Endpoints Summary...
  (DESCRIPTION=(ADDRESS=(PROTOCOL=tcp)(HOST=localhost)(PORT=1521)))
  (DESCRIPTION=(ADDRESS=(PROTOCOL=ipc)(KEY=EXTPROC1521)))
The listener supports no services
The command completed successfully
```

Mozeme kludne aj odisti len do linuxu a cez takyto command urobime vec ako listener

```
LSNRCTL> exit
[oracle@localhost ~]$ lsnrctl stop

LSNRCTL for Linux: Version 19.0.0.0.0 - Production on 06-NOV-2025 10:54:10

Copyright (c) 1991, 2019, Oracle. All rights reserved.

Connecting to (DESCRIPTION=(ADDRESS=(PROTOCOL=TCP)(HOST=localhost)(PORT=1521)))
The command completed successfully
```