


TestMP.lab.

#requirements

- HW 2x VM server → konfig VM
 - vCPU - 2
 - vRAM – 4GB
 - vDisk – 50GB (separatni disk)
 - vNick – 1x
 - licencie = standard lic. 2x – win. Server
 - apps = ADDS
DNS
-

Nainstalovali sme daas a DNS

Dalej ideme promote the server to DC

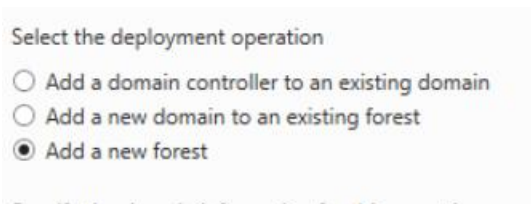

Toto test

DSRM - ak nevieme vratit SID a RID (tie riesia opravenia) a roby to ze umoznuje obnovenie z DB object

Sluzi na to aby sme isly do recovery modu s F8 basically

Nema GUI

Po vrateni usera z recoveri DB budu nezosynchrozinovane a defaultne by sa zese vymazal.
neauthoritative; restore(default)

F
authoritative,

Menovanie domain

1. Max 15 znakov
2. Velke a male pismena
3. Cisla
4. _ , -

