
Binary confusion matrices: adapted model

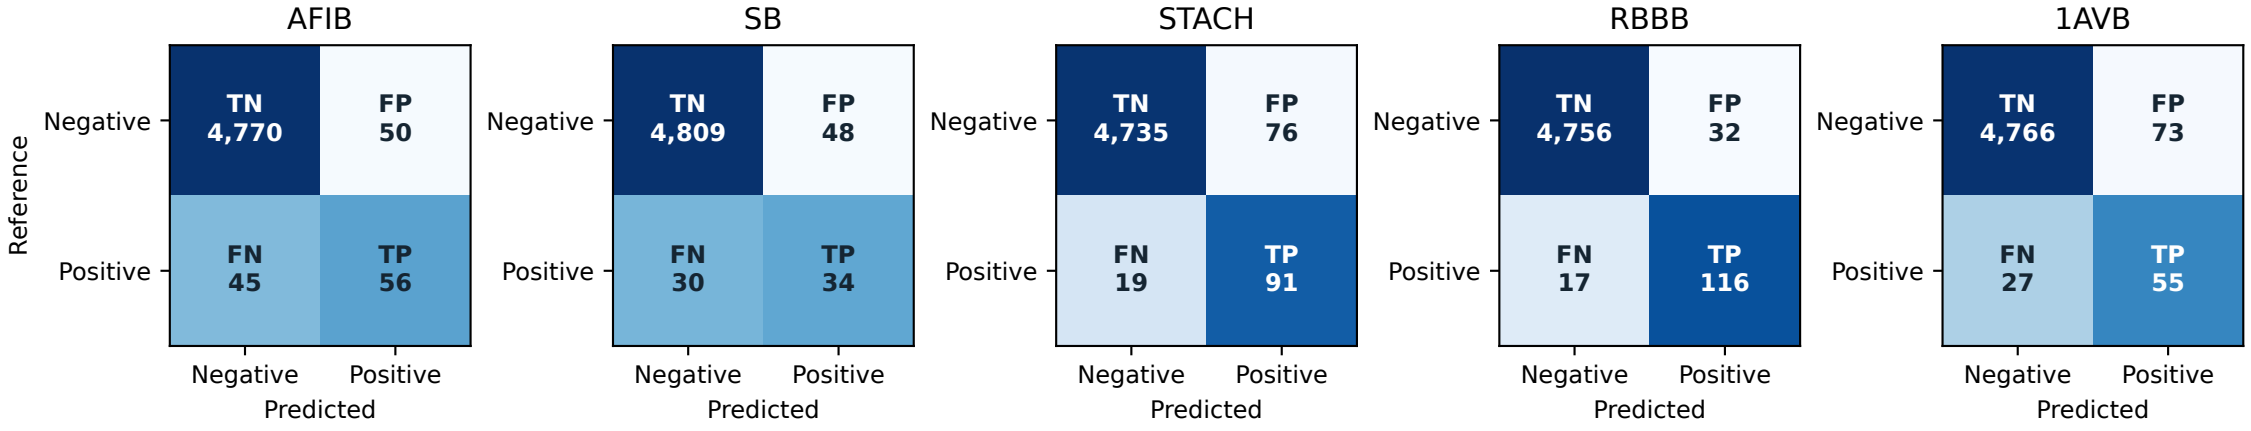

Raw counts per endpoint. Rows are publisher reference labels; columns are model calls.