

Object Oriented Programming with JAVA

Ms. Vaishalee Joishar, Cyber Security Trainer





CHAPTER-3



Control Statements

What we will learn

- ✓ If statement
- ✓ Two way if statement
- ✓ Nested if statement
- ✓ Switch statement
- ✓ Conditional Expression
- ✓ While loop
- ✓ Do-while loop
- ✓ For loop
- ✓ Nested loop
- ✓ Break and continue statement
- ✓ Common mathematical expression

Introduction- Decision Making

- Compiler executes program statements **sequentially**.
- Decision making statements are used to control the **flow of program** execution.
- It allows us to control whether a set of program statement should be executed or not.
- It **evaluates** condition or logical expression first and based on its **result** (true or false), the control is transferred to the particular statement.
- If result is **true** then it takes one path **else** it takes another path.

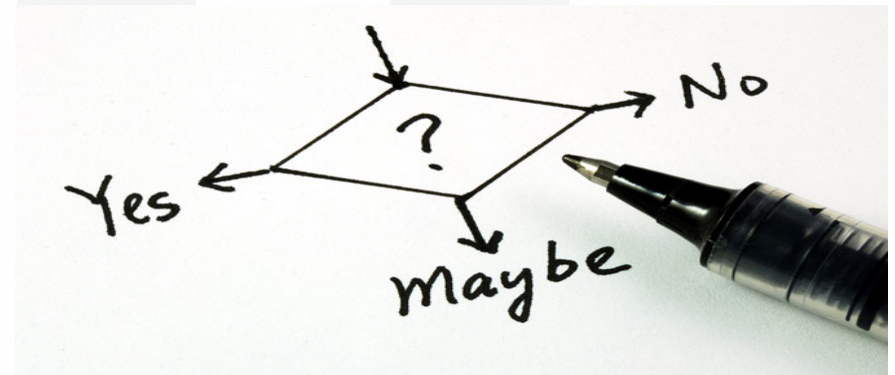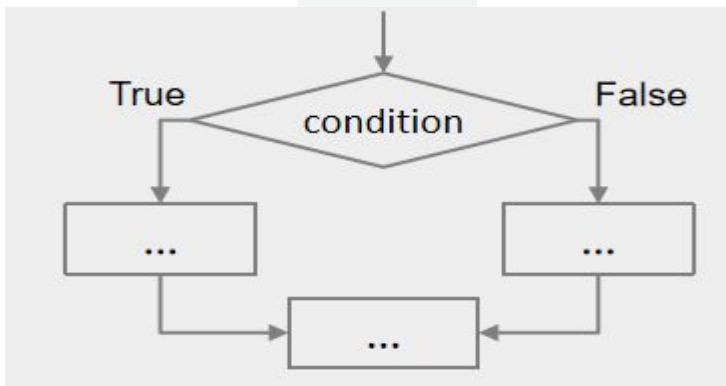

Decision Making Statements


Commonly used decision making statements are

- One way Decision: **if** (Also known as simple if)
- Two way Decision: **if...else**
- Multi way Decision: **if...else if...else if...else**
- Decision within Decision: **nested if**
- Two way Decision: **?: (Conditional Operator)**
- n-way Decision: **switch...case**



if Statement

- **if** statement is the most simple decision-making statement also known as **simple if**.
- An **if** statement consists of a **boolean** expression followed by one or more statements.
- **If** the expression is true, then 'statement-inside' will be executed, otherwise '**statement-inside**' is skipped and only '**statement-outside**' will be executed.
- It is used to decide whether a block of statements will be executed or not i.e if a certain condition is **true** then a block of statement is executed otherwise not.



```
if(condition)
{
    // Statements to execute if
    condition is true
}
```

WAP to print if a number is positive

```
1. import java.util.Scanner;  
2. class MyProgram{  
3.     public static void main (String[] args){  
4.         int x=10;  
5.         if(x > 0){  
6.             System.out.println("number is a positive");  
7.         }  
8.     }
```

- Write a program which reads two numbers and based on difference between it prints either of following message DIFFERENCE IS POSITIVE or DIFFERENCE IS NAGATIVE.




WAP to print if a number is odd or even

```
1. import java.util.*;
2. class Main{
3.     public static void main (String[] args){
4.         int x;
5.         Scanner sc = new Scanner(System.in);
6.         x = sc.nextInt();
7.         if( x % 2 == 1){
8.             System.out.println("number is a odd");
9.         }
10.        else{
11.            System.out.println("number is a even");
12.        }
13.    }
14. }
```



if...else - Two way Decision

- For a **simple if**, if a condition is **true**, the compiler executes a block of statements, if condition is **false** then it doesn't do anything.
- What if we want to do something when the condition is **false**? if...else is used for the same.
- If the '**expression**' is true then the 'statement-block-1' will get executed else 'statement-block-2' will be executed.

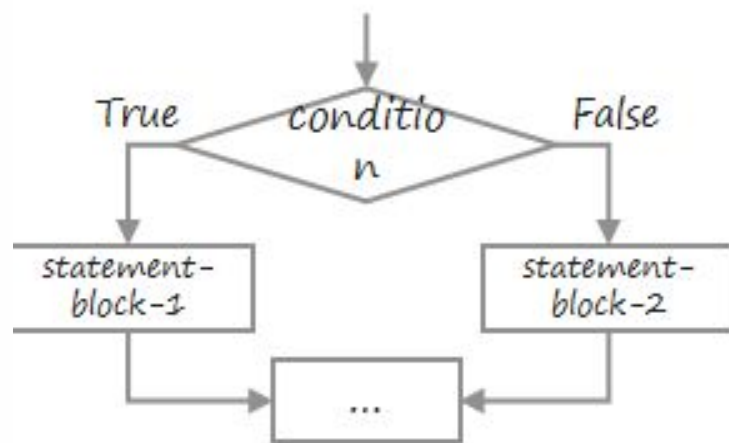

```
if(condition)
{
    // statement-block-1
    // to execute if condition is
    true
}
else
{
    // statement-block-2
    // to execute if condition is
    false
}
```



WAP to print if a number is odd or even

```
1. import java.util.*;
2. class MyProgram{
3.     public static void main (String[] args){
4.         int x;
5.         Scanner sc = new Scanner(System.in);
6.         x = sc.nextInt();
7.         if( x % 2 == 1 ){
8.             System.out.println("number is a odd");
9.         }
10.        else{
11.            System.out.println("number is a even");
12.        }
13.    }
```

Exercise

1. Any year is entered through the keyboard, write a program to determine whether the year is leap or not.
2. Write a program to check whether a triangle is valid or not, when the three angles of the triangle are entered through the keyboard. A triangle is valid if the sum of all the three angles is equal to 180 degrees.



if...else if...else -Multi Way Decision

- **if...else if...else** statement is also known as **if-else-if ladder** which is used for multi way decision making.
- It is **used** when there are more than **two different conditions**.
- It tests conditions in a **sequence**, from **top to bottom**.
- If first condition is **true** then the associated block with if statement is executed and rest of the conditions are **skipped**.
- If condition is **false** then the **next if** condition will be **tested**, if it is **true** then the associated block is executed and rest of the conditions are skipped. Thus it **checks** till **last condition**.
- Condition is **tested only** and only when all previous conditions are **false**.
- The **last else** is the **default block** which will be executed if none of the conditions are **true**.
- The last else is **not mandatory**. If there are no default statements then it can be **skipped**.

Cont...

Syntax:-

```
if(condition 1)
{
    statement-block1;
}


else if(condition 2)
{
    statement-block2;
}

else if(condition 3)
{
    statement-block3;
}

else
    default-statement;
```


if-else-if ladder

```
if(condition 1)
{
    statement-block1;
}
else if(condition 2)
{
    statement-block2;
}
else if(condition 3)
{
    statement-block3;
}
else if(condition 4)
{
    statement-block4;
}
else
    default-
statement;
```

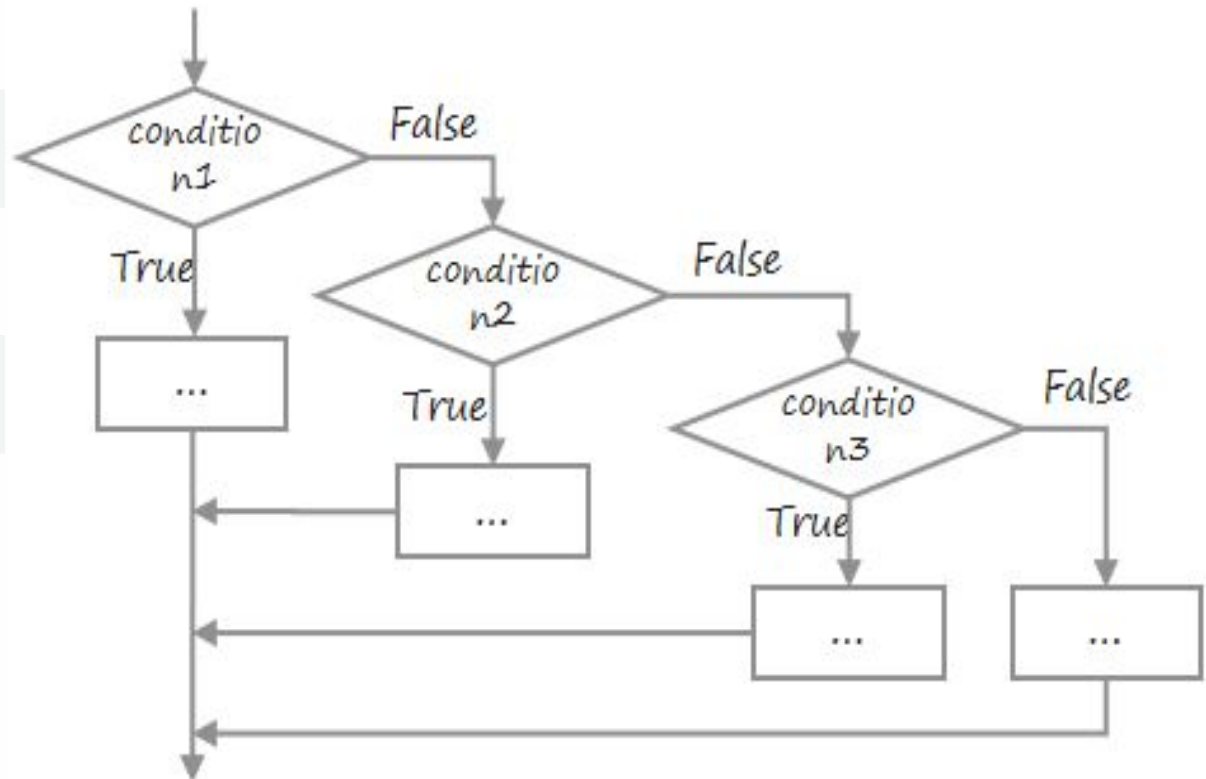



WAP to print if a number is zero or positive or negative

```
1. import java.util.*;
2. class MyProgram{
3.     public static void main (String[] args){
4.         int x;
5.         Scanner sc = new Scanner(System.in);
6.         x = sc.nextInt();
7.         if(x > 0){
8.             System.out.println(" number is a positive");
9.         }
10.        else if(x < 0) {
11.            System.out.println(" number is a negative");
12.        }
13.        else{
14.            System.out.println(" number is a zero");
15.        }
16.    }
```



WAP to print day name from day number

```
1.  import java.io.*;
2.  import java.util.Scanner;
3.  public class Demo {
4.  public static void main(String[]
   args) {
5.  Scanner sc = new
   Scanner(System.in);
6.      int d = sc.nextInt();
7.      if (d == 1){
8.
9.  System.out.println("Monday");
10.     }
11.     else if (d == 2){
12.  System.out.println("Tuesday");
13.     }
14.     else if (d == 3) {
15.  System.out.println("Wednesday"); }
16.     else if (d == 4) {
17.  System.out.println("Thursday");
18.     }
19.     else if (d == 5) {
20.  System.out.println("Friday"); }
21.     else if (d == 6) {
22.  System.out.println("Saturday"); }
23.     else if (d == 7) {
24.  System.out.println("Sunday"); }
25.     else {
26.  System.out.println("Out Of Range");
27.     }
28.     sc.close();
29. }
```



if-else statement

```
1.int marks = 65;
2.if (marks < 60) {
3.    System.out.println("fail");
4.} else if (marks >= 60 && marks < 80) {
5.    System.out.println("B grade");
6.} else if (marks >= 80 && marks < 90) {
7.    System.out.println("A grade");
8.} else if (marks >= 90 && marks < 100) {
9.    System.out.println("A+ grade");
10.} else {
11.    System.out.println("Invalid!");
12.}
```

Nested If

- A **nested if** is an if statement that is the target of another if statement.
- **Nested if** statements mean an if statement **inside** another if statement.
- The statement connected to the nested if statement is only executed when -
 - condition of **outer if statement is true**, and
 - condition of the **nested if statement is also true**.
- Note: There could be an **optional else** statement associated with the **outer if statement**, which is only executed when the condition of the outer if statement is evaluated to be **false** and in this case, the condition of nested if condition won't be checked at all.

Cont...

```
if(condition 1)
{
    if(condition 2)
    {
        nested-block;
    }
    else
    {
        nested-block;
    }
}
//if
else if(condition 3)
{
    statement-block3;
}
else(condition 4)
{
    statement-block4;
}
```


Cont...

- We can also use if/else if statement inside another if/else if statement, this is known as nested if statement.

```
import java.util.Scanner;
```

```
public class Main {  
    public static void main(String[]  
args) {  
        Scanner scanner = new  
Scanner(System.in);  
  
        // Check the username  
System.out.print("Enter username:");  
String username =  
scanner.nextLine();  
  
        if (username.equals("admin")) {  
            // Check the password  
            System.out.print("Enter  
password: ");
```

```
String password = scanner.nextLine();  
  
if (password.equals("password123"))  
{ System.out.println("Login  
successful!");  
} else {  
    System.out.println("Incorrect  
password.");  
}  
} else {  
    System.out.println("Invalid  
username.");  
}  
scanner.close();  
}  
}
```



Exercise

In a company an employee is paid as under:

- If his basic salary is less than Rs. 1500, then HRA = 10% of basic salary and DA = 90% of basic salary.
- If his salary is either equal to or above Rs. 1500, then HRA = Rs. 500 and DA = 98% of basic salary.
- Employee's salary is input through the keyboard, write a program to find his gross salary.



switch...case (n-way Decision)

- **switch...case** is a multi-way decision making statement.
- It is similar to **if-else-if** ladder statement.
- It executes one statement from multiple conditions.

Syntax:

switch (expression)

{

case constant 1:

 // Statement-1

 break;

case constant 2:

 // Statement-2

 break;

default:

 // Statement-default

// if none of the above case matches then this block would be executed.

}



Switch...case

- switch statement executes one statement from multiple conditions. It is like if-else-if ladder statement.

```
public class SwitchExampleDemo {  
    public static void main(String[] args)  
    {  
        int number = 20;  
        switch (number) {  
            case 10:  
                System.out.println("10");  
                break;  
            case 20:  
                System.out.println("20");  
                break;  
            default:  
                System.out.println("Not 10 or 20"); } } }
```

Exercise

- Write a menu driven program that allows user to enters five numbers and then choose between finding the smallest, largest, sum or average. Use switch case to determine what action to take. Provide error message if an invalid choice is entered.



Points to remember for switch...case



- The condition in the switch should result in a **constant value** otherwise it would be **invalid**.
- In some languages, switch statements can be used for **integer values** only.
- **Duplicate** case values are not allowed.
- The value for a case must be of the **same data type** as the variable in the switch.
- The value for a case must be a **constant**.
- **variables are not allowed** as an argument in switch statement.
- The break statement is used inside the switch to **terminate** a statement **sequence**.
- The **break** statement is **optional**, if eliminated, execution will continue on into the **next case**.
- The **default** statement is **optional** and can appear **anywhere** inside the switch block.

Exercise

- Write a program to find maximum no from given 3 no.
- The marks obtained by a student in 5 different subjects are input through the keyboard.
 - The student gets a division as per the following rules:
 - Percentage above or equals to 60-first division
 - Percentage between 50 to 59-second division
 - Percentage between 40 and 49-Third division
 - Percentage less than 40-fail
 - Write a program to calculate the division obtained by the student.
- Write a Java program that takes a number from the user and displays the name of the weekday accordingly (For example if user enter 1 program should return Monday) .

Introduction to loop

- Sometimes we need to repeat certain actions **several times** or **till** the some **criteria** is satisfied.
- Loop constructs are used to **iterate** a block of statements several times.
- Loop constructs repeatedly execute a block of statements for a fixed number of times or till some condition is satisfied

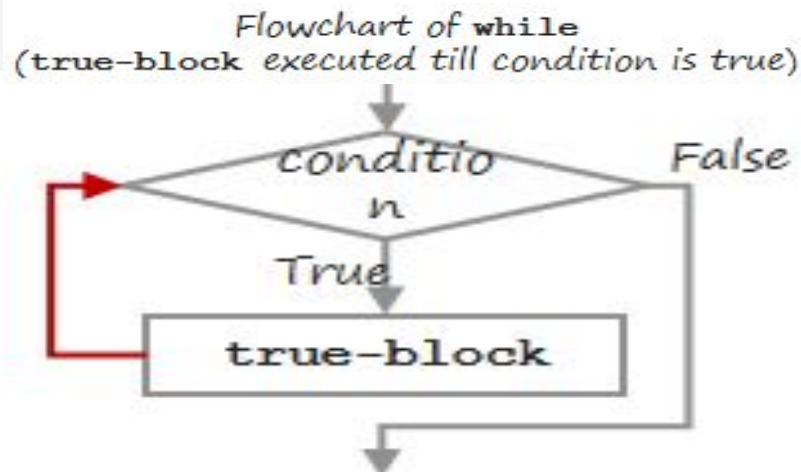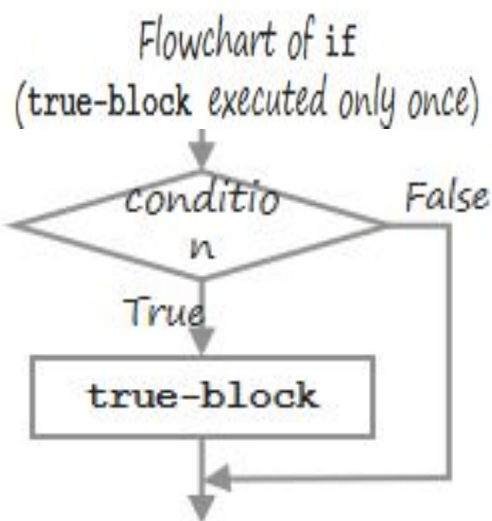




while- Entry Controlled Loop

- **while** is an entry controlled loop.
- It executes a block of statements till the condition is **true**.

```
while(condition)
{
    // true-block
}
```

```
int i = 1;
while (i <= 5)
{
    System.out.println(i);
    i++;
}
```

Flowchart of **while**
(**true-block** executed till
condition is true)

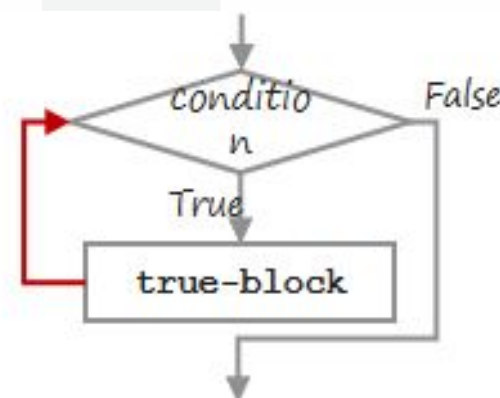



While Loop

- while loop is used to iterate a part of the program several times. while is entry control loop.
- If the number of iteration is not fixed, it is recommended to use while loop.

//code will print 1 to 9

```
public class WhileLoopDemo {  
    public static void main(String[] args) {  
        int number = 1;  
        while(number < 10) {  
            System.out.println(number);  
            number++;  
        }  
    }  
}
```



WAP to print odd numbers between 1 to n

```
1. import java.util.*;
2. class WhileDemo{
3.     public static void main (String[] args){
4.         int n,i=1;
5.         Scanner sc = new Scanner(System.in);
6.         System.out.print("Enter a number:");
7.         n = sc.nextInt();
8.         while(i <= n){
9.             if(i%2==1)
10.                System.out.println(i);
11.             i++;
12.         }
13.     }}
```

Output

```
Enter a number:10
1
3
5
7
9
```



WAP to print factors of a given number

```
1.  import java.util.*;
2.  class WhileDemo{
3.  public static void main (String[] args){
4.  int i=1,n;
5.  Scanner sc = new Scanner(System.in);
6.  System.out.print("Enter a Number:");
7.  n = sc.nextInt();
8.  System.out.print(" Factors:");
9.  while(i <= n){
10.     if(n%i == 0)
11.         System.out.print(i +",");
12.     i++;
13. }
14. }}
```

Output

```
Enter a Number:25
Factors:1,5,25
```


Exercise:while

1. WAP to print multiplication table using while loop
2. Write a program that calculates and prints the sum of the even integers from 1 to 10.

PU



for -Entry Controlled Loop

- **for** is an entry controlled loop
- Statements inside the body of **for** are repeatedly executed till the condition is true

```
for (initialization; condition; increment/decrement){  
    // statements  
}
```

- The **initialization** statement is executed only once, at the beginning of the loop.
- Then, the **condition** is evaluated.
 - If the condition is **true**, statements inside the body of for loop are executed
 - If the condition is **false**, the for loop is terminated.
- Then, **increment / decrement** statement is executed
- Again the **condition** is evaluated and so on so forth till the condition is true.



For Loop

- for loop is used to iterate a part of the program several times.
- If the number of iteration is fixed, it is recommended to use for loop.

//code will print 1 to 9

```
public class ForLoopDemo {  
    public static void main(String[] args)  
    {  
        for(int number=1;number<10;number++)  
        {  
            System.out.println(number);  
        }  
    }  
}
```



WAP to print odd numbers between 1 to n

```
1.  import java.util.*;
2.  class MyProgram{
3.  public static void main (String[] args){
4.      int i=1;
5.      Scanner sc = new Scanner(System.in);
6.      n = sc.nextInt();
7.      for(i=1; i<=n; i++) {
8.          if(i%2==1)
9.              System.out.println(i);
10.         }//for
11.     }//
12. }
```



WAP to print factors of a given number

```
1.  import java.util.*;
2.  class MyProgram{
3.  public static void main (String[] args){
4.      int i=1;
5.      Scanner sc = new Scanner(System.in);
6.      n = sc.nextInt();
7.      for(i=1; i<=n; i++){
8.          if(n%i == 0)
9.              System.out.println(i);
10.     }
11. }
12. }
```

- Write a program to print average of n numbers.
- Write a program that calculates and prints the sum of the even integers from 1 to 10.

- Write a program to print average of n numbers.
- Write a program that calculates and prints the sum of the even integers from 1 to 10.




do...while-Exit Controlled Loop


- **do...while** is an exit controlled loop.
- Statements inside the body of **do...while** are repeatedly executed till the condition is true.
- **while** loop executes zero or more times, **do...while** loop executes one or more times.

```
do
{
    // true-block
}
while(condition) ;
```

Flowchart of while

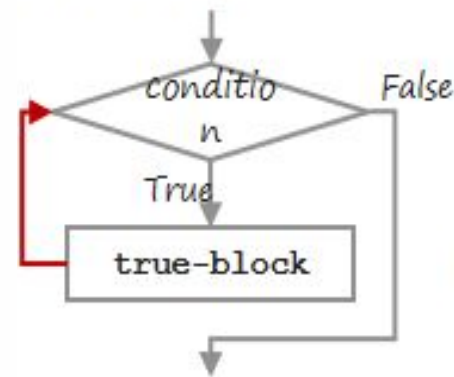

Flowchart of do...while

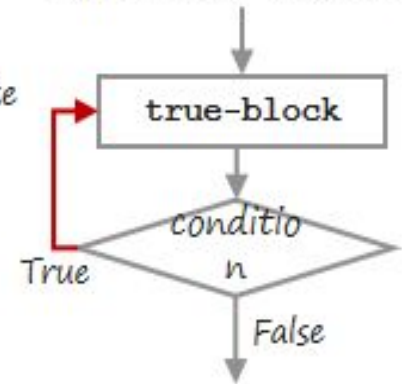



Do-While Loop -(exit control loop)

- do-while loop is executed at least once because condition is checked after loop body.

```
//code will print 1 to 9
public class DoWhileLoopDemo {
    public static void main(String[] args) {
        int number = 1;
        do {
            System.out.println(number);
            number++;
        }while(number < 10) ;
    }
}
```

WAP to print 1 to 10 using do-while loop

```
1.  import java.util.*;
2.  class MyProgram{
3.  public static void main (String[] args){
4.  int i=1;
5.  do{
6.      System.out.println(i);
7.      i++;
8.  }while(i <= 10);
9.  }
10. }
```

continue

- Sometimes, it is required to skip the remaining statements in the loop and continue with the next iteration.
- **continue** statement is used to skip remaining statements in the loop.
- **continue** is keyword.



WAP to calculate the sum of positive numbers.

```
1.import java.util.*;
2.class ContinueDemo{
3.public static void main(String[] args) {
4.int a,n,sum=0;
5.Scanner sc = new Scanner(System.in);
6.n = sc.nextInt();
7.for(int i=0;i<n;i++){
8. a = sc.nextInt();
9. if(a<0){
10.     continue;
11.     System.out.println("a="+a);//error:unreachable statement
12. }//if
13. sum=sum+a;
14. }//for
15. System.out.println("sum="+sum);
16. }
17. }
```

Break

- Sometimes, it is required to early exit the loop as soon as some situation occurs.
- E.g. searching a particular number in a set of 100 numbers. As soon as the number is found it is desirable to terminate the loop.
- **break** statement is used to jump out of a loop.
- **break** statement provides an early exit from **for**, **while**, **do...while** and **switch** constructs.
- **break** causes exit from the innermost loop or switch.
- **break** is keyword.



Cont...

WAP to calculate the sum of given numbers. User will enter -1 to terminate.


```
1. import java.util.*;
2. class BreakDemo{
3. public static void main (String[] args){
4.     int a, sum=0;
5.     System.out.println("enter numbers_ enter -1 to break");
6.     Scanner sc = new Scanner(System.in);
7.     while(true){
8.         a = sc.nextInt();
9.         if(a==-1)
10.            break;
11.         sum=sum+a;
12.     }//while
13.     System.out.println("sum="+sum);
14. }
15. }
```



Types of loops

Entry Control Loop

```
int i=1;
while(i<=10)
{
    i++;
}
```

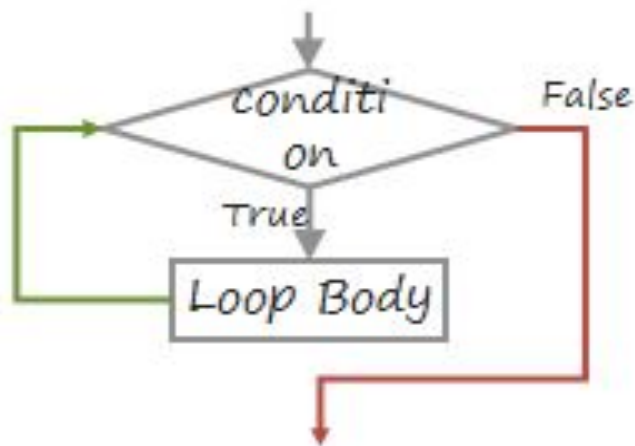


Entry Control Loop

```
int i;
for(i=1;i<=10;i++)
{
    i++;
}
```


Exit Control Loop

```
int i=1;
do
{
    i++;
}
while(i<=10);
```

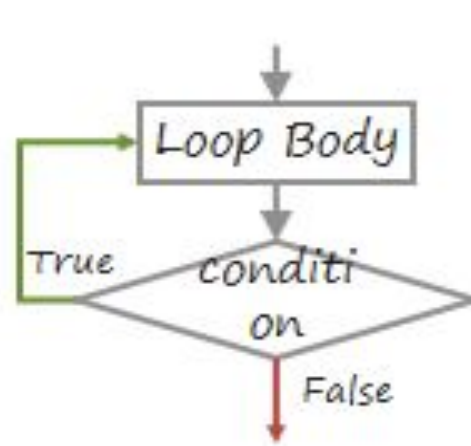

Virtual Loop

```
int i=1;
p: i++;
if(i<=10)
    goto p;
```

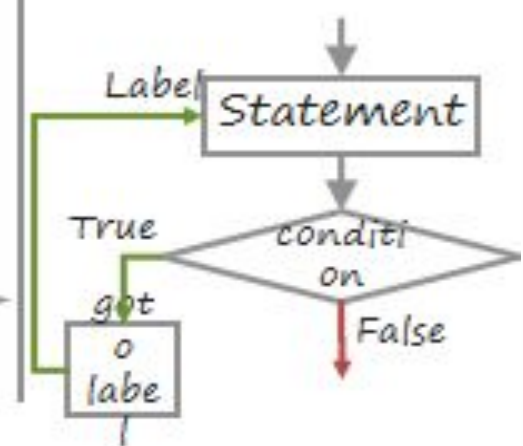



WAP to print given pattern (nested loop)

```
1. class PatternDemo{
2.     public static void main(String[] args) {
3.         int n=5;
4.         for(int i=1;i<=n;i++){
5.             for(int j=1;j<=i;j++){
6.                 System.out.print("*");
7.             }//for j
8.             System.out.println();
9.         }//outer for i
10.    }
11. }
```

```
*
**
***
****
*****
```




WAP to print given pattern (nested loop)

```
1. class PatternDemo{
2.     public static void main(String[] args) {
3.         int n=5;
4.         for(int i=1;i<=n;i++){
5.             for(int j=1;j<=i;j++){
6.                 System.out.print(j+"\t");
7.             }//for j
8.             System.out.println();
9.         }//outer for i
10.    }
11. }
```

1				
1	2			
1	2	3		
1	2	3	4	
1	2	3	4	5

Programs to perform (Looping Statements)

- Write a program to print first n odd numbers.
- Write a program to check that the given number is prime or not.
- Write a program to draw given patterns.

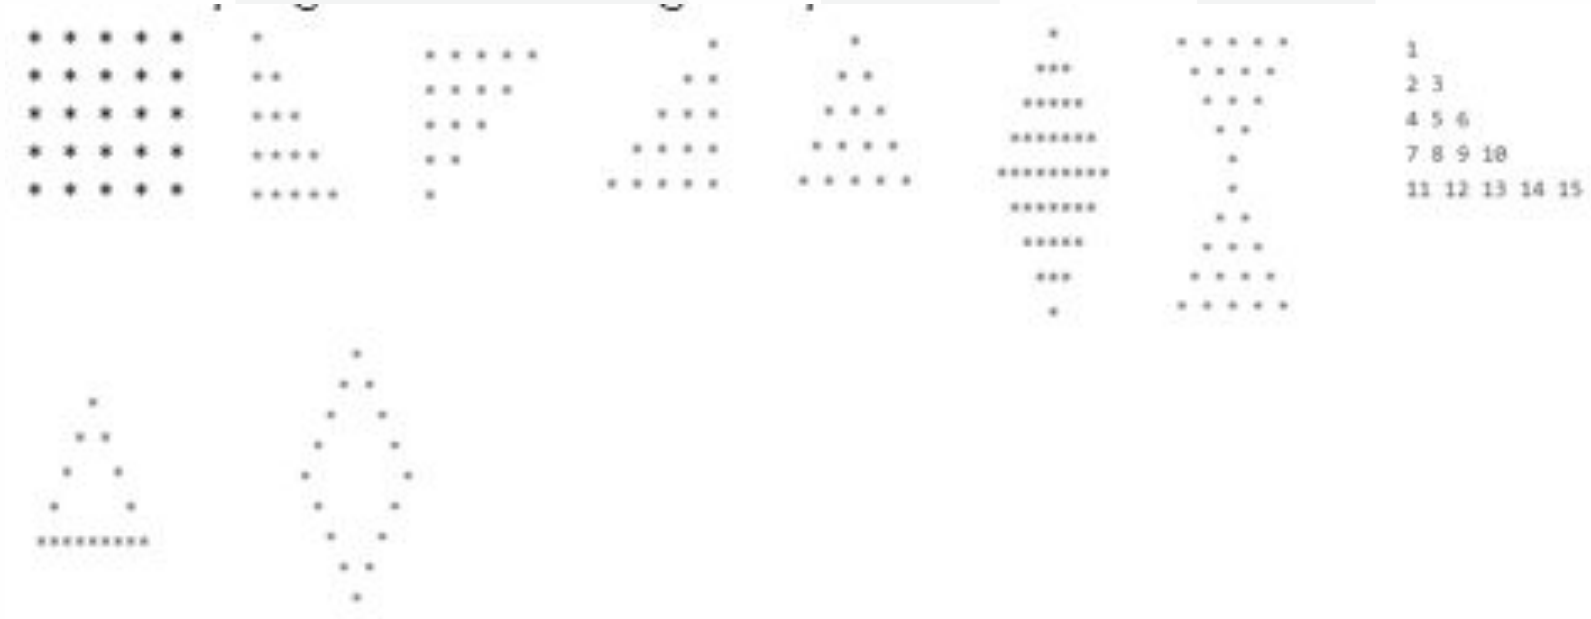

References

1. <https://www.w3schools.com/java/>
2. <https://www.javatpoint.com/java-tutorial>
3. <https://www.geeksforgeeks.org/java/>
4. Black Book Java
5. <https://youtu.be/bm0OyhwFDuY?si=7WdQ3LOOLQi5ll8V>

× ○ DIGITAL LEARNING CONTENT



Parul[®] University



www.paruluniversity.ac.in