

Exploring Virtualization Efficiency, Security Enhancements, and Scripting for File and Operating Systems*

Matus ILLITH

Student ID: 2325478

Robert Gordon University Aberdeen

School of Computing, Engineering and Technology

`m.illith@rgu.ac.uk`

02.10.2024

*CM2134 Assessment

Contents

1	Virtualisation Efficiency Benefits	3
1.1	Understanding virtualization	3
1.2	Benefits of Virtualization	4
1.3	Cost of virtualization and energy efficiency	4
1.3.1	Cost of virtualization	4
1.3.2	Direct cost	5
1.3.3	Energy efficiency	6
2	Security Issues	8
2.1	Operating system security issues	8
2.2	Virtualization security issues	9
2.3	Virtualization threat assessment	9
2.3.1	Most common security risks in virtualized environment .	10
3	File System Scripting	12
3.1	Testing	14
3.2	Whole Script	15
4	Operating System Scripting	16

1 Virtualisation Efficiency Benefits

1.1 Understanding virtualization

Virtualization in simple terms is the sharing of physical resources between multiple virtual machines. You can think of it as a "computer within a computer, implemented in software." [12] This is done by creating an abstraction layer over the physical hardware of the host machine so multiple computers (Virtual Machines) can run on one hardware. They can also share resources such as network cards, CPU, memory, Physical storage and others. The virtual machine is a virtual depiction of machine hardware which is maintained by a virtual machine monitor (VMware Fusion, Oracle VM VirtualBox). Concept shown in Figure 1. The concept of virtualization, isn't new it has been here since 1960. But with the introduction of X86 Architecture and platforms, it has been sought out by many companies because it provided simple seamless implementation without significant interruption to operations and low acquisition. [13] [12]

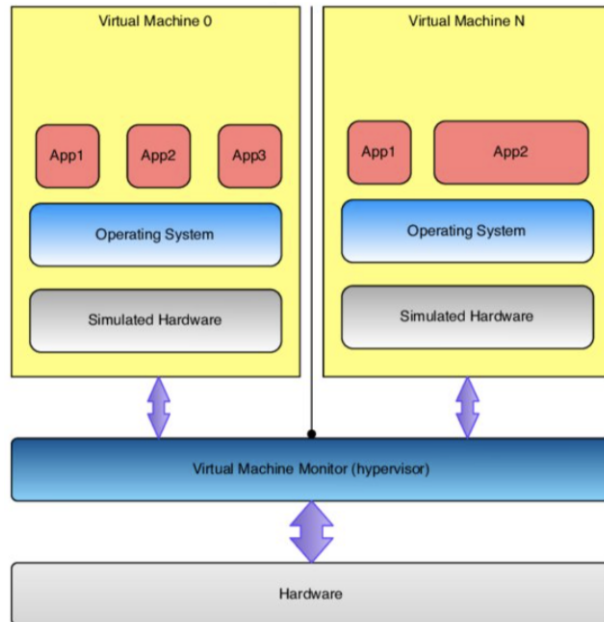


Figure 1: Abstraction Diagram Sourced: [20]

1.2 Benefits of Virtualization

The benefits of virtualization are considerable. Virtualization can help with security, scalability, cost-cutting, efficient uses of resources and others. Non-virtualized systems can be inefficient when non-virtualized resources aren't in use and the hardware is sitting idle without any computing tasks ready to run. While in a virtualized system once resources become available hypervisor can allocate them accordingly to another task so the physical resources are always in use. With this comes another benefit of security and corruption prevention where in normal non-virtualized systems the security and backup lay on one specific machine and user. The virtualized system security depends on the security of the whole system. This can lead to damage prevention where we can back up each VM, so in case of a natural disaster, there isn't any loss of data. In simple terms, virtualization helps with the growth and scalability of an organization.

For ACME Games virtualization will not only help with cost-cutting and security but also with

1. Minimize Servers
2. Reduce Hardware
3. Quick Redeployment
4. Simpler Backups
5. Better Testing

[12] [11]

1.3 Cost of virtualization and energy efficiency

This section delves into the total cost of ownership for virtualized systems compared to standard systems and the energy efficiency of medium to large organizations. We will look into to direct and indirect costs of virtualization for organizations. Real-life examples of companies that went through a restructuring of their servers to implement virtualization.

1.3.1 Cost of virtualization

First, we need to define what the major direct cost categories for an organization to implement a virtualized system are:

1. Hardware cost1.3.2

These are represented as expenses incurred so virtualization can be implemented in the system. Primarily physical technologies that would allow to create new virtualized system [12]

2. Software cost1.3.2

These are expenses derived from buying and/or licensing software which allows access to virtual machines and all its possible functions [12]

3. Deployment costs

These costs are expenses associated with things like disruption to existing operations and space improvement, which would be necessary for the implementation of the virtualized system.

These are direct costs of implementing virtualization they can be one-time or recurring. These expenses (explained later in depth) represent the general figure for medium to large firms. These can be cut down further with the right licensing agreement and the right negotiation with hardware providers.

There are also indirect costs when implementing virtualization, such as:

1. Training personnel cost
2. Maintenance cost
3. Energy cost

1.3.2 Direct cost

Hardware cost The initial virtualization cost can be considered high when a classical system is already in place and working. Let's consider the Hardware cost of implementing new servers. We will look into the 2 most popular servers which are Dell's PowerEdge R6625 and PowerEdge R7625. With these 2 servers, Dell allows extensive customization to get the best price for the best performance and energy efficiency for specific tasks. Figure 2 below shows the specifications of each server and the lowest configuration cost per server.

Dell PowerEdge		
Name:	R7625	R6625
Processor	2XAMD EPYC 9224	
Memory (DDR5 DIMM slots/max)	24(1.5TB)	
Disk Drivers up to:	8 X 3.5	4 x 3.5
	12 X 3.5	8 x 2.5
	8 X 2.5	10 x 2.5
	16 x 2.5	2 x 2.5
	24 X 2.5	
NVMe driver up to	24	10
Gen 5 PCIe slots up to:	4	2
Gen 4 PCIe slots up to:	8	3
Accelerator support	2 x 300 W DW or 6 x 75W SW	3 x 75 W SW
Lowest configuration Cost	28124.8 USD	8399 USD

Figure 2: Table comparing servers. Made by author. Sourced: [5] [7] [6]

Software cost There are multiple virtualization software to consider. We will look into 2 virtualization software VMware vSphere and Citrix XenServer.

1. VMware vSphere

Offers 2 options, vSphere standard and Foundation. vSphere Foundation is their flagship virtualization software which allows access to the full set of virtualization features. This software is for medium to large companies. The set price as of February 2024 is 135 USD per CPU Core. For one of the above-mentioned servers, it would come to 7200 USD Yearly. vSphere Standard is aimed at small to medium-sized companies. It offers essential virtualization capabilities. vSphere standard is priced at 50 USD per CPU core. For one of the above-mentioned servers, it comes to 2400 USD Yearly [19] [1]

2. Citrix XenServer

This software also offers a Standard and Premium Edition. Unlike vSphere, XenServer Operates on a cost per CPU socket. Their standard edition is entry-level virtualization software for a lower cost; however, organizations can still benefit from Technical Support and Maintenance. The Premium version offers GPU virtualization, Dynamic Workload Balancing, Thin provisioning for shared block storage devices and other features which are essential to ACME Games. The premium version for 1-4 Sockets is 875 USD per socket per year. The standard version price for 1-4 sockets is 440 USD per socket per year. The price goes down when more sockets are licensed. [3] [1]

1.3.3 Energy efficiency

The cost of Energy is hard to predict due to constant economic changes, which can cause unpredictable price fluctuations from month to month. However, from research done by Jukka Kommeri, Tapio Niemi and Olli Helin in their Energy Efficiency of Server Virtualization from 2012 [13] shows that with correct implementation of virtualization can save a significant amount of energy.

Real world example as research into virtualization continuously progresses we can expect energy consumption to lower. A case study done in 2010 by K. Thirupathi Rao, P. Sai Kiran and L.S.S.Reddy (Energy Efficiency in Datacenters through Virtualization: A Case Study [14]) indicate that after virtualization a datacenter obtained a power improvement of 65 percent furthermore the data-center reduced their number of servers from 500 to 140. A practical investigation into a Croatian company done in 2012 that went through virtualization is the best example for ACME Games. They used Dell PowerEdge 2970 servers for their virtualization. Figure 3 shows lower numbers of servers with predicted growth of 0.25 servers per year. [12]

Description	Value	Source
Present number of physical servers	7	Interview
Number of physical servers – post virtualization	2	Own source
Life time of server	4 years	Industrial best practice
Chosen model of server	Dell PowerEdge 2970	Own source
Number of virtual machines per physical server	4	Industrial best practice
Annual growth of servers	0.25 servers per year	Interview

Figure 3: Table from: [12]

Their virtualized system yields an economic energy efficiency of 72.41 percent. The energy cost of their non-virtualized system per year was 45,439.69 USD (adjusted to inflation as of 2024) while their virtualized system was 12,535.19 USD (Adjusted to inflation as of 2024). This is 27.59 percent less energy consumed per year.

Overall, the economic effect of virtualization for the company was 57.63 percent.

Therefore, it is safe to assume that with a correct implementation of virtualization, ACME Games can save on energy consumption, resources and capital.

2 Security Issues

Any technological enterprise's biggest concern is the mitigation of unauthorized access to company data. This unauthorized access can be within the company's corporate hierarchies or a malicious attack by a third party. While access permission within a company's structure is achieved by setting up correct access dispensation and secured data movement infrastructure within the company's internal systems, third-party attacks are harder to prognosticate, therefore establishing robust threat assessment and a durable security panel is exceedingly important compared to other parts of virtualization.

2.1 Operating system security issues

In today's technological world operating systems are found everywhere. This results in daily exponential improvements in developing malicious techniques to infect our Operating systems. Here are some common vulnerabilities that can be exploited:

1. Buffer Overflow
2. Code Injections
3. Privilege Escalation
4. Denial of Service
5. Zero-Day

A great example is Microsoft's vulnerability issue from 2023 which was patched in February 2024 and tracked under code CVE-2024-21338. This issue affected the kernel mode in different versions of Windows 10 and 11. This exploit used the CWE-822 weakness where the attacker supplies an internal pointer for memory location which wasn't expected. If the pointer dereferences into write, the attacker can start modifying the variables or carry out code execution. On the other hand, dereferencing pointer to read allows the reading of sensitive data. This issue falls into the Zero-Day exploit. This CWE-822 issue can be exploited in any language that uses pointers (c/c++, assembly...) [8] [15]

This part explores the most common operating system security issues.

Buffer overflow occurs when more information is written to the buffer beyond its memory. Buffer overflow attacks on a system aim to modify the state of memory so that a third party can execute code that allows it to take over the machine. This is done by precisely inputting data so that the buffer would copy this information to the adjacent location in memory.

Code Injections is a security exploitation where a program misinterprets input data as part of its code. Figuratively the attacker injects code into the run of the program and changes its behavior to gain access to the machine.

Privilege Escalation is accomplished by exploiting systems or a program's vulnerability to gradually gain access to different resources and modes of the operating system. This way attackers can go from user mode with the least amount of privilege to the kernel mode to change the behavior of the OS.

Denial of Service attacks are meant to disrupt the network for the intended user so they cannot use it. In these attacks a third party floods the network with a large amount of requests which it can't handle, eventually shutting the network down.

Zero-Day exploitation of a software issue that developers don't know about. This isn't any specific common issue being exploited. In this scenario, attackers are trying to find software vulnerabilities faster than developers can find them.

2.2 Virtualization security issues

The benefits of virtualization on security are vast. As virtualization progresses, new research into virtualized systems issues emerges. Although this research suggests a new way of thinking about security, attackers also expand their roster of knowledge. That's why it is impossible to cover every security issue.

There are two ways of thinking when creating threat assessments in virtualization, one would be considered hypothetical in many cases, for example, many of the physical components are made in countries with no regard for cyber security. In this case, we haven't seen any considerable foreign intervention in the production of hardware. Therefore, we are going to look into the real threats in virtualization. [9]

2.3 Virtualization threat assessment

Here we identify three major routes that third parties can use to exploit virtualized systems.

1. Hypervisor-based Attacks
2. VM-based Attacks
3. VM Image Attacks

As shown in figure 4, all these routes branch out into other subsets of malicious intrusions. [2] [4]

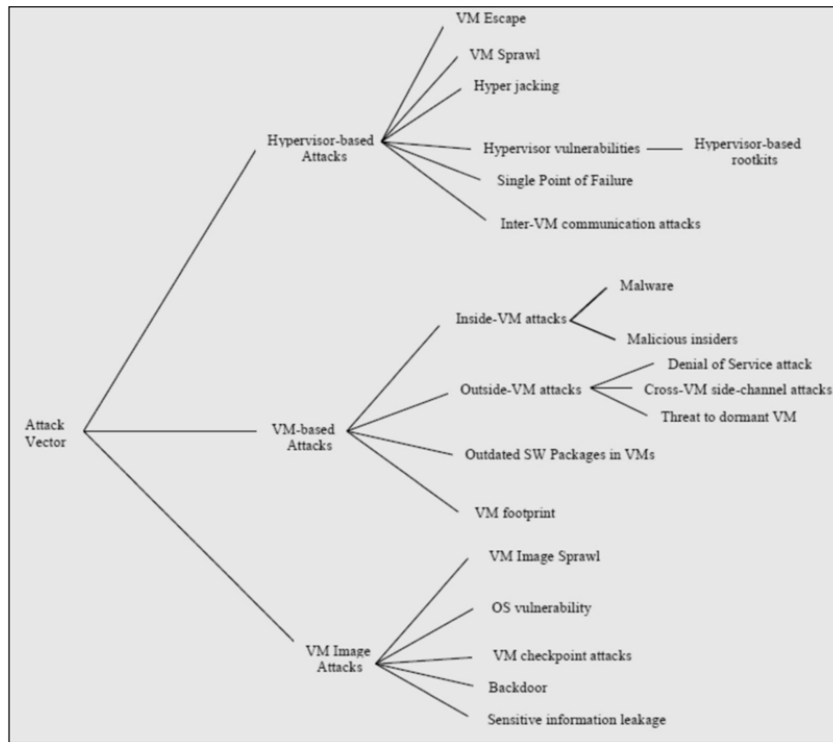


Figure 4: Graph from: [4]

We are going to look into the most common virtualization attacks over the years and explain briefly how we can prevent such issues from arising.

2.3.1 Most common security risks in virtualized environment

VM Sprawl Virtual machine sprawl occurs when an unmanaged number of VMs are created for one specific task and forgotten about. This leads to a waste of resources as already existing VMs take up resources that aren't in use and could be utilized elsewhere. Also, if VMs are left unchecked for prolonged periods of time, vulnerabilities can be created by out-of-date VMs which can be used to access the inner system, resulting in the potential loss of sensitive data. This can be mitigated by creating VM lifecycle insurance or by strict laws under which VMs can be created, managed and terminated.

Malware attacks VMs like any other computing technology are susceptible to malware attacks. This can be a bigger danger in a virtualized environment when users of VMs don't have proper security training which can lead to the infection of a VM. This wouldn't be a significant in a normal system but in virtualization, this can lead to the spread of malicious software to the host machine and all other VMs that run on that same physical machine. This can be mitigated by setting up Firewalls, Host intrusion prevention systems and anti-virus/spyware.

Oragnization issues Virtualization is dominating the technical aspects of companies around the world. That is why all the issues above are being closely monitored by software providers, cyber security companies and other parties. When implementing a virtualized system, the IT corporate structure is often neglected, the additional workload created by the implementation cannot be left to the existing IT team as this could lead to catastrophic scenarios. That's why the IT department needs to maintain great standards and integrity in areas like Monitoring VMs, setting up access control, separation of duties, hardening and making sure that the change of management is seamless. [16]

3 File System Scripting

This section explains the thinking and reason behind the first bash script. With this script, we aimed and successfully created two groups of users each group had a userxy who acted as a supervisor. These groups had their own folders where only the group members could access them and userxy. Each user had their own folder created in their group folder and only that specific user and userxy could read write and execute anything in this personal folder.

```
#!/bin/bash

sudo groupadd group01
sudo groupadd group02

sudo mkdir /home/group01Project
sudo mkdir /home/group02Project

sudo adduser userxy
sudo usermod -a -G group01 userxy
sudo usermod -a -G group02 userxy

sudo setfacl -m g:group01:rwX /home/group01Project
sudo setfacl -m g:group02:rwX /home/group02Project
sudo setfacl -m d:u:userxy:rwX /home/group01Project
sudo setfacl -m d:u:userxy:rwX /home/group02Project
```

Figure 5: First part of first script.

This is the 1st part of the script. Here we run everything with sudo to make sure we don't get any permission denied errors.

sudo groupadd <name> creates 2 groups. With that done, we create two directories for each group with the command sudo mkdir <name>. By stating /home/group01Project we ensured that the directories were created in the home folder of Ubuntu. Next, we create userxy and add him to each group. After that, we set permissions for each group and for the userxy. For this, we used the Access Control List first we set read, write, execute (later rwX) permission for each group for their home folder. These permissions were general so they can't access any new folders created in their home directory. Then we set rwX permissions which are initiated for new folders created in the group home folder. These permissions were given to userxy.

```

users01=("user01" "user02" "user03")
users02=("user04" "user05")

for users01 in "${users01[@]"; do
    sudo adduser $users01
    sudo usermod -a -G group01 $users01
    sudo mkdir /home/group01Project/$users01
    sudo setfacl -m u:$users01:rwX /home/group01Project/$users01
    echo "created user $users01"
done
for users02 in "${users02[@]"; do
    sudo adduser $users02
    sudo usermod -a -G group01 $users02
    sudo mkdir /home/group02Project/$users02
    sudo setfacl -m u:$users02:rwX /home/group02Project/$users02
    echo "created user $users02"
done

```

Figure 6: Seconf part of first script.

In the second part of the script, we created two arrays which hold the names of each user who is in the specific group. We run through the array with a for loop.

1. `sudo adduser $users01`
Creates the specific user whose name is in the array. We used `adduser` to create an account with a more interactive experience and full features rather than `useradd` where we would need to specify everything.
2. `sudo usermod -a -G group01 $users01`
With this line, we add the user to the specific group
3. `sudo mkdir /home/group01Project/ $users01`
this line creates name specific folder in the group01Project
4. `sudo setfacl -m d:u:$users01:rwX /home/group01Project/$users01`
Here we set specific inherited `rwX` permissions for the users personal folder
5. `echo "created user $users01"`
Prints the name of the user which was created

3.1 Testing

To test if the permissions are correct we run to set of tests. One was using the command `getfacl` which are shown in Figures 8 7 9.

```
userxy@m-VMware-Virtual-Platform:/home$ getfacl group01Project
# file: group01Project
# owner: root
# group: root
user::rwx
group::r-x
group:group01:rwx
mask::rwx
other::r-x
default:user::rwx
default:user:userxy:rwx
default:group::r-x
default:mask::rwx
default:other::r-x
```

Figure 7: ACL Group01

```
userxy@m-VMware-Virtual-Platform:/home$ getfacl group02Project
# file: group02Project
# owner: root
# group: root
user::rwx
group::r-x
group:group02:rwx
mask::rwx
other::r-x
default:user::rwx
default:user:userxy:rwx
default:group::r-x
default:mask::rwx
default:other::r-x
```

Figure 8: ACL Group02

```
userxy@m-VMware-Virtual-Platform:/home$ cd group01Project
userxy@m-VMware-Virtual-Platform:/home/group01Project$ getfacl user01
# file: user01
# owner: root
# group: root
user::rwx
user:userxy:rwx
user:user01:rwx
group::r-x
mask::rwx
other::r-x
default:user::rwx
default:user:userxy:rwx
default:group::r-x
default:mask::rwx
default:other::r-x
```

Figure 9: ACL User01

For the second test, we tried to create and access different folders with different users. As shown in Figure 10

```

user01@m-VMware-Virtual-Platform:/home/group02Project/user04$ cd /home
user01@m-VMware-Virtual-Platform:/home$ su userxy
Password:
su: Authentication failure
user01@m-VMware-Virtual-Platform:/home$ su userxy
Password:
userxy@m-VMware-Virtual-Platform:/home$ cd group01Project
userxy@m-VMware-Virtual-Platform:/home/group01Project$ touch testxy.txt
userxy@m-VMware-Virtual-Platform:/home/group01Project$ ls
testxy.txt  user01  user02  user03
userxy@m-VMware-Virtual-Platform:/home/group01Project$ cd user01
userxy@m-VMware-Virtual-Platform:/home/group01Project/user01$ touch testxy.txt
userxy@m-VMware-Virtual-Platform:/home/group01Project/user01$ ls
test.sh  test.txt  testxy.txt
userxy@m-VMware-Virtual-Platform:/home/group01Project/user01$ cd /home/group02Project
userxy@m-VMware-Virtual-Platform:/home/group02Project$ touch testxy.txt
userxy@m-VMware-Virtual-Platform:/home/group02Project$ ls
testxy.txt  user04  user05
userxy@m-VMware-Virtual-Platform:/home/group02Project$ cd user04
userxy@m-VMware-Virtual-Platform:/home/group02Project/user04$ touch testxy.txt
userxy@m-VMware-Virtual-Platform:/home/group02Project/user04$ su user01
Password:
user01@m-VMware-Virtual-Platform:/home/group02Project/user04$ cd
user01@m-VMware-Virtual-Platform:/home/group01Project$ touch test1.txt

```

Figure 10: 2nd Test

3.2 Whole Script

```

#!/bin/bash

sudo groupadd group01
sudo groupadd group02

sudo mkdir /home/group01Project
sudo mkdir /home/group02Project

sudo adduser userxy
sudo usermod -a -G group01 userxy
sudo usermod -a -G group02 userxy

sudo setfacl -m g:group01:rxw /home/group01Project
sudo setfacl -m g:group02:rxw /home/group02Project
sudo setfacl -m d:u:userxy:rxw /home/group01Project
sudo setfacl -m d:u:userxy:rxw /home/group02Project

users01=("user01" "user02" "user03")
users02=("user04" "user05")

for users01 in "${users01[@]"; do
    sudo adduser $users01
    sudo usermod -a -G group01 $users01
    sudo mkdir /home/group01Project/$users01
    sudo setfacl -m u:$users01:rxw /home/group01Project/$users01
    echo "created user $users01"
done
for users02 in "${users02[@]"; do
    sudo adduser $users02
    sudo usermod -a -G group01 $users02
    sudo mkdir /home/group02Project/$users02
    sudo setfacl -m u:$users02:rxw /home/group02Project/$users02
    echo "created user $users02"
done

```

Figure 11: Full script

4 Operating System Scripting

For this script, we created a bash script which would back up the files in folders of group01 and group02. For the backup file, we choose to save it in the TAR file format. The tar file is an archive saved in the tape archive format. It contains both group01 and group02 folders. [10]

```
#!/bin/bash

USERSALL=("user01" "user02" "user03" "user04" "user05" "userxy")

for USERSALL in "${USERSALL[@]"; do

    id_of_user_to_notify=$(id -u $USERSALL)

    sudo -u $USERSALL DBUS_SESSION_BUS_ADDRESS=unix:path=/run/user/$id_of_user_to_notify/bus
    notify-send -t 3000 "Backup Started" "Backing up group01Project and group02Project folders"

done
```

Figure 12: Notify Users

This part of the script sends a notification to users that the backup has been initiated. For this, we used the notify-send command. Due to the nature of the script running in root and being run as a root cron job, we need to find a specific Dbus. D-Bus is a communication channel between Input/Output device and the processor. To ensure that all the users get the message, we run a loop that goes through each user's name. For each user we get the id of the user to notify. Then with sudo -u to run a command as a specific user. Then we find the Dbus of a particular user thanks to its ID and run the command notify-send to show a popup message. We leave this message for three seconds by specifying it -t 3000. [17] [18]

```
group1="/home/group01Project"
group2="/home/group02Project"
backupName="/backup_`date +%d`_`date +%m`_`date +%Y`.tar"
infoName="backup_info_`date +%H`_`date +%M`_`date +%Y+%d`_`date +%m`_`date +%Y`.txt"
touch /home/backup/$infoName
tar -czvf /home/backup$backupName $group1 $group2>>/home/backup/$infoName
```

Figure 13: Tar file backup

In this second part, group01 and group02 are variables which hold the location of their respective folders. BackupName variables is the name of the backup which changes based on the day month and year when it was created. As is the infoName which holds the logs of the backup. Next, we specify that we want to create a tar file tar -czvf /where-we-want-to-backup /location-of-backup-file» where-we-want-to-write-the-logs. This is what this command is doing

- c - (-create) creates new tar file

- z - tells tar to compress the file using gzip
- v - (-verbose) displays files being processed by tar
- f - (- file=archive=name) this allows us to specify archive file name

```

/home/group01Project/
/home/group01Project/user02/
/home/group01Project/user01/
/home/group01Project/user01/test.txt
/home/group01Project/user01/testxy.txt
/home/group01Project/user01/test.sh
/home/group01Project/test1.txt
/home/group01Project/testxy.txt
/home/group01Project/user03/
/home/group02Project/
/home/group02Project/user05/
/home/group02Project/user04/
/home/group02Project/user04/testxtv.txt
/home/group02Project/testxy.txt

```

Figure 14: Backup Logs

```

root@m-VMware-Virtual-Platform: /home/scripts
GNU nano 7.2 /tmp/crontab.vUC9rx/crontab *
0 23 * * * /home/scripts/.2ndScript.sh

```

Figure 15: crontab task scheduling

In this third part, we used cron to schedule and automate the task of backing up the files. Cron is a command-line utility task scheduler. We open up the scheduler by using the command `crontab -e` in the terminal. We run the command as a root to make sure it is accessible and is executed everywhere. The scheduler runs on simple syntax where `*` represents minutes, hours, days of the week, month and year. After the specific time, it is followed by a command that will run. For this, we run our backup script. For our use case, we made it so the backup script runs every day at 23:00. As evidenced below in the figure 16 17

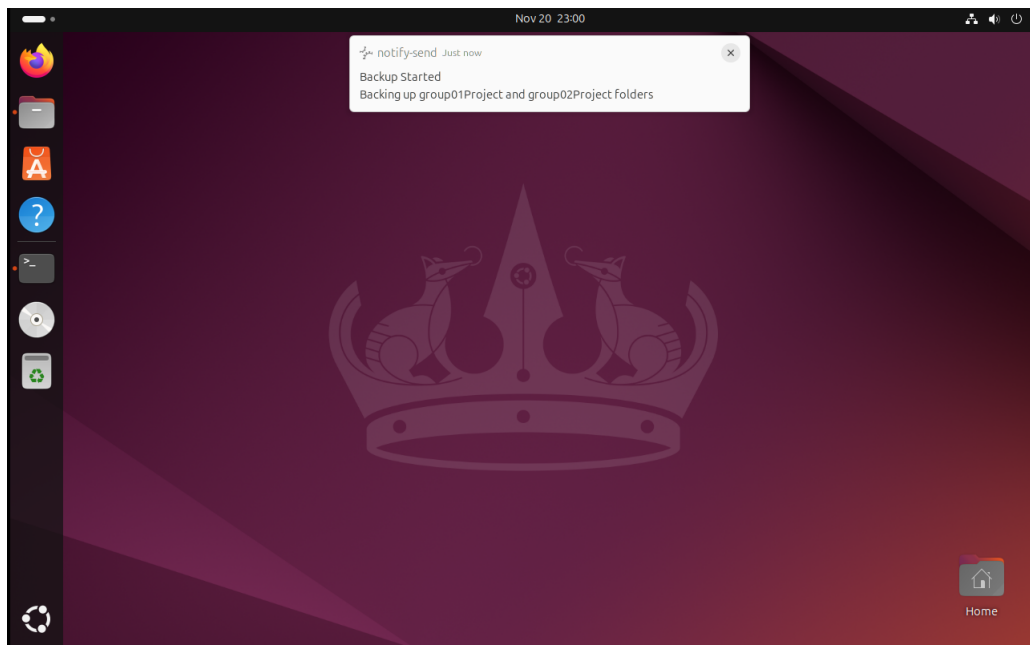


Figure 16: Desktop User01 at 23:00

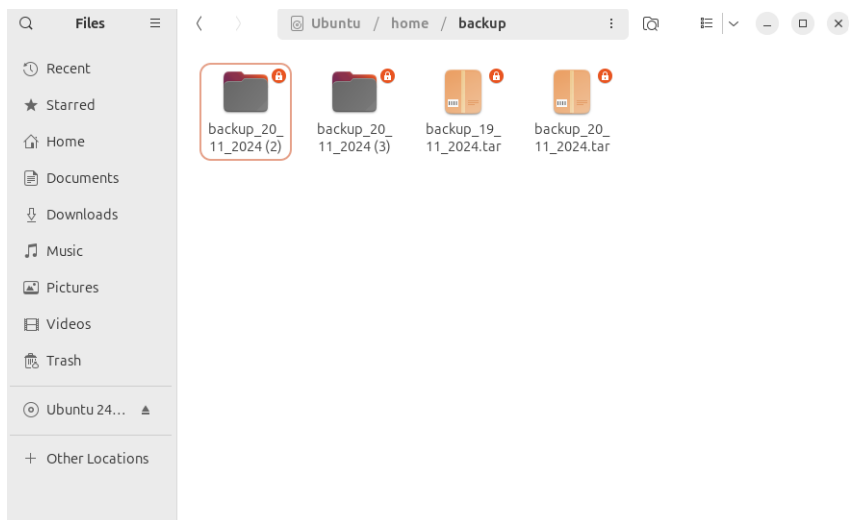


Figure 17: Backup folder after backup script was initiated

a

References

- [1] Virtualization cost comparison. <https://wintelguy.com/2024/virtualization-cost-comparison.html>.
- [2] F. Richard Yu Chengchao Liang. Wireless network virtualization: A survey, some research issues and challenges. <https://ieeexplore.ieee.org/stamp/stamp.jsp?tp=&arnumber=6887287>.
- [3] Citrix. Xenserver product documentation. <https://docs.xenserver.com/en-us/>.
- [4] Nirbhay Chaubey Darshan Tank, Akshai Aggarwal. Virtualization vulnerabilities, security issues, and solutions: a critical study and comparison. <https://link.springer.com/article/10.1007/s41870-019-00294-x>.
- [5] DELL. Dell poweredge rack servers. https://i.dell.com/sites/csdocuments/Product_Docs/en/poweredge-rack-quick-reference-guide.pdf.
- [6] DELL. Poweredge r6625 rack server. https://www.dell.com/en-us/shop/dell-poweredge-servers/poweredge-r6625-rack-server/spd/poweredge-r6625/pe_r6625_tm_vi_vp_sb?msockid=066e800136d46fe613b7951437fd6e71&configurationid=197052b3-0db0-4117-8aa1-7836ec252385#features_section.
- [7] DELL. Poweredge r7625 rack server. https://www.dell.com/en-us/shop/dell-poweredge-servers/poweredge-r7625-rack-server/spd/poweredge-r7625/pe_r7625_15972_vi_vp?msockid=066e800136d46fe613b7951437fd6e71.
- [8] Common Weakness Enumeration. Untrusted pointer dereference. <https://cwe.mitre.org/data/definitions/822.html>.
- [9] BEN LEE FEDERICO SIERRA-ARRIAGA, RODRIGO BRANCO. Security issues and challenges for virtualization technologies. <https://dl.acm.org/doi/pdf/10.1145/3382190>.
- [10] LifeWire Tech for humans. What is a tar file? <https://www.lifewire.com/tar-file-2622386>.
- [11] IBM. Benefits of virtualization. <https://www.ibm.com/think/insights/virtualization-benefits>.
- [12] Davor Ozanic Ivan Pogarcic, David Krnjak. Business benefits from the virtualization of an ict infrastructure. <https://journals.sagepub.com/doi/epub/10.5772/51603>.
- [13] Olli Helin Jukka Kommeri, Tapio Niemi. Energy efficiency of server virtualization. https://personales.upv.es/thinkmind/dl/conferences/energy/energy_2012/energy_2012_4_30_40149.pdf.
- [14] P. Sai Kiran K. Thirupathi Rao and L.S.S.Reddy. Energy efficiency in datacenters through virtualization: A case study. <https://citeseerx.ist.psu.edu/document?repid=rep1&type=pdf&doi=1d94350210dfafa43fb11033bc7c04364d6d2df5>.

- [15] Microsoft MSRC. Windows kernel elevation of privilege vulnerability. <https://msrc.microsoft.com/update-guide/vulnerability/CVE-2024-21338>.
- [16] Dave Shackleford. Rsa conference 2012 – the virtualization security landscape: What’s changed? - dave shackleford. https://youtu.be/WIBnLLweuFg?si=ONwHYF36JLwvd80_.
- [17] superuser. notify-send to other user on the same system. <https://superuser.com/questions/342626/notify-send-to-other-user-on-the-same-system>.
- [18] unix and linux. Show a notification across all running x displays. <https://unix.stackexchange.com/questions/2881/show-a-notification-across-all-running-x-displays>.
- [19] VmWare. vsphere pricing whitepaper. <https://www.vmware.com/docs/vmware-vsphere-pricing-whitepaper>.
- [20] Andrew J. Yunge. Providing a green framework for cloud based data centers. https://www.researchgate.net/figure/rtual-Machine-Abstraction_fig2_229077829.