



## Atividade 4 – Sistemas de Apoio a Decisão

Matheus Costa Rezende – 201210009526

### Criar e configurar uma conta em um repositório GIT

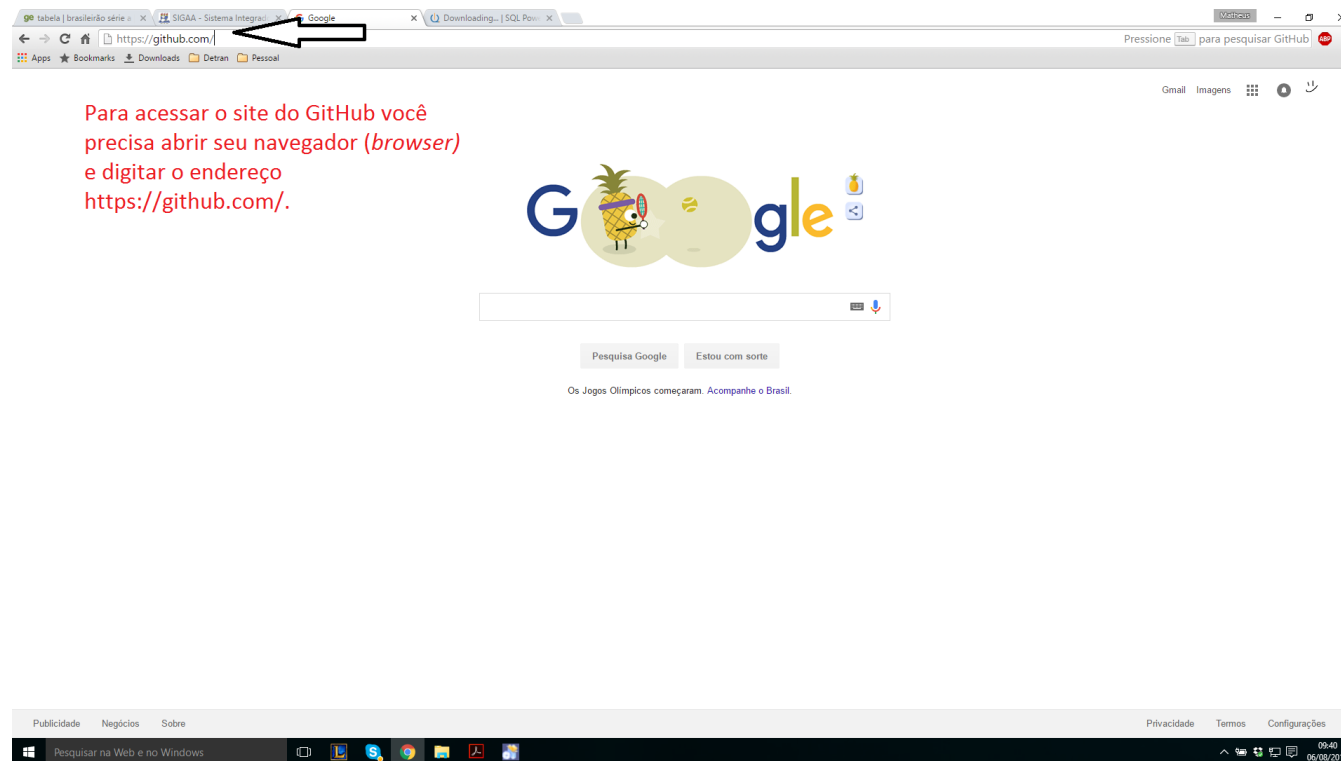

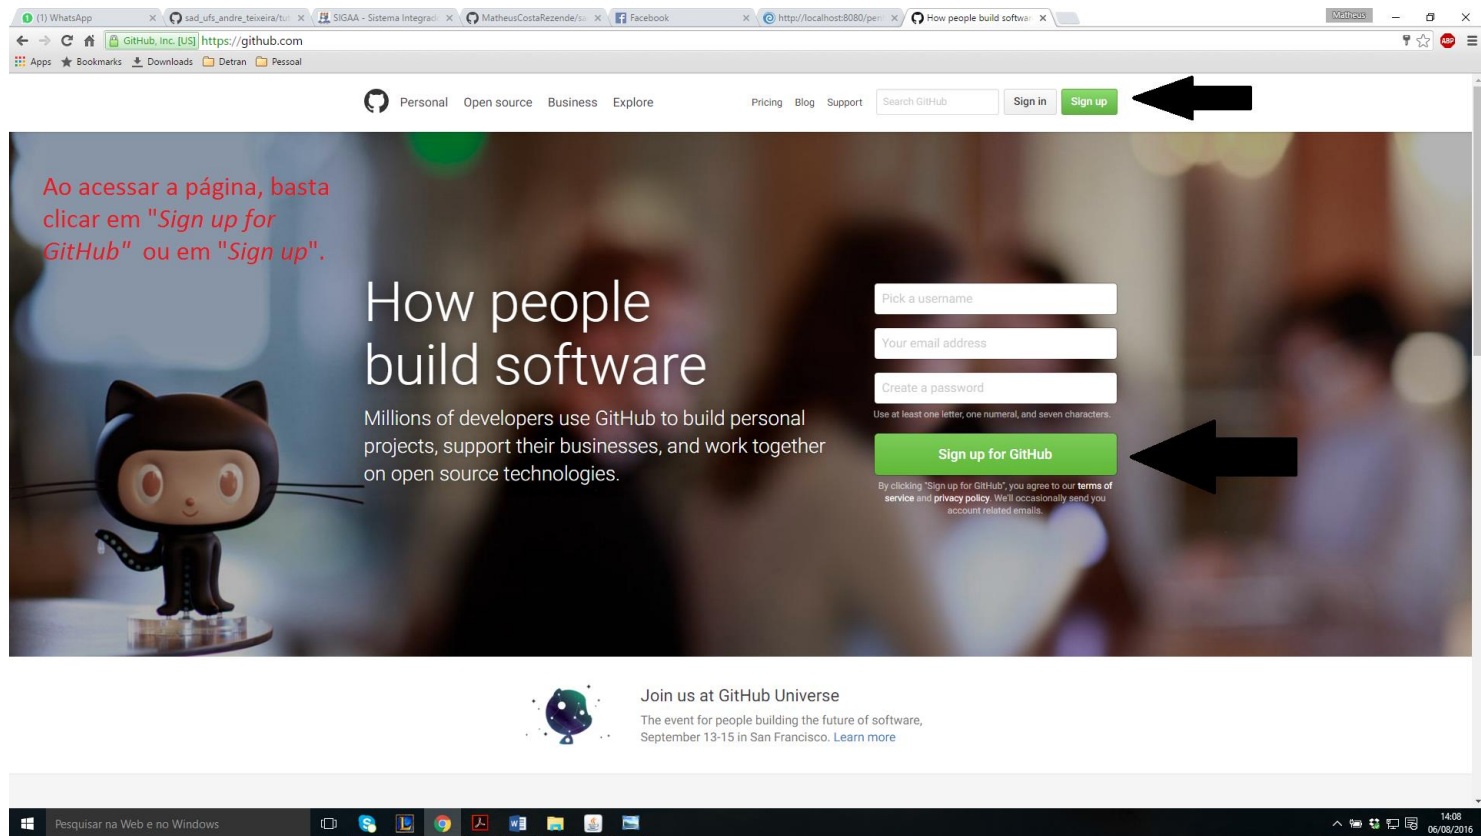

Join GitHub

The best way to design, build, and ship software.

Step 1: Set up a personal account

Step 2: Choose your plan

Step 3: Tailor your experience

Create your personal account

Username

testesad

This will be your username — you can enter your organization's username next.

Email Address

thetheu\_costa@hotmail.com

You will occasionally receive account related emails. We promise not to share your email with anyone.

Password

.....

Use at least one lowercase letter, one numeral, and seven characters.


By clicking on "Create an account" below, you are agreeing to the [Terms of Service](#) and the [Privacy Policy](#).

Create an account

You'll love GitHub

- Unlimited collaborators
- Unlimited public repositories
- Great communication
- Frictionless development
- Open source community

Preencha os campos *Username*, *Email Address* e *Password*. Você deve seguir as regras para definição destes campos. Depois de preencher os campos, verifique se ao lado deles apareceu um "check" verde. Se sim, basta clicar em *Create an account*.

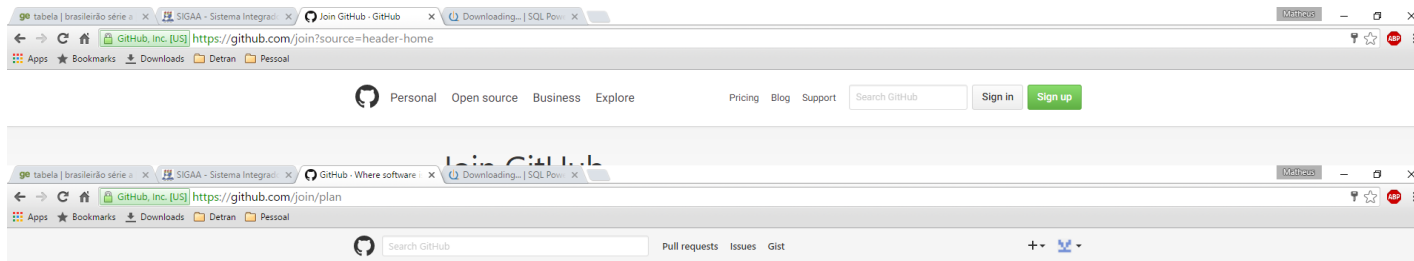

## Welcome to GitHub

You've taken your first step into a larger world, @testesad.

✓ Completed  
Set up a personal account

📁 Step 2:  
Choose your plan

⚙️ Step 3:  
Tailor your experience

### Choose your personal plan

☒ Unlimited public repositories for free.


☐ Unlimited private repositories for \$7/month. [\(view in BRL\)](#)

Don't worry, you can cancel or upgrade at any time.


☐ Help me set up an organization next  
Organizations are separate from personal accounts and are best suited for businesses who need to manage permissions for many employees. [Learn more about organizations.](#)

Continue

Nesta página, você deve escolher o seu plano. Para este exercício, será escolhido o plano *free*. Após escolher, clique eu "Continue".

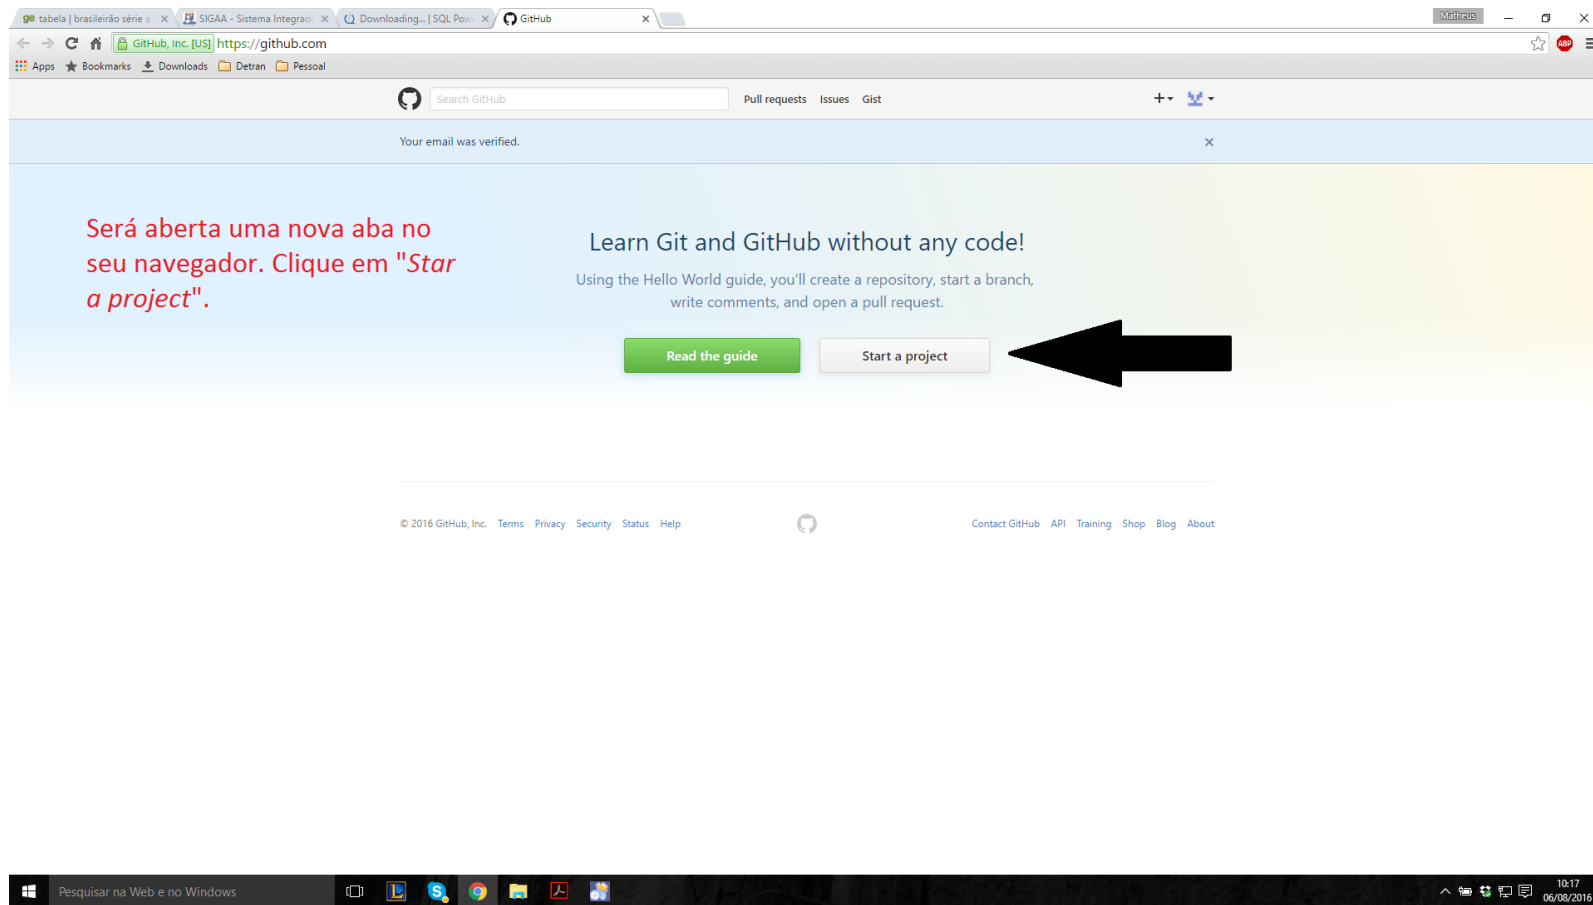


Após clicar para criar um novo projeto, você receberá um *email*, no endereço cadastrado para esta conta, para confirmar a criação desta conta.



### Please verify your email address

Before you can contribute on GitHub, we need you to verify your email address.  
An email containing verification instructions was sent to **thetheu\_costa@hotmail.com**.

Didn't get the email? [Resend verification email](#) or [change your email settings](#).



© 2016 GitHub, Inc. [Terms](#) [Privacy](#) [Security](#) [Status](#) [Help](#) [Contact GitHub](#) [API](#) [Training](#) [Shop](#) [Blog](#) [About](#)

Windows taskbar: Pesquisar na Web e no Windows | 10:10 | 06/08/2016

Internet Explorer browser window showing the Outlook web interface. The address bar displays <https://outlook.live.com/owa/>. The page title is "Email do Outlook".

The left sidebar shows the "Caixa de Entrada" (Inbox) with 46 items. The main content area displays a list of emails. The top email is from GitHub, titled "[GitHub] Please verify your email address.", dated "Hoje 09:58".

The email content shows a message from GitHub to @testesad, asking to verify the email address. A black arrow points to the link "Verify email address". Below the link, there is a button "Button not working? Paste the following link into your browser:" and a long URL: [https://github.com/users/testesad/emails/24121574/confirm\\_verification/5d5bce3256bbf03f61df70df1eb5927a23f95987](https://github.com/users/testesad/emails/24121574/confirm_verification/5d5bce3256bbf03f61df70df1eb5927a23f95987).

At the bottom of the email, it says: "You're receiving this email because you recently created a new GitHub account or added a new email address. If this wasn't you, please ignore this email."

On the right side of the email, there is a sidebar with a message: "Parece que você está usando um bloqueador de anúncios. Para maximizar o espaço na sua caixa de entrada, inscreva-se para obter um Outlook Livre de Anúncios."

At the bottom of the browser window, the Windows taskbar is visible, showing the search bar "Pesquisar na Web e no Windows" and the system clock displaying "10:13 06/08/2016".

**Abra a mensagem enviada pelo GitHub na caixa de entrada do seu email. E sem seguida, clique em "Verify email address".**

tabela | brasileiro série a | SIGAA - Sistema Integrado | Downloading - | SQL Power | Create a New Repository | Matheus

GitHub, Inc. (US) https://github.com/new

Apps ★ Bookmarks Downloads Detran Pessoal

Search GitHub Pull requests Issues Gist

### Create a new repository

A repository contains all the files for your project, including the revision history.

Owner: MatheusCostaRezende / Repository name: sad\_ufs\_matheus\_costa ✓

Great repository names are short and memorable. Need inspiration? How about laughing-couscous.

Description (optional)

☐ Public  
Anyone can see this repository. You choose who can commit.

☐ Private  
You choose who can see and commit to this repository.

☒ Initialize this repository with a README  
This will let you immediately clone the repository to your computer. Skip this step if you're importing an existing repository.

Add .gitignore: None Add a license: None ⓘ

Create repository

© 2016 GitHub, Inc. Terms Privacy Security Status Help Contact GitHub API Training Shop Blog About

10:20 06/08/2016

Nesta página você deve dar um nome ao seu repositório (*Repository name*). Você pode colcar uma descrição neste repósitorio (opcional). Você também deve escolher se o repositório será visível para o publico ou privado. E escolher configurações iniciais. Para criar, clique em "*Create repository*".



Pronto ! Seu repositório GitHub foi criado.

The screenshot shows a web browser window with the GitHub repository page for 'sad\_ufs\_matheus\_costa' by user 'MatheusCostaRezende'. The repository is newly created, showing 1 commit, 1 branch, 0 releases, and 1 contributor. The 'Code' tab is selected, displaying the 'Initial commit' with a 'README.md' file. The repository name 'sad\_ufs\_matheus\_costa' is visible in the file view. A black arrow points to the repository name in the header. The browser's address bar shows the URL 'https://github.com/MatheusCostaRezende/sad\_ufs\_matheus\_costa'. The Windows taskbar at the bottom shows the time as 10:27 on 06/08/2016.

Fazer download do Pentaho Business Intelligence Server executar e realizar um login inicial com ambas as contas de teste

Acesse o endereço <https://sourceforge.net/projects/pentaho/files/Business%20Intelligence%20Server/6.1/> e clique no link [biserver-ce-6.1.0.1-196.zip](#) para realizar o download do arquivo

The screenshot shows the SourceForge project page for Pentaho Business Intelligence Server 6.1. The page includes a search bar, navigation links, and a list of recommended projects. The file list table is as follows:

| Name  | Modified   | Size     | Downloads / Week |
|---|------------|----------|------------------|
| Parent folder                               |            |          |                  |
| biserver-manual-ce-6.1.0.1-196.zip          | 2016-04-09 | 872.6 MB | 183              |
| biserver-manual-ce-6.1.0.1-196.zip.s...     | 2016-04-09 | 46 Bytes | 22               |
| <a href="#">biserver-ce-6.1.0.1-196.zip</a> | 2016-04-07 | 945.1 MB | 1,940            |
| Totals: 3 Items                             |            | 1.8 GB   | 2,145            |

Get latest updates about Open Source Projects, Conferences and News. Sign up for the SourceForge newsletter:

☒ I agree to receive quotes, newsletters and other information from sourceforge.net and its partners regarding IT services and products. I understand that I can withdraw my consent at any time. Please refer to our [Privacy Policy](#) or [Contact Us](#) for more details.

No, thanks

Windows File Explorer window showing the contents of the directory `biserver-ce-6.1.0.1-196 > biserver-ce`.

The left sidebar shows the navigation pane with "Acesso rápido" (Quick access) and "Este Computador" (This computer) sections.

The main pane displays a list of files and folders:

| Nome                    | Data de modificaç... | Tipo                 | Tamanho |
|-------------------------|----------------------|----------------------|---------|
| data                    | 07/04/2016 15:18     | Pasta de arquivos    |         |
| licenses                | 07/04/2016 15:18     | Pasta de arquivos    |         |
| pentaho-solutions       | 07/04/2016 15:18     | Pasta de arquivos    |         |
| third-party-tools       | 07/04/2016 15:18     | Pasta de arquivos    |         |
| tomcat                  | 07/04/2016 15:18     | Pasta de arquivos    |         |
| import-export.bat       | 07/04/2016 15:18     | Arquivo em Lotes ... | 1 KB    |
| import-export.sh        | 07/04/2016 15:18     | Shell Script         | 1 KB    |
| promptuser.js           | 06/08/2016 14:03     | Arquivo JavaScript   | 1 KB    |
| promptuser.sh           | 07/04/2016 15:18     | Shell Script         | 1 KB    |
| set-pentaho-env.bat     | 07/04/2016 15:18     | Arquivo em Lotes ... | 5 KB    |
| set-pentaho-env.sh      | 07/04/2016 15:18     | Shell Script         | 4 KB    |
| start-pentaho.bat       | 07/04/2016 15:18     | Arquivo em Lotes ... | 2 KB    |
| start-pentaho.sh        |                      | Shell Script         | 2 KB    |
| start-pentaho-debug.bat |                      | Arquivo em Lotes ... | 2 KB    |
| start-pentaho-debug.sh  |                      | Shell Script         | 2 KB    |
| stop-pentaho.bat        | 07/04/2016 15:18     | Arquivo em Lotes ... | 1 KB    |
| stop-pentaho.sh         | 07/04/2016 15:18     | Shell Script         | 1 KB    |

A black arrow points to the file `start-pentaho.bat`.


Below the file list, a red text box contains the following instructions:

Após baixar o arquivo, descompacte-o e procure o arquivo .bat star-pentaho.bat.  
Em seguida, basta executar o aquivo .bat

The status bar at the bottom shows "17 itens" and "1 item selecionado 1,01 KB". The taskbar at the bottom right shows the time "14:24" and the date "06/08/2016".

```
Tomcat
java.lang.Exception: Could not start bundle mvn:org.pentaho.pentaho-marketplace-ba/6.1.0.1-196/ in feature(s) pentaho-marketplace-6.1.0.1-196; Unresolved constraint in bundle pentaho-marketplace-ba [135]: Unable to resolve 135.0: missing requirement [135.0] osgi.wiring.package; (osgi.wiring.package=org.apache.cxf.jaxrs.provider.json)
    at org.apache.karaf.features.internal.features.ServiceImpl.startBundle(featuresServiceImpl.java:160)
    at org.apache.karaf.features.internal.features.ServiceImpl.installFeatures(featuresServiceImpl.java:159)
    at org.apache.karaf.features.internal.boot.FeaturesInstaller.installBootFeatures(bootFeaturesInstaller.java:92)
    at org.apache.karaf.features.internal.boot.FeaturesInstaller.run(bootFeaturesInstaller.java:71)
Caused by: org.osgi.framework.BundleException: Unresolved constraint in bundle pentaho-marketplace-ba [135]: Unable to resolve 135.0: missing requirement [135.0] osgi.wiring.package; (osgi.wiring.package=org.apache.cxf.jaxrs.provider.json)
    at org.apache.felix.framework.Felix.resolveBundleRevision(felix.java:4002)
    at org.apache.felix.framework.Felix.startBundle(felix.java:2043)
    at org.apache.felix.framework.BundleImpl.start(BundleImpl.java:976)
    at org.apache.felix.framework.BundleImpl.start(BundleImpl.java:963)
    at org.apache.karaf.features.internal.features.ServiceImpl.startBundle(featuresServiceImpl.java:150)
    ... 3 more
14:04:48,040 INFO [PeriodicStatusLogger] Caution, the system is initializing. Do not shut down or restart the system at this time.
14:05:19,040 INFO [PeriodicStatusLogger] Caution, the system is initializing. Do not shut down or restart the system at this time.
14:05:48,040 INFO [PeriodicStatusLogger] Caution, the system is initializing. Do not shut down or restart the system at this time.
14:06:19,041 INFO [PeriodicStatusLogger] Caution, the system is initializing. Do not shut down or restart the system at this time.
14:06:48,042 INFO [PeriodicStatusLogger] Caution, the system is initializing. Do not shut down or restart the system at this time.
14:07:19,044 INFO [PeriodicStatusLogger] Caution, the system is initializing. Do not shut down or restart the system at this time.
14:07:49,044 INFO [PeriodicStatusLogger] Caution, the system is initializing. Do not shut down or restart the system at this time.
14:08:19,045 INFO [PeriodicStatusLogger] Caution, the system is initializing. Do not shut down or restart the system at this time.
14:08:49,047 INFO [PeriodicStatusLogger] Caution, the system is initializing. Do not shut down or restart the system at this time.
14:09:00,121 INFO [PeriodicStatusLogger] The system has finished initializing.
[pt_67] Pentaho BI Platform server is ready.
08-Aug-2016 14:09:00,127 INFO [localhost-startstop-1] org.apache.catalina.startup.HostConfig.deployDirectory Deployment of web application directory C:\Users\Watheus\Desktop\Biserver-ce-6.1.0.1-196\Biserver-ce\tomcat\webapps\pentaho has finished in 317,728 ms
08-Aug-2016 14:09:00,128 INFO [localhost-startstop-1] org.apache.catalina.startup.HostConfig.deployDirectory Deployment of web application directory C:\Users\Watheus\Desktop\Biserver-ce-6.1.0.1-196\Biserver-ce\tomcat\webapps\pentaho-style has finished in 441 ms
08-Aug-2016 14:09:00,210 INFO [localhost-startstop-1] org.apache.jasper.servlet.TldScanner.scanJars At least one JAR was scanned for TLDs yet contained no TLDs. Enable debug logging for this logger for a complete list of JARs that were scanned but no TLDs were found in them. Skipping unneeded JARs during scanning to improve startup time.
08-Aug-2016 14:09:00,210 INFO [localhost-startstop-1] org.apache.catalina.startup.HostConfig.deployDirectory Deployment of web application directory C:\Users\Watheus\Desktop\Biserver-ce-6.1.0.1-196\Biserver-ce\tomcat\webapps\pentaho-style has finished in 441 ms
08-Aug-2016 14:09:00,348 INFO [localhost-startstop-1] org.apache.catalina.startup.HostConfig.deployDirectory Deployment of web application directory C:\Users\Watheus\Desktop\Biserver-ce-6.1.0.1-196\Biserver-ce\tomcat\webapps\ROOT has finished in 391 ms
08-Aug-2016 14:09:00,350 INFO [localhost-startstop-1] org.apache.jasper.servlet.TldScanner.scanJars At least one JAR was scanned for TLDs yet contained no TLDs. Enable debug logging for this logger for a complete list of JARs that were scanned but no TLDs were found in them. Skipping unneeded JARs during scanning to improve startup time and JSP compilation time.
08-Aug-2016 14:09:00,350 INFO [localhost-startstop-1] org.apache.catalina.startup.HostConfig.deployDirectory Deployment of web application directory C:\Users\Watheus\Desktop\Biserver-ce-6.1.0.1-196\Biserver-ce\tomcat\webapps\sw-style has finished in 426 ms
08-Aug-2016 14:09:00,357 INFO [localhost-startstop-1] org.apache.catalina.startup.HostConfig.deployDirectory Deployment of web application directory C:\Users\Watheus\Desktop\Biserver-ce-6.1.0.1-196\Biserver-ce\tomcat\webapps\sw-style has finished in 426 ms
08-Aug-2016 14:09:00,357 INFO [main] org.apache.coyote.AbstractProtocol.start Starting ProtocolHandler ["http-apr-8080"]
08-Aug-2016 14:09:00,358 INFO [main] org.apache.coyote.AbstractProtocol.start Starting ProtocolHandler ["ajp-apr-8080"]
08-Aug-2016 14:09:00,412 INFO [main] org.apache.catalina.startup.Catalina.start Server startup in 31905 ms
Attempting to load ESAPI.properties via file I/O.
Attempting to load ESAPI.properties as resource file via file I/O.
Not found in 'org.owasp.esapi.resources' directory or file not readable: C:\Users\Watheus\Desktop\Biserver-ce-6.1.0.1-196\Biserver-ce\tomcat\bin\ESAPI.properties
Not found in SystemResource Directory/resourceDirectory: .esapi\ESAPI.properties
Not found in 'user.home' (C:\Users\Watheus) directory: C:\Users\Watheus\esapi\ESAPI.properties
Loading ESAPI.properties via file I/O failed. Exception was: java.io.FileNotFoundException
Attempting to load ESAPI.properties via the classpath.
SUCCESSFULLY LOADED ESAPI.properties via the CLASSPATH from // (root) using current thread context class loader!
SecurityConfigurationForValidator.configurationFile not found in ESAPI.properties. Using default validation.properties
Attempting to load validation.properties via file I/O.
Attempting to load validation.properties as resource file via file I/O.
Not found in 'org.owasp.esapi.resources' directory or file not readable: C:\Users\Watheus\Desktop\Biserver-ce-6.1.0.1-196\Biserver-ce\tomcat\bin\validation.properties
Not found in SystemResource Directory/resourceDirectory: .esapi\validation.properties
Not found in 'user.home' (C:\Users\Watheus) directory: C:\Users\Watheus\esapi\validation.properties
Loading validation.properties via file I/O failed.
Attempting to load validation.properties via the classpath.
Validation.properties could not be loaded by any means. Fail. Exception was: java.lang.IllegalArgumentException: Failed to load ESAPI.properties as a classloader resource.
```

Após executar o arquivo .bat, aguarde a inicialização do Pentaho BI Platform. Em seguida, execute seu navegador (*browser*) e acesso o endereço <http://localhost:8080/pentaho/Login>.



A Hitachi Group Company

Agora basta fazer o login.

## User Console

User Name:  
Admin

Password:  
\*\*\*\*\*

Login

Login as an Evaluator

Administrator


Business User

User Name: Admin  
Password: password

User Name: Suzy  
Password: password

GO

GO

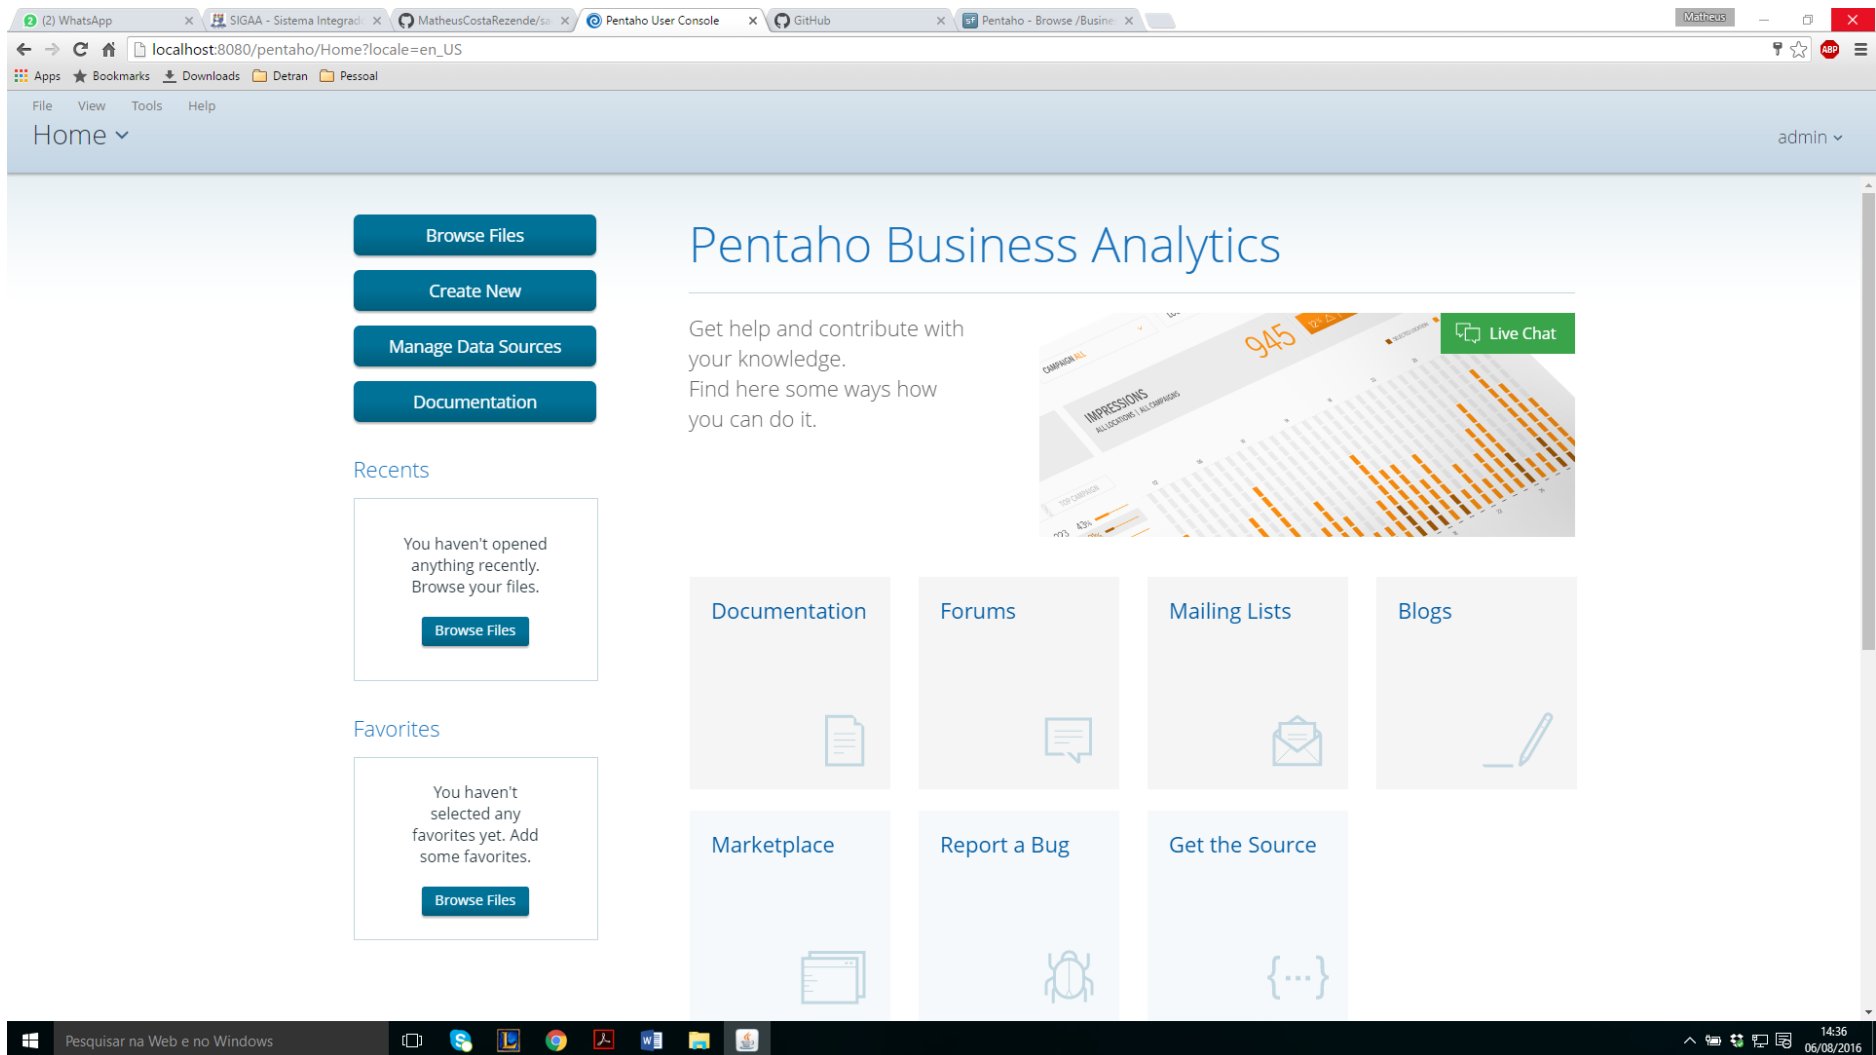

Home

Browse Files

Create New

Documentation

Recents

You haven't opened anything recently. Browse your files.

Browse Files

Favorites

You haven't selected any favorites yet. Add some favorites.

Browse Files

# Pentaho Business Analytics

Get help and contribute with your knowledge. Find here some ways how you can do it.

Documentation

Forums

Mailing Lists

Blogs

Marketplace

Report a Bug

Get the Source

Live Chat

Pentaho - Browse / Busine

localhost:8080/pentaho/Home?locale=en\_US

File View Help

Apps Bookmarks Downloads Detran Pessoal

Matheus

suzy

Pesquisar na Web e no Windows

14:36

06/08/2016