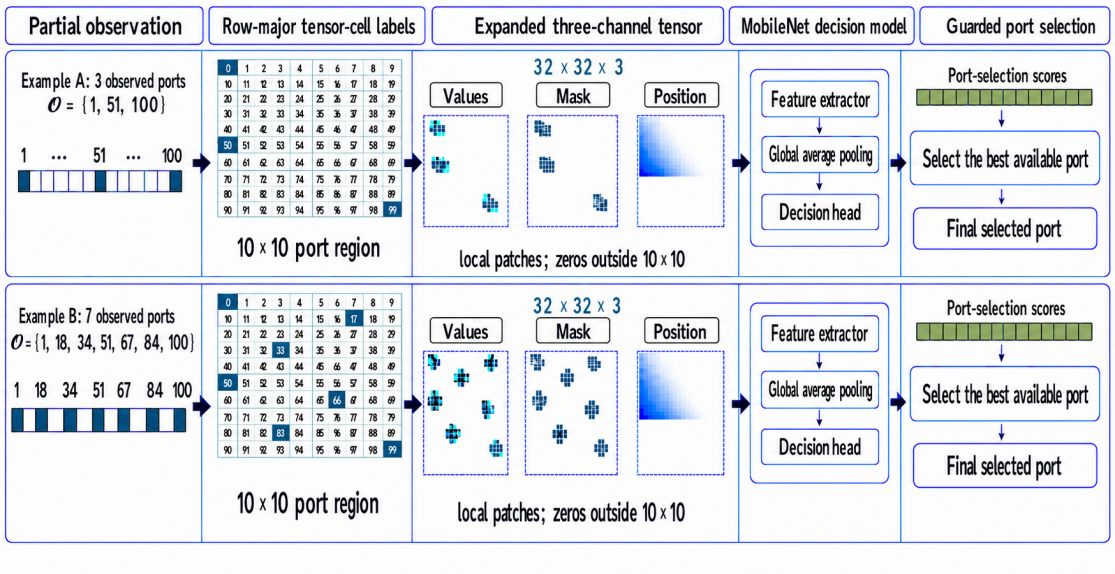

Partial observation
Row-major tensor-cell labels
Expanded three-channel tensor
MobileNet decision model
Guarded port selection
Example A: 3 observed ports
O = {1, 51, 100}
1 … 51 … 100
10 x 10 port region
32 x 32 x 3
Values
Mask
Position
local patches; zeros outside 10 x 10
Feature extractor
Global average pooling
Decision head
Port-selection scores
Select the best available port
Final selected port
Example B: 7 observed ports
O = {1, 18, 34, 51, 67, 84, 100}
1 18 34 51 67 84 100
10 x 10 port region
32 x 32 x 3
Values
Mask
Position
local patches; zeros outside 10 x 10
Feature extractor
Global average pooling
Decision head
Port-selection scores
Select the best available port
Final selected port