



Description Editorial Solutions Submissions

141. Linked List Cycle


Easy Topics

Given `head`, the head of a linked list, determine if the linked list has a cycle in it.

There is a cycle in a linked list if there is some node in the list that can be reached again by continuously following the `next` pointer.

Return `true` if there is a cycle in the linked list. Otherwise, return `false`.

Example 1:

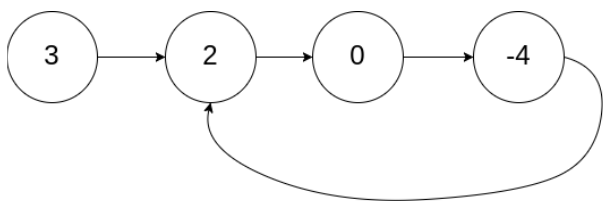


Input: `head = [3,2,0,-4]`, `pos = 1`

Output: `true`

Explanation: There is a cycle in the linked list, where the tail connects to the second node (index 1).

Example 2:



Input: `head = [1,2]`, `pos = 0`

Output: `true`

Explanation: There is a cycle in the linked list, where the tail connects to the first node (index 0).

Example 3:



Input: `head = [1]`, `pos = -1`

Output: `false`

Explanation: There is no cycle in the linked list.

17.6K 522 ☆ ?