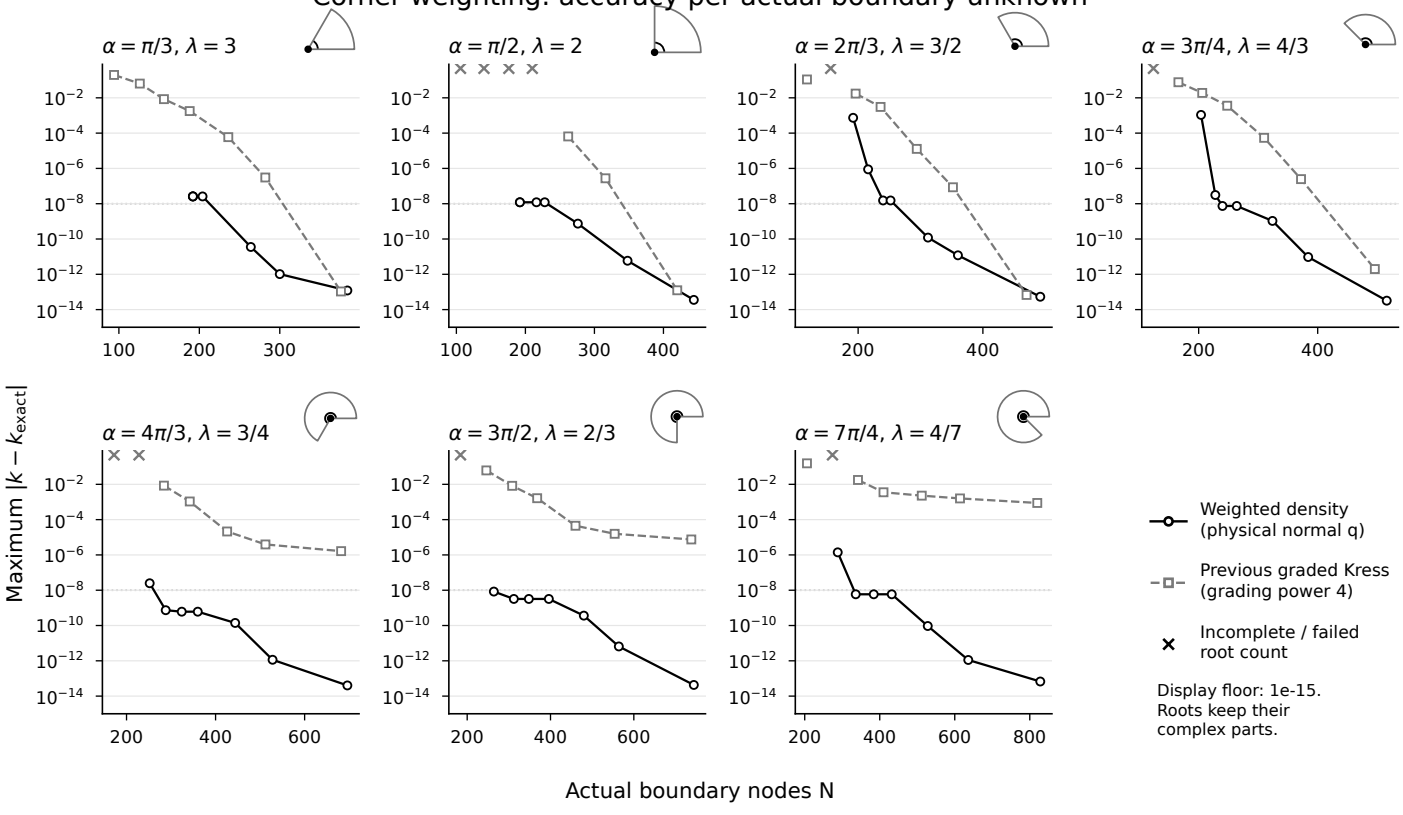

Actual boundary nodes determine the dense matrix dimension. Leftward curves achieve an error with fewer unknowns; nominal ppw can hide the corner-panel safety floor. 10 solves have incomplete or failed root counts; crosses identify these and lines are broken there. At the 1e-8 target, the measured weighted-node saving spans 30% to 52% among 4 angles where both methods reach the target. Radius-1 Dirichlet sectors have two additional pi/2 joins. Insets mark the varied corner. Weighting factors out the leading q(r) ~ r^(lambda-1) power, lambda = pi/alpha; higher powers and possible logarithms remain, so exponential convergence is not assumed.