
RCM-DX Specification

Version 0.3

Swiss federal railways SBB, Schweizerische
Bundesbahnen SBB, Chemins de fer fédéraux suisses
CFF, Ferrovie federali svizzere FFS

RCM-DX 

Contents

1	Specification of the RCM-DX Format version 2.0	4
1.1	Change history	4
1.2	Introduction	6
1.2.1	Motivation	6
1.2.2	Hints	6
1.3	Definitions	8
1.3.1	File names	8
1.3.2	Primitive and extended data types	8
1.3.3	(HDF5) Group	9
1.3.4	(HDF5) Attribut	10
1.3.5	(HDF5) Datasets	10
1.4	Data structures	12
1.4.1	Array	12
1.4.2	Coordinates	14
1.4.3	Pictures	16
1.4.4	Videos	18
1.5	Time-based data structures	20
1.5.1	Timestamp	20
1.5.2	Durations	21
1.6	RCM-DX file format	21
1.7	RCM-DX data hierarchy	22
1.7.1	Root Group	22
1.7.2	Platform Group	23
1.7.3	Session Group	25
1.7.4	Section Group	27
1.7.5	Track list group	28
1.7.6	Position group	29
1.7.7	Environment Group	31
1.7.8	Measuring System Group	34
1.7.9	Datasource Group	36
1.7.10	Channel Group	37
1.7.11	Logging Group	40
1.7.12	Topology Group	43
1.7.13	Track Group	44
1.7.14	Line Group	46
1.7.15	Switch Track Group	47

1.7.16	Track Object Group	48
1.7.17	Track Point Group	49
1.7.18	Property Group	51
1.7.19	Event Group	52
1.7.20	Record Group	56
1.7.21	Configuration Group	59
1.7.22	Data Processing Group	60
1.7.23	Clearance Information Group	61
1.8	Changes to the previous version	62
1.9	XML Schema Definitions	62
1.9.1	Events Comment	62
1.9.2	Events Defect	63
1.9.3	Events Generic	63
1.9.4	RCM-DX Data types	66
1.10	License and copyright	69
1.11	Contribution	69

List of Figures

1	RCM-DX diagram overview	7
2	Limit group overview	13
3	Image of a rail cross section measurement	16
4	RCM-DX structure overview	22
5	Root group overview	23
6	Platform group overview	24
7	Session group overview	25
8	Section group overview	27
9	Environment group overview	32
10	Measuring system overview	34
11	Datasource group overview	36
12	Channel group overview	37
13	Logging group overview	41
14	Topology group overview	44

1 Specification of the RCM-DX Format version 2.0

1.1 Change history

Document version	RCM-DX version	Date	Autor	Change
0.1.0	0.1	06.03.2015	Martin Frey (SCS)	Initial version
0.2.0	0.2	20.03.2015	Martin Frey (SCS)	Extensions
0.3.0	0.3	15.04.2015	Patrik Wernli (SCS)	Review
0.4.0	0.4	20.04.2015	Martin Frey (SCS)	Extensions and revised
0.5.0	0.5	03.05.2015	Patrik Wernli (SCS)	Formal Adaptions
0.6.0	0.6	12.05.2015	Martin Frey (SCS)	PDR Feedback: Storing of Booleans, comments allowed on all levels, format independent of video codec, flags (including simulation) on session level. Schemas for exceedances, comments and drawings added
0.7.0	0.7	13.07.2015	Patrik Wernli (SCS)	Finalized for CDR
0.8.0	0.8	02.10.2015	Martin Frey (SCS)	Event model added, reference to specification event schema added.
0.9.0	0.9	30.11.2015	Patrik Wernli (SCS)	Adaptions for Infotrans position model. Version concept removed. Event model updated.
0.10.0	0.10	21.12.2015	Martin Frey (SCS)	Review
0.11.0	0.11	21.12.2015	Patrik Wernli (SCS)	Revised after review
0.12.0	0.12	16.02.2016	Pascal Brem (SCS)	Topology model in configuration.
0.13.0	0.13	17.02.2016	Martin Frey (SCS)	Review topology model
0.14.0	0.14	19.02.2016	Pascal Brem (SCS)	Sections added to file format.
0.15.0	0.15	23.02.2016	Martin Frey (SCS)	Global configuration and settings updated
0.16.0	0.16	11.07.2016	Pascal Brem (SCS)	New Hash code attribute for the topology.

Document version	RCM-DX version	Date	Autor	Change
0.17.0	0.17	15.07.2016	Pascal Brem (SCS)	New units and data types for positions
0.18.0	0.18	03.01.2018	Pascal Brem (SCS)	New GTG Track Id in the Topology.
0.19.0	0.19	03.01.2018	Pascal Brem (SCS)	Events are stored on session level.
0.20.0	0.20	09.01.2018	Pascal Brem (SCS)	Events and Sections in a group.
0.21.0	0.21	09.01.2018	Patrik Wernli (SCS)	Added chapter “HDF5 File Format Versions”
0.22.0	0.22	11.04.2018	Patrik Wernli (SCS)	Changed document template to official publishing template
0.23.0	0.23	16.08.2018	Pascal Brem (SCS)	Changes in the channel basis definition.
0.24.0	0.24	16.08.2018	Pascal Brem (SCS)	New attributes on the picture block channel.
0.25.0	0.25	04.09.2018	Pascal Brem (SCS)	New minor version.
0.26.0	0.26	28.11.2018	Pascal Brem (SCS)	New minor version for the topology attributes.
0.27.0	0.27	08.01.2019	Pascal Brem (SCS)	New availability group.
0.28.0	0.28	05.06.2019	Pascal Brem (SCS)	New switchtracks in the DfA
2.0.0	2.0	28.04.2020	Michael Ammann (SBB), Jakob Grilj (SBB)	Adaptation of the structure to new requirements. New major release with version number 2.0, due to major changes in the structure and goal for publication of the specification.

1.2 Introduction

1.2.1 Motivation

Railroad companies continuously gather data of their rail, overhead line, and telecommunications networks by means of mobile and stationary measuring systems. Data flows from these systems through processing units – which enrich, evaluate and validate the data –, to systems that display the data to subject matter experts and also to systems that automatically analyse it.

This specification defines the rail condition monitoring data exchange format (RCM-DX format) which is a data format optimised for data in the railroad context, i.e. for data points localised within a railroad network. The RCM-DX format is a file format based on the HDF5 specification and defines a structure of HDF5 groups, datasets, and attributes. The document at hands also describes the content of the elements defined. Although the format is open and can in principle be implemented right away by any railroad company, this specification contains a few non-generic elements and naming conventions that are specific to SBB. The reason for this is that any file that adheres to this specification can be used with the *RCM Viewer*, an application available soon to the public via a website.

The RCM-DX format is developed and maintained by the SBB company. An extension of the specification is permitted, yet, it must be taken into account that the resulting data file may no longer be read or processed by other systems supporting the RCM-DX format.

The RCM-DX format is a file format detailing the HDF5 format version 2.0. HDF5 was chosen for several reasons, including that it is an open format. HDF5 is a hierarchical data storage where the data is arranged in a tree structure. The HDF5 format is described on the webpage of the [HDF5-group](#), in particular on the site [HDF5 file format specification](#). The HDF5 group offers tools and libraries for various programming languages and operating systems that allow to read and write HDF5 files.

1.2.2 Hints

1.2.2.1 RCM-DX structure

RCM-DX defines a structure of HDF5 groups, datasets, and attributes that software solutions that use this format must adhere to.

The extension of the specification is permitted. However, it must be taken into account that such data may no longer be read or processed by existing systems.

1.2.2.2 Versioning

The RCM-DX data format is subject to changes, these are indicated by the version number in the document, see chapter [1.7.1 Root Group](#). The version number consists of two numbers, separated by

dots and is composed as follows: **[Major].[Minor]**. Example: **1.0**

Major

Defines the main version and indicates when major changes have been made. These are, for example, that changing the basic structure or renaming groups, datasets or attributes (major, minor attribute as an example), which are mandatory.

Minor

Indicates minor changes, such as changing the name of an attribute that is not mandatory or defining new groups, attributes, or datasets. These changes do not affect anything that cannot be read with an existing RCM-DX read-write library.

Revision

To version this specification, a third digit is introduced with the abbreviation **[Rev]** for revision. This, however, is only valid for this document as a help and not for the overview of changes to the structure itself. This third version number is not visible in the RCM-DX files. If the major and/or minor version number is increased, the revision number is reset to zero "0".

See chapter [1.1 Change history](#).

1.2.2.3 Diagrams

The following figure shows the color coding used in diagrams:

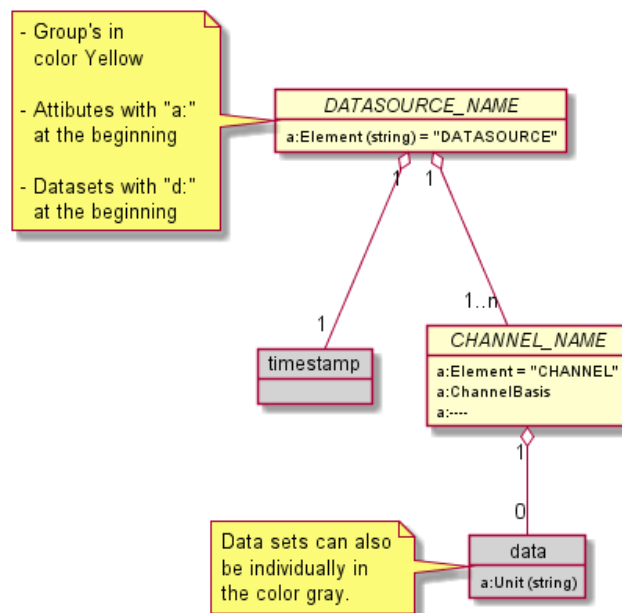


Figure 1: RCM-DX diagram overview

1.3 Definitions

This document defines technical restrictions as well as content descriptions. This chapter provides an overview of the data types used, types of names, and other important points.

1.3.1 File names

Files following the RCM-DX specification get their own defined file extension, which is `rcmdx`.

Example of a file name: `20201228_081522_TGMS.rcmdx`.

1.3.2 Primitive and extended data types

1.3.2.1 Primitive data types

Below are the supported data types used in this specification including a short description. Not all data types possible with HDF5 are described. The read and write library specifies which data types can be used for data sets and attributes.

Data type	Description	Example
boolean	Two values are possible, true or false , 0 or 1	true
byte	One byte or an unlimited number of bytes are possible	-
signed integer	Positive and negative values are allowed. Possible bit depths are: 8, 16, 32 or 64	1256442, -62334
unsigned integer	Only positive values are allowed. Possible bit depths are: 8, 16, 32 or 64	1256442, -62334
float	Positive and negative values are allowed. Possible bit depths are: 32 or 64	12.53, -3212.546
string	Multiple characters of undefined length	"RCM-DX is great!"

1.3.2.2 Extended data types

Extended data types use the primitive data types, but have a more specialized format or meaning. The following is a list of the extended data types used.

Name	Description	Example
Timestamp	Unique and worldwide defined format of a time, since January 1, 1970 00:00 UTC without leap seconds, defined under wikipedia.org/wiki/Timestamp . Datatype is 64 <code>bit unsigned integer</code>	1553237099000000000
Enum	Enumerations are predefined (and always capitalized) strings defined in this specification. Datatype is <code>string</code>	<code>MAX, MIN, RIGHT, LEFT</code>

1.3.3 (HDF5) Group

If we are talking about a group in this document, we mean the groups in HDF5 format (of the type `HDF5 Group`). These contain additional groups or datasets.

If a name of a group in this document is written in capital letters (for example `TOPOLOGY`), it is exactly the same as in the RCM-DX file. If the naming of a group is not fixed, the corresponding chapter describes in more detail how the name is composed.

Groups are described in this specification as follows:

Name	Parent object	Mandatory
<code>SESSION</code>	<code>RCMDX</code>	yes

Name

The name of the group.

Parent object

A group can be a subgroup of a group, here the name of this group is mentioned. If the name is written in quotation marks, it can be freely chosen by the creator of the file. Without quotation marks, the name of the group is meant.

Mandatory

If the group is absolutely necessary and must exist, `yes` is written here, otherwise `no`.

Group names whose ending is "_NAME" are wildcard names and are replaced as described in the corresponding paragraph. Example: *SESSION_NAME*

1.3.4 (HDF5) Attribut

In the RCM-DX, attributes, groups and datasets can be assigned. The names of the attributes are written in the UpperCamelCase-Notation¹. Attributes are always of type **HDF5 attribute** unless otherwise specified.

Attributes are described in this specification as follows:

Name	Data type	Parent object	Mandatory	Description
StartTime	64 bit integer	<i>SESSION_NAME</i>	yes	Start time in miliseconds, for example: 15532370990000000000

Name

The name of the attribute.

Data type

Primitive data type of the attribute, this describes the type of the content in the attribute itself.

Parent object

An attribute is always assigned to a group or a data set, here the name of this group or data set is mentioned.

Mandatory

If the attribute is absolutely necessary and must exist as well as contain a value, **yes** is written here, otherwise **no**.

Description

Description and or examples of the attribute.

¹Upper-Camel-Case-Notation: The Upper Camel Case Notation defines the way a composite name is written. Further information can be found at the following link: [Upper Camel Case](#)

1.3.5 (HDF5) Datasets

A channel as a group always has one data set. A channel defines a type of sensor data that is stored in its data set. Several channels form a data source. Further information on the structure is described

further down in this specification.

A data set is always of the HDF5 type [HDF5 Dataset](#).

Below is a list of possible ways in which data can be stored in the RCM-DX:

Type of storage	Description
Array	Data array of arbitrary length
Image	An image taken at a defined time
Video	A video that has been streamed into several individual blocks of defined size, split and saved

The datasets are described in the lowerCamelCase-Notation². Datasets are described in this specification as follows:

Name	Data type	Parent object	Mandatory	Storage type
timestamp	Timestamp	<i>DATASOURCE_NAME</i>	yes	Array

Name

The name of the data set.

Data type

Primitive data type of the content in the data set, thus the data type of the contained data.

Parent object

A data set is always assigned to a group, here the name of this group is mentioned.

Mandatory

If the data set is absolutely necessary and must be present, [yes](#) is written here, otherwise [no](#).

Storage type

One of the storage types described in this chapter.

Descriptions of the data set are added outside the table.

²**lower-Camel-Case-Notation:** The lower camel case notation defines the way a composite name is written. Further information can be found under the following link: www.wikipedia.org/wiki/Camel_case

1.3.5.1 HDF5 Chunking

The “HDF5 Chunking” is for data within a data set. This means that the data is divided into blocks, which in turn can be processed independently. This also allows faster access to parts of the data. Whether a

splitting is allowed and recommended can be seen with each data set, for example: “HDF5 Chunking” is allowed and recommended. The HDF5 chunking is described in more detail on the website of the HDF5 group: www.support.hdfgroup.org/HDF5/doc/H5.user/Chunking.html

1.4 Data structures

Within a channel group, one of the following structures can be contained: Array, Limits, Coordinates, Pictures or Videos. These structures are described in more detail in this chapter.

1.4.1 Array

Channels which record individual measured values contain a data set with the name `data`, this data set is mandatory. Single values are stored in this data set as a 1D array, the length of this array (or list) is not limited.

The possible data types are defined in chapter [1.3.2 Primitiv and extended data types](#)

Multidimensional measured values are given their own channel group per dimension and thus their own data set called `data`.

Name	Data type	Parent object	Mandatory	Storage type
<code>data</code>	A primitive or extended data type	<code>CHANEL_NAME</code>	yes	<code>Array</code>

The following attributes are assigned to this type of data set:

Name	Data type	Parent object	Mandatory	Description
<code>Unit</code>	string	data set <code>data</code>	yes	A physical unit or empty if the data does not correspond to a physical unit

1.4.1.1 Limits

A channel group can contain one or more limit groups. Each limit group contains its own `timestamp` data set and contains a `duration` data set. If a defined limit value of a measured value of the channel

is exceeded, an entry in the `timestamp` data set follows. Using the optional data set `duration`, the duration of a limit value exceedance can be specified per entry in the data set `timestamp`. If both datasets exist, they contain the same number of entries!

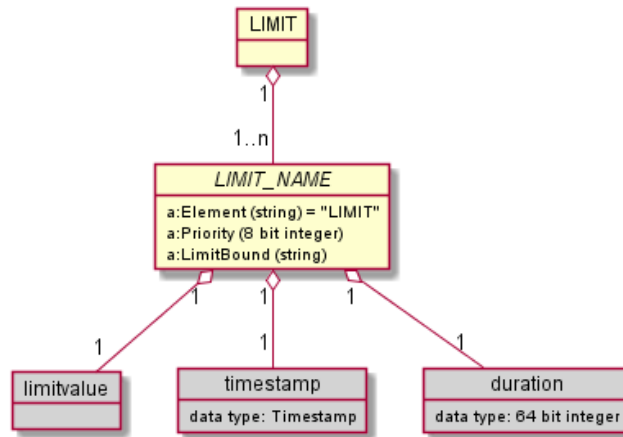


Figure 2: Limit group overview

The group of limit values is defined as follows:

Name	Parent object	Mandatory
<code>LIMIT</code>	<code>CHANNEL_NAME</code>	yes

The group `LIMIT` now contains further groups, each with the name of the limit exceeding, e.g. `TEMP`:

Name	Parent object	Mandatory
<code>LIMIT_NAME</code>	<code>LIMIT</code>	yes

The following attributes are assigned to this group:

Name	Data type	Parent object	Mandatory	Description
Priority	8 bit integer	<code>LIMIT_NAME</code>	yes	Priority of defined limit, lower values are priorities
LimitBound	Enum	<code>LIMIT_NAME</code>	yes	Defines the type of limit, possible values are <code>MAX</code> or <code>MIN</code> .

It contains the following datasets:

Name	Data type	Parent object	Mandatory	Storage type
limitvalue	A primitive or extended data type	LIMIT_NAME	yes	Array
timestamp	Timestamp	LIMIT_NAME	yes	Array
duration	Timestamp	LIMIT_NAME	yes	Array

1.4.2 Coordinates

Measurement data that can be assigned to a coordinate system are given a defined name according to the following pattern: `coord.CN`.

This type of data storage allows several entries to be recorded per measurement time. Thus there are more entries in these datasets than in the data set `timestamp`. How many entries per timestamp belong to each other (as a group) is stored in another data set with the name `sampleindex`. The data set `sampleindex` is describes in chapter [1.4.2.2 Sample index](#).

Element	Description
coord	Simple character string for identifying data of type Coordinates
.	Separators
C	Additional character for identifying data of type Coordinates
N	Index number beginning with "0", increasing for each additional coordinate datasets

The data set is defined as follows:

Name	Data type	Parent object	Mandatory	Storage type
coord.CN	A primitive or extended data type	CHANNEL_NAME	yes	Single

The following attributes are assigned to this type of data set `coord.CN`:

Name	Data type	Parent object	Mandatory	Description
<code>Unit</code>	string	Dataset <code>coord.CN</code>	yes	One physical unit or empty if the data does not correspond to any physical unit

1.4.2.1 Coordinate related measured values

Further measured values can be recorded for each coordinate measuring point. These are stored in individual data sets. In the following the definition of these data sets:

Element	Description
value	Simple character string for identifying data of type Coordinates
.	Separators
V	Additional character for identifying data of type value
N	Index number beginning with "0", increasing for each additional value set

The data set is defined as follows:

Name	Data type	Parent object	Mandatory	Storage type
value.VN	A primitive or extended data type	<code>CHANNEL_NAME</code>	no	Single

The following attributes are assigned to this type of data set `value.VN`:

Name	Data type	Parent object	Mandatory	Description
Type	string	Dataset <code>value.VN</code>	yes	Describes the content and type of the data it contains.

1.4.2.2 Sample Index

If datasets are created for coordinates, a data set on the same level and with the name `sampleindex` must be available. The index number of an entry in `coord.CN`, is entered as the start of the next

group. If the data set `sampleindex` has a value of 21 at index zero, the first 20 entries from the data set `coord.CN` belong together, the next data group start at with index number 21. The number of entries in `sampleindex` corresponds to those in the data set `timestamp`.

The group sizes can vary among themselves, this can be seen from the index positions in `sampleIndex`.

Example

The rail cross profile serves as an example here. At one point, several points of a rail profile are measured and stored. A channel with the name `coord.C0` for the X-axis and `coord.C1` is created for the Y-axis.

The data set `sampleindex` now contains the number of entries that belong together.

Below is a picture of a rail cross section measurement with about 2000 measuring points:

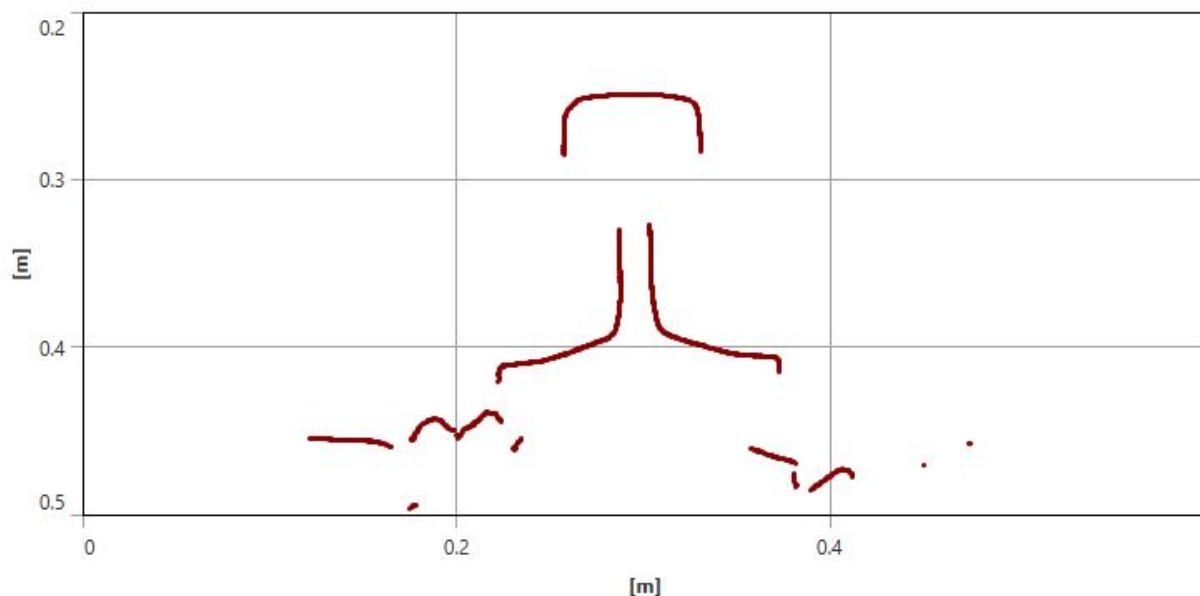


Figure 3: Image of a rail cross section measurement

1.4.3 Pictures

Images can be saved in compressed or uncompressed form. The format of the images is stored in an attribute so that the image can be read correctly.

Images are stored as binary data blocks, so an image results in a data set. All images are stored in a group called `IMG`. All images in this group have the same properties that are stored in the attributes.

Name	Parent object	Mandatory
IMG	<i>DATASOURCE_NAME</i>	yes

The group **IMG** gets the following attributes for the more detailed description of the images contained therein:

Name	Data type	Parent object	Mandatory	Description
ContentType	string	IMG	yes	Data type of images specified as MIME ³ type, for example Content-Type : <image/jpeg>
DataType	string	IMG	no	Description of data type, if no standard image, see 1.4.3.2 ContentType without Image MIME type
ResolutionType	Enum	IMG	yes	Description in chapter 1.4.3.1 Image resolution types
ResolutionInfoX	32 bit float	IMG	yes	Resolution in X direction
ResolutionInfoY	32 bit float	IMG	yes	Resolution in Y-direction

Images can have different resolutions in X and Y direction, this must be considered for a correct representation and evaluation of the images.

³**MIME:** A list of possible MIME types can be found at the link www.iana.org/assignments/media-types/media-types.xhtml. This is maintained by the www.iana.org/.

1.4.3.1 Image resolution types

The “ResolutionType” attribute contains information about the values of the “ResolutionInfoX” and “ResolutionInfoY” attributes.

ResolutionType’ can contain the following values: “none”, “mmPerPixel” or ‘dimension

none

No information available.

mmPerPixel

Defines the pixel size in mm. The values in “ResolutionInfoX” and “ResolutionInfoY” give information about the real size of a pixel in millimeters.

dimension

Defines the resolution of the image. The values in [ResolutionInfoX](#) and [ResolutionInfoY](#) give information about the image size in pixels.

1.4.3.2 ContentType without Image MIME Type

If the created and saved image requires a special software to display it, the following MIME type should be added to the attribute [ContentType](#): [Content-Type](#): `<application/octet-stream>`.

To store more information, for example which system created the data, a new attribute can be added to the group [IMG](#). The attribute gets the name [DataTyp](#).

1.4.3.3 Naming the data set for an image

Name	Data type	Parent object	Mandatory	Storage type
img.NNNNNNNNN	integer, bit depth depending on color depth	IMG	yes	image

The images are named according to the following pattern: [img.NNNNNNNNN](#), hereinafter a description of the individual elements.

Element	Description
img	String for the name of an image
.	Separators.
NNNNNNNNN	Picture number, beginning with 000000000 (nine characters)

1.4.4 Videos

Name	Data type	Parent object	Mandatory	Storage type
vid.NNNNNNNNN	integer, bit depth depending on color depth	VID	yes	image

As with the images, videos can be saved in compressed or uncompressed form. The format is stored in an attribute to make it easier to read the images.

Videos are stored as streams in individual blocks. The blocks are single datasets with a given name.

Name	Parent object	Mandatory
VID	<i>DATASOURCE_NAME</i>	yes

Below is a list of the attributes assigned to the data group **VID**:

Name	Data type	Parent object	Mandatory	Description
ContentType	string	VID	yes	Data type of the video stream specified as MIME ⁴ type, for example Content-Type: <video/h264>
DataType	string	VID	no	Description of data type if no standard video format, see 1.4.4.2 ContentType without video MIME type
ResolutionType	Enum	VID	yes	Description in chapter 1.4.4.1 Video resolution types
ResolutionX	32 bit integer	VID	yes	Resolution in X direction in pixels
ResolutionY	32 bit integer	VID	yes	Resolution in Y direction in pixels
FramesPerSecond	16 bit integer	VID	yes	Number of frames per second (fps) in which the video was recorded

⁴**MIME**: A list of possible MIME types can be found at the link www.iana.org/assignments/media-types/media-types.xhtml. This is maintained by the www.iana.org.

1.4.4.1 Video resolution types

The “ResolutionType” attribute contains information about the values of the “ResolutionInfoX” and “ResolutionInfoY” attributes.

ResolutionType’ can contain the following values: “mmPerPixel” or ‘dimension

none

No information available.

mmPerPixel

Defines the pixel size in mm. The values in “ResolutionInfoX” and “ResolutionInfoY” give information about the real size of a pixel in millimeters.

dimension

Defines the resolution of the video in pixel. The values in `ResolutionInfoX` and `ResolutionInfoY` give information about the video size in pixels.

1.4.4.2 ContentType without Video MIME Type

If the created and saved video stream needs its own special software to display it, the following MIME type should be added to the `ContentType` attribute: `Content-Type: <application/octet-stream>`.

To store more information, for example which system created the data, a new attribute can be added to the group `VID`. The attribute gets the name `DataTyp`.

1.4.4.3 Name of the data set for a video

A video data block is named according to the following pattern: `vid.NNNNNNNNN`, hereinafter a description of the individual elements.

Element	Description
vid	String for the name of a video
.	Separator
NNNNNNNNN	Video number, starting with 000000000 (nine characters), ascending +1

1.5 Time-based data structures**1.5.1 Timestamp**

Each entry in a data set of a channel has a reference to an entry in a data set with the name `timestamp`, which lies within the data source group. In this `timestamp` data set, there are as many entries as there are entries in a data set of a channel.

The time stamps are always stored in ascending order.

Name	Data type	Parent object	Mandatory	Storage type
timestamp	Timestamp	<i>DATASOURCE_NAME</i>	yes	Array

These time stamps are recorded either by a defined distance travelled or by a frequency, this is described in more detail in the chapter [1.7.10.1 Trigger mode](#).

1.5.2 Durations

If data is recorded that is valid for a certain period of time, the data set with the name *duration* is added to the data set *timestamp*. The timestamp recorded in the *timestamp* data set specifies the time at which the value was recorded and the *duration* data set specifies how long this value is valid in nanoseconds. The data set *duration* is *timestamp* within a data source group next to the data set.

The differentiation between discrete (data for discrete *timestamp*) and continuous (data for *timestamp* with *duration*) data is done on data source level. The existence or absence of a *duration* array (see 8.4) defines if the data source is “Discrete” (no *duration* array) or “Continuous” (with *duration* array).

Example: Assuming there is a data source with a temperature value every second and a calculated average temperature for every minute. Such an average temperature would be stored in a continuous data source, within a array, with duration of 60 sec.

Name	Data type	Parent object	Mandatory	Storage type
duration	64 bit integer	<i>DATASOURCE_NAME</i>	Yes for continuous values, otherwise no	Array

1.6 RCM-DX file format

The RCM-DX consists of a file format of the HDF5-group www.hdfgroup.org/HDF5 in version 2.0. This allows to save the data in a tree structure. This structure, or rather the naming of the groups and datasets, is not specified by the HDF5 group, but by the RCM-DX specified here. The datasets can hold different data, what exactly is contained is specified as metadata.

A change to the structure means a new version and thus a new release of this specification.

To read and write the HDF5 file format, the HDF5 group offers libraries for different languages. These can read and write the structure specified here without problems.

Further information about the structure of the HDF5 file format can be found under the following link:
www.portal.hdfgroup.org/display/HDF5/Introduction+to+HDF5

1.7 RCM-DX data hierarchy

In the RCM-DX, the individual groups and datasets as well as their names are defined. Below is an overview of the structure specified in this document:

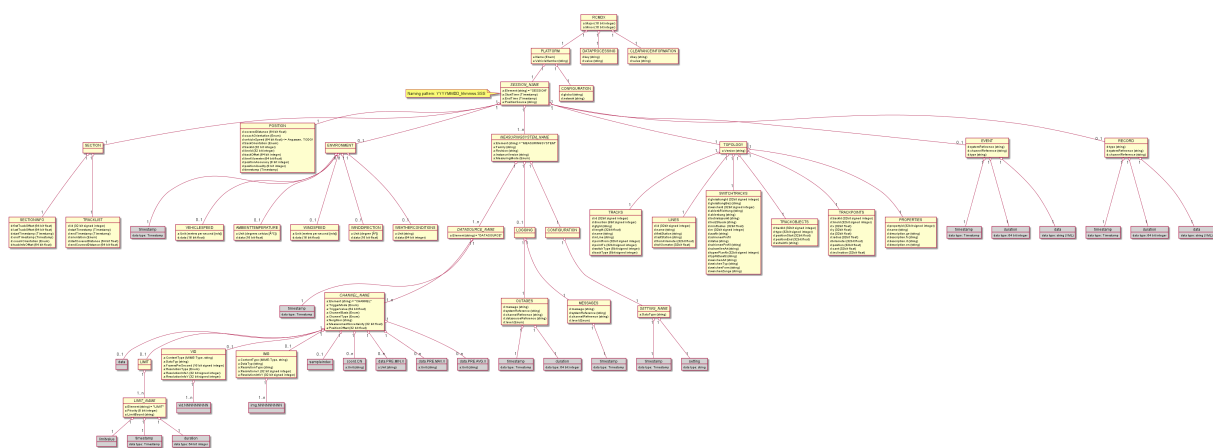


Figure 4: RCM-DX structure overview

Separate and more detailed specifications have been written for individual structure groups. Several measuring instruments can be installed on one measuring and inspection vehicle. Each of these measuring devices generates new channels of data, which flow into the RCM-DX. Since these channels can be different for each measuring device, the specifications were separated. Another reason for this is the fact that other railway operators use different measuring and inspection equipment.

The individual groups are specified in more detail below in the subcategories.

1.7.1 Root Group

The root group contains all other subgroups. This group defines the RCM-DX and bears its name and thus refers to this specification.

Name	Parent object	Mandatory
RCMDX	this is the root node	yes

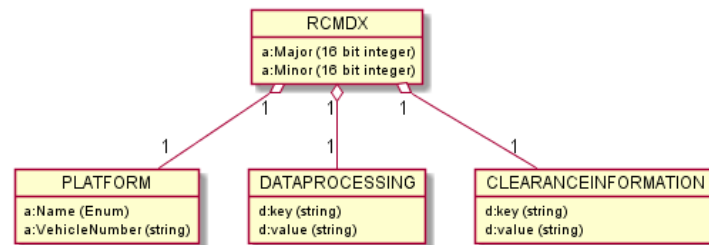


Figure 5: Root group overview

1.7.1.1 Attributes

The following attributes are assigned to the group **RCMDX**:

Name	Data type	Parent object	Mandatory	Description
Major	16 bit integer	RCMDX	yes	Major Version of the RCM-DX specification that corresponds to the structure of the created file
Minor	16 bit integer	RCMDX	yes	Minor Version of the RCM-DX specification that corresponds to the structure of the created file

1.7.2 Platform Group

A platform group contains information about a measuring vehicle that collects the data.

The naming of the group is defined according to which platform produced the data. An overview of all names and the corresponding platform is specified in the chapter [1.7.2.2 Platforms at the SBB](#).

Name	Parent object	Mandatory
Name	Parent object	Mandatory
Platform	RCMDX	yes

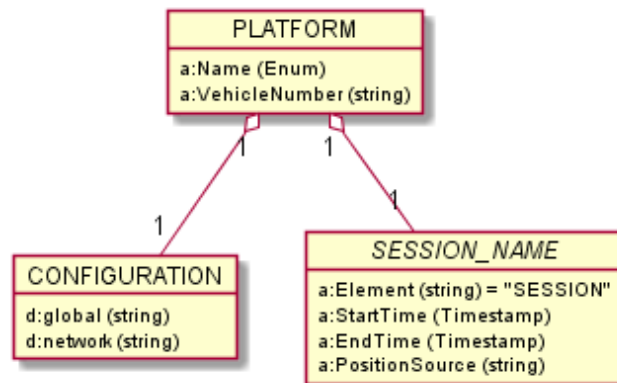


Figure 6: Platform group overview

1.7.2.1 Attributes

The platform group contains the following attributes:

Name	Data type	Mandatory	Description
Name	Enum	yes	Unique platform name of the vehicle, 1.7.2.2 Platforms at the SBB
VehicleNumber	string	yes	Unique number of the vehicle

1.7.2.2 Platforms at the SBB

Below is a list of the defined unique names of the platforms and their names.

Platform Name	Abbreviation	Vehicle Number
DFZ00	DFZ	-
DFZ01	gDFZ	-
DFZ02	SPZ	-

1.7.2.3 Platform Configuration Group

Configurations of various systems can be stored in the datasets of this group. The datasets are designed so that global and network specific configurations can be stored. The Configuration can change and have not to be the same in each session.

Name	Parent object	Mandatory
CONFIGURATION	PLATFORM	no

Subsequent datasets are subordinate to this group:

Name	Data type	Parent object	Mandatory	Storage type
global	string	CONFIGURATION	yes	Single values
network	string	CONFIGURATION	yes	Single values

1.7.3 Session Group

The session group contains data that was collected during the same period. A session group contains data from different sources. A RCM-DX file can contain one session group. One file is created per session.

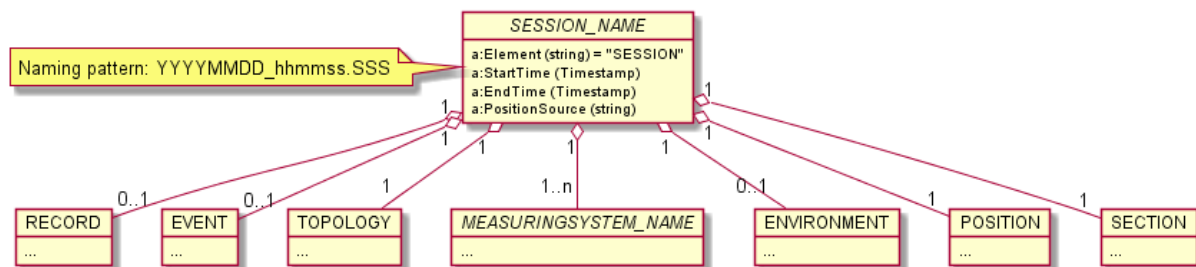


Figure 7: Session group overview

1.7.3.1 Naming

Since several session groups can be contained in one RCM-DX file, they must be given a unique name. To achieve this goal, the names are assigned according to the following pattern:

Name	Parent object	Mandatory
YYYYMMDD_hhmmss.SSS	PLATFORM	yes

Example: 20190212_231255.592

The individual elements and their meaning are described below:

Pattern	Content
YYYY	The year in four digit representation
MM	The month in the year (01 for January)
DD	The day in the month
hh	The hour in the day (0-23)
mm	The minute in the hour
ss	The seconds in the minute
SSS	The milliseconds in the seconds
"_" or "."	Characters as separator

A session contains the data of one or more measuring devices (one or more data sources). For a certain period of time, only one session can exist in a file, this must be ensured by the creator of the file.

1.7.3.2 Attributes

Name	Data type	Parent object	Mandatory	Description
Element	string	SESSION_NAME	yes	Contains the type of the group, this is fix "SESSION"
StartTime	long	SESSION_NAME	yes	Time stamp in nanoseconds since January 1, 1970 UTC as start time of the session
EndTime	long	SESSION_NAME	no	Time stamp in nanoseconds since 1.1.1970 UTC as end time of the session. If the session has not yet been closed, this attribute is missing
PositionSource	string	SESSION_NAME	yes	Contains the name of the source (group) of the positioning.

1.7.4 Section Group

The group [SECTION](#), contains information about a session.

Name	Parent object	Mandatory
SECTION	SESSION_NAME	yes

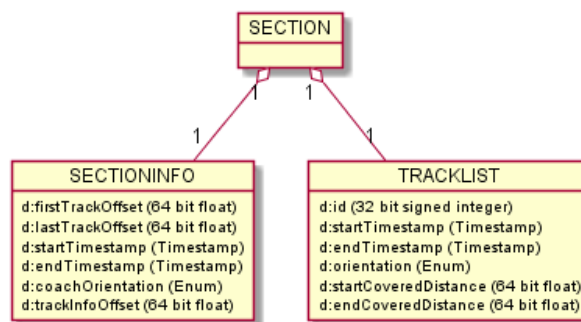


Figure 8: Section group overview

1.7.4.1 Section info

This group contains the information regarding the section itself.

Name	Parent object	Mandatory
SECTIONINFO	SECTION	yes

1.7.4.1.1 Data fields

The following data fields are contained in the group “SECTIONINFO”:

Name	Data type	Parent object	Mandatory	Storage type
firstTrackOffset	64 bit float	SECTIONINFO	yes	Array
lastTrackOffset	64 bit float	SECTIONINFO	yes	Array
startTimestamp	Timestamp	SECTIONINFO	yes	Array
endTimestamp	Timestamp	SECTIONINFO	yes	Array
coachOrientation	Enum	SECTIONINFO	yes	Array
trackInfoOffset	64 bit float	SECTIONINFO	yes	Array

coachOrientation

Defines the orientation of travel of the measuring vehicle per section. This array contains only as many entries as there are sections.

Possible values of this enumeration are:

Value	Orientation of travel
FORWARD	forward
REVERCE	reverse

firstTrackOffset

Indicates the distance in meters between the start of the track and the position at the beginning of the measurement. This array contains only as many entries as there are sections.

lastTrackOffset

Indicates the distance in meters between the position at the end of the measurement and the end of the rail. This array contains only as many entries as there are sections.

startTimestamp

Start time of the section as time stamp since 1.1.1970 at 00:00 UTC.

endTimestamp

End time of the section as time stamp since 1.1.1970 at 00:00 UTC. `endTimestamp` must be greater than `startTimestamp`.

trackInfoOffset

This data set defines how many entries in the datasets of the “Track list group” belong to a section. One entry is created per section in a session and the number of entries is defined. A group size can be determined by calculating the specified offset value at the x position minus the offset value at the $x - 1$ position.

1.7.5 Track list group

This group contains the information regarding the section itself.

Name	Parent object	Mandatory
TRACKLIST	SECTION	yes

1.7.5.1 Data fields

Name	Data type	Parent object	Mandatory	Storage type
id	32 bit signed integer	TRACKLIST	yes	Array
startTimestamp	Timestamp	TRACKLIST	yes	Array
endTimestamp	Timestamp	TRACKLIST	yes	Array
orientation	Enum	TRACKLIST	yes	Array
startCoveredDistance	64 bit float	TRACKLIST	yes	Array
endCoveredDistance	64 bit float	TRACKLIST	yes	Array

id

ID of the tracks that are part of the section.

startTimestamp

Time since beginning of the session at which the measurement on a track started.

endTimestamp

Time since the beginning of the session at which the measurement on a track ended. `endTimestamp` must be greater than `startTimestamp`.

orientation

Orientation of the track with respect to the section's driving direction.

The following values are allowed:

Value	Meaning
ASCENDING	The track kilometrage increases with the driving direction
DESCENDING	The track kilometrage decreases with the driving direction

startCoveredDistance

Start covered distance of the track in the section.

endCoveredDistance

End covered distance of the track in the section.

1.7.6 Position group

This group contains general information on the position.

Name	Parent object	Mandatory
POSITION	SESSION	yes

1.7.6.1 Data fields

Name	Data type	Parent object	Mandatory	Storage type
coveredDistance	64 bit float	POSITION	yes	Array
coachOrientation	Enum	POSITION	yes	Array
vehicleSpeed	64 bit float	POSITION	yes	Array
trackOrientation	Enum	POSITION	yes	Array
trackId	32 bit integer	POSITION	yes	Array
lineId	32 bit integer	POSITION	yes	Array
trackOffset	64 bit float	POSITION	yes	Array
lineKilometer	64 bit float	POSITION	yes	Array
positionAccuracy	8 bit integer	POSITION	yes	Array
positionQuality	8 bit integer	POSITION	yes	Array
timestamp	64 bit integer	POSITION	yes	Array

coveredDistance

Total length of a session.

vehicleSpeed

Speed of the vehicle at the time.

trackId

Defined track ID on which the vehicle is located at the time of recording.

lineId

Defined line ID on which the vehicle is located at the time of recording.

trackOffset

Distance between starting point of track and current position.

lineKilometer

Absolute position on the line travelled at the time of recording.

positionQuality

Quality of the position measurement between zero (0) very good to 15 very bad.

positionAccuracy

The position accuracy.

positionAccuracy

The timestamps according to the number of values in each data set.

Unit's are defined in the attribute `Unit` of each data field.

1.7.6.2 Coach Orientation

The data set `coachOrientation` contains the coach direction of the vehicle. This information influences the position of the measuring systems.

This data set can contain the following values:

Value	Description
FORWARD	Vehicle moving forward
REVERSE	Vehicle moving reversing

1.7.6.3 Track Orientation

The data set `trackOrientation` contains the alignment of the track. This information serves the correct evaluation of the kilometer data of the line, see data set `trackOffset`.

This data set can contain the following values:

The following values are allowed:

Value	Meaning
ASCENDING	The rail was crossed in ascending mileage
DESCENDING	The rail was crossed in decreasing mileage

1.7.7 Environment Group

Name	Parent object	Mandatory
ENVIRONMENT	SESSION_NAME	no

Information about the environment can be stored in the subgroups and their datasets. Since such information applies to all measurement systems, this is the right place for it.

As always with a data source, the data set `timestamp` must **not** be forgotten.

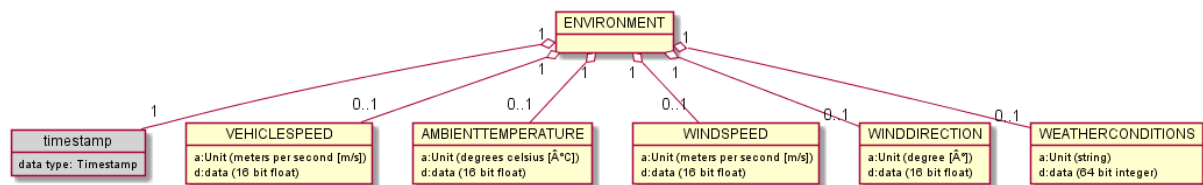


Figure 9: Environment group overview

1.7.7.1 Vehicle Speed

Name	Parent object	Mandatory
<code>VEHICLESPEED</code>	<code>ENVIRONMENT</code>	no

The data set contains a measured vehicle speed for each time stamp.

Name	Data type	Parent object	Mandatory	Storage type
data	16 bit float	<code>VEHICLESPEED</code>	no	Array

Unit: meters per second [m/s]

1.7.7.2 Ambient Temperature Group

This group contains a data set containing the ambient temperatures. One temperature measurement is performed per time stamp.

Name	Parent object	Mandatory
<code>AMBIENTTEMPERATURE</code>	<code>ENVIRONMENT</code>	no

For each time stamp, the ambient temperature is entered in the data set.

Name	Data type	Parent object	Mandatory	Storage type
data	16 bit float	<code>AMBIENTTEMPERATURE</code>	no	Array

Unit: degrees celsius [°C]

1.7.7.3 Wind Speed Group

The wind speed can be stored in the data set of the group [WINDSPEED](#).

Name	Parent object	Mandatory
WINDSPEED	ENVIRONMENT	no

For each time stamp, the wind speed is entered in the data set.

Name	Data type	Parent object	Mandatory	Storage type
data	16 bit float	WINDSPEED	no	Array

Unit: meters per second [m/s]

1.7.7.4 Wind Direction Group

In addition to the wind speed, the wind direction is also saved, this is done in this group.

Name	Parent object	Mandatory
WINDDIRECTION	ENVIRONMENT	no

For each time stamp, the wind direction is entered in the data set.

Name	Data type	Parent object	Mandatory	Storage type
data	16 bit float	WINDDIRECTION	no	Array

Unit: degree [°]

1.7.7.5 Weather Conditions Group

The weather has an influence on the measurements. How the weather was at the time of the measurements is recorded in this group.

Name	Parent object	Mandatory
WEATHERCONDITIONS	ENVIRONMENT	no

For each time stamp, the weather conditions are entered in the data set. This could be for example “rain, fog, snowfall”.

Name	Data type	Parent object	Mandatory	Storage type
data	64 bit integer	WEATHERCONDITIONS	no	Array

1.7.8 Measuring System Group

Each measuring system has its own data sources, which have their own names, as well as their own channels, which in turn have their own names. Common features are described in this specification, everything else is defined in a separate specification. Since this part differs greatly from railway companies and measuring equipment, a rigid specification has been dispensed with, but a certain framework is still given.

A group is created for each system that collects data. The name of the group is unique for each system. The composition of this name is not predefined. Each system contains further subgroups, each of which contains a data source at the end.

Name	Parent object	Mandatory
MEASURINGSYSTEM_NAME	PLATFORM	yes

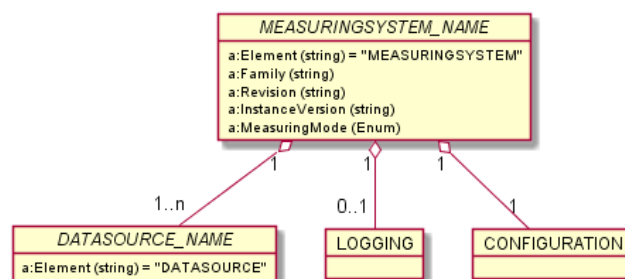


Figure 10: Measuring system overview

1.7.8.1 Attributes

The following attributes are contained in the group of the measuring system:

Name	Data type	Parent object	Mandatory	Description
Family	string	MEASURINGSYSTEM_NAM	yes	General name of the measuring system
Revision	string	MEASURINGSYSTEM_NAME	yes	Version of the software on the measuring system, issued by the owner of the platform
InstanceVersion	string	MEASURINGSYSTEM_NAM	yes	Version of the data format created by the measuring instrument. This version can be different within different gauges of the same family
Element	string	MEASURINGSYSTEM_NAME	yes	Contains the type of the group, this is fixed MEASURINGSYSTEM
MeasuringMode	Enum	MEASURINGSYSTEM_NAM	yes	Indicates the measuring mode, defined in chapter 1.7.8.1.1 Measuring mode

1.7.8.1.1 Measurement mode

There are three different measurement modes, which are explained individually below.

Name	Description
OPERATIV	Productive data that will be further used.
TEST	Test data recorded during a diagnostic run with the aim of checking and testing the measuring equipment.
SIMULATION	Simulated values that the measuring systems produce themselves and are no longer used.

1.7.9 Datasource Group

A data source group can contain several channels and thus several data sources. This group combines these channels. The naming can be freely selected, but must be unique.

Name	Parent object	Mandatory
DATASOURCE_NAME	MEASURINGSYSTEM_NAME	yes

A timestamp is available for each individual measuring point within a data source group. There are two types of data acquisition for a data source group. One is always after a defined distance (e.g. every 250 millimeters) and the other is the recording of measurement data at a certain frequency (e.g. 4000 Hz). The way the measurement data was recorded is shown in two attributes for each channel group. For a description see [1.7.10.1 Trigger mode](#).

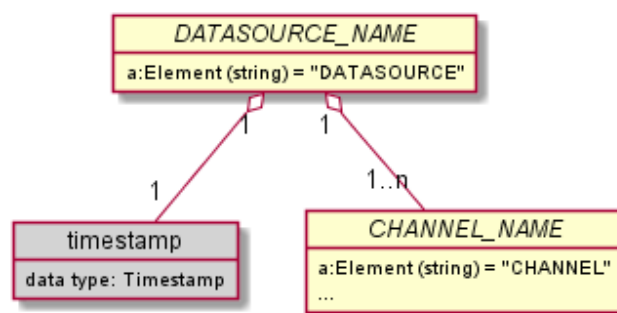


Figure 11: Datasource group overview

1.7.9.1 Attributes

The following attribute is assigned to the group:

Name	Data type	Parent object	Mandatory	Description
Element	string	<i>DATASOURCE_NAME</i>	yes	Contains the type of the group, this is fix DATASOURCE

1.7.9.2 Example

In our example the name of the data source group is assigned, which should contain our environmental measurement data, which we call **ENVIRONMENT**.

1.7.9.3 Timestamp data set

Each data source group contains a data set called `timestamp`. It contains all timestamps at which a measurement was recorded. The size of this list of timestamps is the same as the size of the datasets per channel.

A more detailed description can be found in the chapter [1.5.1 Timestamp Array](#)!

1.7.10 Channel Group

A channel group contains metadata for the actual measurement data and thus for the various channels. The naming can be freely selected, but must be unique within the data source group.

Name	Parent object	Mandatory
<code>CHANNEL_NAME</code>	<code>DATASOURCE_NAME</code>	yes

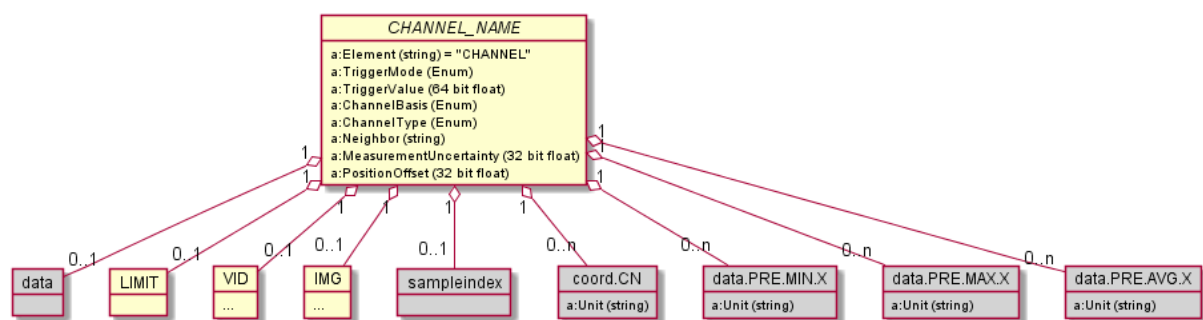


Figure 12: Channel group overview

The following attributes are contained in this group:

Name	Data type	Parent object	Mandatory	Description
TriggerMode	Enum	<code>CHANNEL_NAME</code>	yes	See chapter 1.7.10.1 Trigger Mode
TriggerValue	64 bit float	<code>CHANNEL_NAME</code>	yes	See below
ChannelBasis	Enum	<code>CHANNEL_NAME</code>	yes	See below
ChannelType	Enum	<code>CHANNEL_NAME</code>	yes	See below
Neighbor	string	<code>CHANNEL_NAME</code>	yes	See below

Name	Data type	Parent object	Mandatory	Description
MeasurementUncertainty	32 bit float	<i>CHANNEL_NAME</i>	yes	This attribute contains the measurement accuracy of the channel according to the specifications of the measurement system.
PositionOffset	32 bit signed float	<i>CHANNEL_NAME</i>	yes	See below
Element	string	<i>CHANNEL_NAME</i>	yes	Contains the type of the group, this is fix CHANNEL

TriggerValue

The trigger value defines when a value is measured based on the trigger mode.

In a data source group there is always only one common trigger mode! A mixture within the group is not permitted! The attribute has the value "0.0" if [TriggerMode](#) contains the value [EVENT](#).

ChannelBasis

Description of the channel, what was measured and in which direction. Since a measuring vehicle can move on a rail in two directions and the sensor could therefore be on the other side, it should be possible to indicate this. Here is the place for it.

Possible values are:

Value	Description
COACH_LEFT	Sensor is installed on the left hand side of the measuring platform. The data has not been corrected for direction of travel
COACH_RIGHT	Sensor is installed on the right hand side of the measuring platform. The data has not been corrected for direction of travel
RAIL_LEFT	Channel contains data of the left rail in terms of travel direction. The data has been corrected for direction of travel

Value	Description
RAIL_RIGHT	Channel contains data of the right rail in terms of travel direction. The data has been corrected for direction of travel
ABSOLUTE	Channel is not associated with a single rail

ChannelType

Defines how a value was created. This can be measured, calculated or taken from a previously defined data source that was read from there and inserted into the file.

The following values are possible:

Value	Description
MEASURED	Measured values
REFERENCE	A setpoint of a third source

An example for reference values are defined target values which flow in from another source (file, database etc.) and are to be used for comparisons.

Neighbor

Refers to the name of an adjacent channel. This can be the right rail, for example, when measuring the track temperature of the left rail. Thus the attribute `neighbor` of the channel “TEMP_RAIL_L” would contain the name “TEMP_RAIL_R” and vice versa.

PositionOffset

Describes the distance between a defined zero point (position) on the measuring vehicle and a the measuring sensor. This specification is used to convert the exact time at which the measurement was taken to a defined zero point. The value can be positive or negative and has the unit millimeter.

1.7.10.1 TriggerMode

This attribute defines how the data was recorded.

Possible values are:

Value	Description	TriggerValue Unit
TIME	Time-based measurement data recording	Nanoseconds
FREQUENCY	Frequency-based measurement data recording	Hz
DISTANCE	Distance-based measurement data acquisition	Millimeter

Value	Description	TriggerValue Unit
EVENT	Event based recording	none

1.7.10.2 Data object

Each channel group receives a data set with the actual measurement data:

Name	HDF5 Type	Mandatory
data	HDF5 Dataset	yes

There are as many measurement data entries as there are timestamps in the data set `timestamp` which is included in the channel group.

The data set needs more information, this is given as attributes:

Name	Data type	Parent object	Mandatory	Storage type
Unit	string	CHANNEL_NAME	yes	Array

Unit: The physical unit of the measurement data, such as “millimeter”. If no physical unit can be assigned to the data, this attribute remains empty.

The data set and the possible data that can be stored are described in more detail in the chapter [1.3.5 Dataset](#).

1.7.11 Logging Group

The logging group contains information about the status of the measuring systems. The data is divided into two subgroups, `OUTAGES` and `MESSAGES`. These are described in separate chapters.

Name	Parent object	Mandatory
LOGGING	MEASURINGSYSTEM_NAME	no

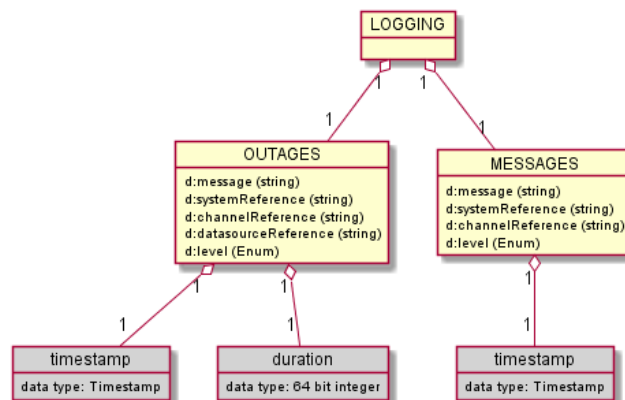


Figure 13: Logging group overview

1.7.11.1 Outage Group

In this group, failures and interruptions of measurement systems are recorded in a defined structure, each as its own data set.

Name	Parent object	Mandatory
OUTAGES	LOGGING	yes

The following datasets are included in this group:

Name	Data type	Parent object	Mandatory	Storage type
message	string	OUTAGES	yes	Array
systemReference	string	OUTAGES	yes	Array
channelReference	string	OUTAGES	yes	Array
datasourceReference	string	OUTAGES	yes	Array
level	Enum	OUTAGES	yes	Array
timestamp	Timestamp	OUTAGES	yes	Array
duration	64 bit integer	OUTAGES	yes	Array

This group receives a **timestamp** data set as well as a **duration** data set to indicate the time of the measurement failure.

message

This data set contains one message per entry about a failure of a measuring instrument.

systemReference

A reference to the measurement system.

channelReference

A reference to a channel.

datasourceReference

A reference to a data source.

level

See chapter **?? Outage level**

1.7.11.1 Outage level

Defines the severity of the failure or interruption of a measurement system. Following values are possible:

level	description
CORRECTLY	The measuring system or the sensor functioned without problems and the measured values can be reused.
TOTAL_FAILURE	The measuring system or sensor has completely failed and has not recorded any measured values during the session.
PARTIAL_FAILURE	The measuring system or the sensor has partially failed and has only recorded measured values for a certain time during the session.
MALFUNCTION	The measuring system or the sensor had a malfunction and the measured values cannot be used because they may not be correct.

1.7.11.2 Message Group

This group contains messages, generated from a measurement system or a person, structured in data set.

Name	Parent object	Mandatory
MESSAGES	LOGGING	yes

The following datasets are included in this group:

Name	Data type	Parent object	Mandatory	Storage type
message	string	MESSAGES	yes	Array
level	Enum	MESSAGES	yes	Array
systemReference	string	MESSAGES	yes	Array
channelReference	string	MESSAGES	yes	Array
timestamp	Timestamp	MESSAGES	yes	Array

message

This data set contains one message per entry about a failure of a measuring instrument.

systemReference

A reference to the measurement system.

channelReference

A reference to a channel.

level

See chapter **?? Message level**

1.7.11.2.1 Message level

Defines the importance of a message. Following values are possible:

level	description
VERY_HIGHT	Priority of the message is very high.
HIGHT	Priority of the message is not high.
MEDIUM	Priority of the message is medium important.
LOW	Priority of the message is not important.

1.7.12 Topology Group

A topology group contains all information on the route network of the respective railway company. This chapter has been optimised for SBB and may differ between railway companies. SBB's data processing chain provides for this structure, which is why it is described here.

Name	HDF5 Type	Parent object	Mandatory
TOPOLOGY	HDF5 Group	SESSION_NAME	yes

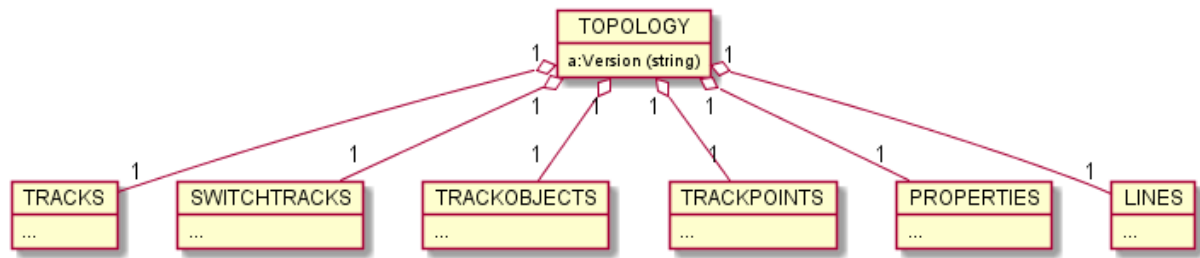


Figure 14: Topology group overview

1.7.12.1 Attributes

The group **TOPOLOGY** contains the following attributes:

Name	Data type	Parent object	Mandatory	Storage type
Version	string	TOPOLOGY	yes	Array

Version

Version number of topology, included to check validity.

The DfA (Database of fixed assets) is a SBB construct and reflects the SBB route network. The data comes from a database and is distributed as a file to the SBB measuring vehicles. They can read the information contained therein and also add it to the RCM-DX. This DfA is used for positioning and it is therefore possible to assign the measured data to an object from the route network.

1.7.13 Track Group

This group contains information on the tracks of the railway network. The information is stored in separate datasets.

Name	Parent object	Mandatory
TRACK	TOPOLOGY	yes

The following datasets are included in this group, some of which are described in more detail in the subchapters:

Name	Data type	Parent object	Mandatory	Storage type
direction	8 bit signed integer	TRACK	yes	Array

Name	Data type	Parent object	Mandatory	Storage type
id	32 bit integer	TRACK	yes	Array
gtgId	string	TRACK	yes	Array
length	string	TRACK	yes	Array
name	string	TRACK	yes	Array
pointFrom	32 bit integer	TRACK	yes	Array
pointTo	32 bit integer	TRACK	yes	Array
switchType	8 bit signed integer	TRACK	yes	Array
trackType	8 bit signed integer	TRACK	yes	Array

direction

The direction of a switch is specified in this data set.

If the track is of the type “switch”, a value greater than zero must be selected here. Which number means what is shown in the following table:

Value	Description
0	No crossover
1	Straight line switch track
2	Left-handed switch
3	switch running to the right

id

ID of the track.

gtgId

Unique GTG ID of a GTG string, this ID is stored as UUID.

length

The length of the track section.

name

Name of the track section.

pointFrom

ID of the starting point of the track section.

pointTo

ID of the end point of the track section.

switchType

If the track is of the type “Switch”, a value greater than zero must be selected here. Which number means what is shown in the following table:

Value	Description
0	Anything but a turnout
1	simple switch
2	Double switch
3	Simple crossovers
4	Double track connection
5	Double crossover

trackType

The number in the *trackType* data set defines the type of track that belongs to it. Which number means what is shown in the following table:

Value	Description
0	Station track
1	Track
2	Switch

1.7.14 Line Group

This group contains information about a line in the route network. The information is stored in separate datasets.

Name	Parent object	Mandatory
LINE	TOPOLOGY	yes

The following datasets are included in this group:

Name	Data type	Parent object	Mandatory	Storage type
id	32 bit signed integer	LINE	yes	Array
name	string	LINE	yes	Array
firstStation	string	LINE	yes	Array
lastStation	string	LINE	yes	Array

Name	Data type	Parent object	Mandatory	Storage type
fromKilometer	string	LINE	yes	Array
toKilometer	string	LINE	yes	Array

id

Defines the ID of the line, this is unique.

name

The name of the line.

firstStation

The name of the first station of this line.

LastStation

The name of the last station of this line.

km

Start kilometre of the line, expressed in kilometres.

toKilometer

Final kilometer of the line, in kilometers.

1.7.15 Switch Track Group

This group contains information about switches in the route network. The information is stored in separate datasets.

Name	Parent object	Mandatory
SWITCHTRACK	TOPOLOGY	yes

The following datasets are included in this group:

Name	Data type	Parent object	Mandatory	Storage type
gleisstrangId	32 bit signed integer	SWITCHTRACK	yes	Array
gleisstrangBez	string	SWITCHTRACK	yes	Array
soft	32 bit signed integer	SWITCHTRACK	yes	Array

Name	Data type	Parent object	Mandatory	Storage type
deflecting direction	string	SWITCHTRACK	yes	Array
distraction	string	SWITCHTRACK	yes	Array
operating point	string	SWITCHTRACK	yes	Array
herzStueck	string	SWITCHTRACK	yes	Array
minRadius	32 bit signed integer	SWITCHTRACK	yes	Array
nr	32 bit signed integer	SWITCHTRACK	yes	Array
zusNr	string	SWITCHTRACK	yes	Array
rail profile	string	SWITCHTRACK	yes	Array
status	string	SWITCHTRACK	yes	Array
rail profile	string	SWITCHTRACK	yes	Array
thresholdArt	string	SWITCHTRACK	yes	Array
typesPlanNr	32 bit signed integer	SWITCHTRACK	yes	Array
typeNraddition	string	SWITCHTRACK	yes	Array
softArt	string	SWITCHTRACK	yes	Array
softType	string	SWITCHTRACK	yes	Array
softForm	string	SWITCHTRACK	yes	Array
soft tongue	string	SWITCHTRACK	yes	Array

gleisstrangId

A reference to the GTG-ID.

trackBez

Contains a description of the track section.

softId

Contains the ID's of the switches as a reference.

1.7.16 Track Object Group

This group contains information about objects in the route network, for example a balise. The information is stored in separate datasets.

Name	Parent object	Mandatory
TRACKOBJECT	TOPOLOGY	yes

The following datasets are included in this group:

Name	Data type	Parent object	Mandatory	Storage type
trackId	32 bit signed integer	TRACKOBJECT	yes	Array
type	32 bit signed integer	TRACKOBJECT	yes	Array
positionStart	32 bit signed integer	TRACKOBJECT	yes	Array
positionEnd	32 bit signed integer	TRACKOBJECT	yes	Array
extraInfo	string	TRACKOBJECT	yes	Array

trackId

Contains the ID of the track to which the track is connected.

type

Type of the object.

positionStart

Start position of the object in meters.

positionEnd

End position of the object in meters.

ExtraInfo

Additional information about the object, for example, the ID of a balise.

1.7.17 Track Point Group

This group contains information about defined points on the route network. The information is stored in separate datasets.

Name	Parent object	Mandatory
TRACKPOINT	TOPOLOGY	yes

The following datasets are included in this group:

Name	Data type	Parent object	Mandatory	Storage type
trackId	32 bit signed integer	TRACKPOINT	yes	Array
lineId	32 bit signed integer	TRACKPOINT	yes	Array
x	32 bit float	TRACKPOINT	yes	Array
y	32 bit float	TRACKPOINT	yes	Array
z	32 bit float	TRACKPOINT	yes	Array
radius	32 bit float	TRACKPOINT	yes	Array
kilometers	32 bit float	TRACKPOINT	yes	Array
position	32 bit float	TRACKPOINT	yes	Array
cant	32 bit float	TRACKPOINT	yes	Array
inclination	32 bit float	TRACKPOINT	yes	Array

trackId

Reference to the ID of the track section.

lineId

Reference to the ID of the line.

x

X-Koordiante of the point.

y

Y-Koordiante of the point.

z

Z-Koordiante of the point.

radius

The radius of a point, given in meters.

kilometers

Contains the line kilometre of the point in the route network, expressed in kilometres.

position

Position of the point, in meters.

cant

The inclination at this point, expressed in millimetres.

inclination

Gradient at this point, expressed in parts per thousand.

1.7.18 Property Group

This group contains information about properties of the topology itself. The information is stored in separate datasets.

Name	Parent object	Mandatory
PROPERTY	TOPOLOGY	yes

The following datasets are included in this group:

Name	Data type	Parent object	Mandatory	Description
propertyId	32 bit signed integer	PROPERTY	yes	Array
name	string	PROPERTY	yes	Array
description.ge	string	PROPERTY	yes	Array
description.fr	string	PROPERTY	yes	Array
description.it	string	PROPERTY	yes	Array
description.en	string	PROPERTY	yes	Array

propertyId

Unique ID of the characteristic.

name

Name of the characteristic.

description.ge

Description of the characteristic in the language German.

description.fr

Description of the characteristic in French language.

description.it

Description of the characteristic in Italian language.

description.en

Description of the feature in English language.

1.7.19 Event Group

The Event group is used to store events that occurred during the recording of data. Events are bound to a channel, system or session and have a link to it. In addition to events, log entries can also be created, these are described in more detail in the chapter [1.7.20 Record Group](#). Systems can, for example, trigger an event when a limit value is exceeded. Events are always time-bound which means an event contains the exact time of occurrence and the duration of the event. The duration can also be zero, so the event occurred exactly at the specified time.

Name	HDF5 Type	Parent object	Mandatory
EVENT	HDF5 Group	<i>SESSION_NAME</i>	yes

Within the group there are the following data fields:

Name	Data type	Parent object	Mandatory	Storage type
systemReference	string	EVENT	yes	Array
channelReference	string	EVENT	no	Array
type	string	EVENT	yes	Array
defect	string	EVENT	yes	Array
duration	64 bit signed integer	EVENT	yes	Array
timestamp	Timestamp	EVENT	yes	Array

Each of these datasets contains a list with information about an entry, at a certain time. Each data set is described in more detail in the following subchapters.

systemReference Contains a list of entries containing the name of the system that triggered the event.

Name	Data type	Parent Object	Mandatory	Storage Type
systemReference	string	EVENT	yes	Array

channelReference Contains a list of entries that refers to a channel to which the event applies.

Name	Data type	Parent Object	Mandatory	Storage Type
channelReference	string	EVENT	no	Array

data This data set contains the actual information about an event, this in the XML notation which is described in more detail in each chapter of the event types (Defect event type, Detected object event type, Limit event type and Consistency event type).

A type can be stored for each event. These are explained in more detail below.

Name	Data type	Parent object	Mandatory	Storage type
data	string	EVENT	yes	Array

duration Defines for each event the duration of the event itself. This value can also be zero.

Name	Data type	Parent object	Mandatory	Storage type
duration	64 bit integer	EVENT	yes	Array

type Contains the type of an event.

Name	Data type	Parent object	Mandatory	Storage type
type	string	EVENT	yes	Array

In the list “type” the type of the recorded event is shown. The different types contain different information which is shown in the following subchapters. There are corresponding XML schemas for all types that define the technical specifications.

1.7.19.1 Defect event type

A defect can be, for example, an image of a rail showing a damage of the surface. This defect is recorded by a system. However, it may happen that this error is not one (incorrectly detected), this information can be specified afterwards (attribute “PossibleValidationResults”). Defects are always channel bound and recorded or evaluated by a system. In the following, the elements and attributes that occur in a *Defect* as XML are described in more detail.

The XML Schema can be found in the chapter [1.9.2 EventsDefect](#).

1.7.19.1.1 XML elements

Not all of these elements must be present, details can be taken from the XML Schema.

Name	Description	Parent object
Defect	XML Root Element	none
PossibleDefectNames	Name of a possible error	Defect
PossibleClassifications	Classification of a possible defect	Defect
PossibleValidationResults	Possible confirmations of the defect	Defect

1.7.19.1.2 XML attributes

Below are the attributes of the root element “Defect”:

Name	Description	Parent object
Classification	Classification of the error	Defect
DefectName	Name of the error	Defect
Details	Further information or more detailed descriptions of the error	Defect
Parameter1Name	Name of the parameter 1	Defect
Parameter1Value	Value of parameter 1	Defect
Parameter2Name	Name of the parameter 2	Defect
Parameter2Value	Value of Parameter 2	Defect
Parameter3Name	Name of the parameter 3	Defect
Parameter3Value	Value of parameter 3	Defect
ID	Unique number for identification of the error	Defect

1.7.19.2 Detected object event type

These events indicate an object found during a diagnose ride. These can be, for example, detected balises or tunnels. What exactly counts as a found object is not defined in this specification, only the information for a recorded event.

The XML Schema can be found in the chapter [1.9.3 EventsGeneric](#).

1.7.19.2.1 XML elements

Not all of these elements must be present, details can be taken from the XML schema.

Name	Description	Parent object
DetectedObject	Root Element	none

Name	Description	Parent object
object	Element with information about the found object in the element itself or in the attributes	DetectedObject
Reference	Reference to a list of known and uniquely assignable objects of the railway company	DetectedObject
ObjectAttribute	Further information about the object, the information is contained in the attributes	DetectedObject

1.7.19.2.2 XML attributes

Name	Description	Parent object
Unique ID of the event	DetectedObject	
Type	Type of object found	object
Description	further description or information about/from object	object
ObjectConsistency	Reference to the correctness of the specified data	object
ReferenceSystem	Reference to the name of the system from which the data originates	Reference
Key	Information about the data contained in the “ObjectAttribute” element	ObjectAttribute

1.7.19.3 Limit violation event type

Limit value exceedances of measured values of a channel can also be recorded as events. The XML schema can be found in chapter [1.9.3 EventsGeneric](#).

1.7.19.3.1 XML elements

Name	Description	Parent object
LimitViolation	Root Element	none

1.7.19.3.2 XML attributes

Name	Description	Parent object
TimestampMaxViolation	Time at which limit value was exceeded	LimitViolation
ViolatedLimit	Name of the defined limit	LimitViolation
ID	Unique ID of the event	LimitViolation

1.7.19.4 Consistency event type

The message about the consistency of the data is triggered by a system that checks all data according to certain criteria. For example, this could be a check for black images in a video. If all frames in the video are black, something is wrong and the video is unusable. Messages are only created if a finding is present.

The XML Schema can be found in the chapter [1.9.3 EventsGeneric](#).

1.7.19.4.1 XML element

Name	Description	Parent object
Consistency	Root Element	none

1.7.19.4.2 XML attributes

Name	Description	Parent object
Type	Type or type of consistency check in response to the question "What has been checked?"	Consistency
ProcessName	Name of the process that checked consistency	Consistency
Result	Result of the consistency check.	Consistency
ID	Unique ID of the event (UUID)	Consistency

Result

The actual result of the consistency check. Each system that performs a consistency check has different results, which in turn must be described in more detail in its specification.

1.7.20 Record Group

Unlike events, logs are only created by a user and not by a system. For all protocol types, there are corresponding XML schemas that define the technical specifications. Metadata is defined in the

respective channels. Protocol entries can have references to systems, sessions, and channels.

Name	HDF5 Type	Mandatory
RECORD	HDF5 Group	yes

Within the group there are the following data fields:

Name	Data type	Parent object	Mandatory	Storage type
type	string	RECORD	yes	Array
systemReference	string	RECORD	yes	Array
channelReference	string	RECORD	no	Array
data	string	RECORD	yes	Array
duration	64 bit signed integer	RECORD	yes	Array
timestamp	64 bit signed integer	RECORD	yes	Array

Each of these datasets contains a list with information about an entry at a specific time. Each data set is described in more detail in the following subchapters.

data

This data set contains the actual information for a protocol entry, this in the XML notation which is described in more detail in each chapter of the protocol types.

The protocol entries are stored in this data set as a list. A type can be stored for each entry. These are explained in more detail below.

Name	Data type	Parent object	Mandatory	Storage type
data	string	RECORD	yes	Array

duration

Defines for each entry the duration of the log entry itself. This value can also be zero.

Name	Data type	Parent object	Mandatory	Storage type
duration	64 bit integer	RECORD	yes	Array

systemReference

Contains a list of entries containing the name of the system that triggered the record.

Name	Data type	Parent Object	Mandatory	Storage Type
systemReference	RECORD	string	yes	Array

channelReference

Contains a list of entries that refers to a channel to which the record applies.

Name	Data type	Parent Object	Mandatory	Storage Type
channelReference	RECORD	string	yes	Array

type

Contains the type of a log entry.

Name	Data type	Parent object	Mandatory	Storage type
recordtype	string	RECORD	yes	Array

In the list “recordtype” the type of the recorded protocol entry is shown. The different types contain different information, which is shown in the following subchapters. Corresponding XML schemas are available for all types, which define the technical specifications.

1.7.20.1 Comment

Comments recorded during a diagnostic drive by the user. The content is not specified, only the XML structure. The XML schema can be found in chapter [1.9.1 EventsComment](#).

1.7.20.1.1 XML elements

Name	Description	Parent object
Comment	Root element and message, recorded by the user	none

1.7.20.1.2 XML attributes

Name	Description	Parent object
Username	Name of the user who recorded the message	Comment
ID	Unique ID of this message	Comment

1.7.20.2 Corrupt

Messages of the type “damaged” or “unusable” do not receive a content specification, only the XML structure is predefined and described here. The XML schema can be found in chapter [1.9.3 Events-Generic](#).

1.7.20.2.1 XML elements

Name	Description	Parent object
Corrupt	Root element and message, recorded by the user	none

1.7.20.2.2 XML attributes

Name	Description	Parent object
Username	Name of the user who recorded the message	Corrupt
ID	Unique ID of this message	Corrupt

1.7.21 Configuration Group

In the configuration group, data can be stored in any format that was used for the configuration of one or more measuring systems. Each subgroup defines a measurement system.

This group is below that of a measurement system and thus within the group [1.7.8 Measuring System Group](#).

Name	Parent object	Mandatory
CONFIGURATION	<i>MEASURINGSYSTEM_NAME</i>	no

1.7.21.1 Configuration Group datasets

Within this group there are further groups whose names correspond to those of a measuring system to which the configuration contained therein belongs.

In the following *SETTING_NAME* is used as placeholder of the actual name of the measuring system.

Name	Parent object	Mandatory
<i>SETTING_NAME</i>	<i>CONFIGURATION</i>	no

This group contains two datasets:

Name	Data type	Parent object	Mandatory	Storage type
setting	string	<i>SETTING_NAME</i>	yes	Array
timestamp	64 bit integer	<i>SETTING_NAME</i>	yes	Array

setting

Contains the actual configuration.

timestamp

Contains the time from when this configuration is valid and was used.

The following attributes are contained in this group:

Name	Data type	Parent object	Mandatory	Description
DataType	string	<i>setting</i>	yes	Defines the datatype of the configuration within the data set <i>setting</i> . Data type specified as MIME ³ type, for example <i>Content-Type: < text/strings></i>

1.7.22 Data Processing Group

The data source group *DATAPROCESSING* contains information on data processing. This information is written by systems that make changes to the data. These changes, for example, can be a conversion from millimeters to meters.

Name	Parent object	Mandatory
DATAPROCESSING	RCMDX	yes

1.7.22.1 Data Processing Group datasets

The group [DATAPROCESSING](#) contains one datasets:

Name	Data type	Parent object	Mandatory	Storage type
key	string	DATAPROCESSING	yes	Array
value	string	DATAPROCESSING	yes	Array
timestamp	64 bit integer	DATAPROCESSING	yes	Array

key

This record contains a unique key as a reference to a data processing step. The number of values in this data set corresponds to the number in data set [value](#). The key value in index no. 0 of [key](#) belongs to the value in the data set [value](#) at index no. 0 and so on.

value This data set contains the value about what was done in that step or what the result was.

timestamp

Contains the time of the acquisition of the entry in the [key](#) and [value](#) data set.

1.7.23 Clearance Information Group

This group is used by SBB to record information about the data release of all parties who have processed this data. The information is stored in the form of key-value pairs in a data set.

Name	Parent object	Mandatory
CLEARANCEINFORMATION	RCMDX	no

The group [CLEARANCEINFORMATION](#) contains one datasets:

Name	Data type	Parent object	Mandatory	Storage type
key	string	CLEARANCEINFORMATION	yes	Array
value	string	CLEARANCEINFORMATION	yes	Array
timestamp	64 bit integer	CLEARANCEINFORMATION	yes	Array

key

This record contains a unique key as a reference to a clearance step. The number of values in this data set corresponds to the number in data set **value**. The key value in index no. 0 of **key** belongs to the value in the data set **value** at index no. 0 and so on.

value This data set contains the value about what was done in that step or what the result was.

timestamp

Contains the time of the acquisition of the entry in the **key** and **value** data set.

1.8 Changes to the previous version

TODO: Hier die Änderungen zur Version 0.1 vermerken!

1.9 XML Schema Definitions

1.9.1 Events Comment

```

1 <?xml version="1.0" encoding="UTF-8"?>
2 <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema"
3   xmlns:tns="http://www.sbb.ch/RCMDX/Events/Comment"
4   targetNamespace="http://www.sbb.ch/RCMDX/Events/Comment"
5   elementFormDefault="qualified">
6
7   <xs:include schemaLocation="../RcmDxDatatypes.xsd" />
8
9   <xs:element name="Comment">
10     <xs:complexType>
11       <xs:simpleContent>
12         <xs:extension base="xs:string">
13           <xs:attribute name="Username" type="xs:string" use="required"
14             />
15           <xs:attribute name="ID" type="tns:UUID" use="required" />
16         </xs:extension>
17       </xs:simpleContent>
18     </xs:complexType>
19   </xs:element>
20 </xs:schema>

```

1.9.2 Events Defect

```

1 <?xml version="1.0" encoding="UTF-8"?>
2 <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema"
3   xmlns:tns="http://www.sbb.ch/RCMDX/Events/Defect"
4   targetNamespace="http://www.sbb.ch/RCMDX/Events/Defect"
5   elementFormDefault="qualified">
6
7   <xs:include schemaLocation="../../../RcmDxDatatypes.xsd" />
8
9   <xs:element name="Defect">
10     <xs:complexType>
11       <xs:sequence>
12         <xs:element name="PossibleDefectNames" type="xs:string"
13           minOccurs="0" maxOccurs="unbounded" />
14         <xs:element name="PossibleClassifications" type="xs:string"
15           minOccurs="0" maxOccurs="unbounded" />
16         <xs:element name="PossibleValidationResults" type="xs:string"
17           minOccurs="0" maxOccurs="unbounded" />
18       </xs:sequence>
19       <xs:attribute name="Classification" type="xs:string" use="
20         required" />
21       <xs:attribute name="DefectName" type="xs:string" use="required"
22         />
23       <xs:attribute name="Details" type="xs:string" use="required" />
24       <xs:attribute name="Parameter1Name" type="xs:string" />
25       <xs:attribute name="Parameter1Value" type="xs:string" />
26       <xs:attribute name="Parameter2Name" type="xs:string" />
27       <xs:attribute name="Parameter2Value" type="xs:string" />
28       <xs:attribute name="Parameter3Name" type="xs:string" />
29       <xs:attribute name="Parameter3Value" type="xs:string" />
30       <xs:attribute name="ID" type="tns:UUID" use="required" />
31     </xs:complexType>
32   </xs:element>
33 </xs:schema>

```

1.9.3 Events Generic

```

1 <?xml version="1.0" encoding="UTF-8"?>
2 <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema"
3   xmlns:tns="http://www.sbb.ch/RCMDX/Events/Generic"

```

```
4   targetNamespace="http://www.sbb.ch/RCMDX/Events/Generic"
5   elementFormDefault="qualified">
6
7   <xs:include schemaLocation="../RcmDxDatatypes.xsd" />
8
9   <xs:element name="Corrupt">
10    <xs:complexType>
11      <xs:simpleContent>
12        <xs:extension base="xs:string">
13          <xs:attribute name="Username" type="xs:string" use="required"
14            />
15          <xs:attribute name="ID" type="tns:UUID" use="required" />
16        </xs:extension>
17      </xs:simpleContent>
18    </xs:complexType>
19  </xs:element>
20
21  <xs:simpleType name="ObjectConsistencyXml">
22    <xs:restriction base="xs:string">
23      <xs:enumeration value="Ok" />
24      <xs:enumeration value="OnlyInReal" />
25      <xs:enumeration value="OnlyInData" />
26      <xs:enumeration value="Measured" />
27    </xs:restriction>
28  </xs:simpleType>
29
30  <xs:element name="DetectedObject">
31    <xs:complexType>
32      <xs:sequence>
33        <xs:element name="object" minOccurs="1" maxOccurs="1">
34          <xs:complexType>
35            <xs:simpleContent>
36              <xs:extension base="xs:string">
37                <xs:attribute name="Type" type="xs:string" use="
38                  required" />
39                <xs:attribute name="Description" type="xs:string" use="
40                  required" />
41                <xs:attribute name="ObjectConsistency" type="tns:
42                  ObjectConsistencyXml" use="required" />
43              </xs:extension>
44            </xs:simpleContent>
45          </xs:complexType>
46        </xs:element>
```



```

43     <xs:element name="Reference" minOccurs="0" maxOccurs="unbounded
44         ">
45         <xs:complexType>
46             <xs:simpleContent>
47                 <xs:extension base="xs:string">
48                     <xs:attribute name="ReferenceSystem" type="xs:string"
49                         use="required" />
50                 </xs:extension>
51             </xs:simpleContent>
52         </xs:complexType>
53     </xs:element>
54     <xs:element name="ObjectAttribute" minOccurs="0" maxOccurs="
55         unbounded">
56         <xs:complexType>
57             <xs:simpleContent>
58                 <xs:extension base="xs:string">
59                     <xs:attribute name="Key" type="xs:string" use="required
60                         " />
61                 </xs:extension>
62             </xs:simpleContent>
63         </xs:complexType>
64     </xs:element>
65
66     <xs:element name="LimitViolation">
67         <xs:complexType>
68             <xs:attribute name="TimestampMaxViolation" type="xs:long" use="
69                 required" />
70             <xs:attribute name="ViolatedLimit" type="xs:string" use="required
71                 " />
72             <xs:attribute name="ID" type="tns:UUID" use="required" />
73         </xs:complexType>
74     </xs:element>
75
76     <xs:element name="Consistency">
77         <xs:complexType>
78             <xs:attribute name="Type" type="xs:string" use="required" />
79             <xs:attribute name="ProcessName" type="xs:string" use="required"
80                 />
81             <xs:attribute name="Result" type="xs:string" use="required" />

```

```

79     <xs:attribute name="ID" type="tns:UUID" use="required" />
80   </xs:complexType>
81 </xs:element>
82
83 </xs:schema>

```

1.9.4 RCM-DX Data types

```

1 <?xml version="1.0" encoding="UTF-8"?>
2 <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema"
   elementFormDefault="qualified">
3   <xs:simpleType name="restrictedString">
4     <xs:restriction base="xs:string">
5       <xs:minLength value="1" />
6       <xs:maxLength value="512" />
7       <xs:pattern value="[a-zA-Z0-9_\-\.]+" />
8     </xs:restriction>
9   </xs:simpleType>
10  <xs:simpleType name="restrictedStringWithColon">
11    <xs:restriction base="xs:string">
12      <xs:minLength value="1" />
13      <xs:maxLength value="512" />
14      <xs:pattern value="[a-zA-Z0-9_\-\.]+" />
15    </xs:restriction>
16  </xs:simpleType>
17  <xs:simpleType name="restrictedID">
18    <xs:restriction base="xs:ID">
19      <xs:minLength value="1" />
20      <xs:maxLength value="512" />
21      <xs:pattern value="[a-zA-Z0-9_\-\.]+" />
22    </xs:restriction>
23  </xs:simpleType>
24  <xs:simpleType name="restrictedIDREF">
25    <xs:restriction base="xs:IDREF">
26      <xs:minLength value="1" />
27      <xs:maxLength value="512" />
28      <xs:pattern value="[a-zA-Z0-9_\-\.]+" />
29    </xs:restriction>
30  </xs:simpleType>
31  <xs:simpleType name="versionString">
32    <xs:restriction base="xs:string">

```

```

33     <xs:minLength value="1" />
34     <xs:maxLength value="32" />
35     <xs:pattern value="[a-zA-Z0-9_\-\.]+" />
36   </xs:restriction>
37 </xs:simpleType>
38 <xs:simpleType name="portNumber">
39   <xs:restriction base="xs:int">
40     <xs:minExclusive value="0" />
41     <xs:maxInclusive value="65535" />
42   </xs:restriction>
43 </xs:simpleType>
44 <xs:simpleType name="ipAddress">
45   <xs:restriction base="xs:string">
46     <xs:pattern value="([0-9]{1,3}\.){3}[0-9]{1,3}" />
47   </xs:restriction>
48 </xs:simpleType>
49 <xs:simpleType name="network">
50   <xs:restriction base="xs:string">
51     <xs:pattern value="([0-9]{1,3}\.){3}[0-9]{1,3}/[0-9]{1,2}" />
52   </xs:restriction>
53 </xs:simpleType>
54 <xs:simpleType name="hostName">
55   <xs:restriction base="xs:string">
56     <xs:pattern value="([a-zA-Z0-9] | [a-zA-Z0-9][a-zA-Z0-9\-\-]*[a-zA-Z0-9])\.)*([A-Za-z0-9] | [A-Za-z0-9][A-Za-z0-9\-\-]*[A-Za-z0-9])" />
57   </xs:restriction>
58 </xs:simpleType>
59 <xs:simpleType name="ipAddressOrHostName">
60   <xs:union memberTypes="ipAddress hostName" />
61 </xs:simpleType>
62 <xs:simpleType name="nonNegativeInt">
63   <xs:restriction base="xs:int">
64     <xs:minInclusive value="0" />
65   </xs:restriction>
66 </xs:simpleType>
67 <xs:simpleType name="positiveInt">
68   <xs:restriction base="xs:int">
69     <xs:minInclusive value="1" />
70   </xs:restriction>
71 </xs:simpleType>
72 <xs:simpleType name="positiveFloat">
73   <xs:restriction base="xs:float">

```

```

74     <xs:minExclusive value="0" />
75   </xs:restriction>
76 </xs:simpleType>
77 <xs:simpleType name="positiveIntOrMinus1">
78   <xs:restriction base="xs:int">
79     <xs:minInclusive value="-1" />
80   </xs:restriction>
81 </xs:simpleType>
82 <xs:simpleType name="positiveLong">
83   <xs:restriction base="xs:long">
84     <xs:minExclusive value="0" />
85   </xs:restriction>
86 </xs:simpleType>
87 <xs:simpleType name="nonNegativeLong">
88   <xs:restriction base="xs:long">
89     <xs:minInclusive value="0" />
90   </xs:restriction>
91 </xs:simpleType>
92 <xs:simpleType name="compressionLevel">
93   <xs:restriction base="xs:integer">
94     <xs:minInclusive value="0" />
95     <xs:maxInclusive value="9" />
96   </xs:restriction>
97 </xs:simpleType>
98 <xs:simpleType name="mimeType">
99   <xs:restriction base="xs:string">
100    <xs:pattern value="(!#$%'+*\-\0-9A-Z\^_'a-z{|}~)+/(!#$%'+*\-\0-9A-Z
        \^_'a-z{|}~)+(; *[^;]+)*" />
101   </xs:restriction>
102 </xs:simpleType>
103 <xs:simpleType name="nonEmptyString">
104   <xs:restriction base="xs:string">
105     <xs:minLength value="1" />
106   </xs:restriction>
107 </xs:simpleType>
108 <xs:simpleType name="UUID">
109   <xs:restriction base="xs:string">
110     <xs:pattern
111       value="(urn:uuid:)?[0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]
        ]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}|\{[0-9a-fA-F]{8}-[0-9a-fA-F]
        ]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}\}" />
112   </xs:restriction>
113 </xs:simpleType>

```

```
114 <xs:simpleType name="vehicleNumber">
115   <xs:restriction base="xs:string">
116     <xs:pattern value="[0-9]{2} [0-9]{2} [0-9]{4} [0-9]{3}-[0-9]" />
117   </xs:restriction>
118 </xs:simpleType>
119 <xs:simpleType name="httpUrl">
120   <xs:restriction base="xs:anyURI">
121     <xs:pattern value="https?://.+" />
122   </xs:restriction>
123 </xs:simpleType>
124 </xs:schema>
```

1.10 License and copyright

TODO: Lizenzhinweise notieren für RCM-DX
HDF5

1.11 Contribution

TODO: Vermerk auf die Zusammenarbeit und die Weiterentwicklung des RCM-DX sowie Hinweis auf die Webseite!