


Feature count, $\log_{10}(\rho)$

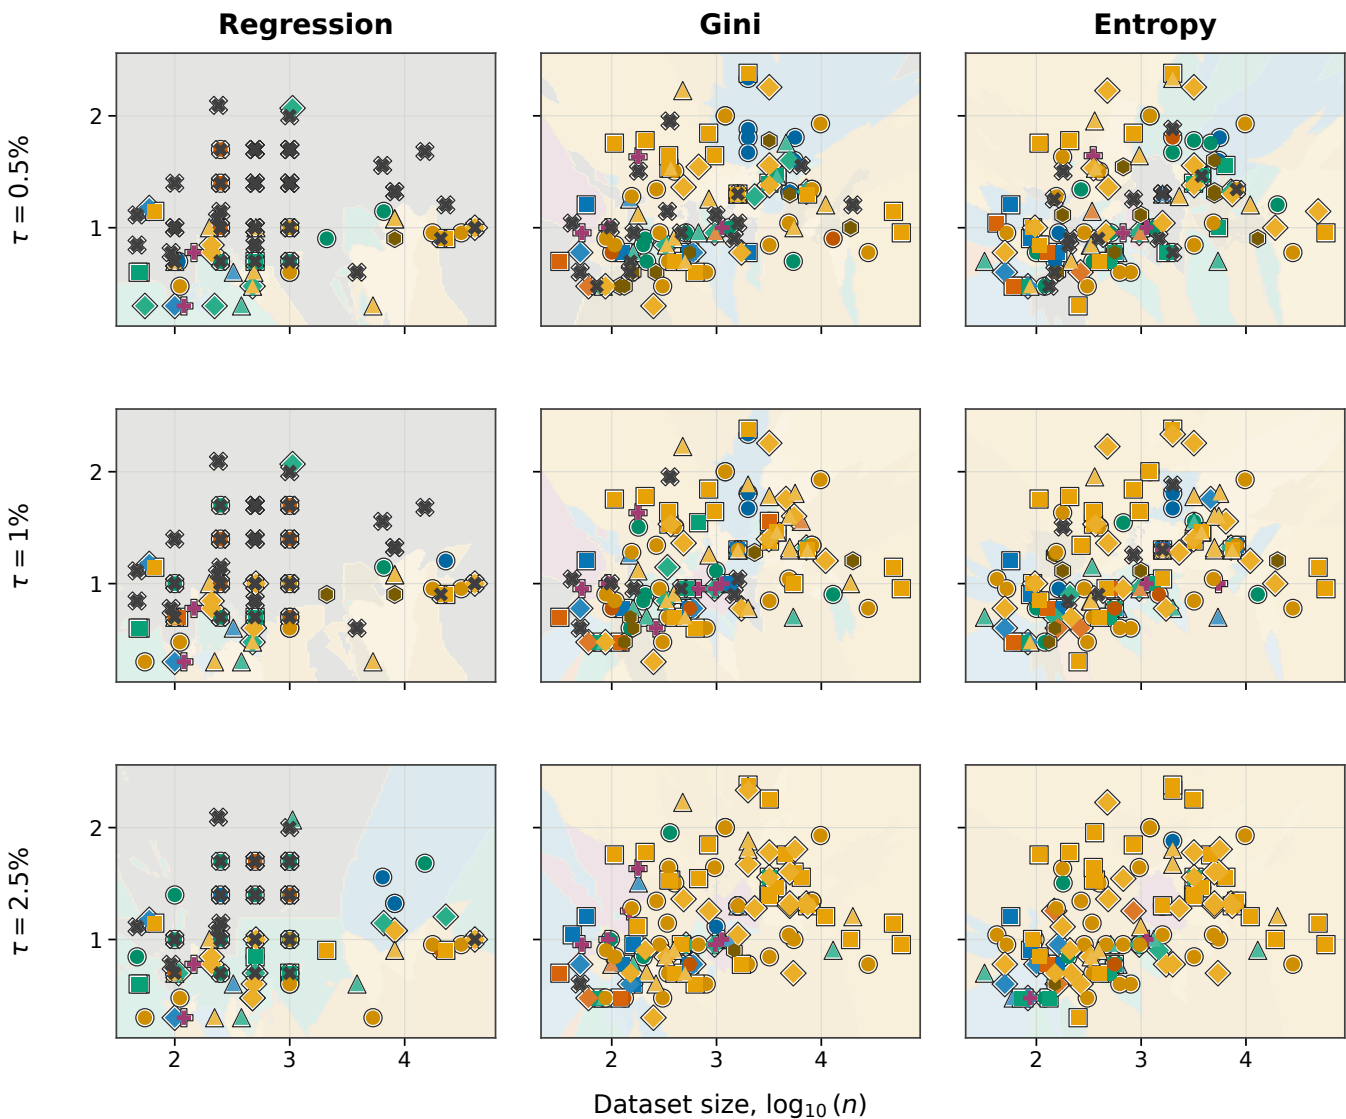

Secretary (S)

- $f = 1/e$
- $f = 1/\sqrt{n_{\text{node}}}$
- ◆ $f = 1/\log N_{\text{data}}$
- ▲ $f = 0.1$
- $f = 1/e$
- $f = 1/\sqrt{n_{\text{node}}}$
- ◆ $f = 1/\log N_{\text{data}}$
- ▲ $f = 0.1$

S_{all}

S^2

- $f = 1/e$
- $f = 1/\sqrt{n_{\text{node}}}$
- ◆ $f = 1/\log N_{\text{data}}$
- ▲ $f = 0.1$

Extra Trees (ERT)

- $m_{\text{try}} = 1$
- $m_{\text{try}} = p/3$
- ◆ $m_{\text{try}} = 2p/3$
- ▲ $m_{\text{try}} = p$

Other methods

- ✕ Exhaustive (best)
- + Rank-inspired
- Prophet-style

Outlined symbols: observed datasets; winner = fastest method with loss $\leq \tau$ (exhaustive if none qualifies).
Background tint: descriptive 7-NN interpolation of observed winner labels (not model estimates).