
Lab 8 : Decoy scan


i) IPS/IDS

Allow well known ports to traffic


Nmap --source port nmap -f 150.1.7.102 //f feagments

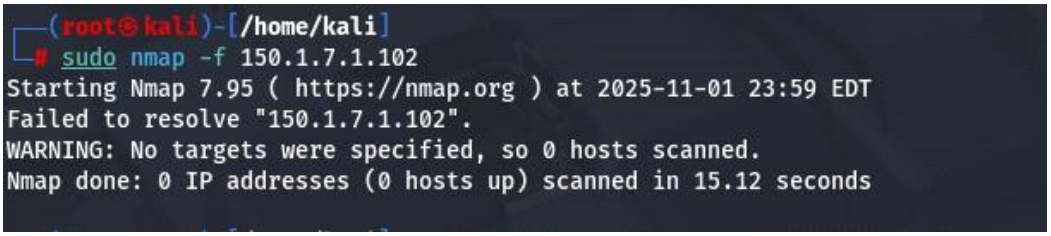

ii) Open wireshark with command sudo wireshark

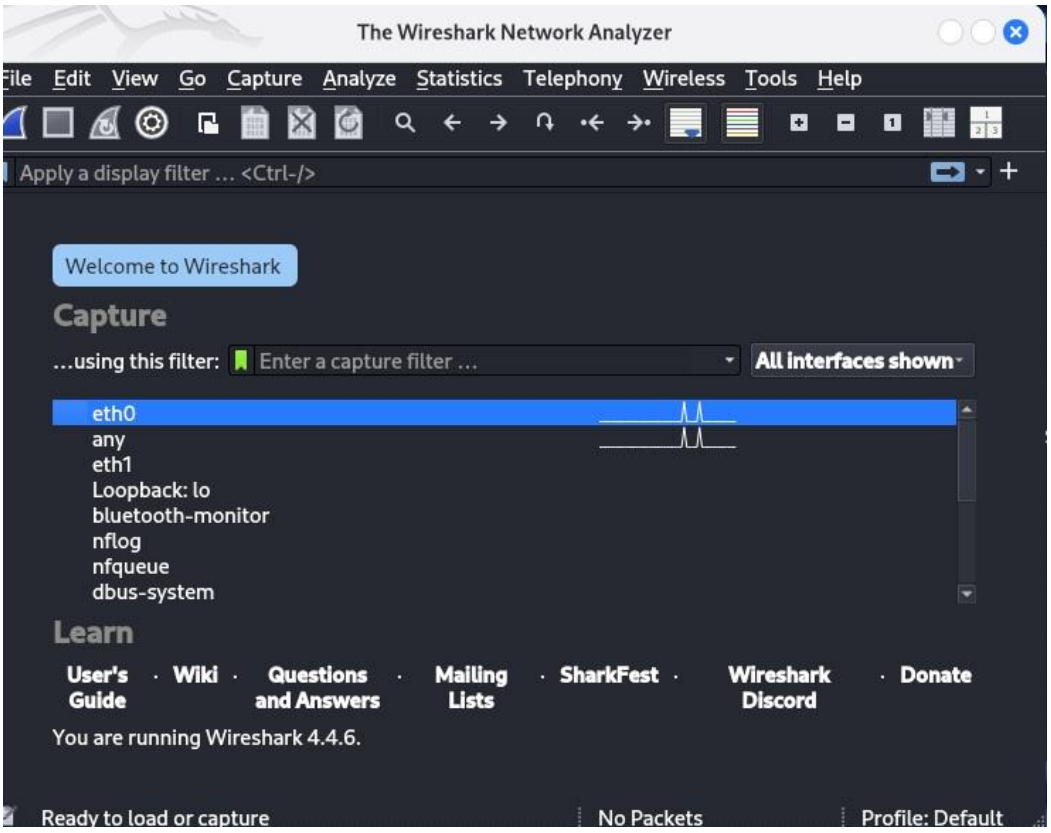

Double click on eth0

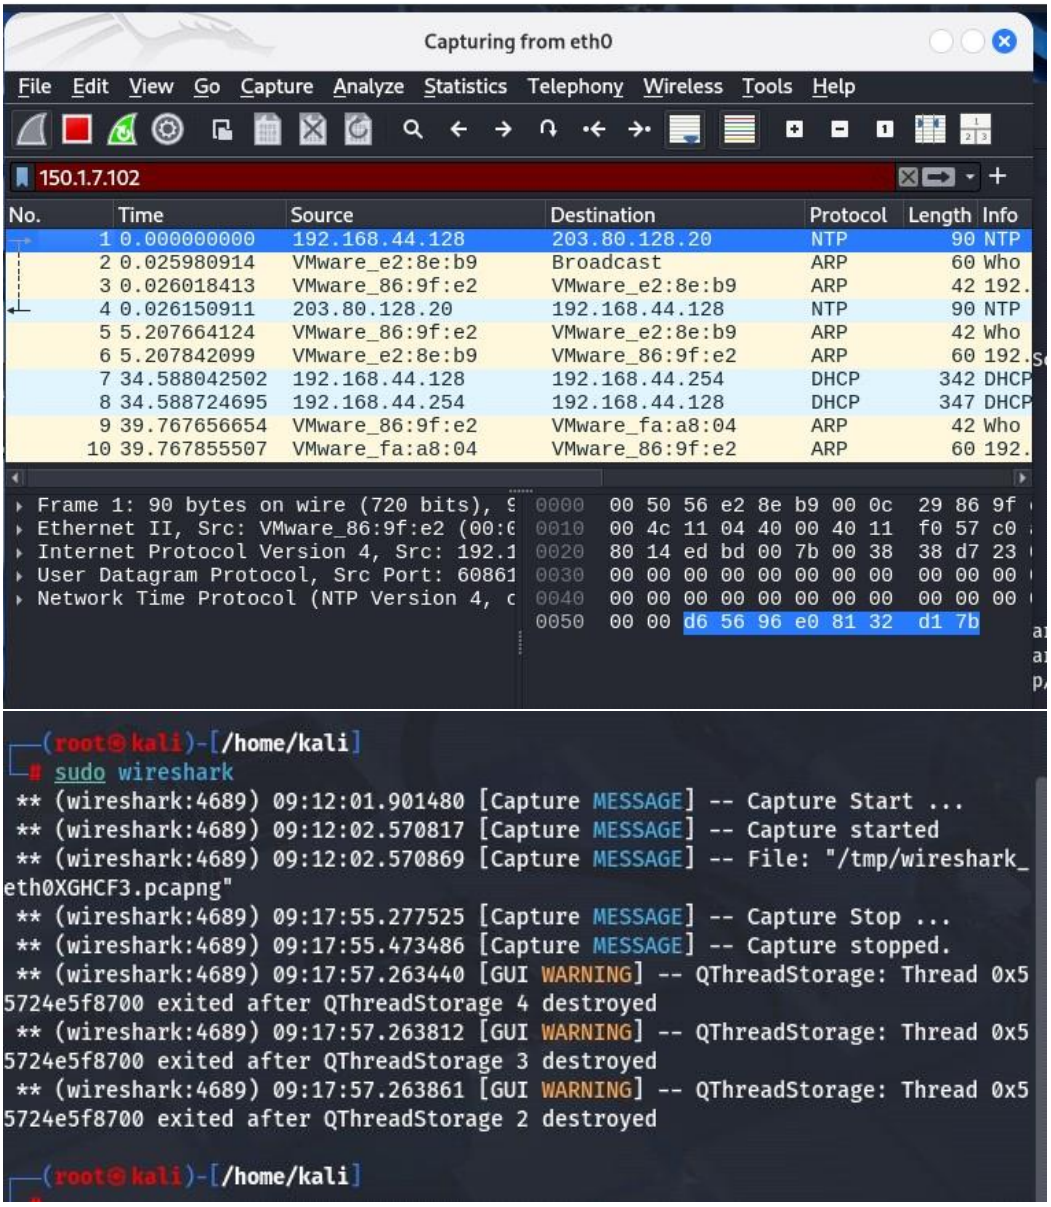


```
┌──(root㉿kali)-[/home/kali]
└─# sudo wireshark
 ** (wireshark:4689) 09:12:01.901480 [Capture MESSAGE] -- Capture Start ...
 ** (wireshark:4689) 09:12:02.570817 [Capture MESSAGE] -- Capture started
 ** (wireshark:4689) 09:12:02.570869 [Capture MESSAGE] -- File: "/tmp/wireshark_
eth0XGHCF3.pcapng"
 ** (wireshark:4689) 09:17:55.277525 [Capture MESSAGE] -- Capture Stop ...
 ** (wireshark:4689) 09:17:55.473486 [Capture MESSAGE] -- Capture stopped.
 ** (wireshark:4689) 09:17:57.263440 [GUI WARNING] -- QThreadStorage: Thread 0x5
5724e5f8700 exited after QThreadStorage 4 destroyed
 ** (wireshark:4689) 09:17:57.263812 [GUI WARNING] -- QThreadStorage: Thread 0x5
5724e5f8700 exited after QThreadStorage 3 destroyed
 ** (wireshark:4689) 09:17:57.263861 [GUI WARNING] -- QThreadStorage: Thread 0x5
5724e5f8700 exited after QThreadStorage 2 destroyed

┌──(root㉿kali)-[/home/kali]
```

Enable wireshark


Ens 34

```
┌──(root㉿kali)-[/home/kali]
└─# nmap --mtu 16 150.1.7.102
Starting Nmap 7.95 ( https://nmap.org ) at 2025-11-02 09:19 EST
Nmap scan report for 150.1.7.102
Host is up (0.037s latency).
All 1000 scanned ports on 150.1.7.102 are in ignored states.
Not shown: 1000 filtered tcp ports (no-response)

Nmap done: 1 IP address (1 host up) scanned in 48.76 seconds

┌──(root㉿kali)-[/home/kali]
└─#
```

Decoy scan (specific decoy IPs)

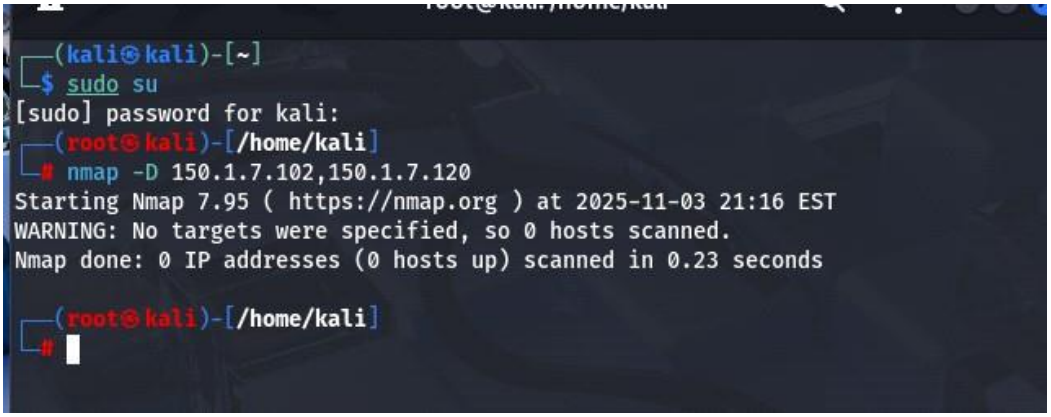


Random decoy count



Lab 9 : Metasploitable

Login and pasdword: msfadmin

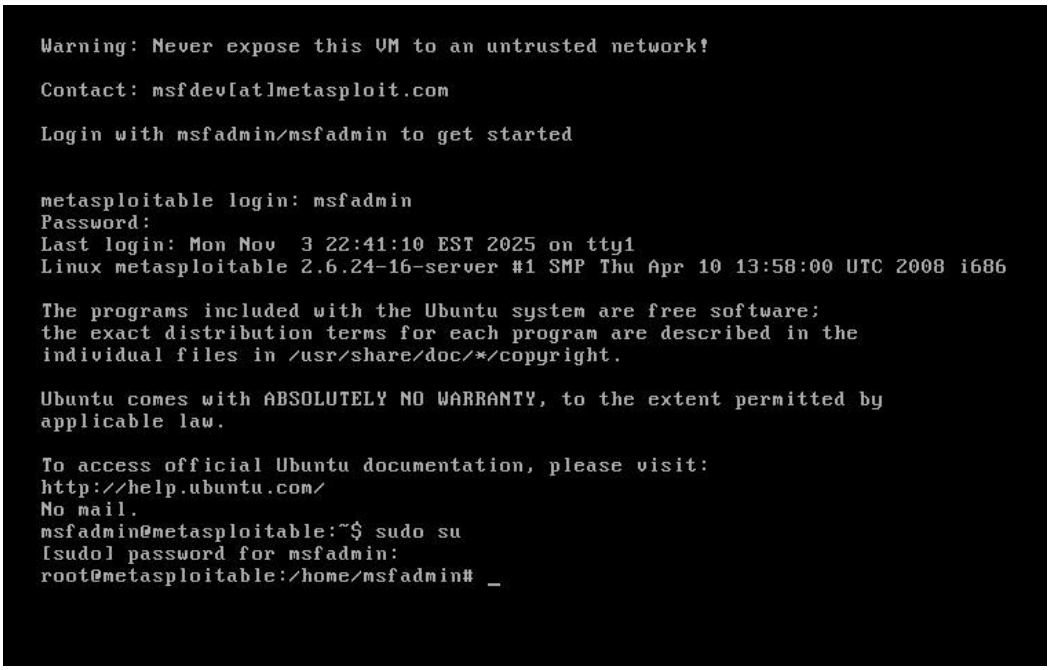

Check ip on eth0

```
          TX packets:104 errors:0 dropped:0 overruns:0 carrier:0
          collisions:0 txqueuelen:1000
          RX bytes:4382 (4.2 KB)  TX bytes:11829 (11.5 KB)
          Interrupt:17 Base address:0x2000

eth1      Link encap:Ethernet  HWaddr 00:0c:29:1e:45:f2
          inet addr:192.168.100.104  Bcast:192.168.100.255  Mask:255.255.255.0
          inet6 addr: fe80::20c:29ff:fe1e:45f2/64 Scope:Link
          UP BROADCAST RUNNING MULTICAST  MTU:1500  Metric:1
          RX packets:1 errors:0 dropped:0 overruns:0 frame:0
          TX packets:52 errors:0 dropped:0 overruns:0 carrier:0
          collisions:0 txqueuelen:1000
          RX bytes:243 (243.0 B)  TX bytes:6865 (6.7 KB)
          Interrupt:18 Base address:0x2080

lo        Link encap:Local Loopback
          inet addr:127.0.0.1  Mask:255.0.0.0
          inet6 addr: ::1/128 Scope:Host
          UP LOOPBACK RUNNING  MTU:16436  Metric:1
          RX packets:127 errors:0 dropped:0 overruns:0 frame:0
          TX packets:127 errors:0 dropped:0 overruns:0 carrier:0
          collisions:0 txqueuelen:0
          RX bytes:36017 (35.1 KB)  TX bytes:36017 (35.1 KB)

root@metasploitable:/home/msfadmin# _
```

Change ip on eth1

Write command sudo nano /etc/network/interfaces

Then file open and you can edit the file accourding to need.

```
  GNU nano 2.0.7         File: /etc/network/interfaces

# This file describes the network interfaces available on your system
# and how to activate them. For more information, see interfaces(5).

# The loopback network interface
auto lo
iface lo inet loopback

# The primary network interface
auto eth1
iface eth1 inet dhcp
auto eth1
iface eth1 inet static
```

```
  GNU nano 2.0.7         File: /etc/network/interfaces

# This file describes the network interfaces available on your system
# and how to activate them. For more information, see interfaces(5).

# The loopback network interface
auto lo
iface lo inet loopback

# The primary network interface
auto eth1
iface eth1 inet dhcp
auto eth1
iface eth1 inet static
address 150.1.7.104
netmask 255.255.255.0
gateway 150.1.7.100




                          [ Wrote 19 lines ]

root@metasploitable:/home/msfadmin# _
```

Check the modification in file with the command cat /etc/network/interfaces

```
root@metasploitable:/home/msfadmin# Reboot
bash: Reboot: command not found
root@metasploitable:/home/msfadmin# cat /etc/network/interfaces
# This file describes the network interfaces available on your system
# and how to activate them. For more information, see interfaces(5).

# The loopback network interface
auto lo
iface lo inet loopback

# The primary network interface
auto eth1
iface eth1 inet dhcp
auto eth1
iface eth1 inet static
address 150.1.7.104
netmask 255.255.255.0
gateway 150.1.7.100



root@metasploitable:/home/msfadmin#
```

Assign ip to eth1 with command sudo ifconfig eth1 150.1.7.104 netmask 255.255.255.0

Then enter command ifconfig

```
          BROADCAST MULTICAST  MTU:1500  Metric:1
          RX packets:0 errors:0 dropped:0 overruns:0 frame:0
          TX packets:0 errors:0 dropped:0 overruns:0 carrier:0
          collisions:0 txqueuelen:1000
          RX bytes:0 (0.0 B)  TX bytes:0 (0.0 B)
          Interrupt:17 Base address:0x2000

eth1      Link encap:Ethernet  HWaddr 00:0c:29:1e:45:f2
          inet addr:150.1.7.104  Bcast:150.1.7.255  Mask:255.255.255.0
          inet6 addr: fe80::20c:29ff:fe1e:45f2/64 Scope:Link
          UP BROADCAST RUNNING MULTICAST  MTU:1500  Metric:1
          RX packets:0 errors:0 dropped:0 overruns:0 frame:0
          TX packets:6 errors:0 dropped:0 overruns:0 carrier:0
          collisions:0 txqueuelen:1000
          RX bytes:0 (0.0 B)  TX bytes:468 (468.0 B)
          Interrupt:18 Base address:0x2080

lo        Link encap:Local Loopback
          LOOPBACK  MTU:16436  Metric:1
          RX packets:0 errors:0 dropped:0 overruns:0 frame:0
```

```
lo        Link encap:Local Loopback
          LOOPBACK  MTU:16436  Metric:1
          RX packets:0 errors:0 dropped:0 overruns:0 frame:0
          TX packets:0 errors:0 dropped:0 overruns:0 carrier:0
          collisions:0 txqueuelen:0
          RX bytes:0 (0.0 B)  TX bytes:0 (0.0 B)


root@metasploitable:/home/msfadmin# _
```

ping on kali


```
┌──(root㉿kali)-[/home/kali]
└─# ping 150.1.7.104
PING 150.1.7.104 (150.1.7.104) 56(84) bytes of data.
^C
--- 150.1.7.104 ping statistics ---
472 packets transmitted, 0 received, 100% packet loss, time 487575ms
```

Lab : Pyphisher


Sudo apt update

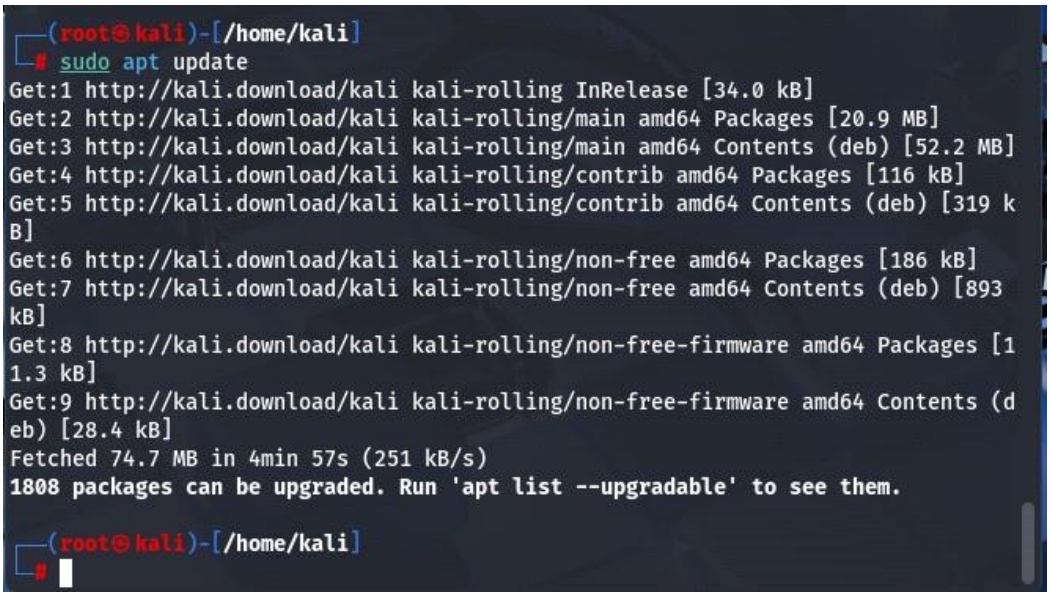



Sudo apt install curl

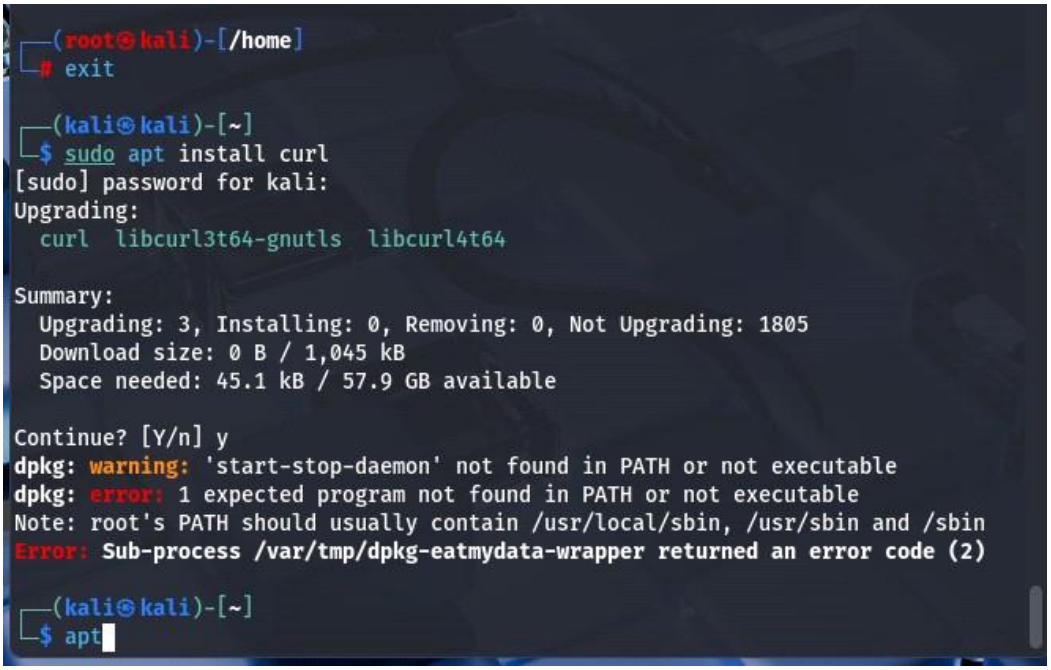

Sudo apt install openssl

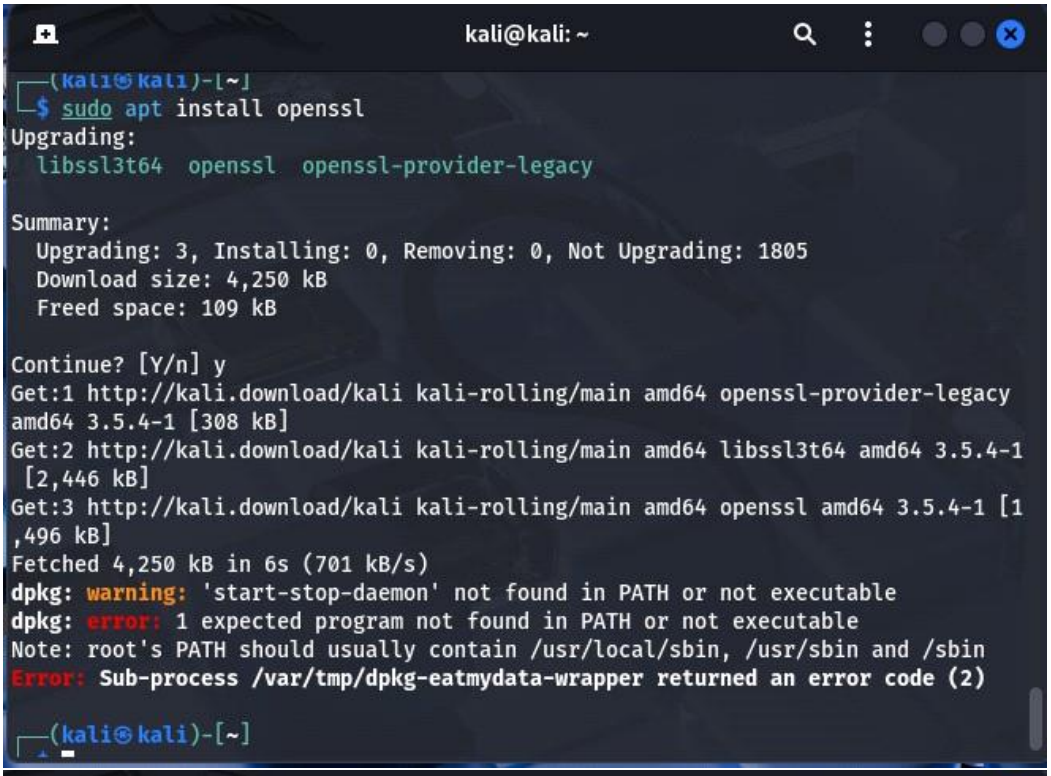
kali@kali: ~
┌──(kali㉿kali)-[~]
└─$ sudo apt install openssl
Upgrading:
libssl3t64 openssl openssl-provider-legacy
Summary:
Upgrading: 3, Installing: 0, Removing: 0, Not Upgrading: 1805
Download size: 4,250 kB
Freed space: 109 kB
Continue? [Y/n] y
Get:1 http://kali.download/kali kali-rolling/main amd64 openssl-provider-legacy amd64 3.5.4-1 [308 kB]
Get:2 http://kali.download/kali kali-rolling/main amd64 libssl3t64 amd64 3.5.4-1 [2,446 kB]
Get:3 http://kali.download/kali kali-rolling/main amd64 openssl amd64 3.5.4-1 [1,496 kB]
Fetched 4,250 kB in 6s (701 kB/s)
dpkg: warning: 'start-stop-daemon' not found in PATH or not executable
dpkg: error: 1 expected program not found in PATH or not executable
Note: root's PATH should usually contain /usr/local/sbin, /usr/sbin and /sbin
Error: Sub-process /var/tmp/dpkg-eatmydata-wrapper returned an error code (2)
┌──(kali㉿kali)-[~]

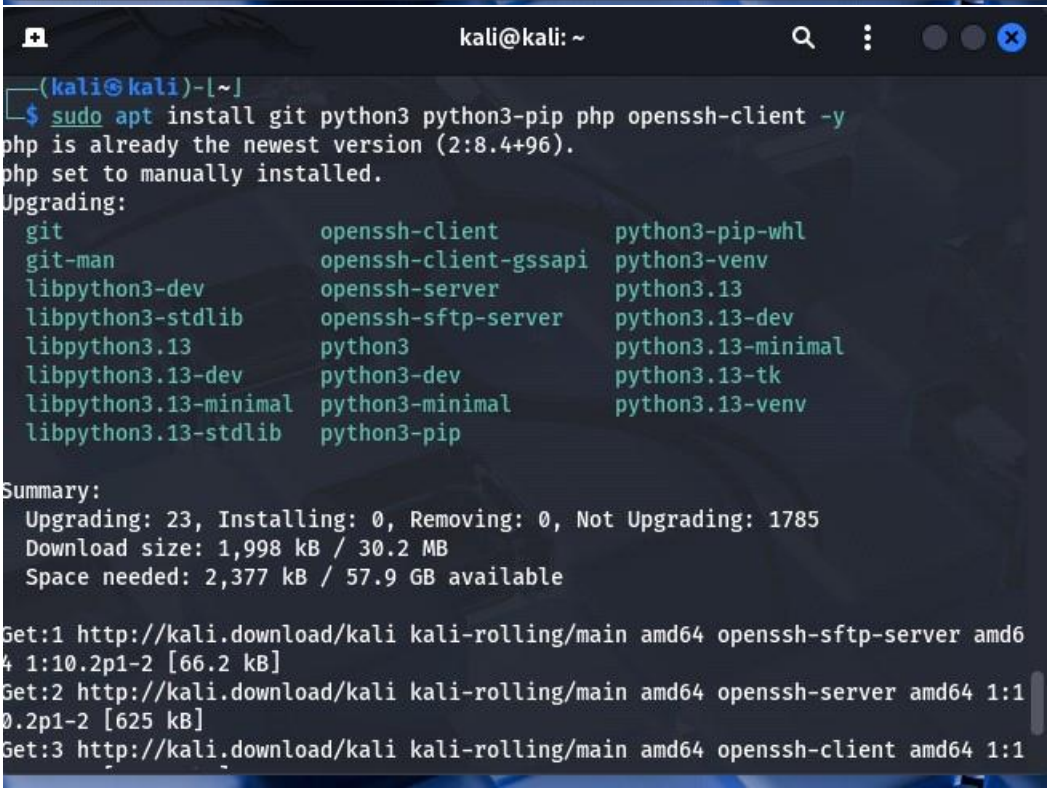

kali@kali: ~
┌──(kali㉿kali)-[~]
└─$ sudo apt install git python3 python3-pip php openssh-client -y
php is already the newest version (2:8.4+96).
php set to manually installed.
Upgrading:
git openssh-client python3-pip-whl
git-man openssh-client-gssapi python3-venv
libpython3-dev openssh-server python3.13
libpython3-stdlib openssh-sftp-server python3.13-dev
libpython3.13 python3 python3.13-minimal
libpython3.13-dev python3-dev python3.13-tk
libpython3.13-minimal python3-minimal python3.13-venv
libpython3.13-stdlib python3-pip
Summary:
Upgrading: 23, Installing: 0, Removing: 0, Not Upgrading: 1785
Download size: 1,998 kB / 30.2 MB
Space needed: 2,377 kB / 57.9 GB available
Get:1 http://kali.download/kali kali-rolling/main amd64 openssh-sftp-server amd64 1:10.2p1-2 [66.2 kB]
Get:2 http://kali.download/kali kali-rolling/main amd64 openssh-server amd64 1:10.2p1-2 [625 kB]
Get:3 http://kali.download/kali kali-rolling/main amd64 openssh-client amd64 1:1

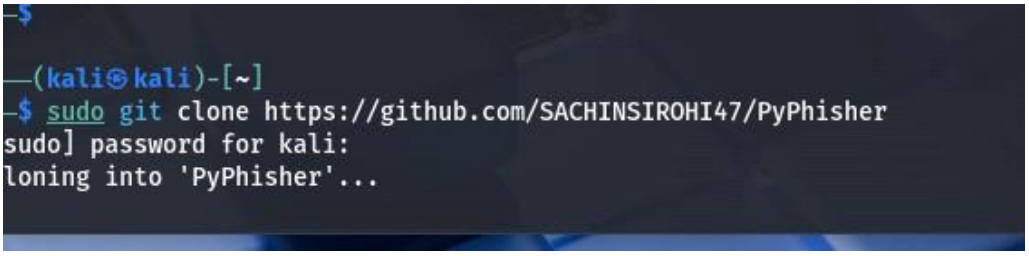

┌──(kali㉿kali)-[~]
└─$ sudo git clone https://github.com/SACHINSIROHI47/PyPhisher
sudo] password for kali:
loning into 'PyPhisher'...


Information gathering : 1. Footprinting --

> whois,nslookup,dig

1. Footprinting --> whois,nslookup,dig

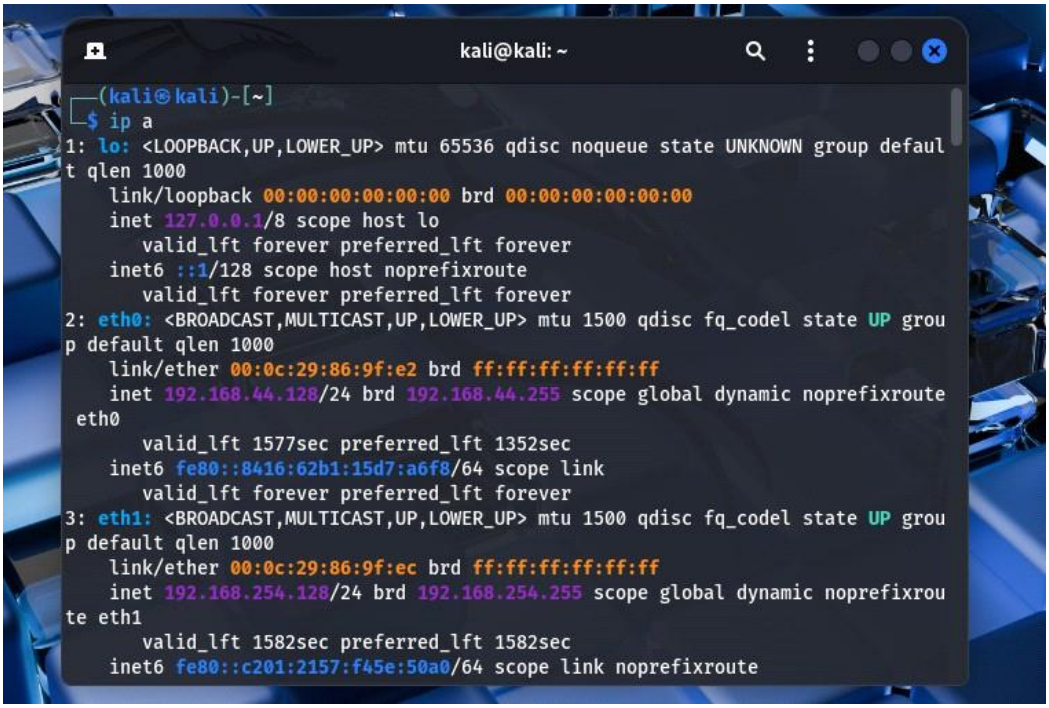

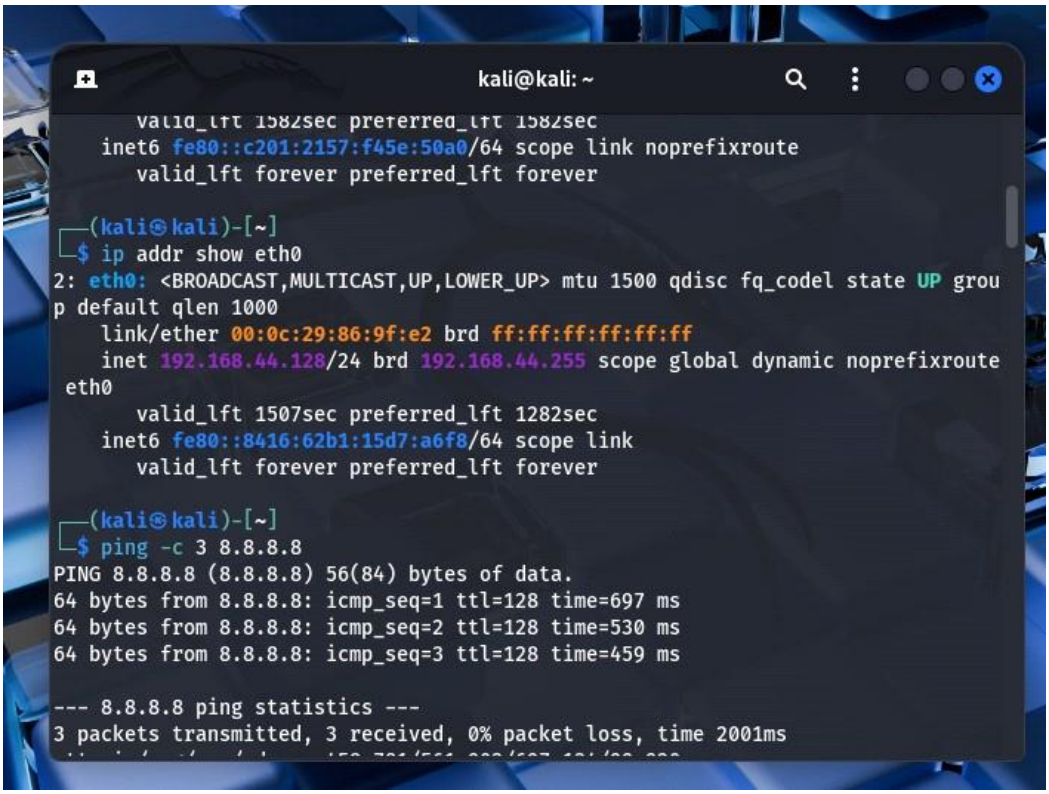

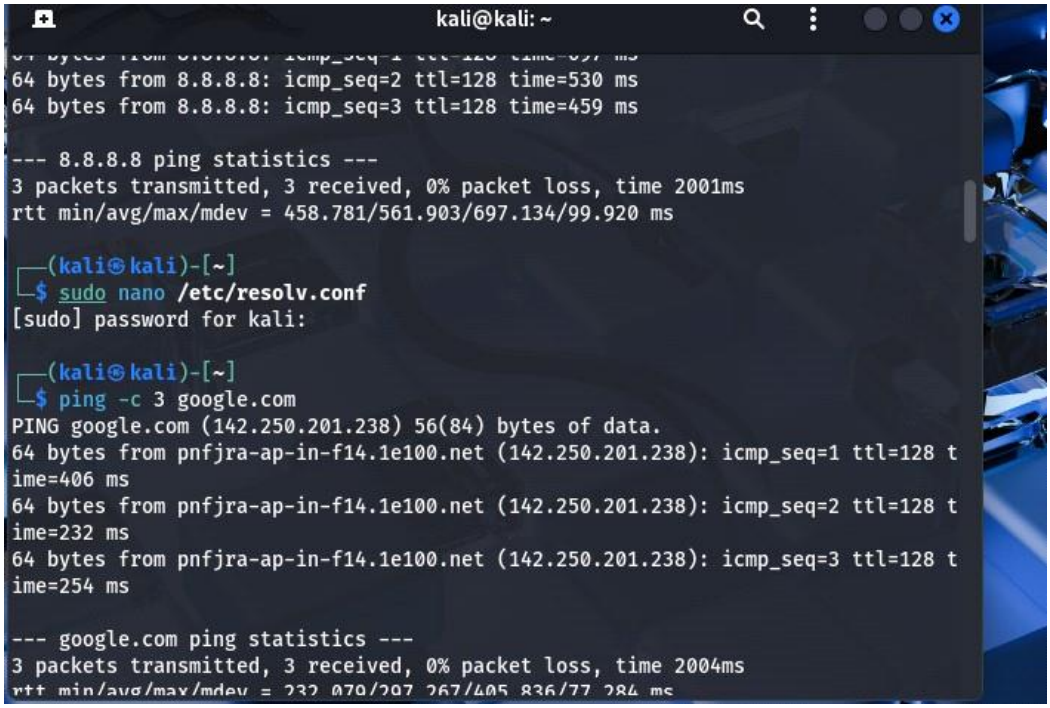
kali@kali: ~
64 bytes from 8.8.8.8: icmp_seq=2 ttl=128 time=530 ms
64 bytes from 8.8.8.8: icmp_seq=3 ttl=128 time=459 ms
--- 8.8.8.8 ping statistics ---
3 packets transmitted, 3 received, 0% packet loss, time 2001ms
rtt min/avg/max/mdev = 458.781/561.903/697.134/99.920 ms
(kali㉿kali)-[~]
$ sudo nano /etc/resolv.conf
[sudo] password for kali:
(kali㉿kali)-[~]
$ ping -c 3 google.com
PING google.com (142.250.201.238) 56(84) bytes of data.
64 bytes from pnfjra-ap-in-f14.1e100.net (142.250.201.238): icmp_seq=1 ttl=128 time=406 ms
64 bytes from pnfjra-ap-in-f14.1e100.net (142.250.201.238): icmp_seq=2 ttl=128 time=232 ms
64 bytes from pnfjra-ap-in-f14.1e100.net (142.250.201.238): icmp_seq=3 ttl=128 time=254 ms
--- google.com ping statistics ---
3 packets transmitted, 3 received, 0% packet loss, time 2004ms


kali@kali: ~
ime=254 ms
--- google.com ping statistics ---
3 packets transmitted, 3 received, 0% packet loss, time 2004ms
rtt min/avg/max/mdev = 232.079/297.267/405.836/77.284 ms
(kali㉿kali)-[~]
$ whois jazz.com
Domain Name: JAZZ.COM
Registry Domain ID: 4845199_DOMAIN_COM-VRSN
Registrar WHOIS Server: whois.name.com
Registrar URL: http://www.name.com
Updated Date: 2021-03-13T17:58:56Z
Creation Date: 1994-01-18T05:00:00Z
Registry Expiry Date: 2031-01-19T05:00:00Z
Registrar: Name.com, Inc.
Registrar IANA ID: 625
Registrar Abuse Contact Email: abuse@name.com
Registrar Abuse Contact Phone: 7202492374
Domain Status: clientTransferProhibited https://icann.org/epp#clientTransferProhibited
Domain Status: clientUpdateProhibited https://icann.org/epp#clientUpdateProhibited

(kali㉿kali)-[~]
$
(kali㉿kali)-[~]
$ nslookup covrit.com
Server: 192.168.44.2
Address: 192.168.44.2#53
Non-authoritative answer:
Name: covrit.com
Address: 35.215.77.113
(kali㉿kali)-[~]
$

```
└─$ dig zong.com

; <<>> DiG 9.20.9-1-Debian <<>> zong.com
;; global options: +cmd
;; Got answer:
;; ->>HEADER<<- opcode: QUERY, status: NOERROR, id: 21535
;; flags: qr rd ra; QUERY: 1, ANSWER: 1, AUTHORITY: 0, ADDITIONAL: 1

;; OPT PSEUDOSECTION:
; EDNS: version: 0, flags:; MBZ: 0x0005, udp: 512
;; QUESTION SECTION:
;zong.com.                      IN      A

;; ANSWER SECTION:
zong.com.               5       IN      A       99.83.176.46

;; Query time: 592 msec
;; SERVER: 192.168.44.2#53(192.168.44.2) (UDP)
;; WHEN: Fri Nov 07 00:15:26 EST 2025
;; MSG SIZE  rcvd: 53


┌──(kali㉿kali)-[~]
└─$
```

2.scanning

Host discovery

```
┌──(kali㉿kali)-[~]
└─$

┌──(kali㉿kali)-[~]
└─$ nmap -sn 192.168.44.0/24
Starting Nmap 7.95 ( https://nmap.org ) at 2025-11-07 00:22 EST
Nmap scan report for 192.168.44.1
Host is up (0.0013s latency).
MAC Address: 00:50:56:C0:00:08 (VMware)
Nmap scan report for 192.168.44.2
Host is up (0.00070s latency).
MAC Address: 00:50:56:E2:8E:B9 (VMware)
Nmap scan report for 192.168.44.254
Host is up (0.00056s latency).
MAC Address: 00:50:56:E2:40:AA (VMware)
Nmap scan report for 192.168.44.128
Host is up.
Nmap done: 256 IP addresses (4 hosts up) scanned in 3.81 seconds

┌──(kali㉿kali)-[~]
└─$
```


Ports scanning


```
┌──(kali㉿kali)-[~]
└─$ sudo nmap -sS -T4 192.168.44.128
[sudo] password for kali:
Sorry, try again.
[sudo] password for kali:
Starting Nmap 7.95 ( https://nmap.org ) at 2025-11-07 00:25 EST
Nmap scan report for 192.168.44.128
Host is up (0.000012s latency).
All 1000 scanned ports on 192.168.44.128 are in ignored states.
Not shown: 1000 closed tcp ports (reset)


Nmap done: 1 IP address (1 host up) scanned in 2.50 seconds


┌──(kali㉿kali)-[~]
└─$
```


SNMP enumaration SNMP enumaration

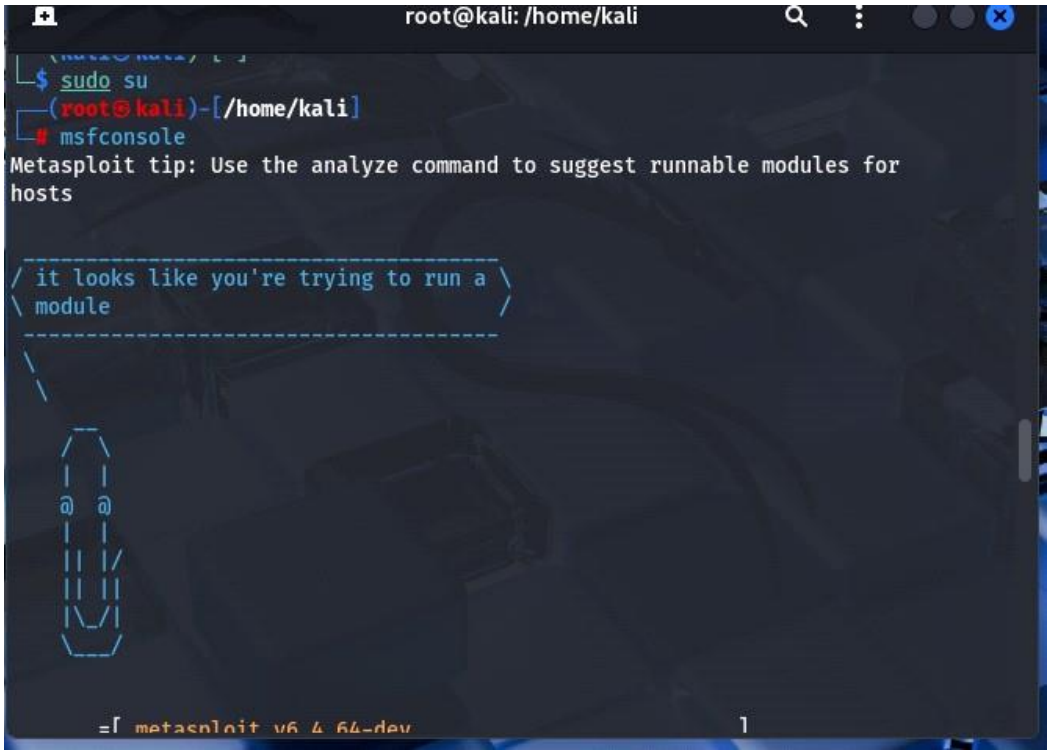


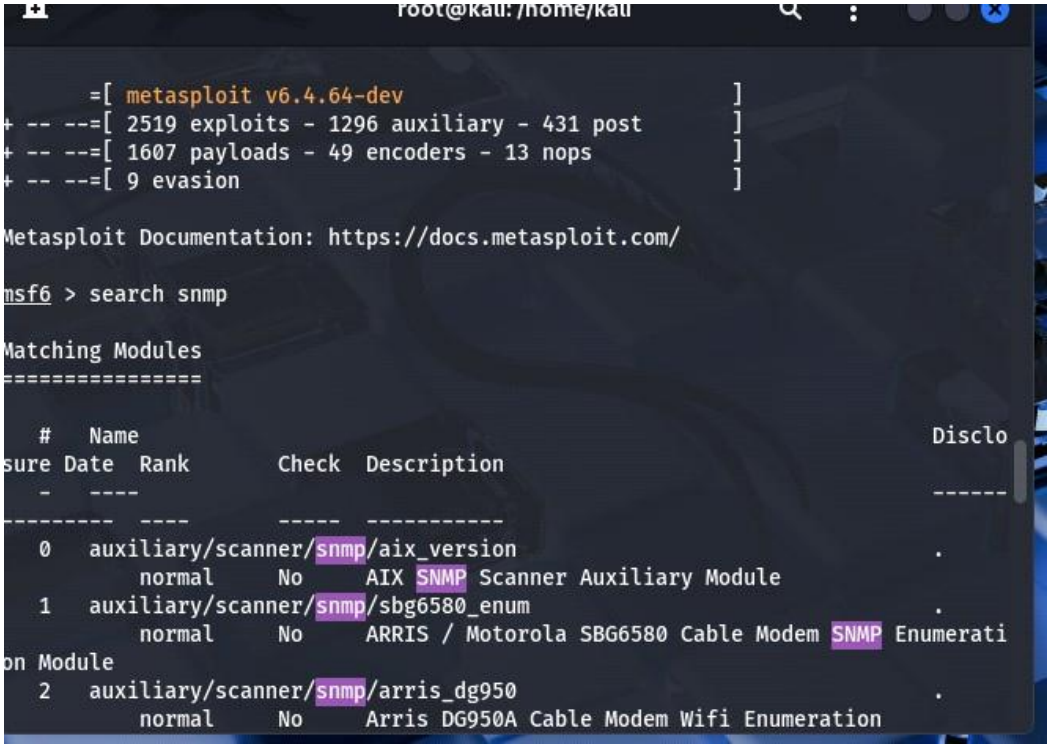


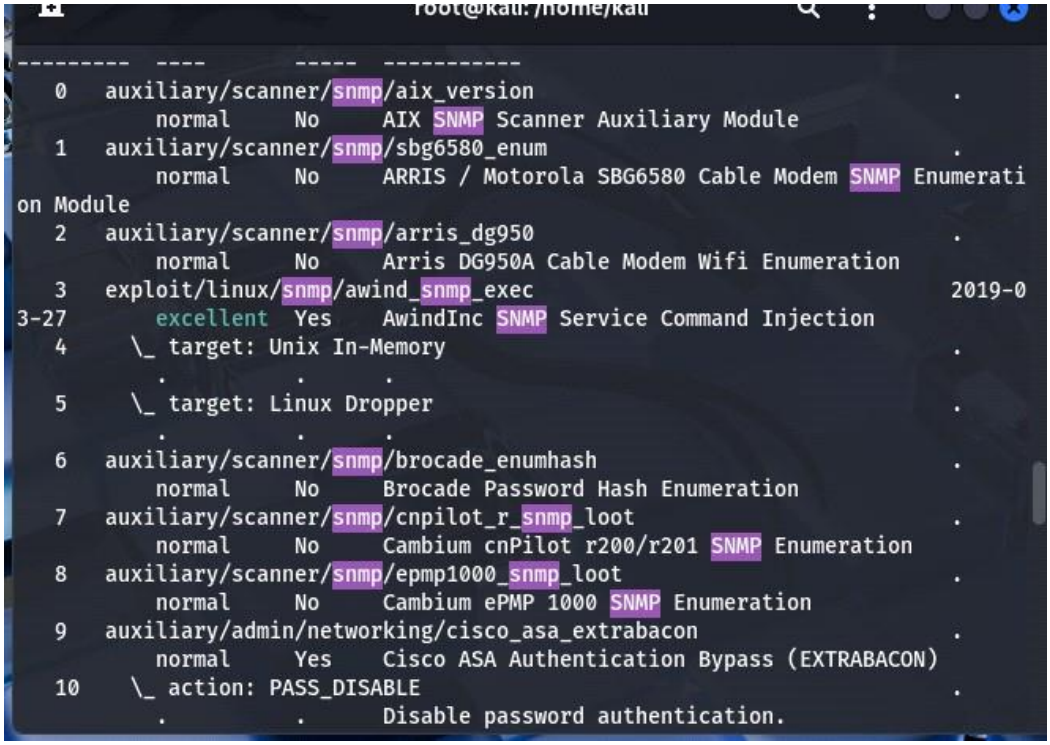
root@kali: /home/kali
0 auxiliary/scanner/snmp/aix_version . normal No AIX SNMP Scanner Auxiliary Module
1 auxiliary/scanner/snmp/sbg6580_enum . normal No ARRIS / Motorola SBG6580 Cable Modem SNMP Enumeration Module
2 auxiliary/scanner/snmp/arris_dg950 . normal No Arris DG950A Cable Modem Wifi Enumeration
3 exploit/linux/snmp/awind_snmp_exec 2019-03-27 excellent Yes AwindInc SNMP Service Command Injection
4 _ target: Unix In-Memory . . .
5 _ target: Linux Dropper . . .
6 auxiliary/scanner/snmp/brocade_enumhash . normal No Brocade Password Hash Enumeration
7 auxiliary/scanner/snmp/cnpilot_r_snmp_loot . normal No Cambium cnPilot r200/r201 SNMP Enumeration
8 auxiliary/scanner/snmp/epmp1000_snmp_loot . normal No Cambium ePMP 1000 SNMP Enumeration
9 auxiliary/admin/networking/cisco_asa_extrabacon . normal Yes Cisco ASA Authentication Bypass (EXTRABACON)
10 _ action: PASS_DISABLE . . Disable password authentication.

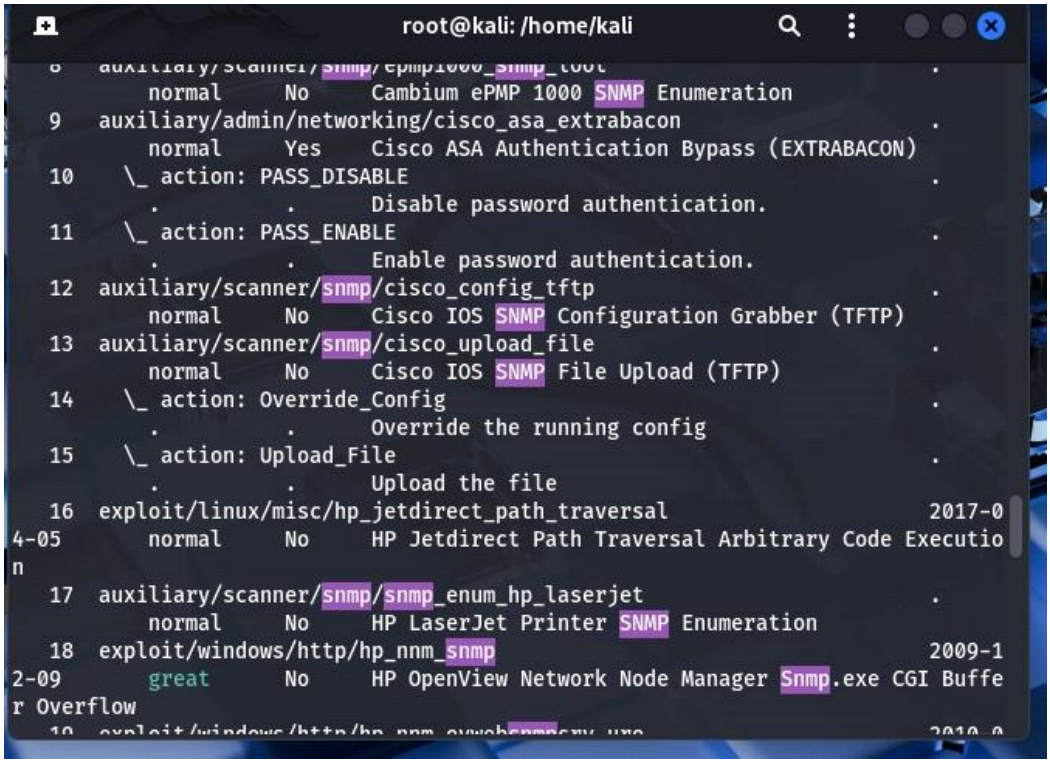

root@kali: /home/kali
normal No Cambium ePMP 1000 SNMP Enumeration
9 auxiliary/admin/networking/cisco_asa_extrabacon . normal Yes Cisco ASA Authentication Bypass (EXTRABACON)
10 _ action: PASS_DISABLE . . Disable password authentication.
11 _ action: PASS_ENABLE . . Enable password authentication.
12 auxiliary/scanner/snmp/cisco_config_tftp . normal No Cisco IOS SNMP Configuration Grabber (TFTP)
13 auxiliary/scanner/snmp/cisco_upload_file . normal No Cisco IOS SNMP File Upload (TFTP)
14 _ action: Override_Config . . Override the running config
15 _ action: Upload_File . . Upload the file
16 exploit/linux/misc/hp_jetdirect_path_traversal 2017-04-05 normal No HP Jetdirect Path Traversal Arbitrary Code Execution
17 auxiliary/scanner/snmp/snmp_enum_hp_laserjet . normal No HP LaserJet Printer SNMP Enumeration
18 exploit/windows/http/hp_nnm_snmp 2009-12-09 great No HP OpenView Network Node Manager Snmp.exe CGI Buffer Overflow

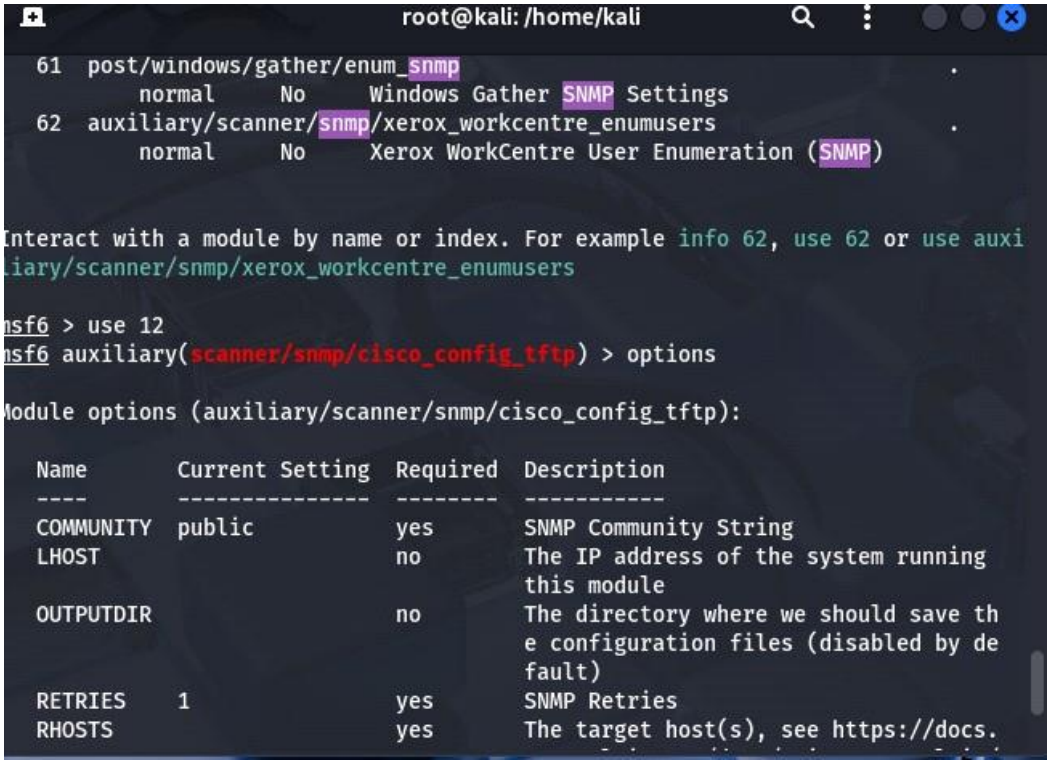

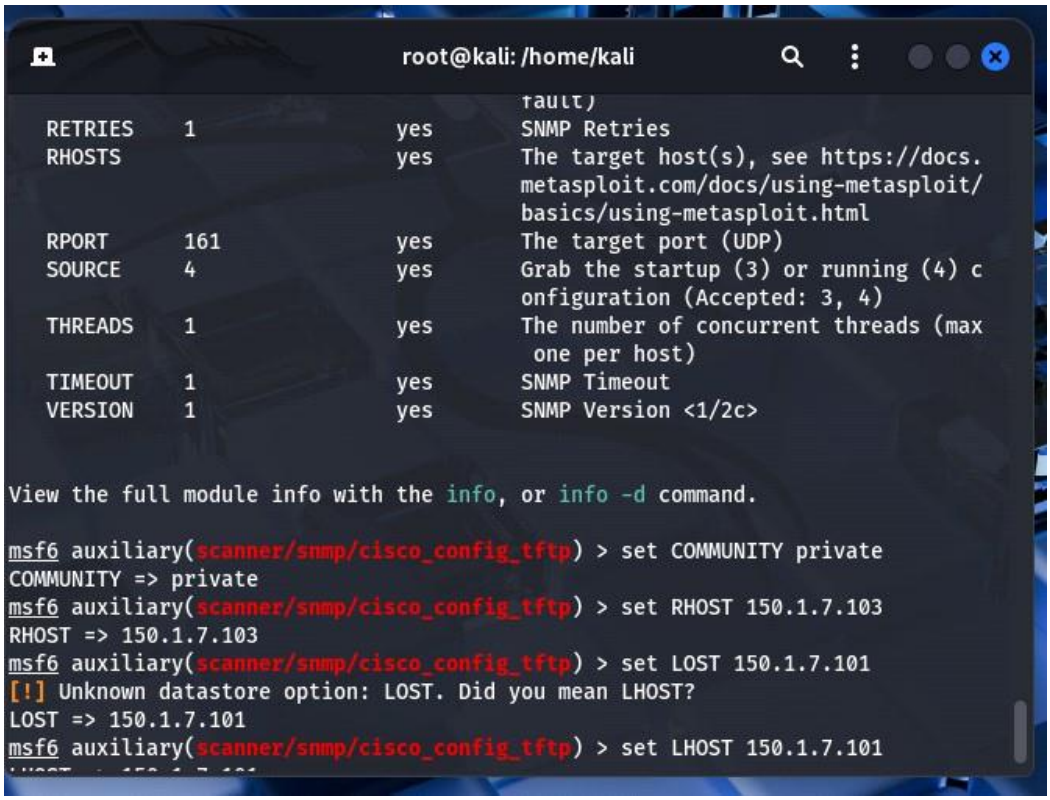


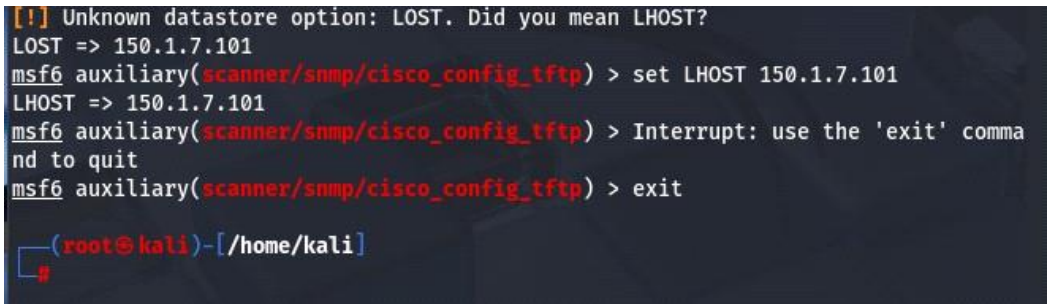

Lab : Max phisher

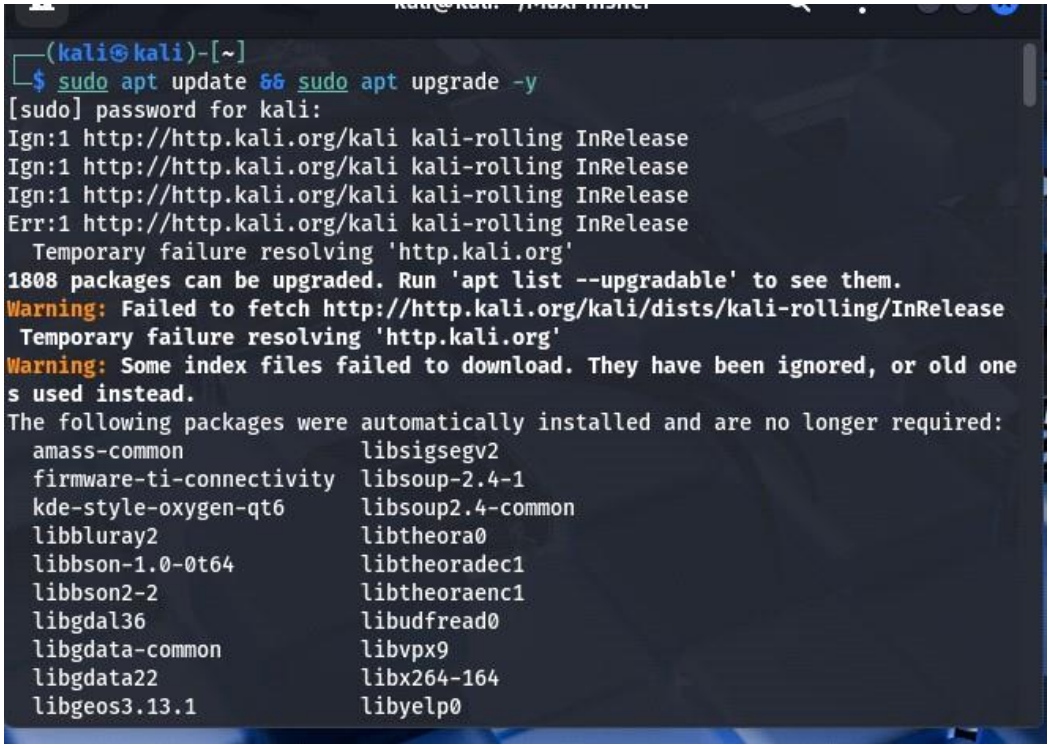



```
┌──(kali㉿kali)-[~]
└─$ sudo apt update && sudo apt upgrade -y
[sudo] password for kali:
Ign:1 http://http.kali.org/kali kali-rolling InRelease
Ign:1 http://http.kali.org/kali kali-rolling InRelease
Ign:1 http://http.kali.org/kali kali-rolling InRelease
Err:1 http://http.kali.org/kali kali-rolling InRelease
  Temporary failure resolving 'http.kali.org'
1808 packages can be upgraded. Run 'apt list --upgradable' to see them.
Warning: Failed to fetch http://http.kali.org/kali/dists/kali-rolling/InRelease
 Temporary failure resolving 'http.kali.org'
Warning: Some index files failed to download. They have been ignored, or old one
s used instead.
The following packages were automatically installed and are no longer required:
  amass-common              libsigsegv2
  firmware-ti-connectivity  libsoup-2.4-1
  kde-style-oxygen-qt6      libsoup2.4-common
  libbluray2                libtheora0
  libbson-1.0-0t64          libtheoradec1
  libbson2-2                libtheoraenc1
  libgdal36                 libudfread0
  libgdata-common           libvpx9
  libgdata22                libx264-164
  libgeos3.13.1             libyelp0
```

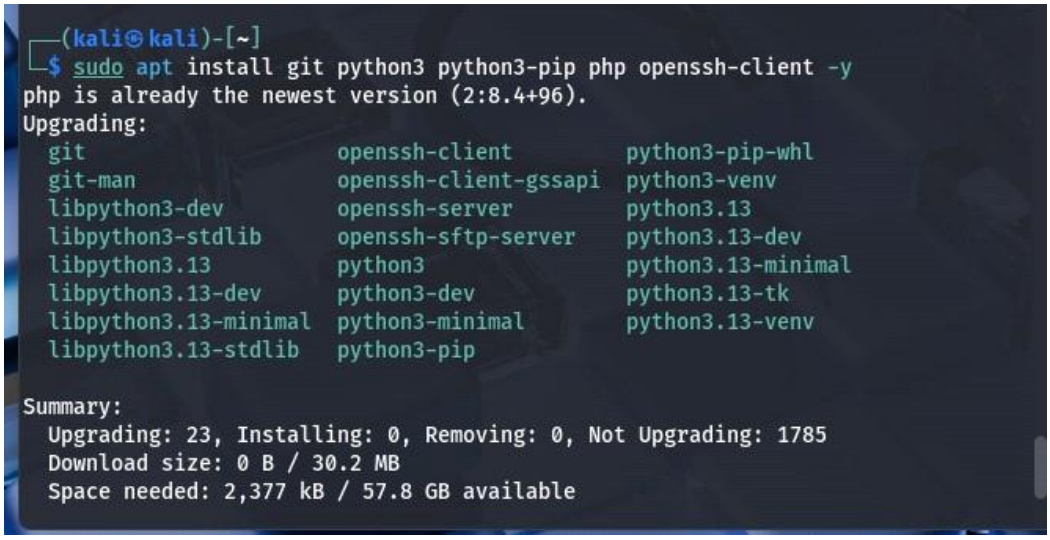



```
┌──(kali㉿kali)-[~]
└─$ sudo apt install git python3 python3-pip php openssh-client -y
php is already the newest version (2:8.4+96).
Upgrading:
  git                  openssh-client         python3-pip-whl
  git-man              openssh-client-gssapi  python3-venv
  libpython3-dev       openssh-server         python3.13
  libpython3-stdlib    openssh-sftp-server    python3.13-dev
  libpython3.13        python3                python3.13-minimal
  libpython3.13-dev    python3-dev            python3.13-tk
  libpython3.13-minimal  python3-minimal      python3.13-venv
  libpython3.13-stdlib   python3-pip


Summary:
  Upgrading: 23, Installing: 0, Removing: 0, Not Upgrading: 1785
  Download size: 0 B / 30.2 MB
  Space needed: 2,377 kB / 57.8 GB available
```

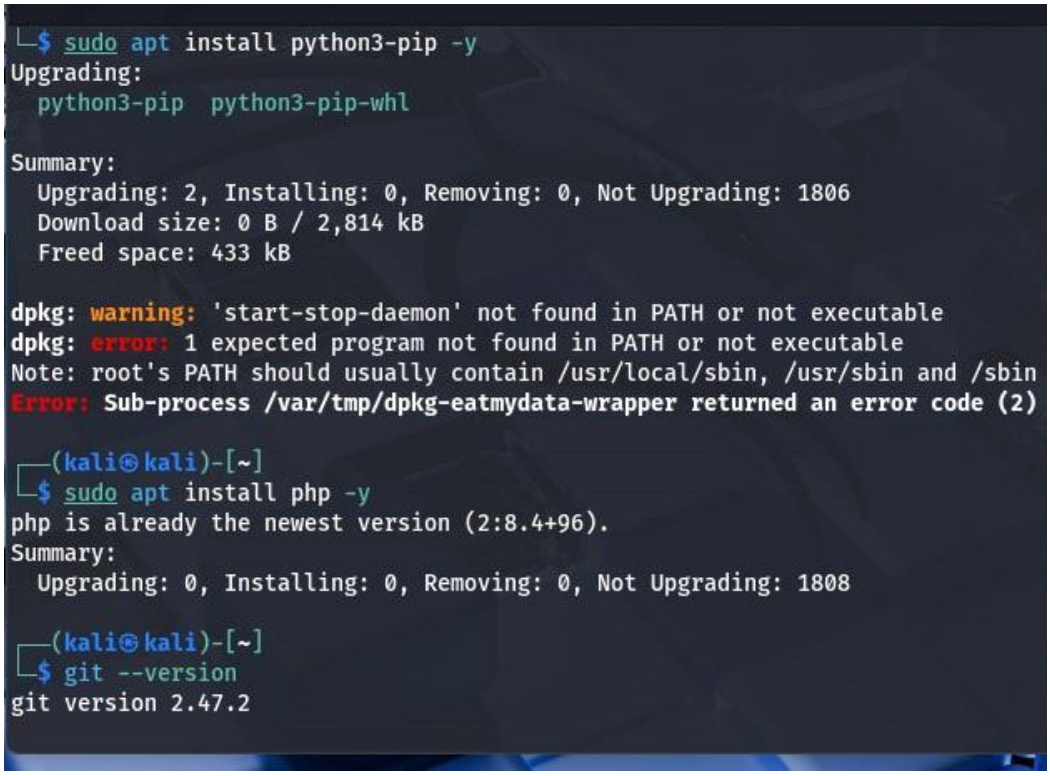

└─$ sudo apt install python3-pip -y
Upgrading:
python3-pip python3-pip-whl
Summary:
Upgrading: 2, Installing: 0, Removing: 0, Not Upgrading: 1806
Download size: 0 B / 2,814 kB
Freed space: 433 kB
dpkg: warning: 'start-stop-daemon' not found in PATH or not executable
dpkg: error: 1 expected program not found in PATH or not executable
Note: root's PATH should usually contain /usr/local/sbin, /usr/sbin and /sbin
Error: Sub-process /var/tmp/dpkg-eatmydata-wrapper returned an error code (2)
┌──(kali㉿kali)-[~]
└─$ sudo apt install php -y
php is already the newest version (2:8.4+96).
Summary:
Upgrading: 0, Installing: 0, Removing: 0, Not Upgrading: 1808
┌──(kali㉿kali)-[~]
└─$ git --version
git version 2.47.2

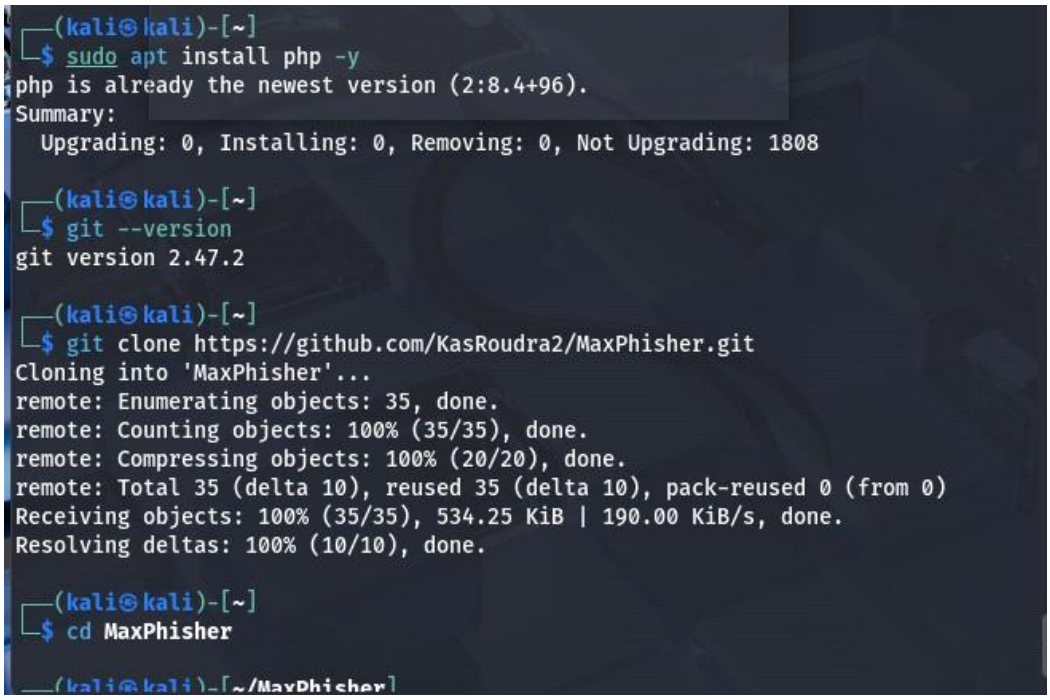
┌──(kali㉿kali)-[~]
└─$ sudo apt install php -y
php is already the newest version (2:8.4+96).
Summary:
Upgrading: 0, Installing: 0, Removing: 0, Not Upgrading: 1808
┌──(kali㉿kali)-[~]
└─$ git --version
git version 2.47.2
┌──(kali㉿kali)-[~]
└─$ git clone https://github.com/KasRoudra2/MaxPhisher.git
Cloning into 'MaxPhisher'...
remote: Enumerating objects: 35, done.
remote: Counting objects: 100% (35/35), done.
remote: Compressing objects: 100% (20/20), done.
remote: Total 35 (delta 10), reused 35 (delta 10), pack-reused 0 (from 0)
Receiving objects: 100% (35/35), 534.25 KiB | 190.00 KiB/s, done.
Resolving deltas: 100% (10/10), done.
┌──(kali㉿kali)-[~]
└─$ cd MaxPhisher

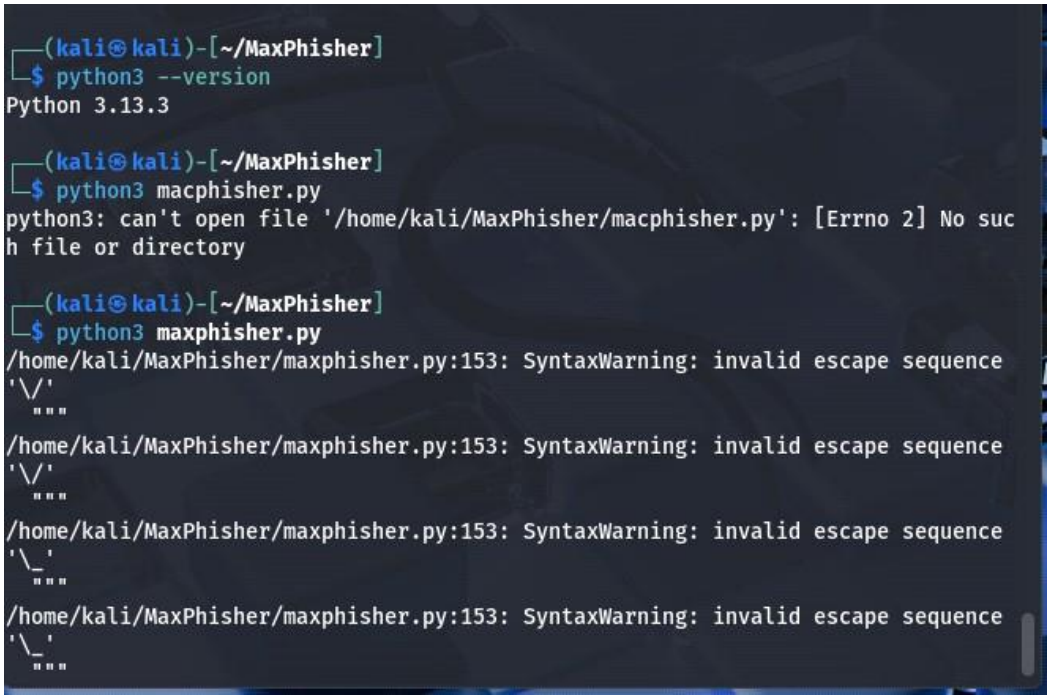
┌──(kali㉿kali)-[~/MaxPhisher]
└─$ python3 --version
Python 3.13.3
┌──(kali㉿kali)-[~/MaxPhisher]
└─$ python3 macphisher.py
python3: can't open file '/home/kali/MaxPhisher/macphisher.py': [Errno 2] No suc
h file or directory
┌──(kali㉿kali)-[~/MaxPhisher]
└─$ python3 maxphisher.py
/home/kali/MaxPhisher/maxphisher.py:153: SyntaxWarning: invalid escape sequence
'\/'
"""
/home/kali/MaxPhisher/maxphisher.py:153: SyntaxWarning: invalid escape sequence
'\/'
"""
/home/kali/MaxPhisher/maxphisher.py:153: SyntaxWarning: invalid escape sequence
'_'
"""
/home/kali/MaxPhisher/maxphisher.py:153: SyntaxWarning: invalid escape sequence
'_'
"""

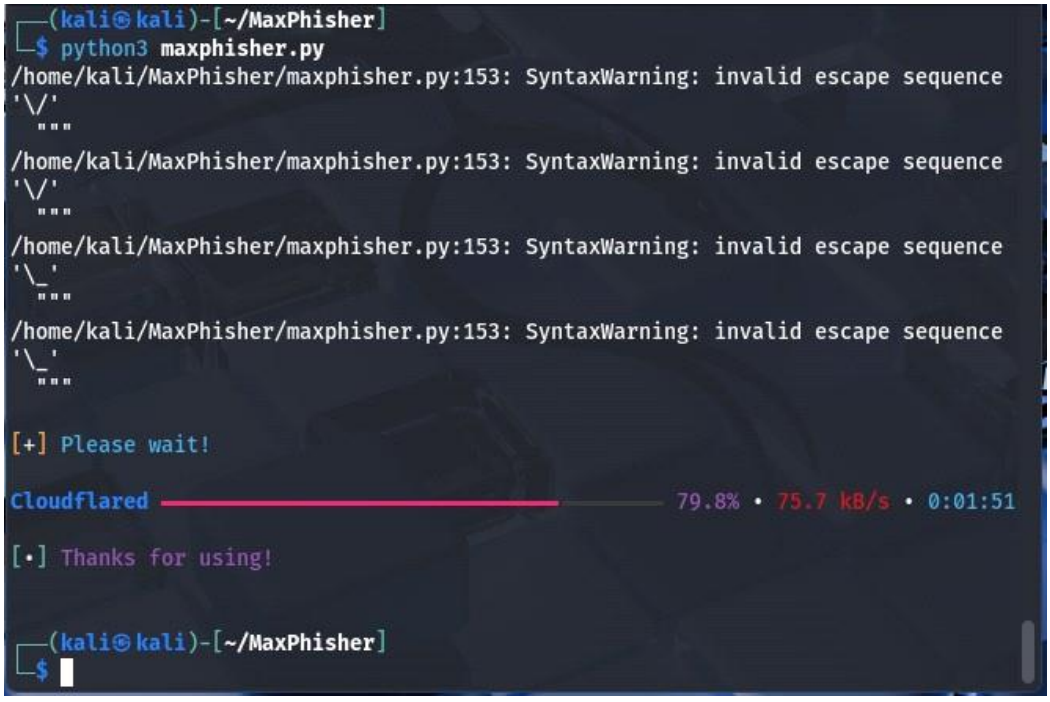
┌──(kali㉿kali)-[~/MaxPhisher]
└─$ python3 maxphisher.py
/home/kali/MaxPhisher/maxphisher.py:153: SyntaxWarning: invalid escape sequence
'\/'
"""
/home/kali/MaxPhisher/maxphisher.py:153: SyntaxWarning: invalid escape sequence
'\/'
"""
/home/kali/MaxPhisher/maxphisher.py:153: SyntaxWarning: invalid escape sequence
'_'
"""
/home/kali/MaxPhisher/maxphisher.py:153: SyntaxWarning: invalid escape sequence
'_'
"""
[+] Please wait!
Cloudflared 79.8% • 75.7 kB/s • 0:01:51
[•] Thanks for using!
┌──(kali㉿kali)-[~/MaxPhisher]
└─$

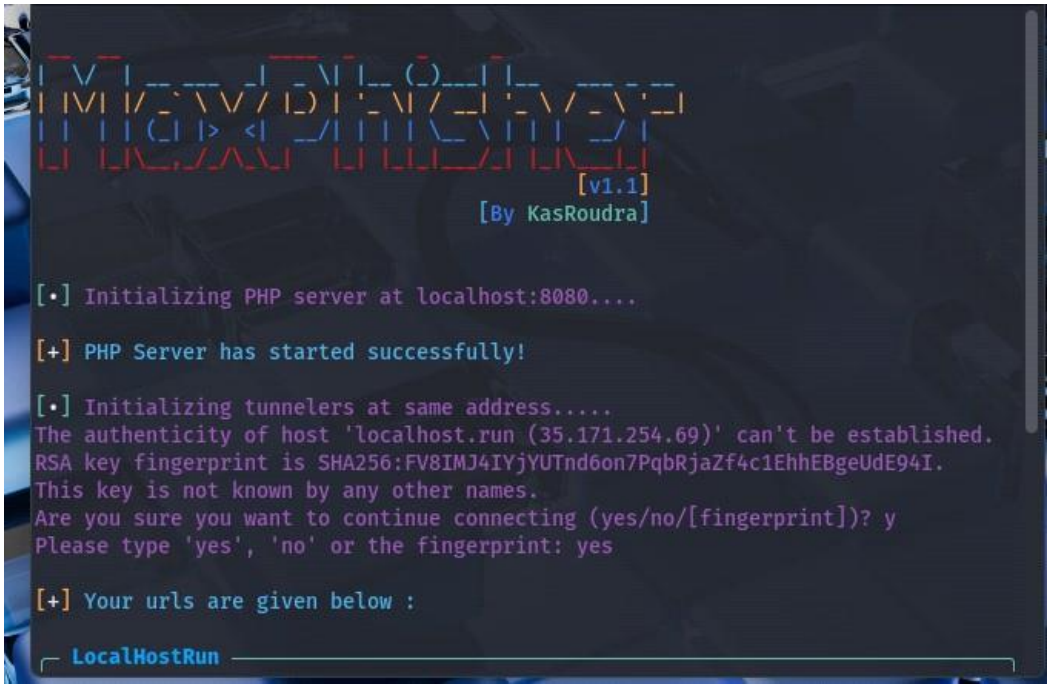

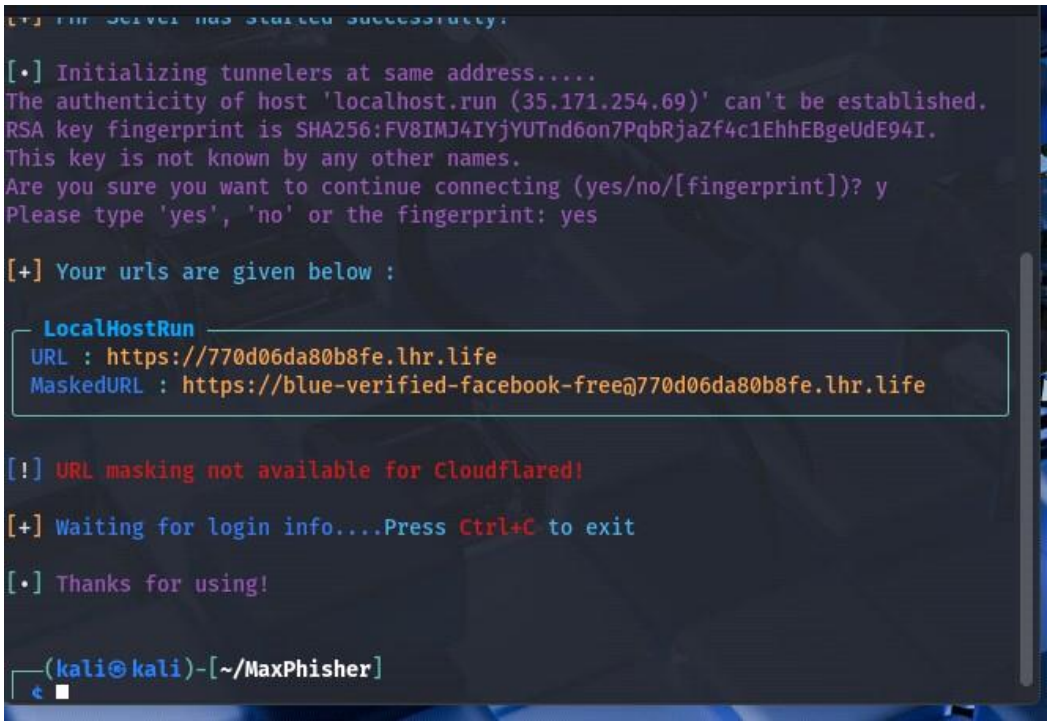

Lab : share folder

Purpose of share folder is that If we are on the same network, we can share files from one PC to another without using a USB, data cable, or any physical connection.


Create a folder

Right click on the folder

Go to give access


Choose specific people

Choose specific people

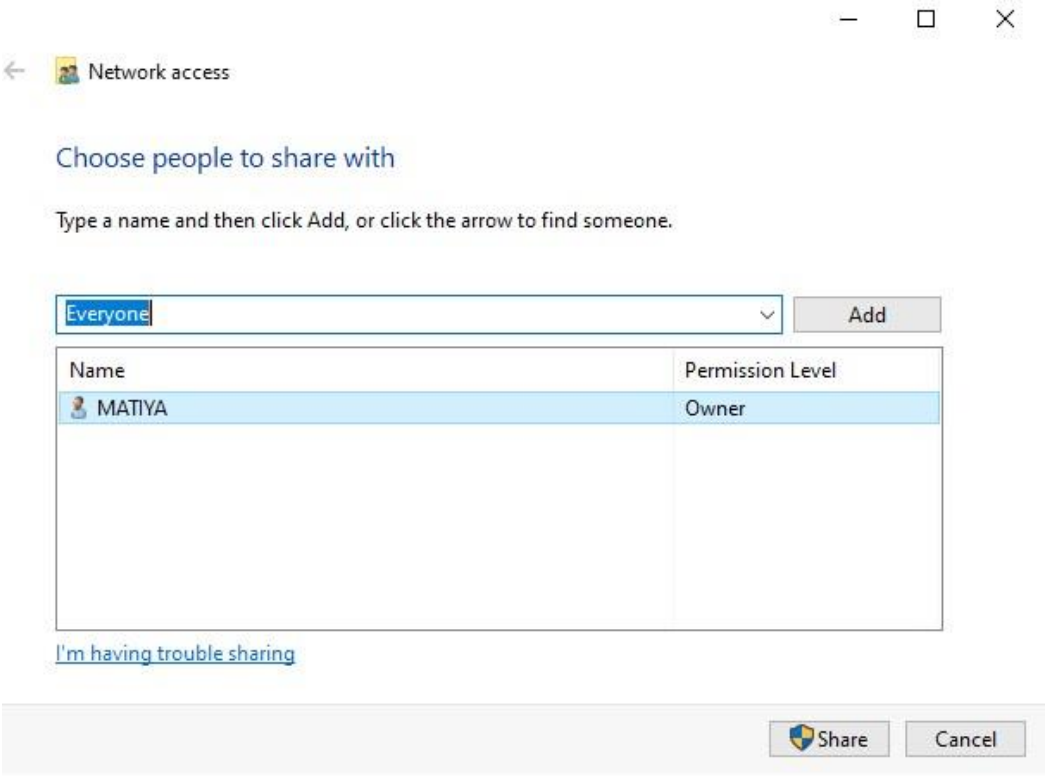

Click share button


Now open windows powershell

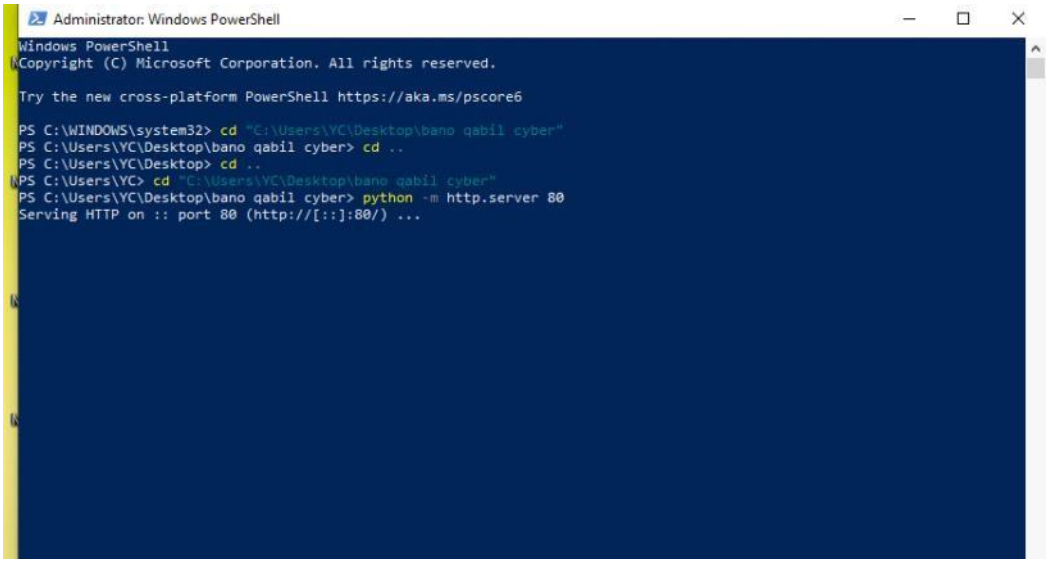


netcraft- resource tool - site report- telenor.com


copy ipv4 ip2 location geop api paste ip city district zipcode longitude ,latitude copy google map

paste longitude and latitude numerical values see their server location

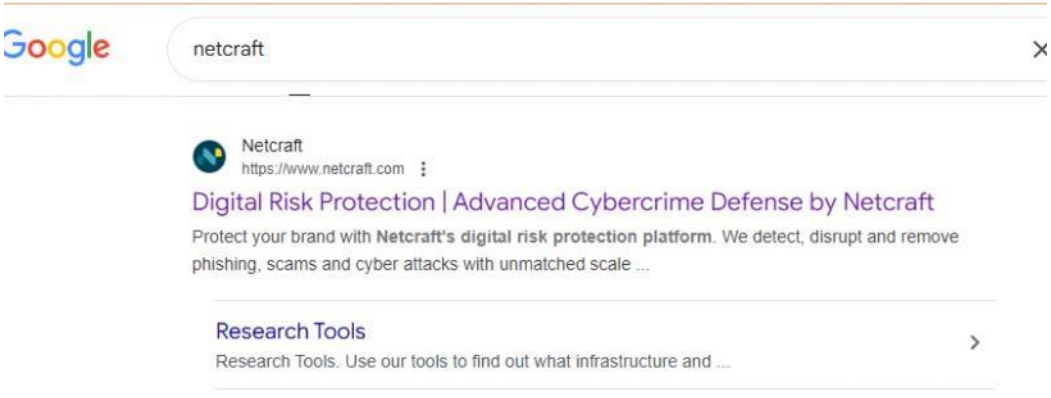

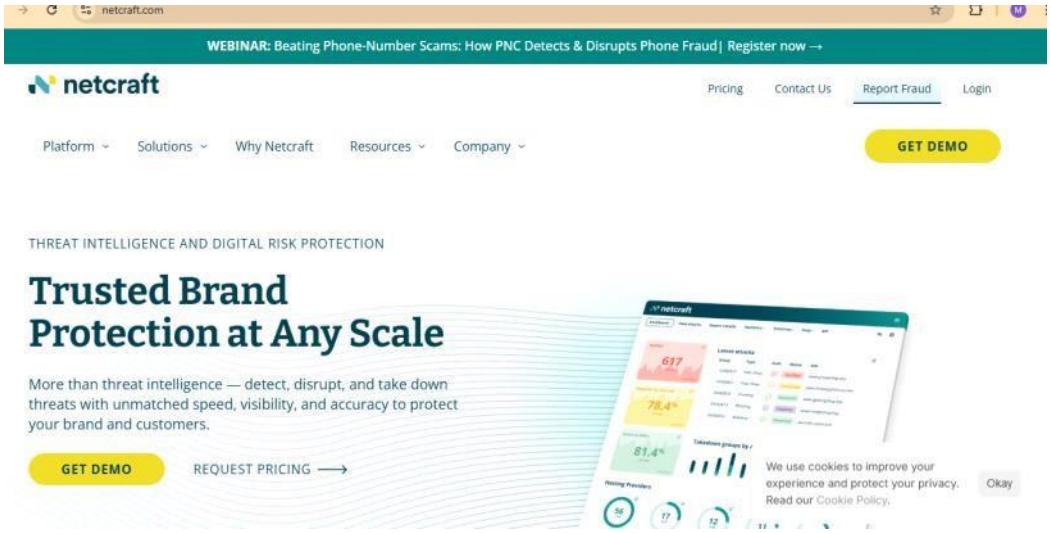


Click on resources and go to resource tools

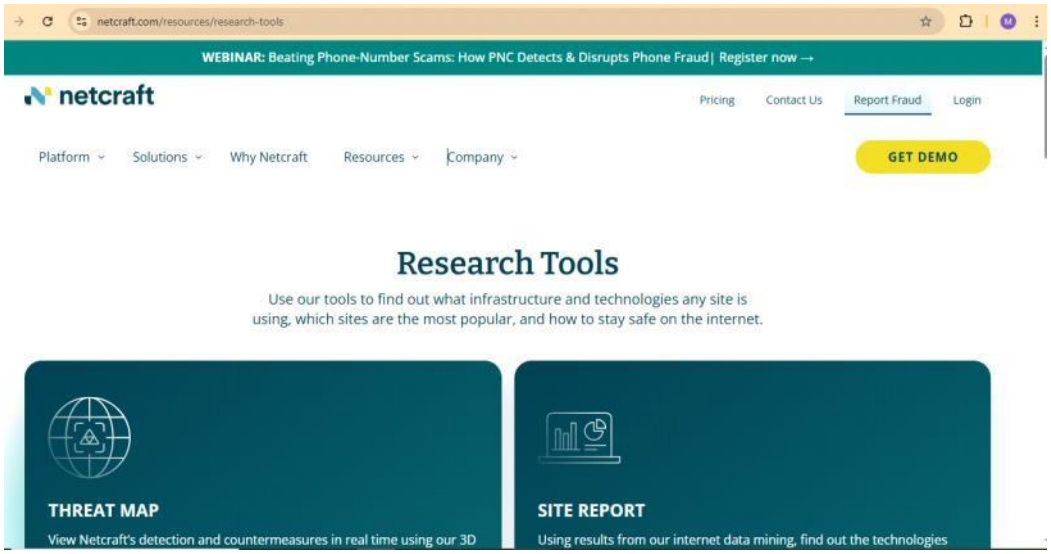



Click on site report

Click on site report

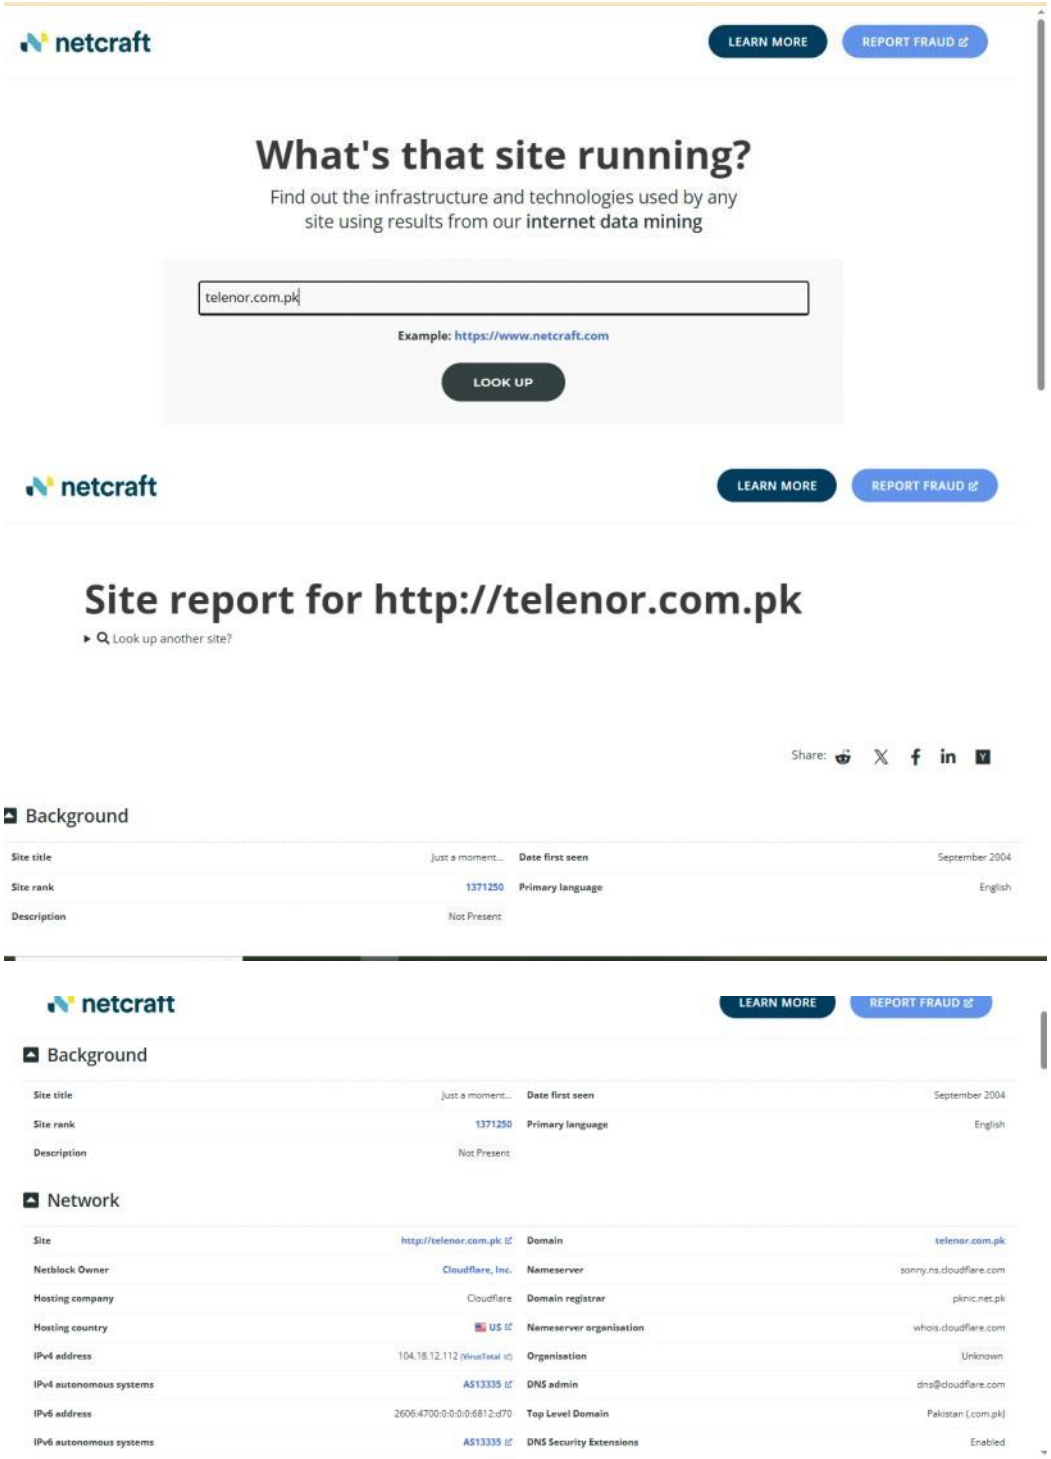

Copy ipv4 address and open website ip2location geop api

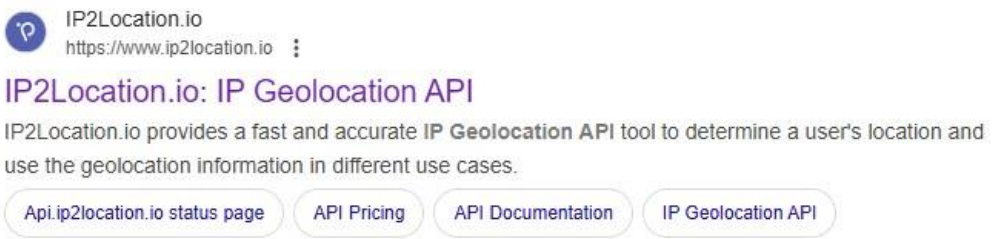

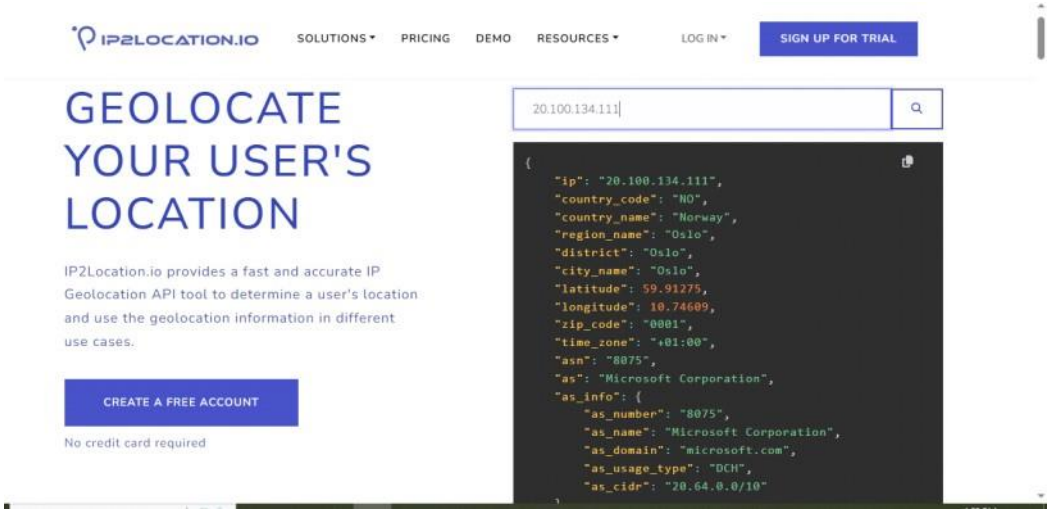

Copy latitude and longitude and open google map then paste the mon search bar and see the location of the server

