

Use-case prioritisation and selection

Place each scored use case on the matrix by its value and ease scores, then decide what happens to it. The matrix suggests an action; the decision belongs to the people who sign this record.

Use case
Define 1 · Describe it


Scorecard
Define 2 · Score it

Prioritisation
Define 3 · Choose

BRD or PRD
Define 4 · Require it

TDD
Design · Next stage

Worked example. The three use cases from the seed template. The first nine scores are the seed's own. The seed did not score data readiness or delivery risk, so those scores, and the decisions, are illustrative.

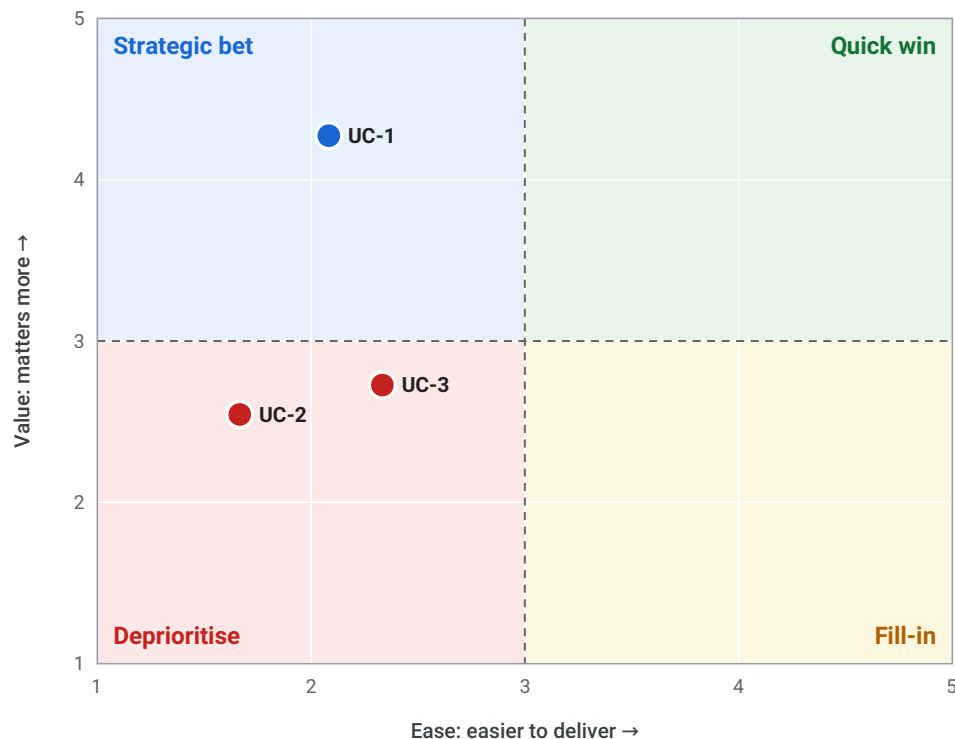

Quick win

Value high, ease high (high = 3.0 or more)

Approve and start. Write the BRD or PRD.

Strategic bet

Value high, ease low (high = 3.0 or more)

Approve for discovery. Plan the funding and reduce the risk first, for example by fixing data readiness.

Fill-in

Value low, ease high (high = 3.0 or more)

Do it when there is capacity, or bundle it with related work.

Deprioritise

Value low, ease low (high = 3.0 or more)

Park it. Look again if circumstances change.

Decision record

One row per use case. The quadrant suggests an action; record what was decided, why, and any conditions.

Use case	Value	Ease	Quadrant	Decision	Reason and conditions	Next	Owner
UC-1 Develop new data product	4.27	2.08	Strategic bet	Approve for discovery	High value, hard to deliver. Agree funding and a delivery plan, and improve data readiness before committing to a build.	PRD	Sponsor to be named
UC-2 Gather customer contact data	2.55	1.67	Deprioritise	Defer	Low value and hard to deliver today. Revisit if customer contact data becomes a strategic need. UC-3 depends on it.	-	-
UC-3 Share customer contact data with supplier	2.73	2.33	Deprioritise	Defer	Needs the data that UC-2 would gather. Sharing personal data with a supplier needs a legal and privacy review first.	-	-

Next: For each approved use case, write a BRD (4a) or a PRD (4b).