

# Tidy Time Series & Forecasting in R

## 4. Seasonality and trends



# Outline

- 1 Time series decompositions
- 2 Lab Session 8
- 3 Seasonal adjustment

# Outline

- 1 Time series decompositions
- 2 Lab Session 8
- 3 Seasonal adjustment

# Time series decomposition

**Trend-Cycle** aperiodic changes in level over time.

**Seasonal** (almost) periodic changes in level due to seasonal factors (e.g., the quarter of the year, the month, or day of the week).

## Additive decomposition

$$y_t = S_t + T_t + R_t$$

where  $y_t$  = data at period  $t$

$T_t$  = trend-cycle component at period  $t$

$S_t$  = seasonal component at period  $t$

$R_t$  = remainder component at period  $t$

# STL decomposition

- STL: “Seasonal and Trend decomposition using Loess”
- Very versatile and robust.
- Seasonal component allowed to change over time, and rate of change controlled by user.
- Smoothness of trend-cycle also controlled by user.
- Optionally robust to outliers
- No trading day or calendar adjustments.
- Only additive.
- Take logs to get multiplicative decomposition.
- Use Box-Cox transformations to get other decompositions.


# Decomposition dable

```
dcmp <- elecequip %>%  
  model(STL(value ~ season(window = 7))) %>%  
  components()  
dcmp
```

```
## # A dable: 195 x 7 [1M]  
## # Key:      .model [1]  
## # :      value = trend + season_year + remainder  
##   .model      index value trend season_year remainder season_adjust  
##   <chr>      <mth> <dbl> <dbl>      <dbl>      <dbl>      <dbl>  
## 1 STL(value ~ se~ 1996 Jan   79.4  78.9      -3.37       3.81      82.7  
## 2 STL(value ~ se~ 1996 Feb   75.8  79.1      -3.87       0.547     79.7  
## 3 STL(value ~ se~ 1996 Mar   86.3  79.3       6.73      0.301     79.6  
## 4 STL(value ~ se~ 1996 Apr   72.6  79.5      -5.74      -1.15     78.3  
## 5 STL(value ~ se~ 1996 May   74.9  79.7      -3.53      -1.31     78.4  
## 6 STL(value ~ se~ 1996 Jun   83.8  79.9       5.03      -1.14     78.8  
## 7 STL(value ~ se~ 1996 Jul   79.8  80.1       0.222     0.118     80.0
```


# Euro electrical equipment

```
autoplot(dcmp) + xlab("Year")
```

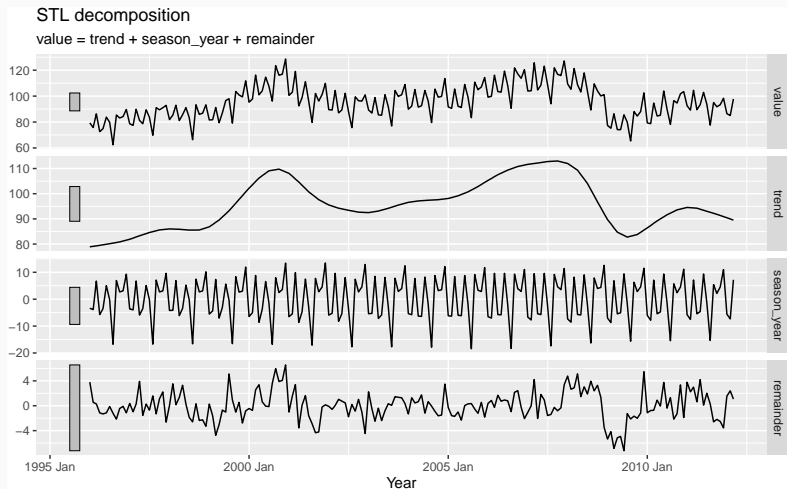

# Euro electrical equipment


```
dcmp %>% gg_subseries(season_year)
```

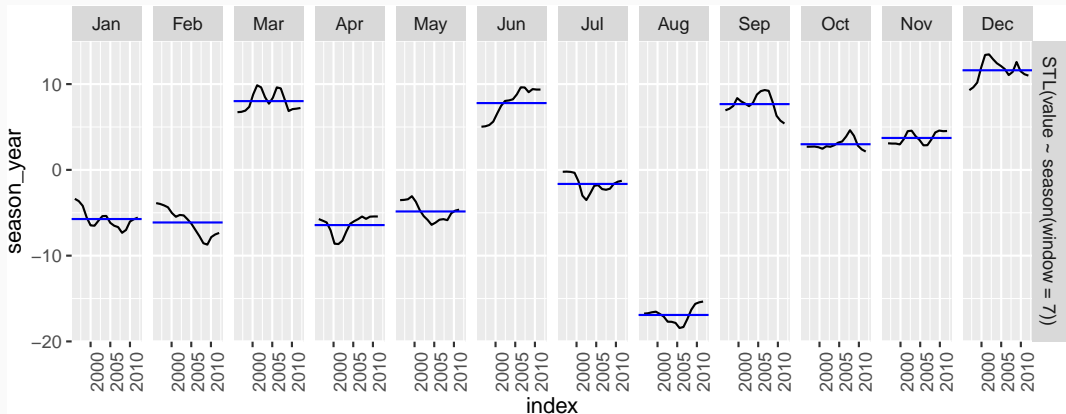




# Euro electrical equipment

```
elecequip %>%  
  autoplot(value) +  
  autolayer(dcmp, trend, col='blue')
```

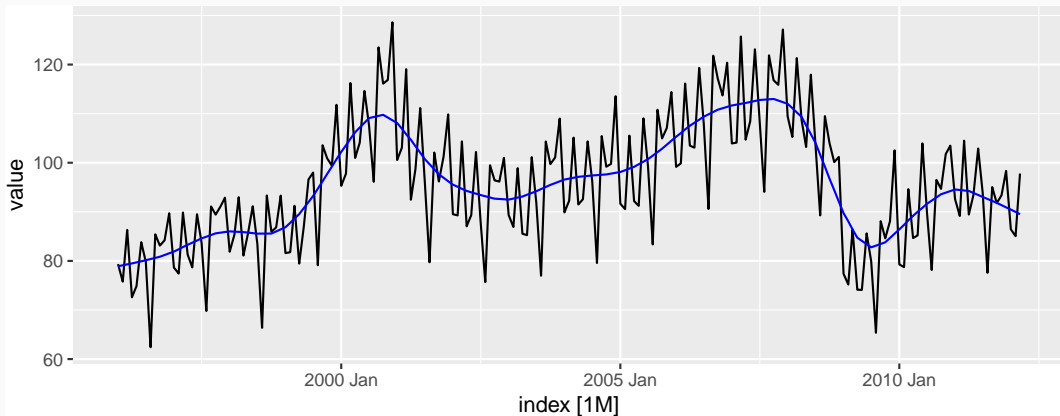


# Australian holidays

```
holidays %>% autoplot(Trips) +  
  ylab("thousands of trips") + xlab("Year") +  
  ggtitle("Australian domestic holiday nights")
```

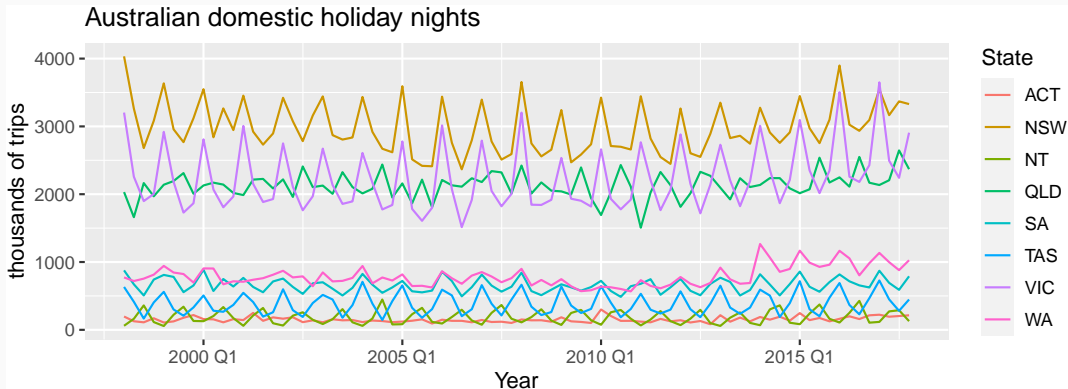


# Holidays decomposition

```
holidays %>%  
  model(stl = STL(Trips ~ season(window = "periodic"), robust = TRUE)) %>%  
  components() %>%  
  autoplot()
```

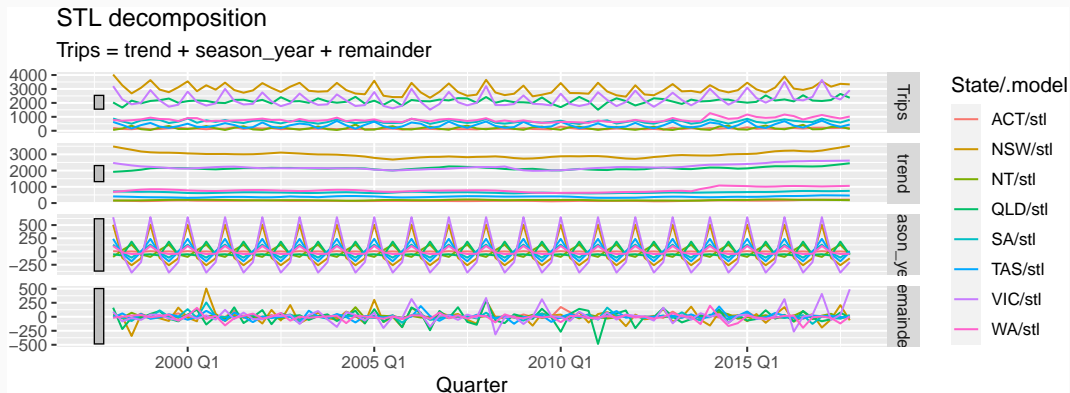

# Holidays decomposition

```
holidays %>%  
  model(stl = STL(Trips ~ season(window = 5), robust = TRUE)) %>%  
  components() %>%  
  autoplot()
```

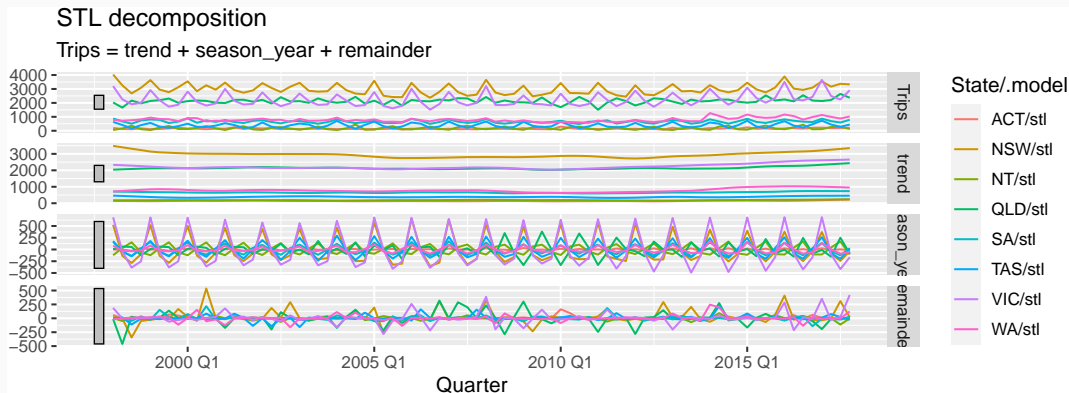

# STL decomposition

```
holidays %>%  
  model(stl = STL(Trips ~ trend(window=15) + season(window=13),  
    robust = TRUE))
```

- `trend(window = ?)` controls wiggleness of trend component.
- `season(window = ?)` controls variation on seasonal component.
- `STL()` chooses `season(window=13)` by default
- A large seasonal window is equivalent to setting `window="periodic"`.
- Odd numbers should be used for symmetry.


# Holidays decomposition

```
dcmp <- holidays %>% model(stl = STL(Trips)) %>% components()
dcmp
```

```
## # A dable: 640 x 8 [1Q]
## # Key:      State, .model [8]
## # :        Trips = trend + season_year + remainder
##   State .model Quarter Trips trend season_year remainder season_adjust
##   <chr> <chr>    <qtr> <dbl> <dbl>      <dbl>      <dbl>      <dbl>
## 1 ACT   stl     1998 Q1  196.  172.      -8.48       32.6       205.
## 2 ACT   stl     1998 Q2  127.  157.       10.3      -40.6       116.
## 3 ACT   stl     1998 Q3  111.  142.     -16.8      -14.5       128.
## 4 ACT   stl     1998 Q4  170.  130.       14.6       25.6       156.
## 5 ACT   stl     1999 Q1  108.  135.     -8.63     -18.3       116.
## 6 ACT   stl     1999 Q2  125.  148.       11.0     -34.6       114.
## 7 ACT   stl     1999 Q3  178.  166.    -16.0       28.3       194.
## 8 ACT   stl     1999 Q4  218.  177.       13.2       27.5       204.
## 9 ACT   stl     2000 Q1  158.  169.     -8.75      -1.96       167.
## 10 ACT  stl     2000 Q2  155.  151.      11.7      -8.20       143.
```


# Holidays decomposition

```
dcmp %>% gg_subseries(season_year)
```

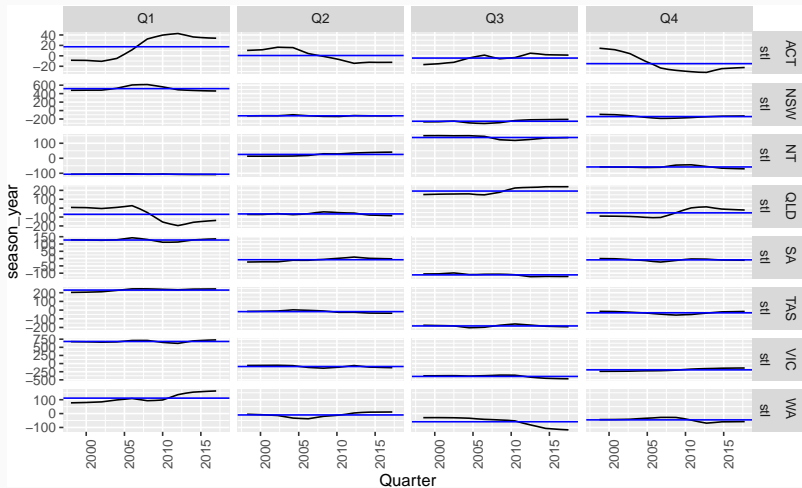

# Holidays decomposition

```
autoplot(dcmp, trend, scaleBars = FALSE) +  
  autolayer(holidays, alpha = 0.4)
```

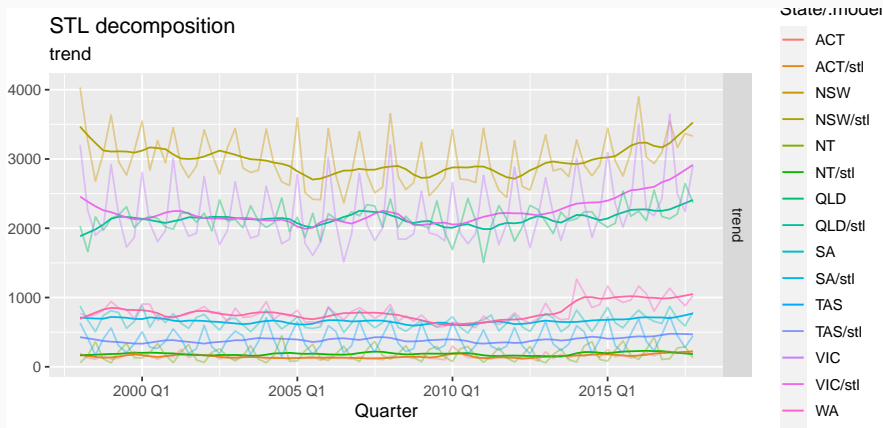



# Outline

1 Time series decompositions

2 Lab Session 8

3 Seasonal adjustment

# Lab Session 8

## 1 Produce the following decomposition

```
canadian_gas %>%  
  model(STL(Volume ~ season(window=7) + trend(window=11))) %>%  
  components() %>%  
  autoplot()
```


- 2 What happens as you change the values of the two window arguments?
- 3 How does the seasonal shape change over time? [Hint: Try plotting the seasonal component using gg\_season.]
- 4 Can you produce a plausible seasonally adjusted series? [Hint: season\_adjust is one of the variables returned by STL.]

# Multiple seasonality

```
vic_elec %>%  
  model(STL(Demand)) %>%  
  components() %>%  
  autoplot()
```

## STL decomposition

Demand = trend + season\_year + season\_week + season\_day + season\_hour + remainder

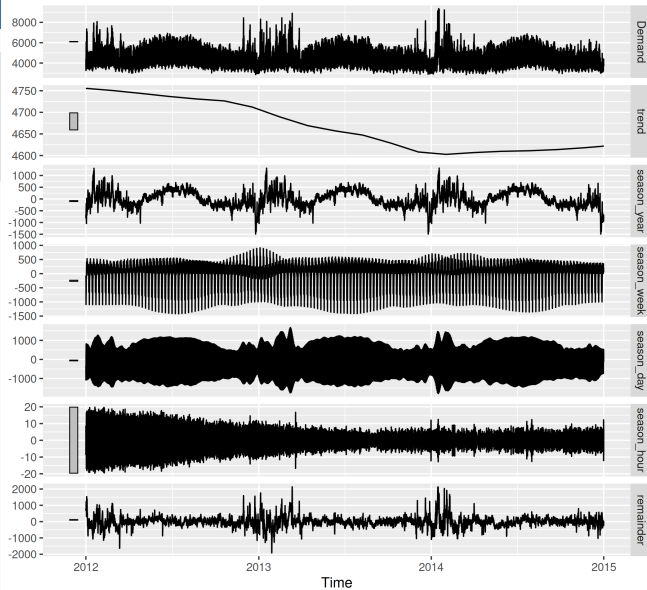

# Outline

- 1 Time series decompositions
- 2 Lab Session 8
- 3 Seasonal adjustment

# Seasonal adjustment

- Useful by-product of decomposition: an easy way to calculate seasonally adjusted data.
- Additive decomposition: seasonally adjusted data given by

$$y_t - S_t = T_t + R_t$$

- Multiplicative decomposition: seasonally adjusted data given by

$$y_t / S_t = T_t \times R_t$$


# US Retail Employment

```
us_retail_employment <- us_employment %>%  
  filter(year(Month) >= 1990, Title == "Retail Trade") %>%  
  select(-Series_ID)  
us_retail_employment
```

```
## # A tsibble: 357 x 3 [1M]  
##       Month Title      Employed  
##       <mth> <chr>      <dbl>  
## 1 1990 Jan Retail Trade 13256.  
## 2 1990 Feb Retail Trade 12966.  
## 3 1990 Mar Retail Trade 12938.  
## 4 1990 Apr Retail Trade 13012.  
## 5 1990 May Retail Trade 13108.  
## 6 1990 Jun Retail Trade 13183.  
## 7 1990 Jul Retail Trade 13170.  
## 8 1990 Aug Retail Trade 13160.  
## 9 1990 Sep Retail Trade 13112.
```

# US Retail Employment

```
us_retail_employment %>%  
  autoplot(Employed) +  
  labs(y="Persons (thousands)", title="Total employment in US retail")
```

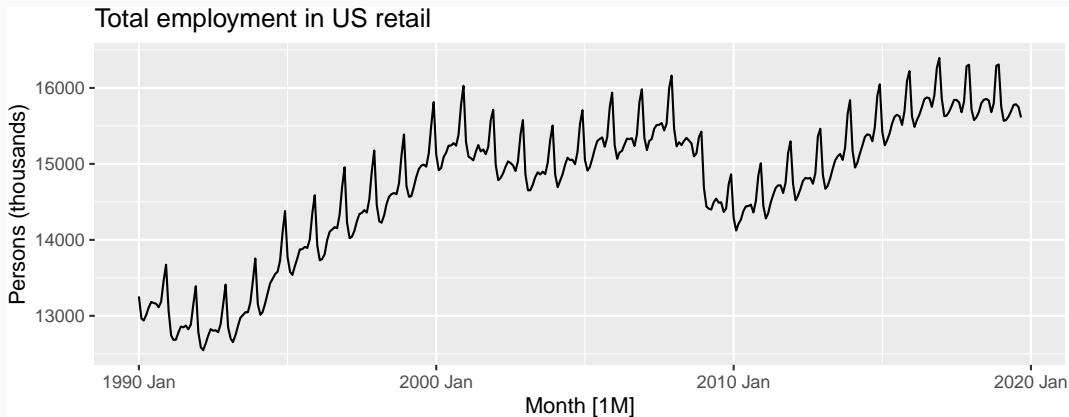

# US Retail Employment


```
dcmp <- us_retail_employment %>%  
  model(stl = STL(Employed))  
components(dcmp)
```

```
## # A dable: 357 x 7 [1M]  
## # Key:      .model [1]  
## # :      Employed = trend + season_year + remainder  
##   .model      Month Employed  trend season_year remainder season_adjust  
##   <chr>      <mth>      <dbl>  <dbl>      <dbl>      <dbl>      <dbl>  
## 1 stl      1990 Jan      13256. 13288.      -33.0        0.836      13289.  
## 2 stl      1990 Feb      12966. 13269.     -258.       -44.6      13224.  
## 3 stl      1990 Mar      12938. 13250.     -290.       -22.1      13228.  
## 4 stl      1990 Apr      13012. 13231.     -220.         1.05      13232.  
## 5 stl      1990 May      13108. 13211.     -114.        11.3      13223.  
## 6 stl      1990 Jun      13183. 13192.     -24.3        15.5      13207.  
## 7 stl      1990 Jul      13170. 13172.     -23.2        21.6      13193.24  
## 8 stl      1990 Aug      13160. 13151.     -20.5        17.0      13160.
```




# US Retail Employment

```
components(dcmp) %>% autoplot()
```

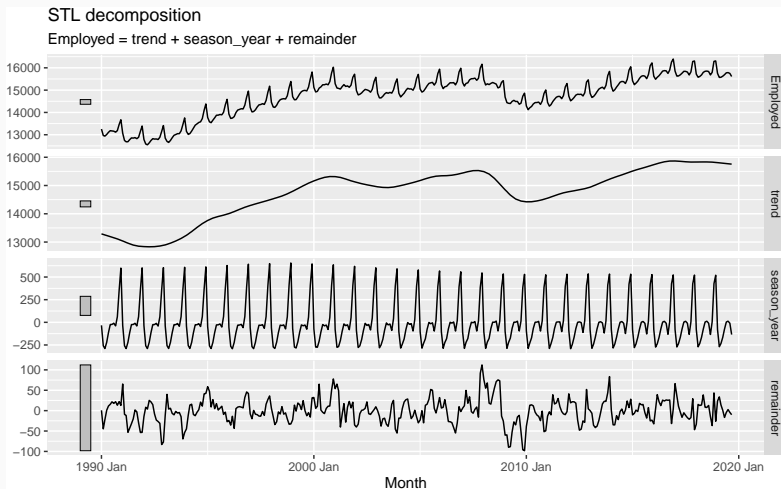

# US Retail Employment


```
us_retail_employment %>%  
  autoplot(Employed, color='gray') +  
  autolayer(components(dcmp), season_adjust, color='#0072B2') +  
  labs(y="Persons (thousands)", title="Total employment in US retail")
```

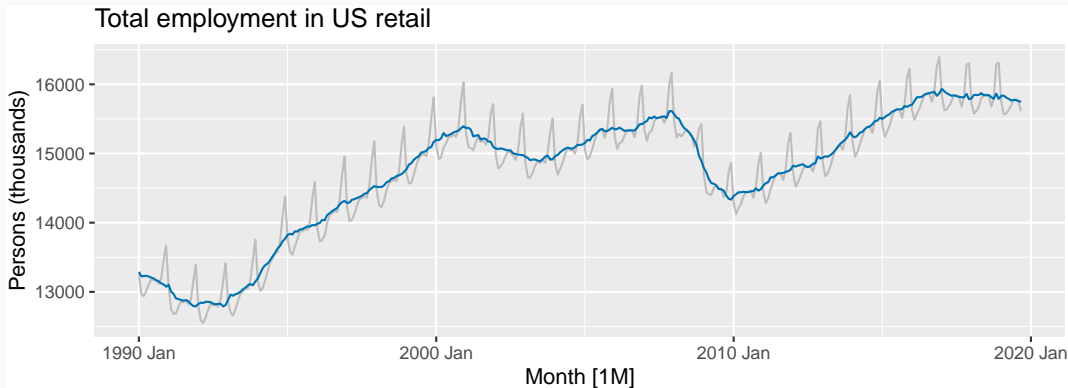


# Seasonal adjustment

- We use estimates of  $S$  based on past values to seasonally adjust a current value.
- Seasonally adjusted series reflect **remainders** as well as **trend**. Therefore they are not “smooth” and “downturns” or “upturns” can be misleading.
- It is better to use the trend-cycle component to look for turning points.





# The ABS stuff-up

**NEWS** 

LOCATION:  
Clayton, Vic [Change](#)

 Just In [Australia](#) [World](#) [Business](#) [Sport](#) [Analysis & Opinion](#) [Fact Check](#) [Programs](#)

**BREAKING NEWS** Police arrest man in connection with stabbing death of 17-year-old Masa Vukotic in M

 Print  Email  Facebook  Twitter  More

## Treasurer Joe Hockey calls for answers over Australian Bureau of Statistics jobs data

By [Michael Vincent](#) and [Simon Frazer](#)

Updated 9 Oct 2014, 12:17pm

**Federal Treasurer Joe Hockey says he wants answers to the problems the Australian Bureau of Statistics (ABS) has had with unemployment figures.**

Mr Hockey, who is in the US to discuss Australia's G20 agenda, said last month's unemployment figures were "extraordinary".

The rate was 6.1 per cent after jumping to a 12-year high of 6.4 per cent the previous month.


The ABS has now taken the rare step of abandoning seasonal adjustment for its latest employment data.





**PHOTO:** Joe Hockey says he is unhappy with the volatility of ABS unemployment figures. (AAP: Alan Porritt)

**RELATED STORY:** [ABS abandons seasonal adjustment for latest jobs data](#)

# The ABS stuff-up

**NEWS** 

LOCATION:  Clayton, Vic [Change](#)

 [Just In](#) [Australia](#) [World](#) [Business](#) [Sport](#) [Analysis & Opinion](#) [Fact Check](#) [Programs](#) [More](#)

**BREAKING NEWS** Police arrest man in connection with stabbing death of 17-year-old Masa Vukotic in Mel

[Print](#) [Email](#) [Facebook](#) [Twitter](#) [More](#)

## ABS abandons seasonal adjustment for latest jobs data

By business reporter [Michael Janda](#)  
Updated 8 Oct 2014, 4:19pm

**The Australian Bureau of Statistics is taking the rare step of abandoning seasonal adjustment for its latest employment data.**

The ABS uses seasonal adjustment, based on historical experience, to account for the normal variation between hiring and firing patterns between different months.

However, after a winter where the seasonally adjusted unemployment rate swung wildly from 6.1 to 6.4 and back to 6.1 per cent, [the bureau released a statement](#) saying it will not adjust the original figure for September for seasonal factors.

It will also reset the seasonal adjustment for July and August to one, meaning that these months will also reflect the original figures.

Sorry, this video has expired

**VIDEO:** Westpac chief economist Bill Evans discusses the ABS jobs data changes (ABC News)

**RELATED STORY:** Doubt the record breaking jobs figures? So does the ABS

**RELATED STORY:** Jobs increase record sees unemployment slashed

**RELATED STORY:** Unemployment surges to 12-year high at 6.4 pc

**MAP:** [Australia](#)

# The ABS stuff-up

## ABS jobs and unemployment figures – key questions answered by an expert

A professor of statistics at Monash University explains exactly what is seasonal adjustment, why it matters and what went wrong in the July and August figures



📷 School leavers come on to the jobs market at the same time, causing a seasonal fluctuation. Photograph: Brian Snyder/Reuters

The Australian Bureau of Statistics has [retracted its seasonally adjusted employment data for July and August](#), which recorded huge swings in the jobless rate. The ABS is also planning to review the methods it uses for seasonal adjustment to ensure its figures are as accurate as possible. Rob Hyndman, a professor of statistics at Monash University and member of the bureau's methodology advisory board, answers our questions:


# The ABS stuff-up

employed

```
## # A tsibble: 440 x 4 [1M]
##       Time Month Year Employed
##       <mt> <ord> <dbl>    <dbl>
## 1 1978 Feb Feb    1978    5986.
## 2 1978 Mar Mar    1978    6041.
## 3 1978 Apr Apr    1978    6054.
## 4 1978 May May    1978    6038.
## 5 1978 Jun Jun    1978    6031.
## 6 1978 Jul Jul    1978    6036.
## 7 1978 Aug Aug    1978    6005.
## 8 1978 Sep Sep    1978    6024.
## 9 1978 Oct Oct    1978    6046.
## 10 1978 Nov Nov    1978    6034.
## # ... with 430 more rows
```

# The ABS stuff-up


```
employed %>%  
  autoplot(Employed) +  
  labs(title = "Total employed", y = "Thousands")
```

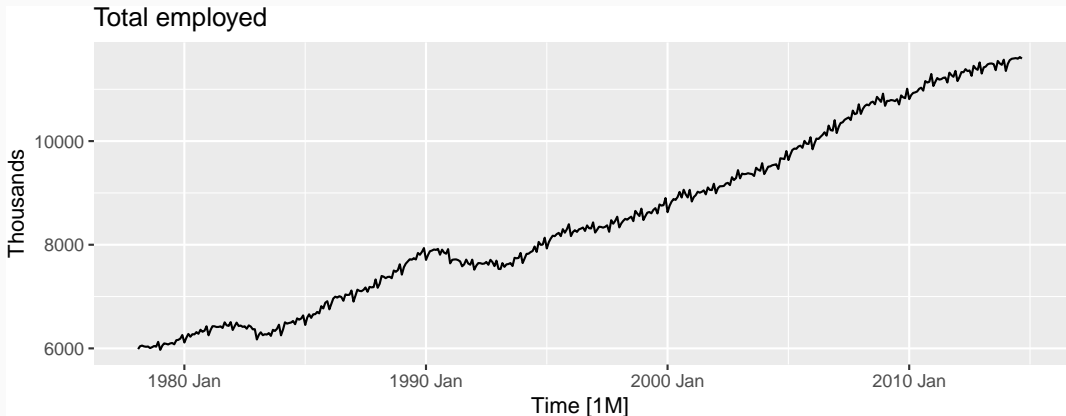




# The ABS stuff-up

```
employed %>%  
  filter(Year >= 2005) %>%  
  autoplot(Employed) +  
  labs(title = "Total employed", y = "Thousands")
```

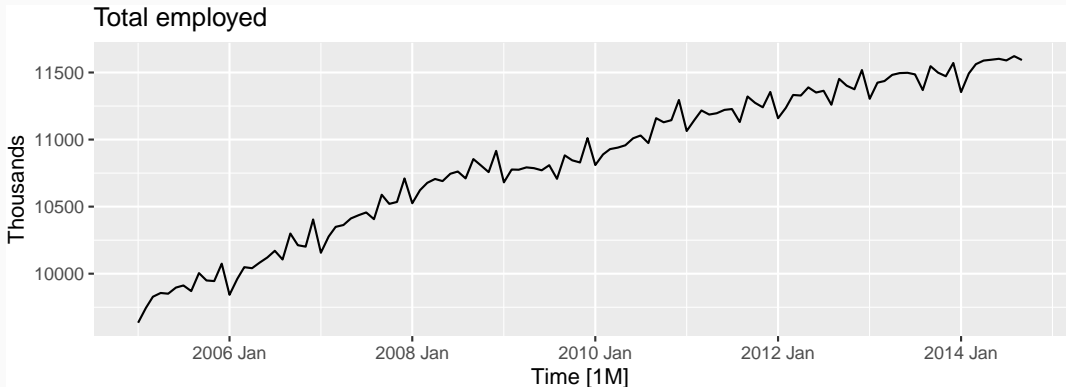

# The ABS stuff-up


```
employed %>%  
  filter(Year >= 2005) %>%  
  gg_season(Employed, labels = "right") +  
  labs(title = "Total employed", y = "Thousands")
```

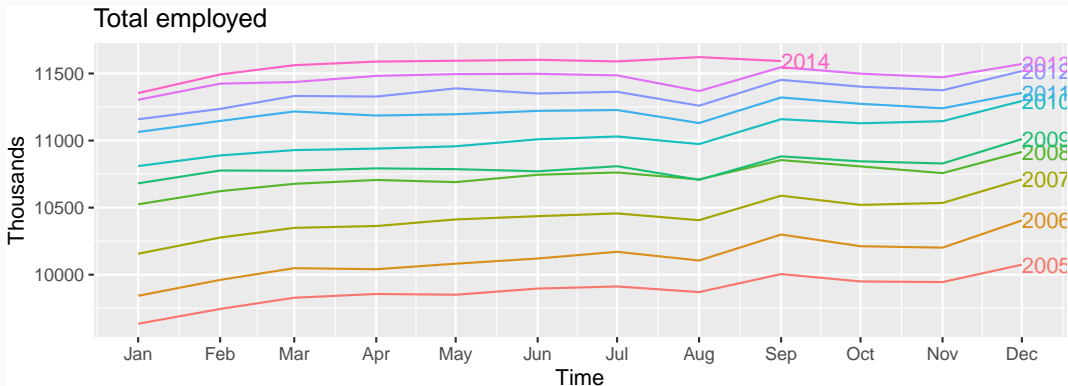

# The ABS stuff-up

```
employed %>%  
  mutate(diff = difference(Employed)) %>%  
  filter(Month == "Sep") %>%  
  ggplot(aes(y = diff, x = 1)) +  
  geom_boxplot() + coord_flip() +  
  labs(title = "Sep - Aug: total employed", y = "Thousands") +  
  scale_x_continuous(breaks = NULL, labels = NULL)
```

Sep - Aug: total employed

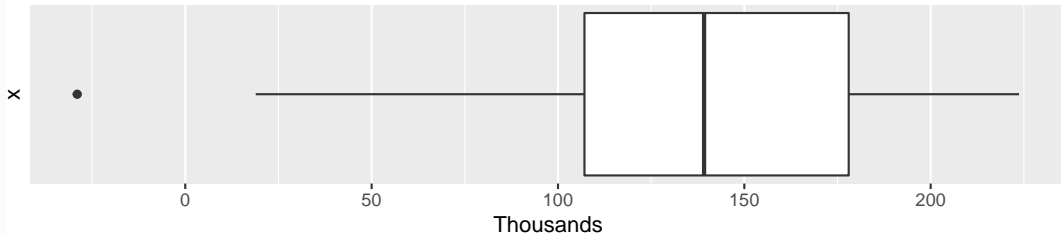


# The ABS stuff-up

```
dcmp <- employed %>%  
  filter(Year >= 2005) %>%  
  model(stl = STL(Employed ~ season(window = 11), robust = TRUE))  
components(dcmp) %>% autoplot()
```


## STL decomposition

Employed = trend + season\_year + remainder

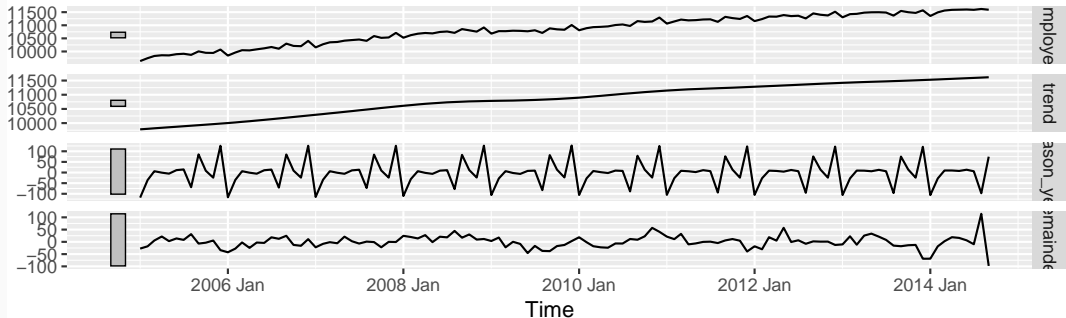


# The ABS stuff-up

```
components(dcmp) %>%  
  filter(year(Time) == 2013) %>%  
  gg_season(season_year) +  
  labs(title = "Seasonal component") + guides(colour = "none")
```

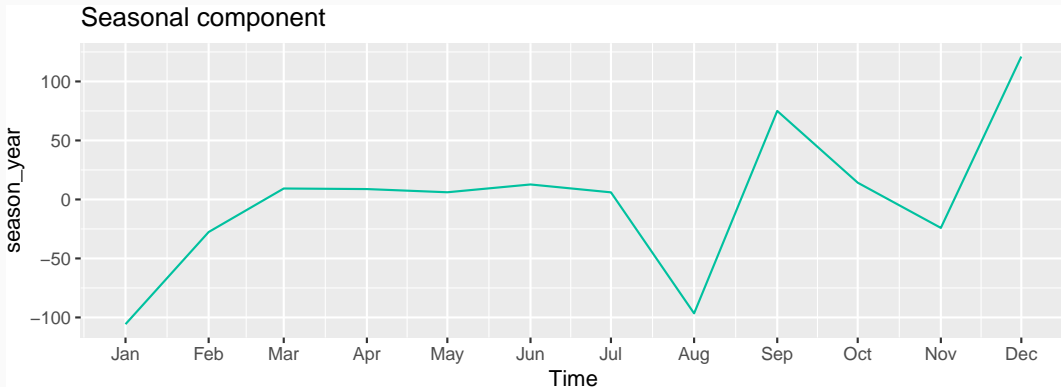

# The ABS stuff-up

```
components(dcmp) %>%  
  as_tsibble() %>%  
  autoplot(season_adjust)
```

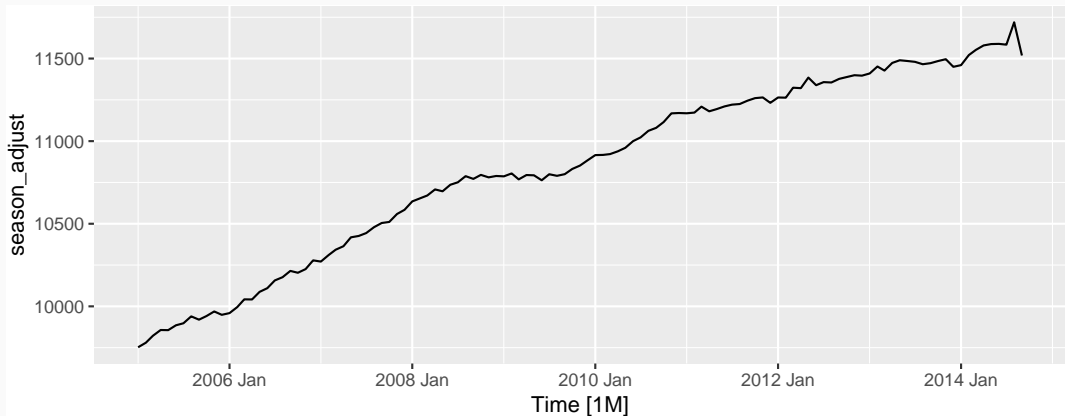

# The ABS stuff-up

- August 2014 employment numbers higher than expected.
- Supplementary survey usually conducted in August for employed people.
- Most likely, some employed people were claiming to be unemployed in August to avoid supplementary questions.
- Supplementary survey not run in 2014, so no motivation to lie about employment.
- In previous years, seasonal adjustment fixed the problem.
- The ABS has now adopted a new method to avoid the bias.