


**BECKHOFF**

Last change: 13.8.2020

# FormWebbrowser

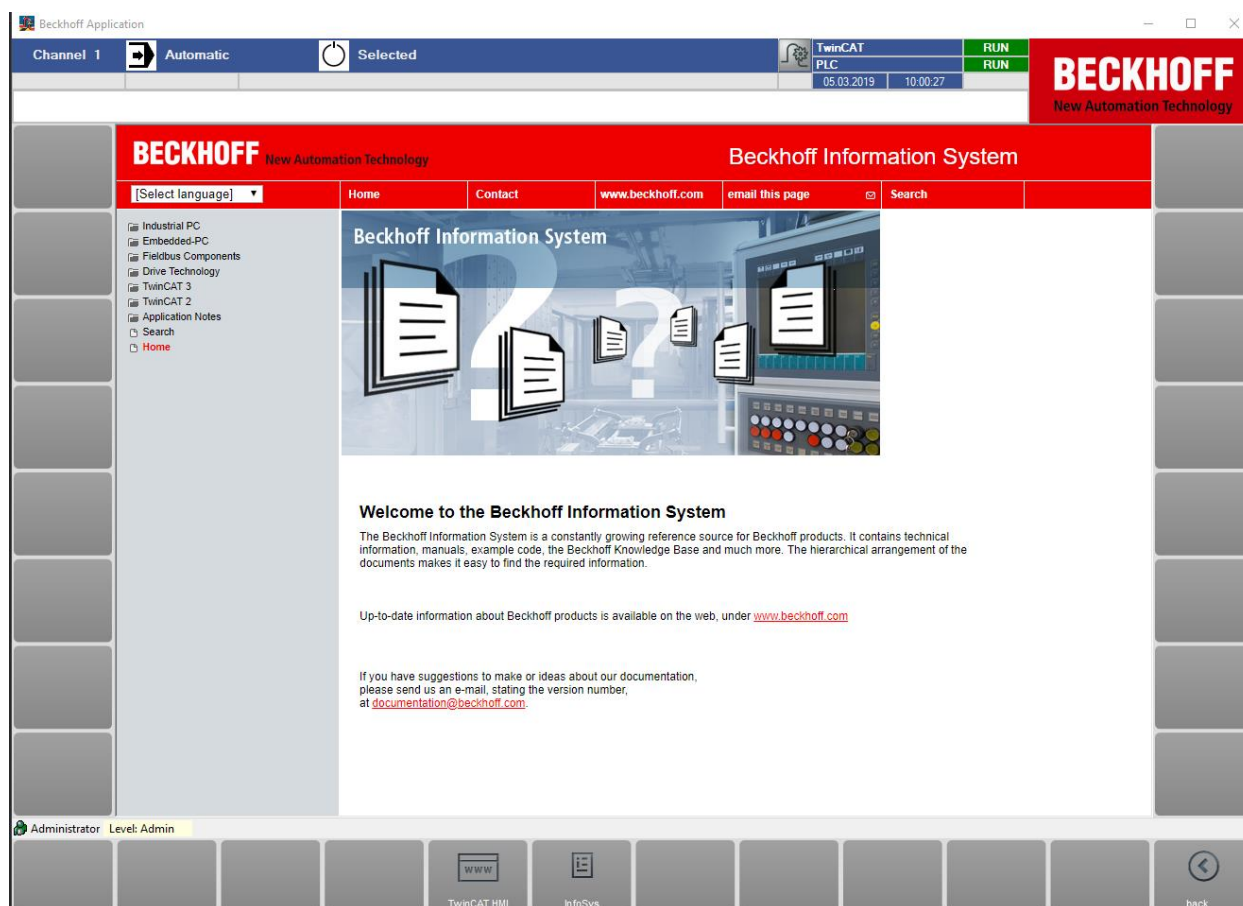

The Plugin FormWebbrowser is located in folder WebBrowser inside of the file “Beckhoff.App.Webbrowser.dll” and is used with the help of “MenuManager”:

<input checked="" type="checkbox"/>	FomCNCNpv2	Beckhoff.App.FomCNCNpv2	Plugins\Beckhoff.App.CNCNpv.dll
<input type="checkbox"/>	FomNC_WPF	Beckhoff.App.CNC_WPF.FomCNC_WPF	Plugins\Beckhoff.App.CNC-WPF.dll
<input type="checkbox"/>	TcVariableViewer	TcCNCVariablenViewer.MainFom	TcCNCVariablenViewer\TcCNCVariablenViewe
<input checked="" type="checkbox"/>	fomMessages	Beckhoff.EventLogger.LogMessageView.FomActive...	References\Beckhoff.EventLogger.dll
<input type="checkbox"/>	FomLogView	Beckhoff.EventLogger.LogMessageView.FomLogView	References\Beckhoff.EventLogger.dll
<input type="checkbox"/>	FomWebBrowser	Beckhoff.App.WebBrowser.FomWebBrowser	WebBrowser\Beckhoff.App.Web Browser.dll

# BECKHOFF

When calling the form the parameter „Data2“ is used as startup page.  
(here a local TchML page is shown):

There exists an internal function „LoadUrl“, which can be used with “callMethod” to load web pages or for example local pdf files into the browser.  
(here the Beckhoff InfoSys is loaded):

Other functions that can be called via CallMethod are

- BrowserBack: Back in the browser history
- BrowserForward: Forward in the browser history
- BrowserHome: Call up the start page (URL that is entered in Data2)