
Knowledge organiser

Year A | Autumn 2 · Week 1 | 3 November 2026

I can create two named score variables in my maze project and set both to zero on start.

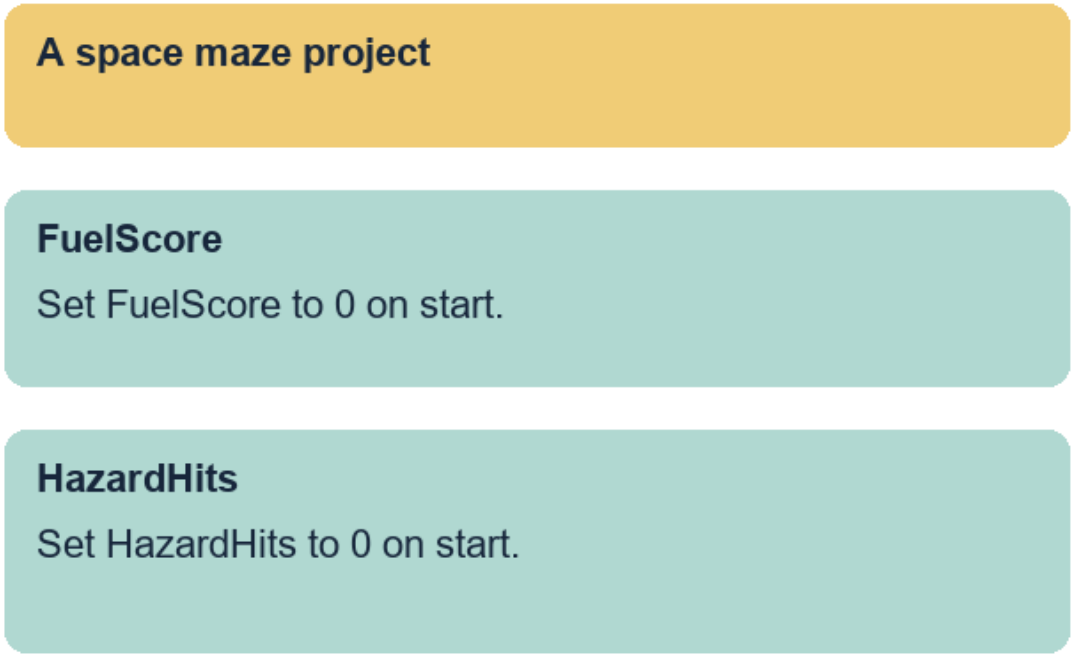

I created two named score variables.

I set both score variables to zero on start.

I placed both readouts clear of the maze path.

I tested the start reset from a non-zero value.

I reopened my saved file and checked the script.

Give each score variable a clear name that matches its role. Attach two set-to-zero blocks directly under the start event. Keep both stage readouts away from the maze walls and test the reset before saving.