

Asynchronous communications (AMQP)

The [Advanced Message Queuing Protocol \(AMQP\)](#) is an open standard designed to efficiently support a wide variety of messaging applications and communication patterns.


Broker	AMQP Protocol Version	Notes
RabbitMQ	AMQP 0-9-1	Open source, widely used, supports MQTT and STOMP. Great for microservices and enterprise systems.
LavinMQ	AMQP 0-9-1	Open source, written in Crystal, high-performance, compatible with standard AMQP clients.
Apache Qpid	AMQP 1.0	Apache project, offers broker and client implementations in Java, C++, Python. Suitable for enterprise systems.
ActiveMQ (Classic / Artemis)	AMQP 1.0	Supports STOMP, MQTT, OpenWire. Open source, flexible and robust.
Microsoft Azure Service Bus	AMQP 1.0	Cloud service for reliable messaging between distributed applications.
IBM MQ	AMQP 1.0	Enterprise broker, integrates with legacy systems and mainframes.
Red Hat AMQ	AMQP 1.0	Commercial distribution based on Apache Qpid/ActiveMQ. Enterprise-grade management and middleware integration.
Solace PubSub+	AMQP 1.0	Commercial broker optimized for real-time events and enterprise messaging; also supports MQTT and REST.

Key Components

- **Broker:** system that implements AMQP and handles message exchange between *producers* and *consumers*
- **Producer:** application that sends messages to broker
- **Consumer:** application that receives messages from broker

Broker is internally composed by two main components:

- [Exchange](#)
- [Queue](#)

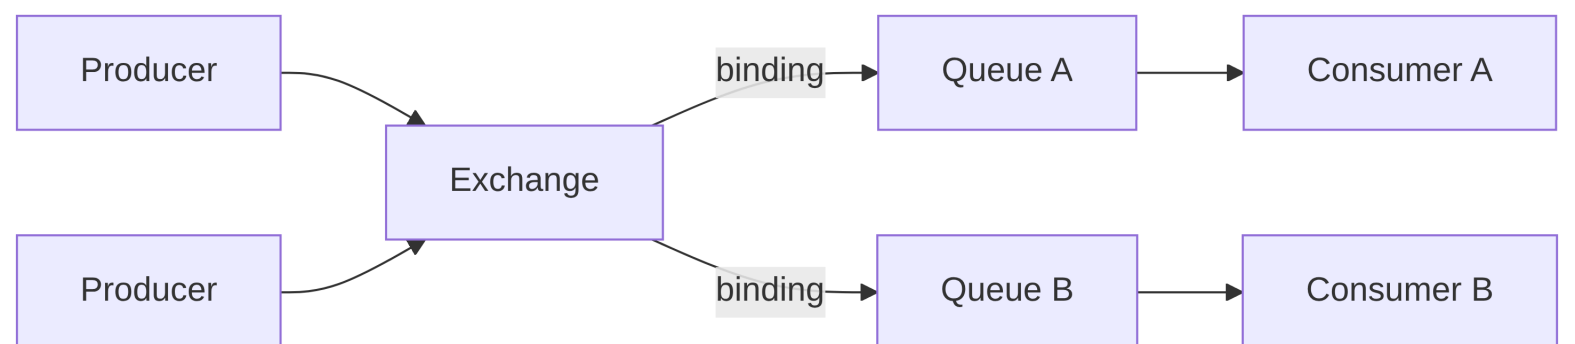

Queue

Queue is the fundamental component that stores messages sent by producers. In fact, messages sent by producers (and routed by exchanges) wait to be processed by consumer applications in queues.

- **Storage:** Queues store messages until they are processed or consumed by applications.
- **Message Order:** FIFO — First-In, First-Out.
- **Configurable Properties:** Queues have configurable properties such as maximum length, maximum priority levels, message TTL (Time-To-Live), etc., allowing fine-tuning to meet specific requirements.

Exchange


Exchange is the AMQP entity which receives messages from producers and routes them to one or more [queues](#) based on routing rules.

The relationship between an exchange and a queue (including routing rules) is called **binding**.

- Fanout exchanges
- Direct exchanges
- Topic exchanges
- Header exchanges

Fanout Exchange

A fanout exchange **routes messages to all queues that are bound to it, regardless of the routing key**. It broadcasts messages to multiple consumers.

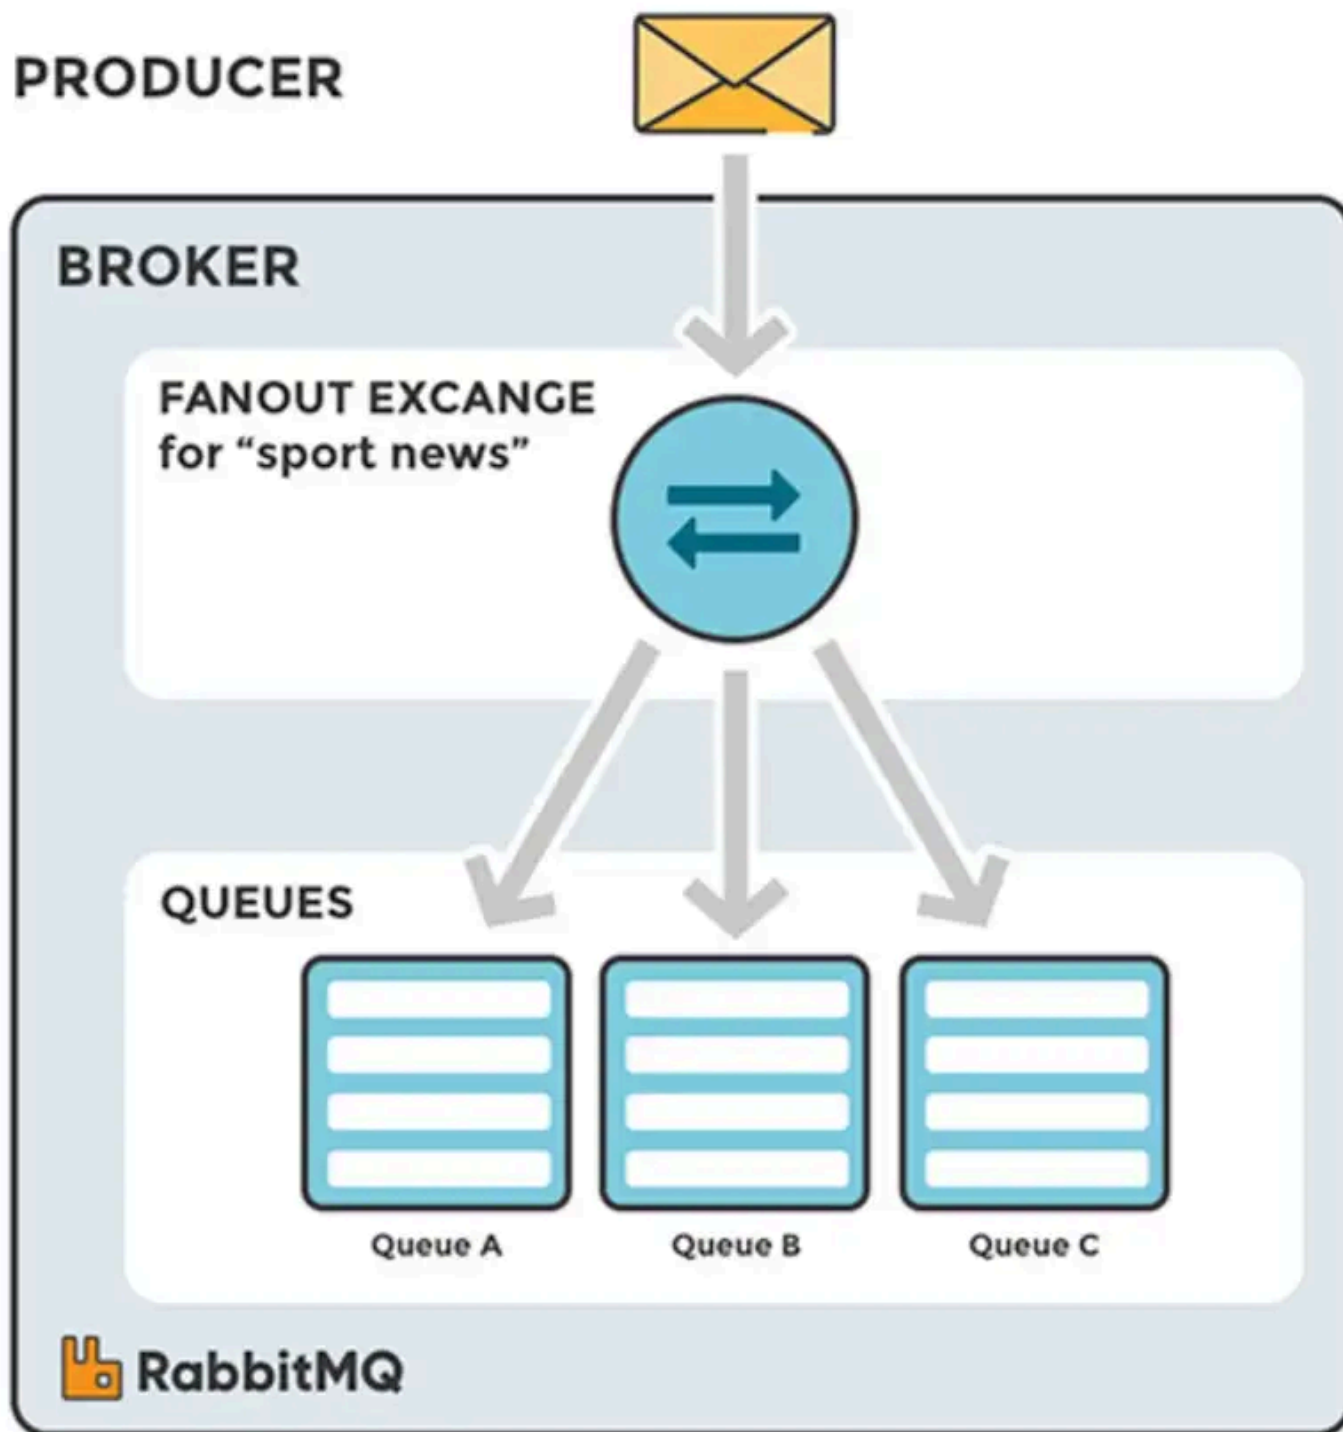

Direct Exchange


A direct exchange **routes messages with a specific routing key** to the queues that are bound to the exchange with the same routing key.

PRODUCER



BROKER

DIRECT EXCHANGE
for "pdf_events"



BINDINGS

1. Binding_key:
pdf_create

2. Binding_key:
pdf_log

QUEUES



Queue A
create_pdf_queue



Queue B
pdf_log_queue



RabbitMQ

Topic Exchange


A topic exchange **routes messages to one or more queues based on wildcard patterns in the routing key**. This allows for more complex routing logic.

PRODUCER



BROKER

TOPIC EXCHANGE
for "agreements"



BINDINGS

A: agreements.eu.berlin.#

B: agreements.#

C: agreements.eu.*.store

QUEUES



Queue A
berlin_agreements



Queue B
all_agreements




Queue C
store_agreements



RabbitMQ

Headers Exchange

A headers exchange **routes messages based on the message's header attributes rather than the routing key**. It matches the headers against specified criteria.

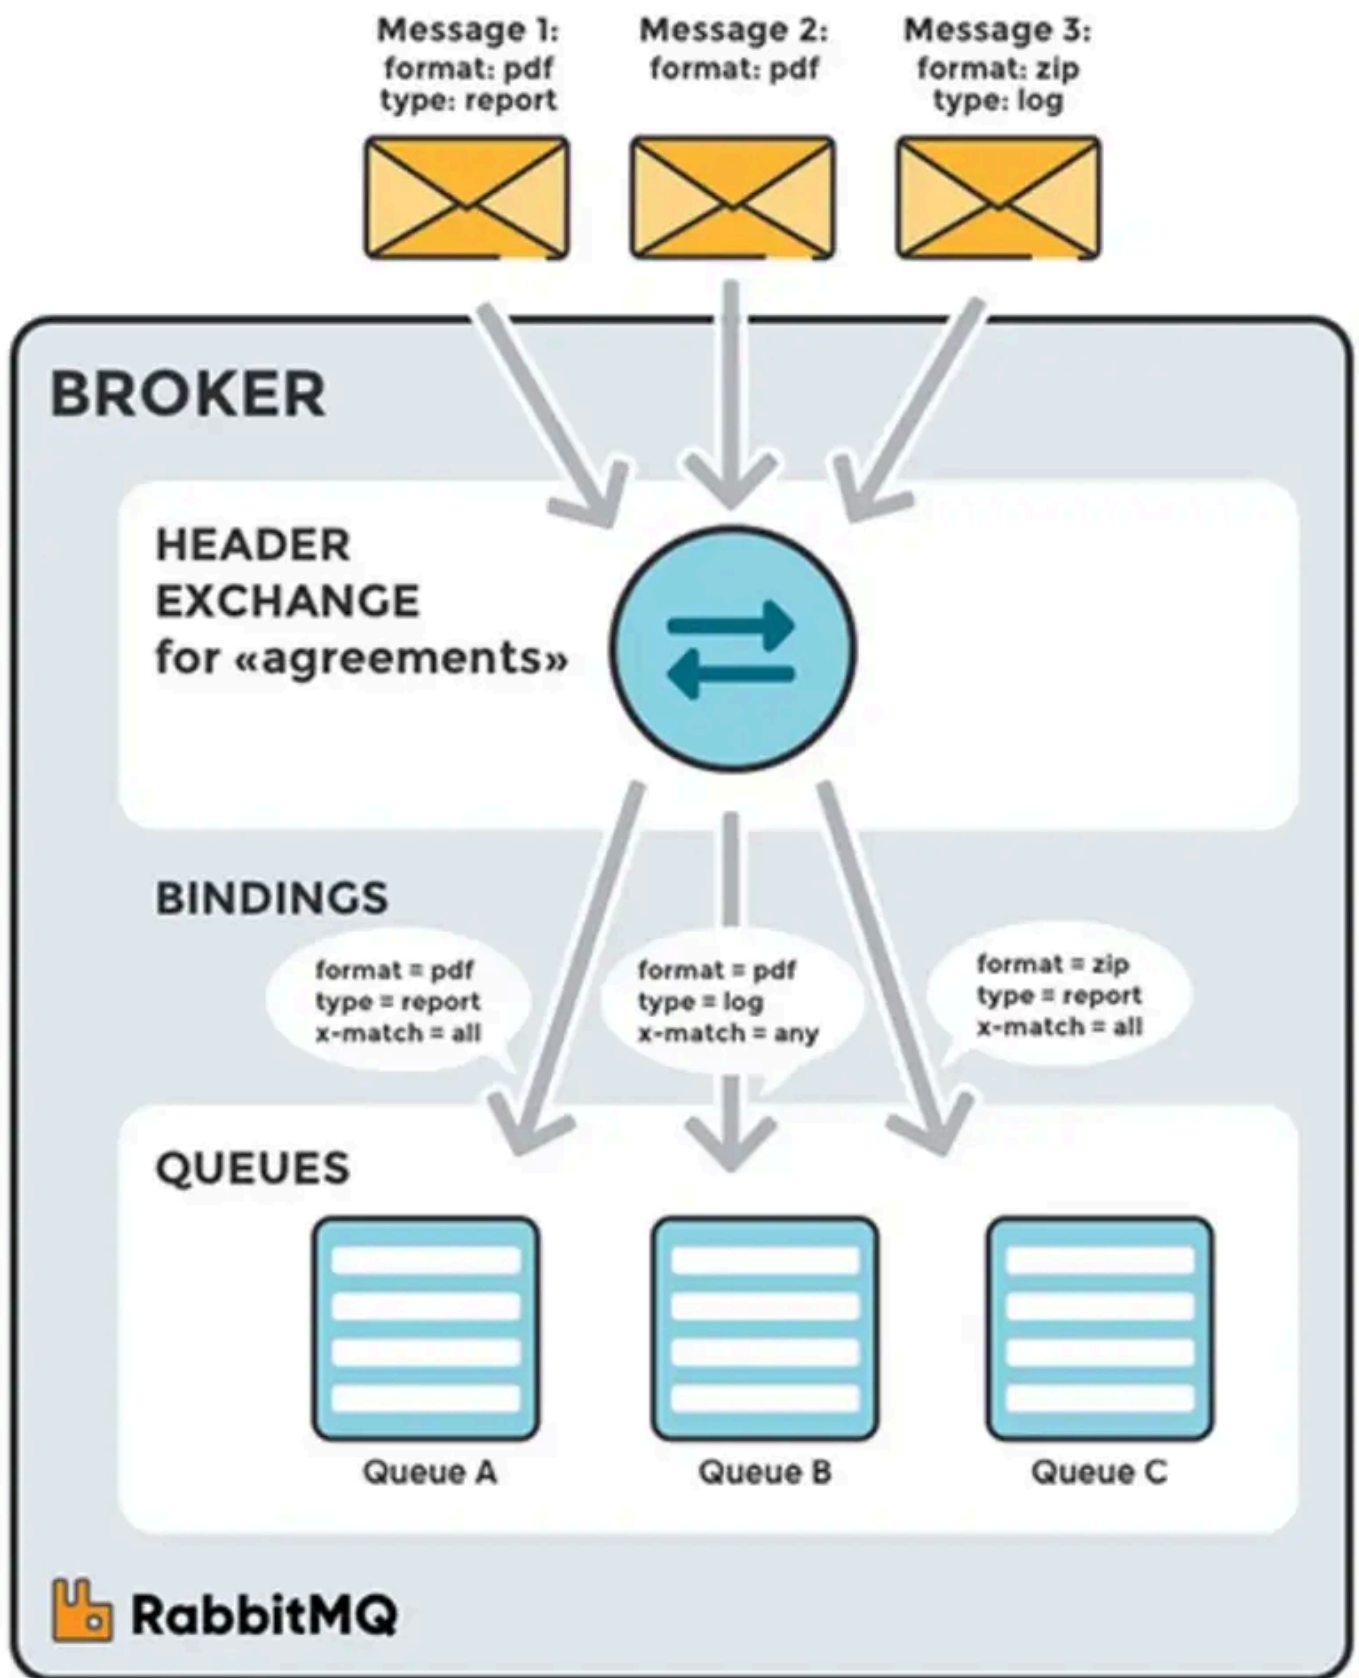


Why **topic** dominates in practice

- Supports a mix of **broadcast** and **selective delivery** in the same system.
- Event-driven architectures, microservices, and notification systems almost always require **selective message delivery**.
- Multiple consumers can subscribe to different patterns without changing producer logic.
- **Direct** is too rigid for complex systems; **fanout** is too blunt for most enterprise needs; **headers** exchanges are rarely used because pattern-matching on routing keys is simpler and more performant.

Communication Patterns


One To Many

Each consumer listens on a dedicated anonymous queue. All queues are connected to the same exchange, ensuring that every message published to the exchange is delivered to all consumers.

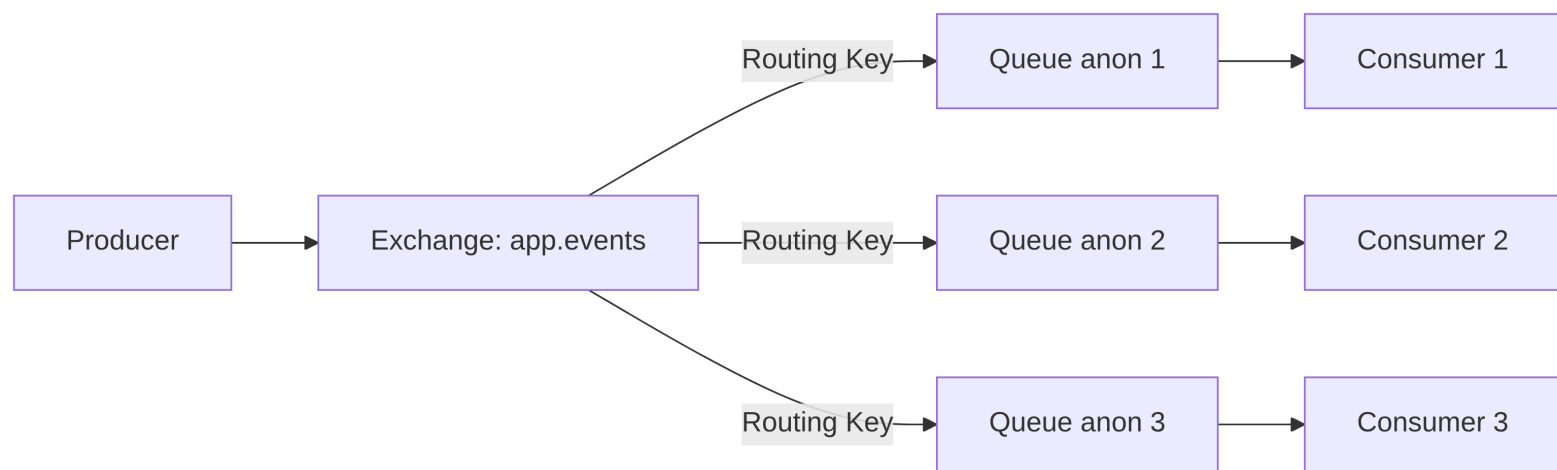


One To Many (Competing Consumers)

All consumers share the same named queue, so each message is delivered to only one consumer. Messages are load-balanced across consumers.

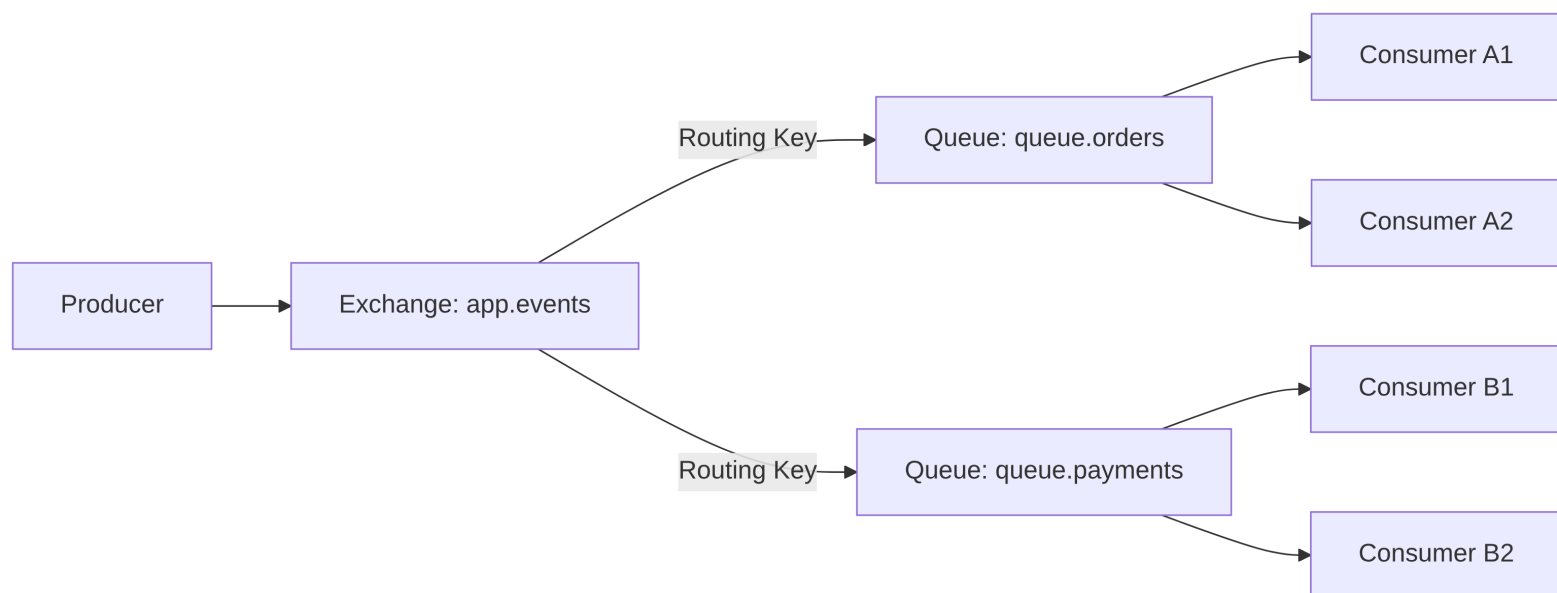


One To Many (Sharded Consumers)

All consumers share the same named queue, so each message is delivered to only one consumer. Messages are load-balanced across consumers. (each consumer receives events related to same entity).

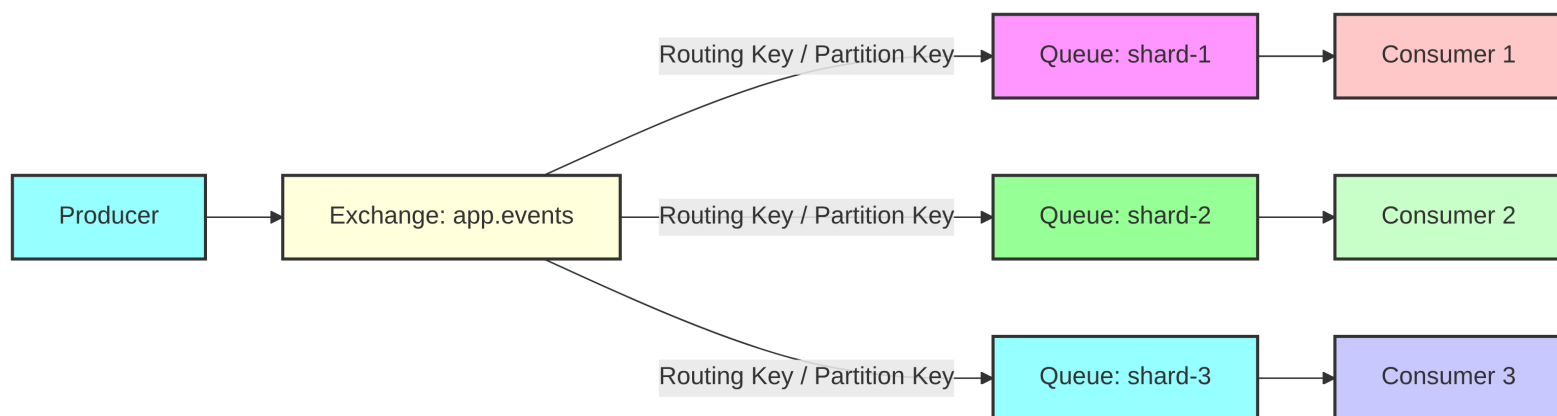


Messaging-based RPC is a pattern where remote procedure calls are implemented on top of a **message broker** (e.g., RabbitMQ), instead of direct network calls.

A client sends a **request message** to a broker, which routes it to a server. The server processes the request and sends back a **response message**. The client typically waits for the reply, matching it using a **correlation identifier**.

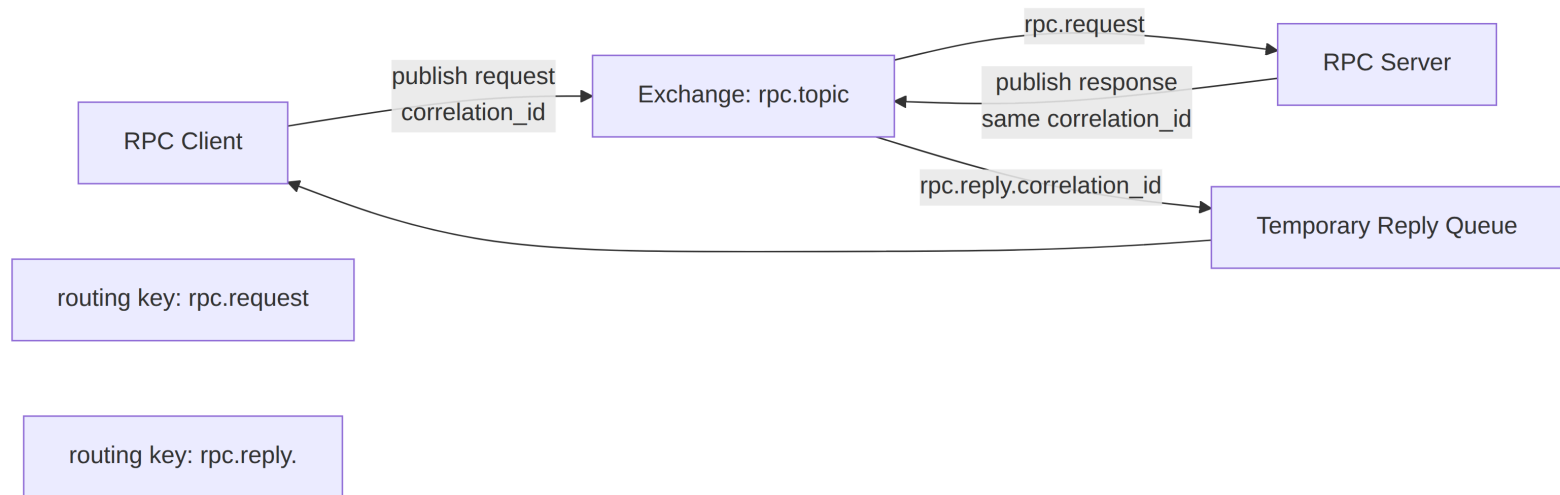

Dead-Letter Queue (DLQ)

Handle messages that cannot be processed (nack, TTL expired, retries exceeded).

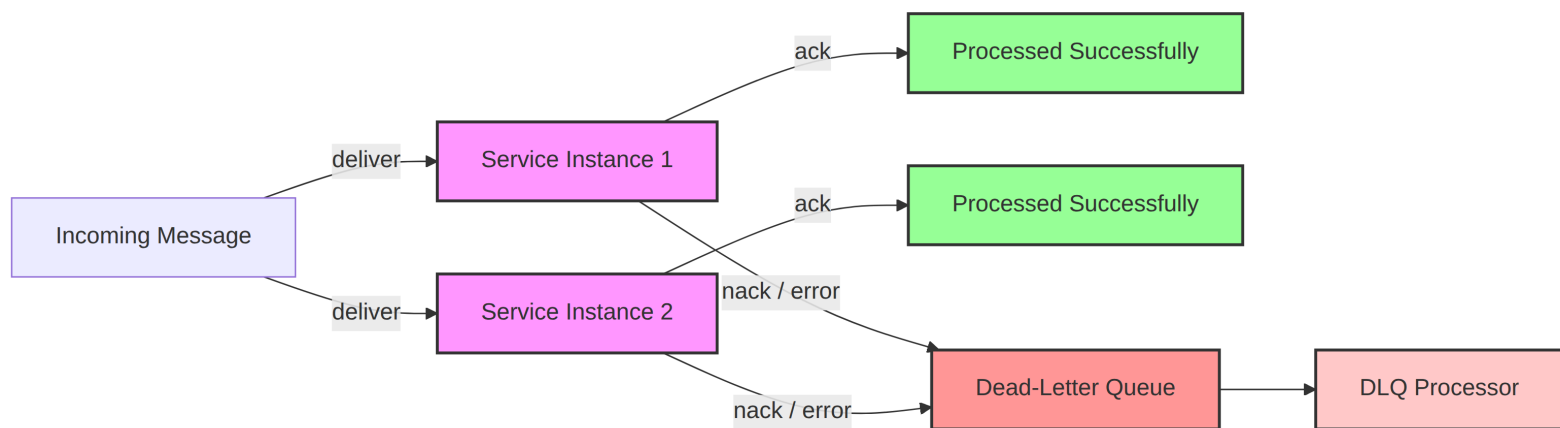

Resources

- [RabbitMQ Official Documentation](#)
- [RabbitMQ Tutorials](#)
- [RabbitMQ in Action](#)