


2 - First Cluster

In this lesson you will learn the basics of Kubernetes elements, and then you will start your first cluster.

Kubernetes elements

Kubernetes is like an Operating System for your cluster. Just as an OS manages processes, threads, files, and networking, Kubernetes manages the following elements:

Kubernetes element	OS analogue	Explanation
Container	Thread	The actual execution unit. While technically isolated processes under the hood, conceptually they act like threads: they share local network (localhost) and storage with other containers in the same Pod.
Pod	Process	The smallest deployable unit in Kubernetes. It encapsulates one or more containers (threads), providing a shared environment (namespaces) for them to run and communicate natively.
Deployment / ReplicaSet	systemd	Manages the lifecycle of Pods. It acts as a supervisor that ensures the desired number of replicas are always running, automatically restarting crashed Pods and managing rolling updates.
Service	Named Pipe	Provides a stable internal IP and DNS name to route traffic to a dynamic set of Pods. It shields other applications from the fact that backend Pods are constantly dying and changing IP addresses.
Volume	Filesystem	A directory accessible to the containers in a Pod, abstracting the underlying storage. It allows data persistence beyond a single container's crash and allows containers in a Pod to share files.
Ingress	Reverse Proxy	Manages external access into the cluster, typically HTTP/HTTPS. It acts like an OS-level reverse proxy (e.g., NGINX) routing incoming public traffic to specific internal Services based on URLs or hostnames.

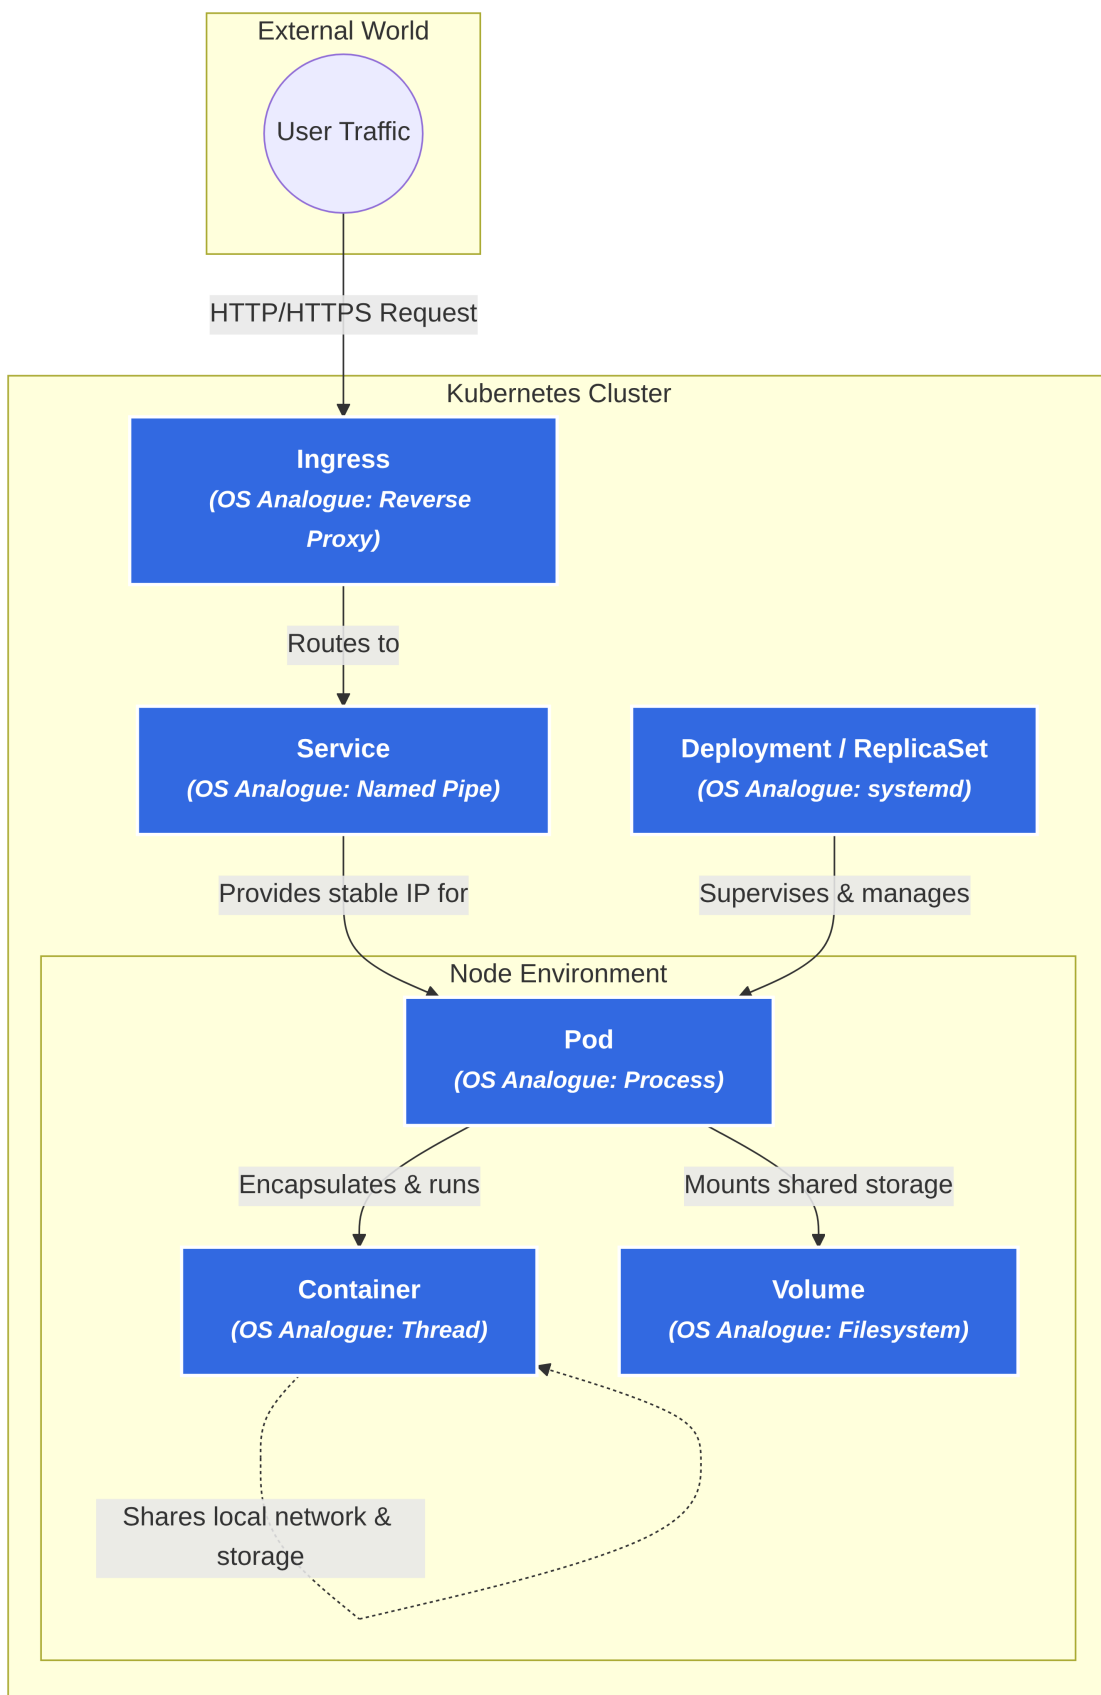

Chassis-demo cluster

In the following steps, we will recreate the service described in [chassis-demo docker-compose.yaml](#) by using each of the elements described above.

1. First build and push your product-service container on Docker Hub

```
cd modules/chassis/chassis-java/labs/chassis-demo/product-service
mvn package
docker build . -t $DOCKER_USERNAME/product-service
docker push $DOCKER_USERNAME/product-service
```

Info

This is essential since having the container image in a remote repository is required to make it accessible to your cluster.

2. Create the cluster

```
k3d cluster create first-cluster -s 1 -a 2
```

3. Create Postgres Deployment

```
kubectl create deployment postgres --image=postgres:17-alpine
kubectl set env deployment/postgres POSTGRES_USER=user POSTGRES_PASSWORD=secret
POSTGRES_DB=jdbc_schema
```

Info

Postgres and the Product Service container will be managed in two separate Deployments. This is best practice since it is often necessary to scale the frontend and backend of a service differently. The Kubernetes Deployment object automatically defines a Pod and its associated containers.

Warning

For now the database will be run without a Volume attached. This is critical in production environment since this makes the data ephemeral.

5. Create a Service to make the database reachable from inside the cluster

To create a service you can use `kubectl expose` command.

```
kubectl expose deployment postgres --port=5432
```

Info: Kubernetes DNS

By exposing this deployment, Kubernetes creates an internal DNS entry named postgres. Any other application in the cluster can now reach the database simply by pointing to postgres:5432 — exactly like Docker Compose!

6. Create `product-service` Deployment

```
kubectl create deployment product-service --image=$DOCKER_USERNAME/product-service -
-port=8080
```

```
kubectl set env deployment/product-service SPRING_PROFILES_ACTIVE=docker
SPRING_DATASOURCE_URL=jdbc:postgresql://postgres:5432/jdbc_schema
```

7. Create a Service for `product-service`

```
kubectl expose deployment product-service --port=8080
```

8. Provide an Ingress to the system

```
kubectl create ingress chassis-demo-ingress --rule="chassis.local/*=product-
service:8080"
```

Get the Ingress IP with

```
kubectl get ingresses
```

Info

This will route any request aimed at the domain `chassis.local` to the `product-service` Service on port 8080.

Tip: Local DNS Resolution

To test this locally in your browser or via terminal, you will need to map `chassis.local` to your local machine. You can do this by adding `INGRESS_IP chassis.local` to your `/etc/hosts` file.

You can verify that everything is working properly both from Headlamp and from kubectl command line:

```
# Verify both Pods are active
kubectl get pods

# Verify both Services exist and are routing ports
kubectl get svc

# Verify the external mapping is active
kubectl get ingress
```

As you might have noticed, using imperative commands has its limits. For instance, it becomes incredibly difficult to manage multi-container deployments and volumes this way, and the commands become long and hard to maintain very quickly.

A more robust and scalable way to manage a Kubernetes cluster is by writing declarative **YAML configuration files**.

Kubernetes YAML Structure

Before we dive into a full configuration file, it is essential to understand its basic anatomy. No matter how complex a Kubernetes object gets, almost every YAML file is built around four foundational root fields:

- `apiVersion` : Specifies which version of the Kubernetes API you are using to create the object (e.g., `v1`, `apps/v1`). Different resources live under different API groups.

- **kind** : Defines the type of resource you want to create, such as a Deployment, Service, or PersistentVolumeClaim.
- **metadata** : Contains data used to uniquely identify the object, primarily its name and any organizational labels.
- **spec** : Short for "specification," this is the heart of the file. It defines the desired state of the resource-like which container image to use, what ports to open, or how many replicas to run. Kubernetes will constantly monitor the cluster to ensure the actual state matches this spec.

Additionally, you will often see three dashes (`---`) used throughout these configurations. This is standard YAML syntax that separates multiple distinct documents within a single file. It allows us to bundle an entire application stack (databases, backend services, routing rules) into one deployable file.

As you might have noticed, using imperative commands has its limits. For instance, it becomes incredibly difficult to manage multi-container deployments and volumes this way, and the commands become long and hard to maintain very quickly.

A more robust and scalable way to manage a Kubernetes cluster is by writing declarative YAML configuration files.

For example, this single configuration file replaces all the individual commands we ran in the previous steps. You can save this as `chassis-demo.yaml` : ``yaml

1. PersistentVolumeClaim (The request for storage)

```
apiVersion: v1 kind: PersistentVolumeClaim metadata: name: pg-data-pvc spec: accessModes: -
ReadWriteOnce # This means the volume can be mounted as read-write by a single node resources:
requests: storage: 1Gi # Request 1 Gigabyte of storage space
```

2. Postgres Deployment (Updated)

```
apiVersion: apps/v1 kind: Deployment metadata: name:
postgres spec: replicas: 1 selector: matchLabels: app:
postgres template: metadata: labels: app: postgres spec:
containers: - name: postgres image: postgres:17-alpine
ports: - containerPort: 5432 env: - name: POSTGRES_USER
value: user - name: POSTGRES_PASSWORD value: secret -
name: POSTGRES_DB value: jdbc_schema volumeMounts: -
name: pg-data-volume mountPath: /var/lib/postgresql/data
volumes: - name: pg-data-volume persistentVolumeClaim:
claimName: pg-data-pvc
```

3. Postgres Service

apiVersion: v1 kind: Service metadata: name: postgres spec: selector: app: postgres ports: - port: 5432 targetPort: 5432

4. Product-Service Deployment

apiVersion: apps/v1 kind: Deployment metadata: name: product-service spec: replicas: 1 selector: matchLabels: app: product-service template: metadata: labels: app: product-service spec: containers: - name: product-service # ⚠️ Replace with your actual Docker Hub username! image: /product-service ports: - containerPort: 8080 env: - name: SPRING_PROFILES_ACTIVE value: docker - name: SPRING_DATASOURCE_URL value: jdbc:postgresql://postgres:5432/jdbc_schema

5. Product-Service Service

apiVersion: v1 kind: Service metadata: name: product-service spec: selector: app: product-service ports: - port: 8080 targetPort: 8080

6. Ingress

apiVersion: networking.k8s.io/v1 kind: Ingress metadata: name: chassis-demo-ingress spec: rules: - host: chassis.local http: paths: - path: / pathType: Prefix backend: service: name: product-service port: number: 8080

```
After having created the YAML configuration file, you can apply it by running `kubectl
apply`:
```shell
kubectl apply -f FILENAME.yaml
```

It is highly suggested to mix imperative and declarative approaches when building complex systems. You can use imperative commands to quickly generate a base YAML mockup (without actually deploying it) by using the `--dry-run=client` flag:

```
kubectl create deployment NAME --image=IMAGE --dry-run=client -o yaml >
kubernetes.yaml
```

Then, you can open `kubernetes.yaml` in your editor and add details to it. If you aren't sure how a specific field should be formatted, you can inspect Kubernetes objects using the `explain` command:

```
kubectl explain OBJECT
```

For example, you can get every Pod YAML field by running:

```
kubectl explain pod
```