
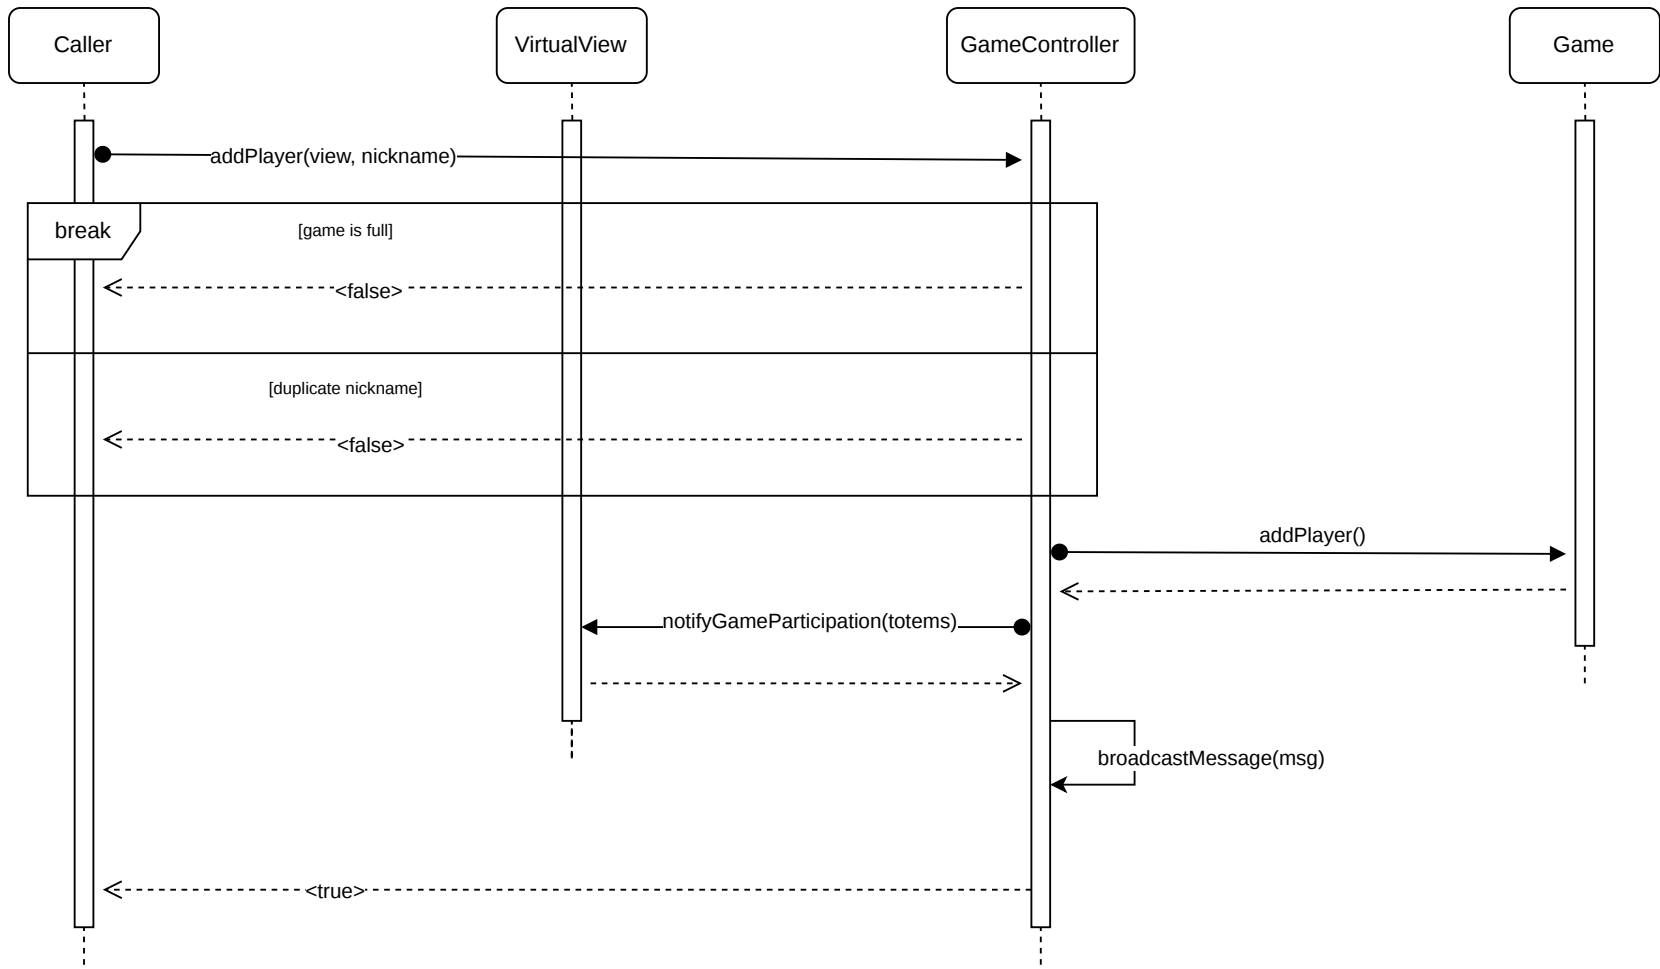
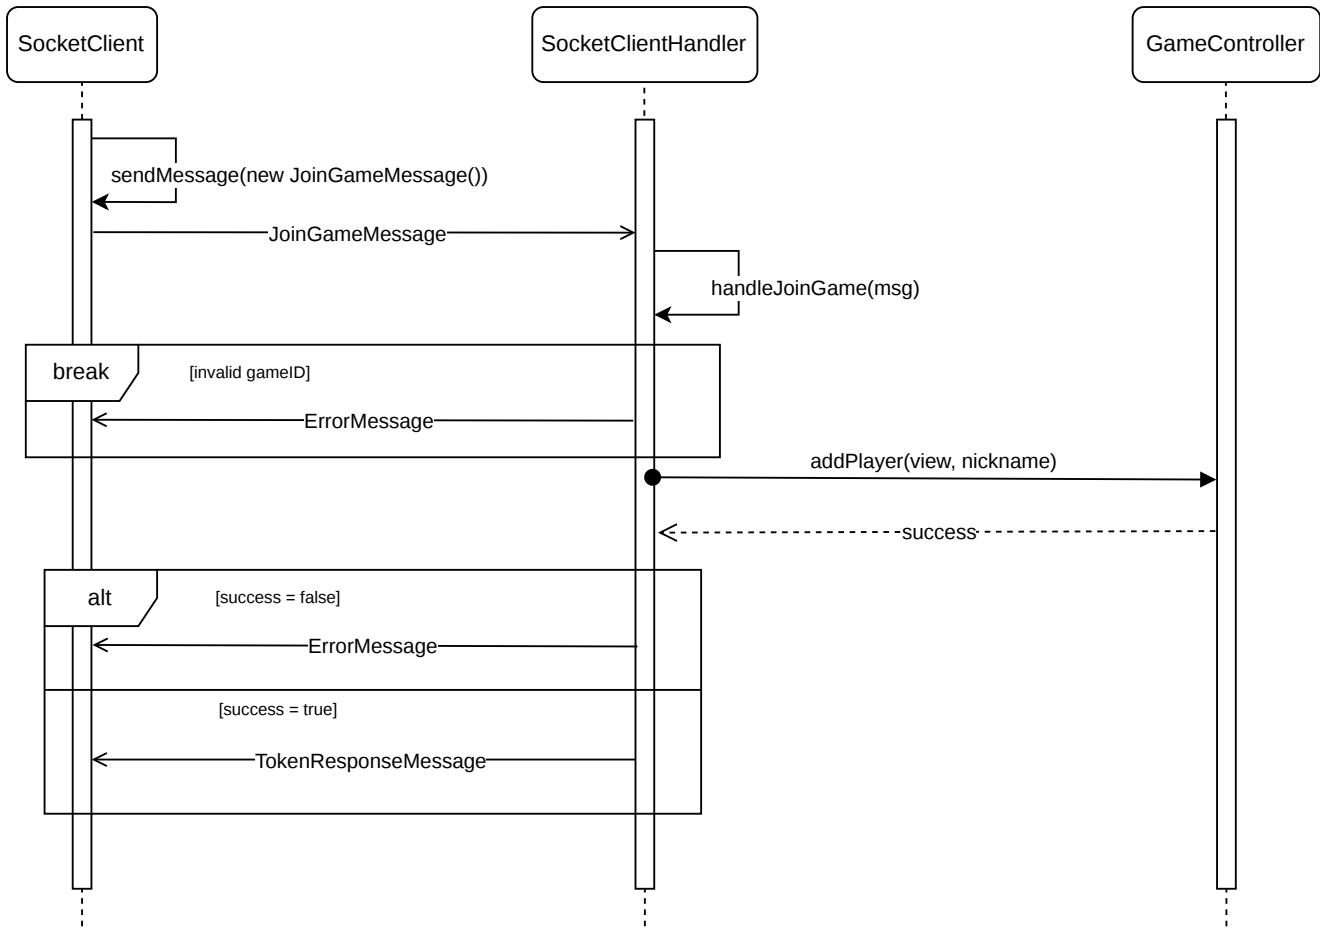


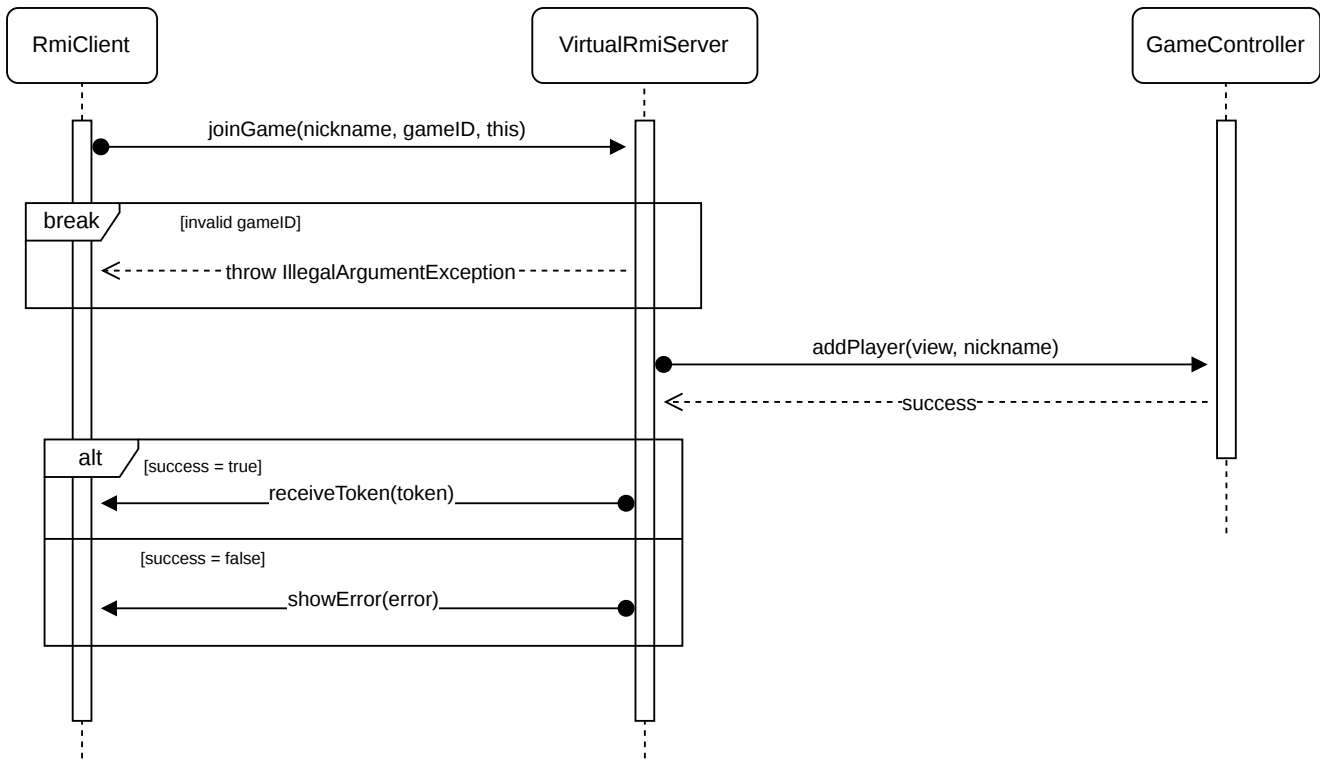

The client (RMI or Socket) sends the join request either by calling the remote method VirtualRMIServer:joinGame() or by sending a JoinGameMessage containing the player's nickname and the gameId via Socket.

Either way, then the receiver (VirtualRMIServer or SocketClientHandler) checks the validity of gameId. If the gameId is not valid, the server sends the client an error. If it is valid, the server calls GameController:addPlayer(), which in turn checks if the game is full or if the joining player's nickname is a duplicate. In these cases, the GameController notifies the server that the join request failed, and the server notifies the client.

If there is no such error, the GameController adds the player the list of the game's player, then sends the corresponding VirtualView the set of available totems for the player to choose. Then, it sends a broadcast message to notify each player waiting for the game to start that another player joined, and then notifies the server the join request succeeded. The server in turn sends the client his token.