


短信验证码请求流程

2018-11-29 8:53

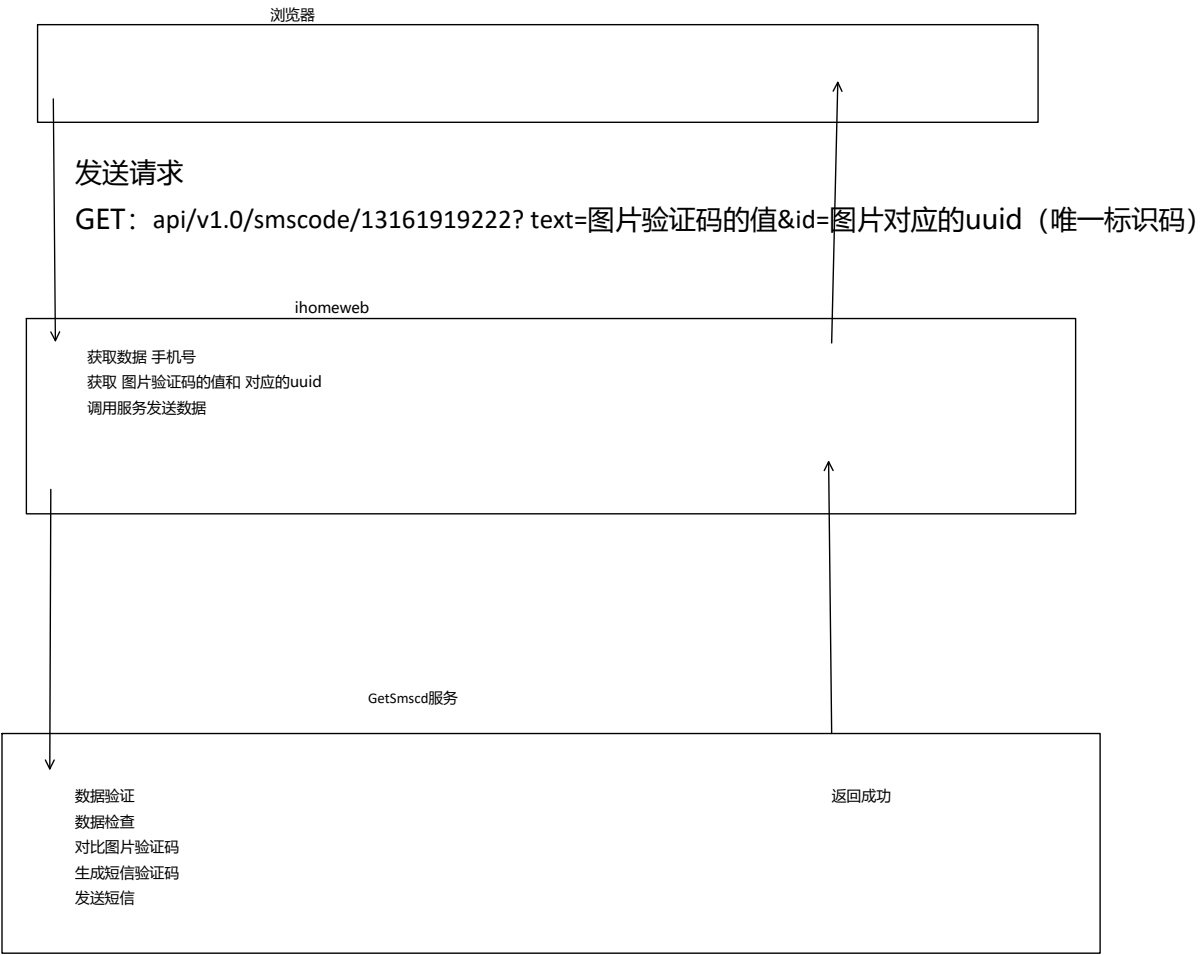

# 短信验证码服务的创建

2018-11-29 10:40

```
micro new --type "srv" sss/GetSmscd
Creating service go.micro.srv.GetSmscd in
/home/itcast/go/src/sss/GetSmscd
```

```
.
├─ main.go
├─ plugin.go
├─ handler
│   └─ example.go
├─ subscriber
│   └─ example.go
├─ proto/example
│   └─ example.proto
├─ Dockerfile
├─ Makefile
└─ README.md
```

download protobuf for micro:


```
brew install protobuf
go get -u github.com/golang/protobuf/{proto,protoc-gen-go}
go get -u github.com/micro/protoc-gen-micro
```


compile the proto file example.proto:

```
cd /home/itcast/go/src/sss/GetSmscd  
protoc --proto_path=. --go_out=. --micro_out=.  
proto/example/example.proto
```

# http是无状态

2018-11-29 14:52

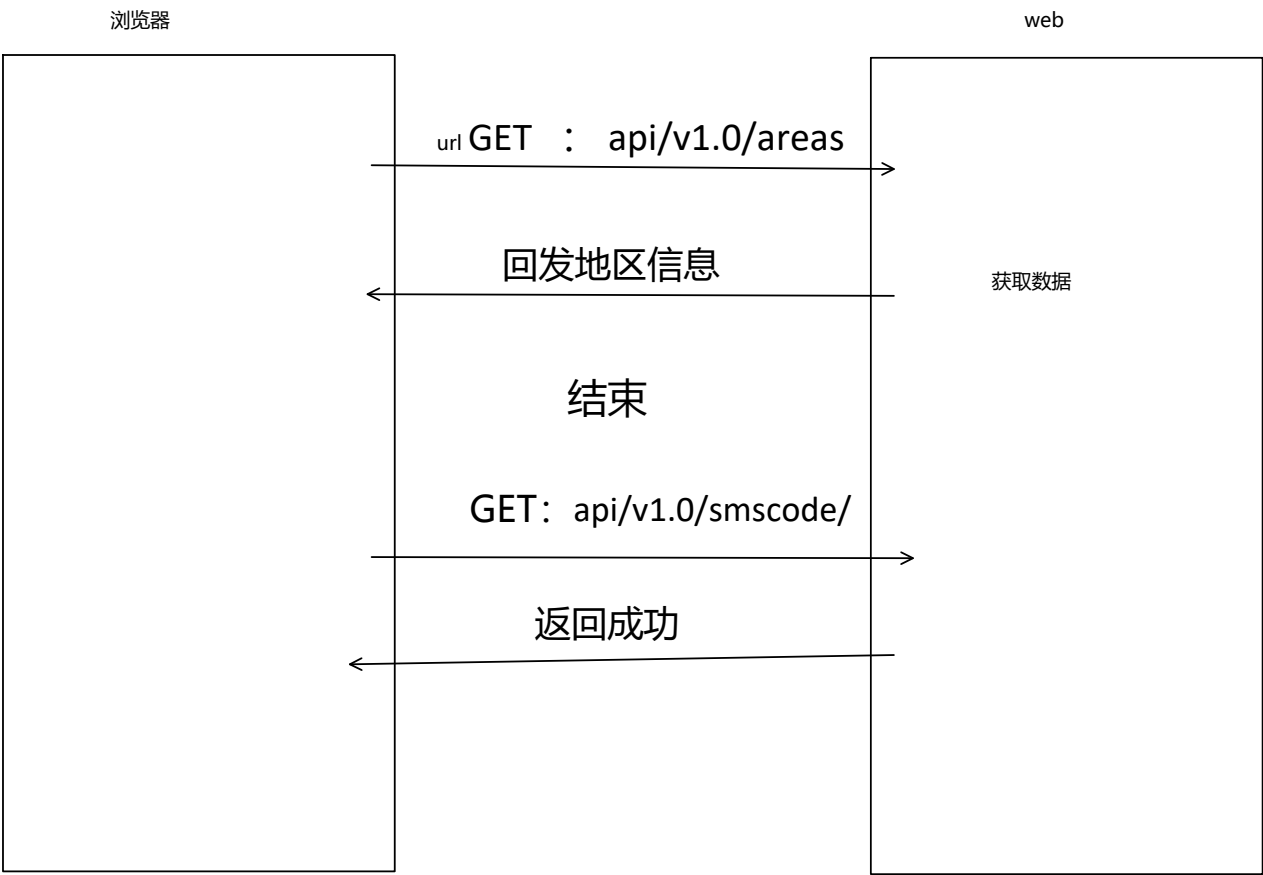


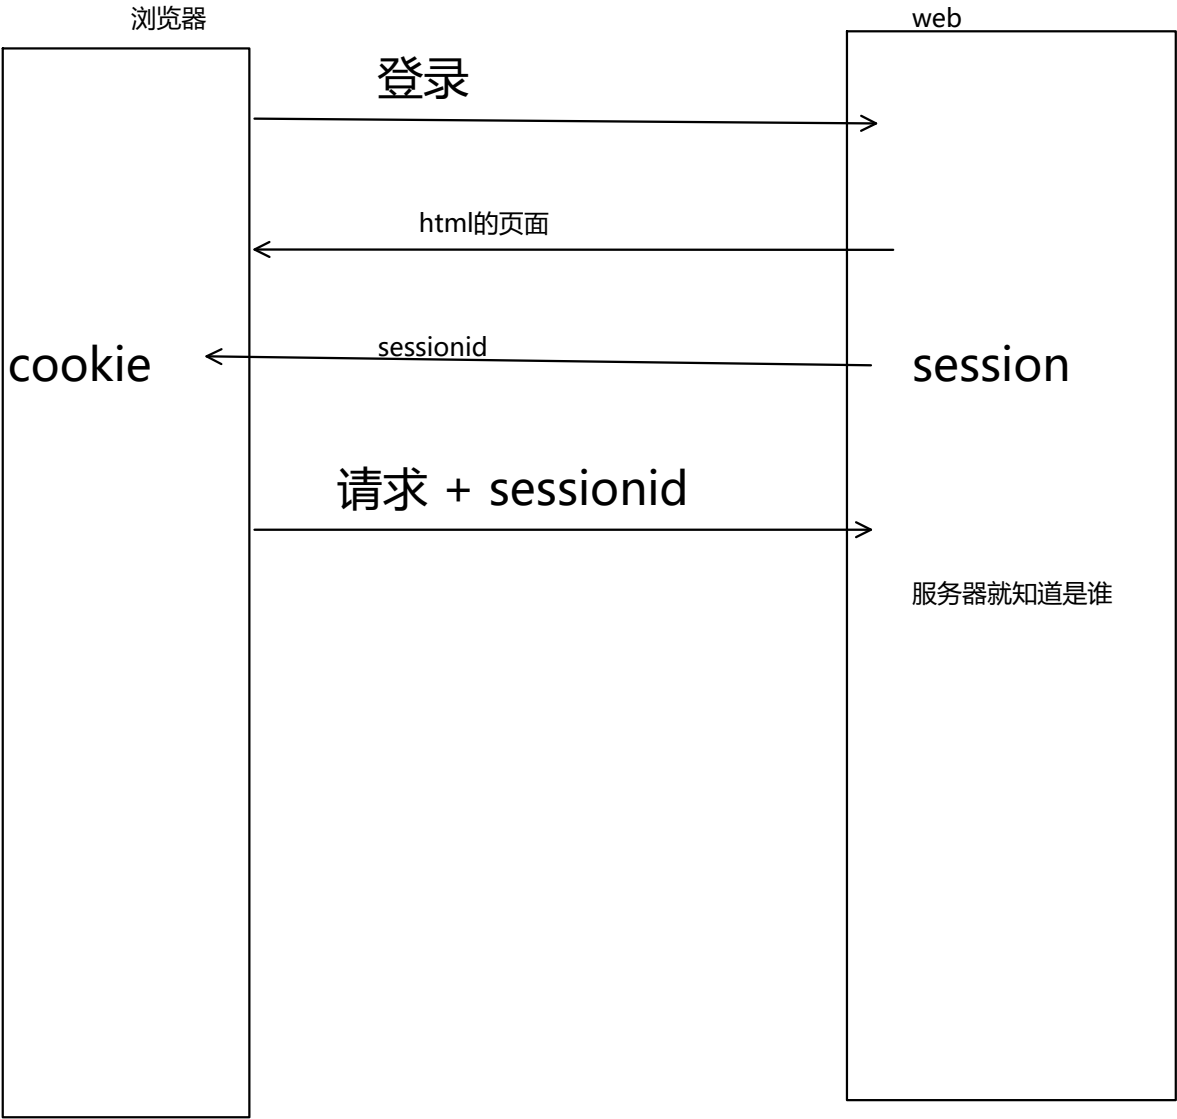

session失效


2018-11-29 15:12

浪费1秒

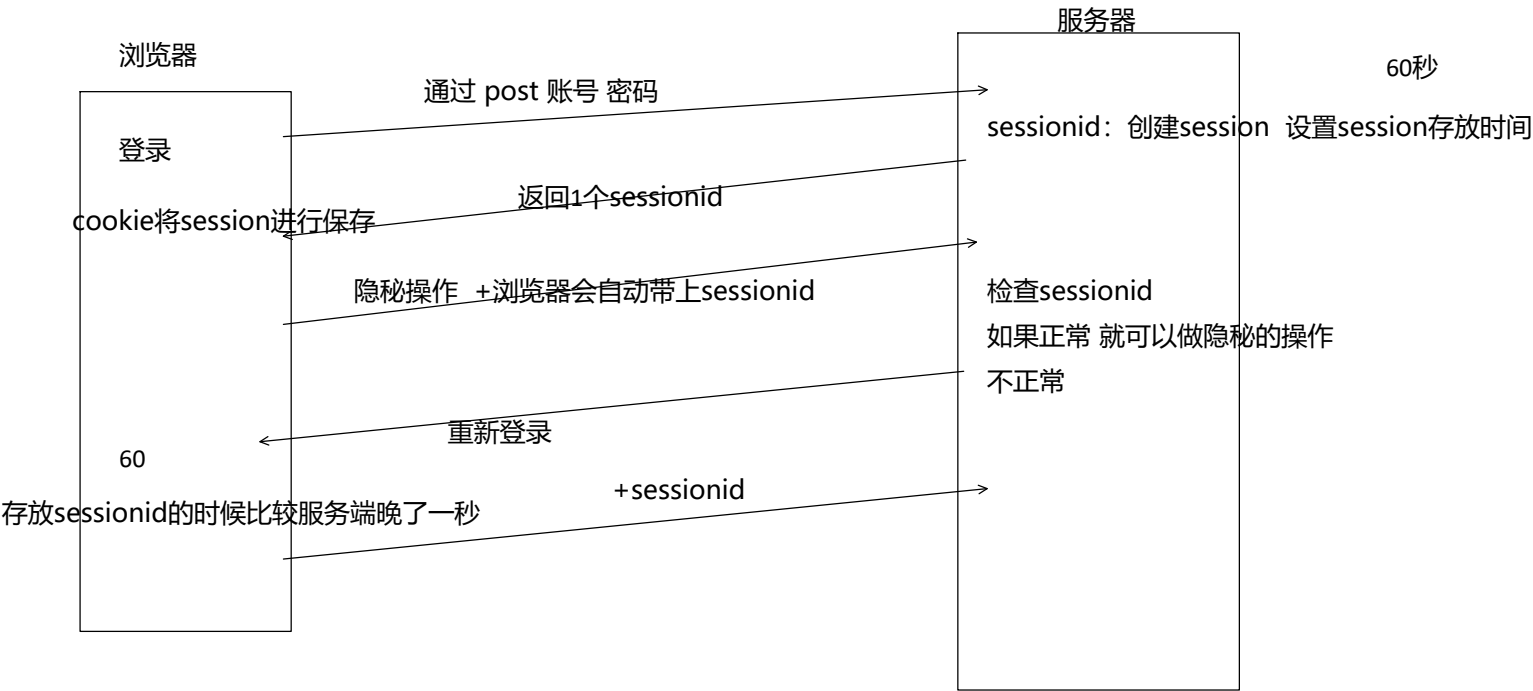

注册请求流程

2018-11-29 15:28

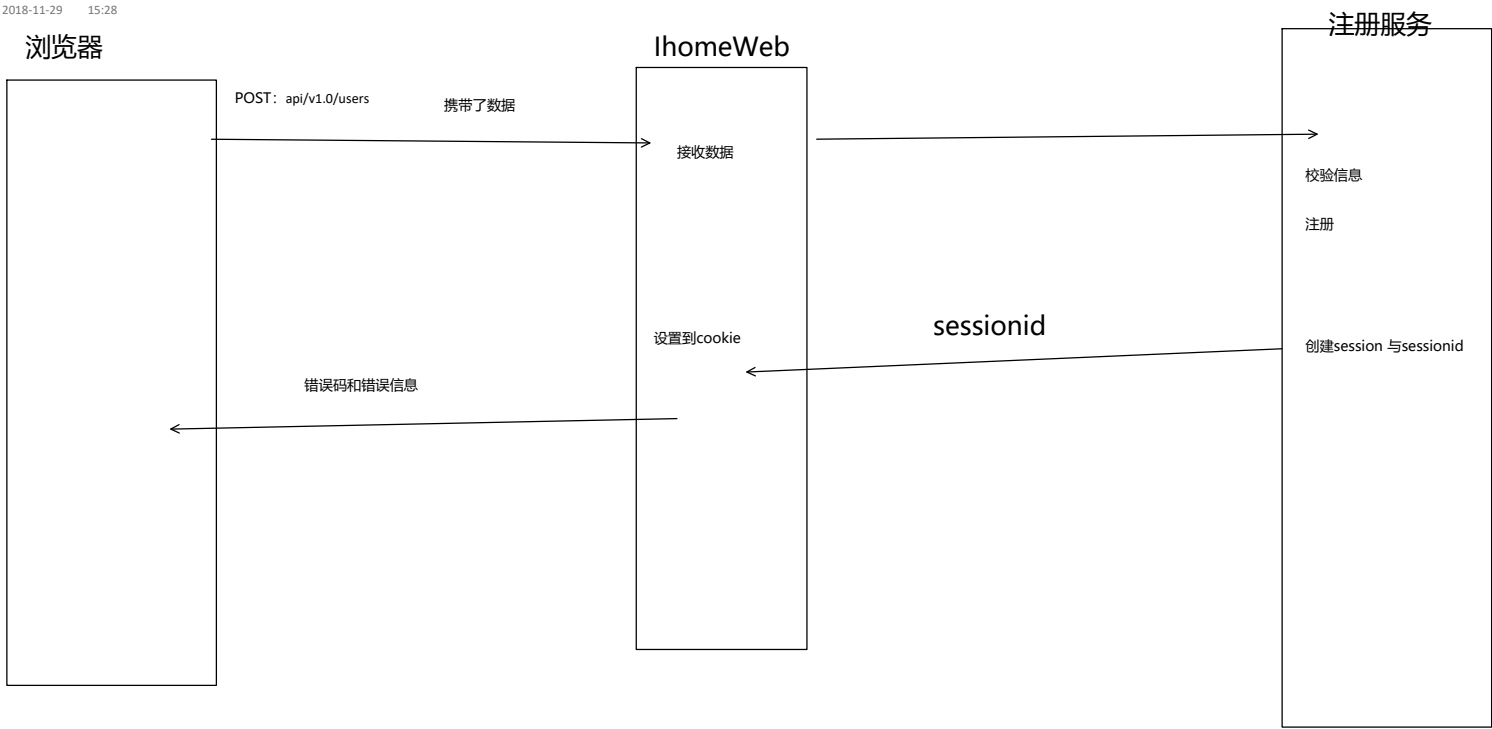

# 注册服务创建

2018-11-29 15:45

```
micro new --type "srv" sss/PostRet
Creating service go.micro.srv.PostRet in
/home/itcast/go/src/sss/PostRet
```

```
.
├── main.go
├── plugin.go
├── handler
│   └── example.go
├── subscriber
│   └── example.go
├── proto/example
│   └── example.proto
├── Dockerfile
├── Makefile
└── README.md
```

download protobuf for micro:

```
brew install protobuf
```

```
go get -u
```

```
github.com/golang/protobuf/{proto,protoc-gen-go}
```

```
go get -u github.com/micro/protoc-gen-micro
```


compile the proto file example.proto:



```
cd /home/itcast/go/src/sss/PostRet  
protoc --proto_path=. --go_out=. --micro_out=.  
proto/example/example.proto
```

获取session请求

2018-11-29 16:53

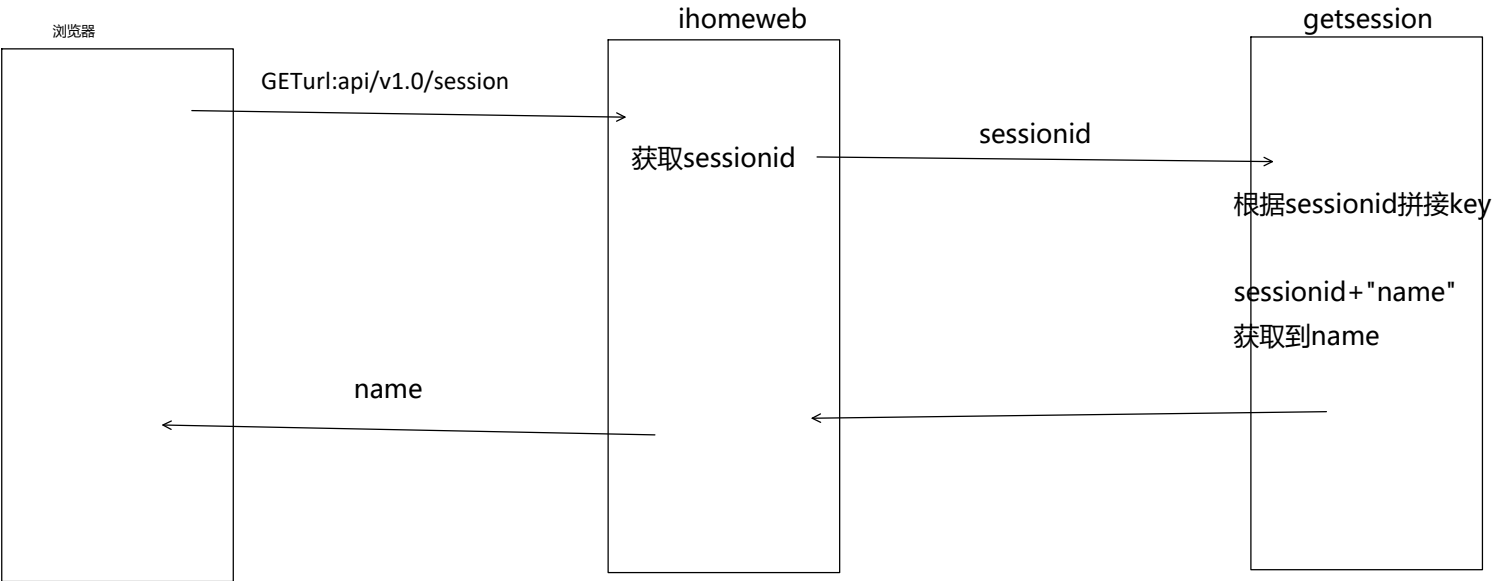

# 创建getsession

2018-11-29 16:58

```
micro new --type "srv" sss/GetSession
Creating service go.micro.srv.GetSession in
/home/itcast/go/src/sss/GetSession
```

```
.
├─ main.go
├─ plugin.go
├─ handler
│   └─ example.go
├─ subscriber
│   └─ example.go
├─ proto/example
│   └─ example.proto
├─ Dockerfile
├─ Makefile
└─ README.md
```

download protobuf for micro:

```
brew install protobuf
```

```
go get -u github.com/golang/protobuf/{proto,protoc-
gen-go}
```

```
go get -u github.com/micro/protoc-gen-micro
```

compile the proto file example.proto:

```
cd /home/itcast/go/src/sss/GetSession  
protoc --proto_path=. --go_out=. --micro_out=.  
proto/example/example.proto
```