



a




Five-dimensional trajectory, $\sin \theta_i(t)$

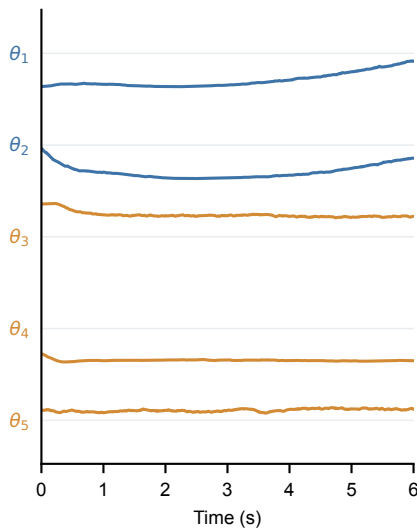

b

Root $\{1, 2, 3, 4, 5\} \cdot 15$ candidate cuts

root $\Phi = 4.23$; retained residual = 0.45 bits

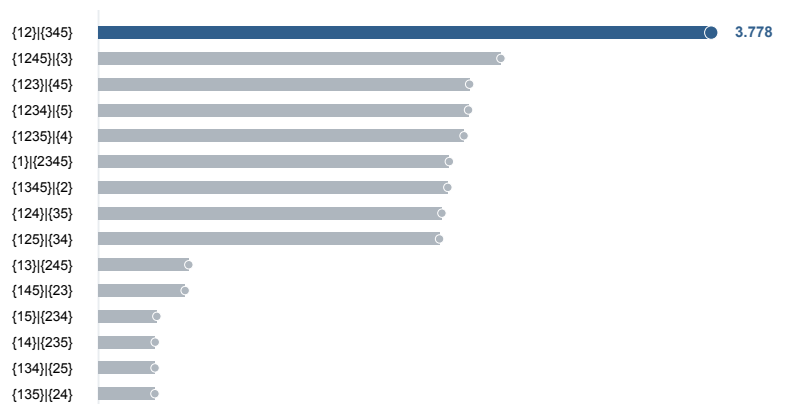

terminal two-node atom

$\{12\}$ → $\Xi_{\{12\}} = 1.830$ bits

Recurse on $\{3, 4, 5\}$

root $\Phi = 1.95$; retained residual = 1.54 bits



Greedy capture, $C(L, R) = \Phi(L) + \Phi(R)$ (bits)

terminal two-node atom

$\{45\}$ → $\Xi_{\{45\}} = 0.410$ bits