
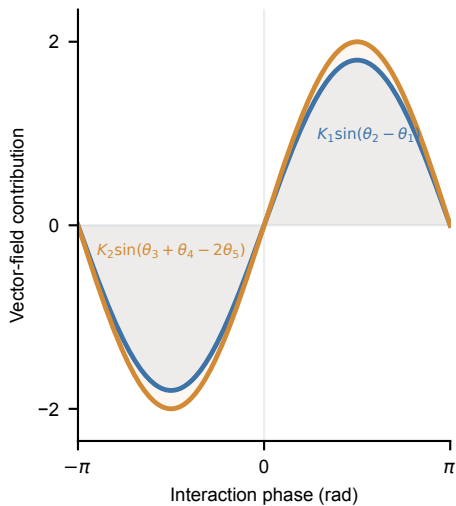



a

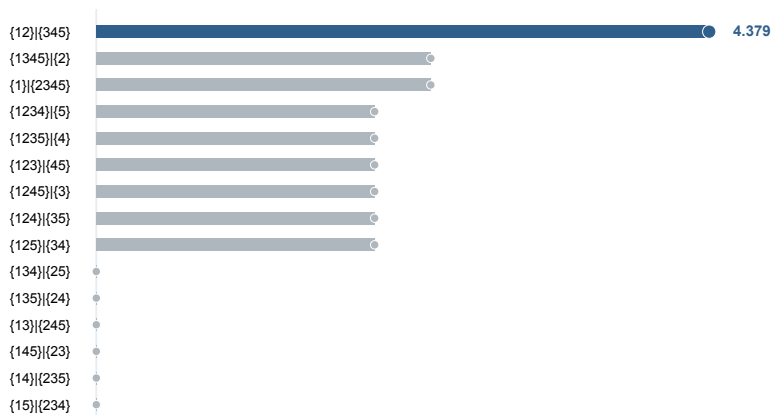

b

Root $\{1, 2, 3, 4, 5\} \cdot 15$ candidate cutsroot $\Phi = 4.38$; retained residual = 0.00 bitsRecurse on $\{1, 2\}$ structural stop: singleton $\Phi = 0$; atom $\Phi = 1.99$ bits $\{1\} \setminus \{2\}$ Recurse on $\{3, 4, 5\}$ max $C = 0.000 \rightarrow$ stop; atom $\Phi = 2.39$ bits $\{34\} \setminus \{5\}$ $\{35\} \setminus \{4\}$ $\{3\} \setminus \{45\}$ Greedy capture, $C(L, R) = \Phi(L) + \Phi(R)$ (bits)