


CREATE TABLE **Person** (user_id serial PRIMARY KEY, male varchar(50) not null, age varchar(50) not null, BMI varchar(50) not null, totChol varchar(50) not null);

CREATE TABLE **Heart** (user_id int not null, primary key (user_id), foreign key (user_id) references Person (user_id), sysBP varchar(50) not null, diaBP varchar(50) not null, heartRate varchar(50) not null);

CREATE TABLE **Outside** (user_id int not null, primary key (user_id), foreign key (user_id) references Person (user_id), currentSmoker varchar(50) not null, cigsPerDay varchar(50) not null, BPMeds varchar(50) not null, prevalentStroke varchar(50) not null, prevalentHyp varchar(50) not null, diabetes varchar(50) not null);

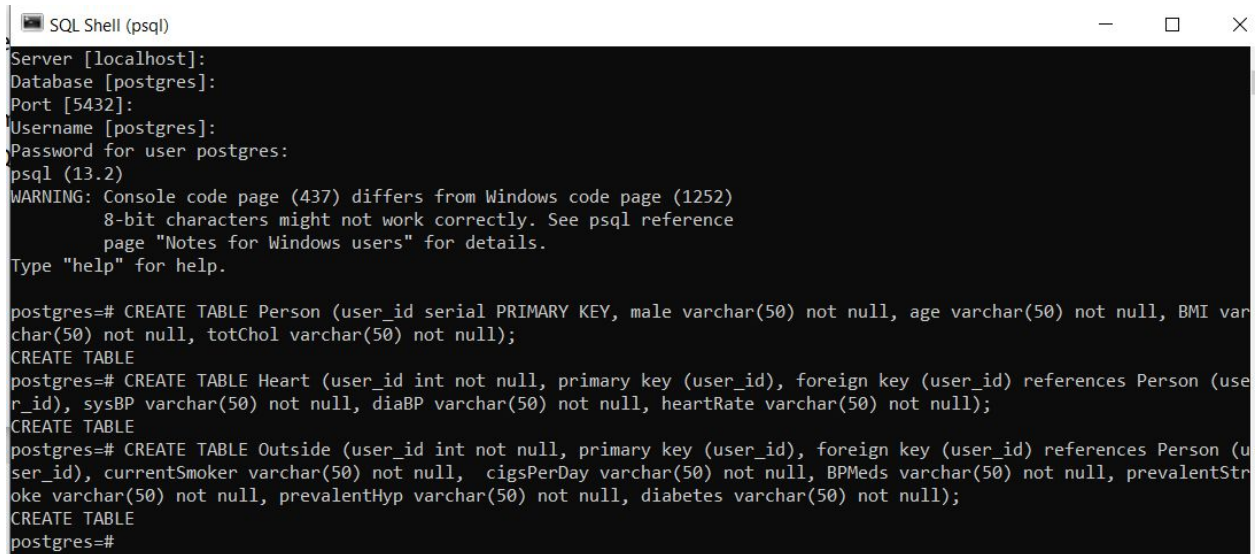

```
SQL Shell (psql)
Server [localhost]:
Database [postgres]:
Port [5432]:
Username [postgres]:
Password for user postgres:
psql (13.2)
WARNING: Console code page (437) differs from Windows code page (1252)
         8-bit characters might not work correctly. See psql reference
         page "Notes for Windows users" for details.
Type "help" for help.

postgres=# CREATE TABLE Person (user_id serial PRIMARY KEY, male varchar(50) not null, age varchar(50) not null, BMI var
char(50) not null, totChol varchar(50) not null);
CREATE TABLE
postgres=# CREATE TABLE Heart (user_id int not null, primary key (user_id), foreign key (user_id) references Person (use
r_id), sysBP varchar(50) not null, diaBP varchar(50) not null, heartRate varchar(50) not null);
CREATE TABLE
postgres=# CREATE TABLE Outside (user_id int not null, primary key (user_id), foreign key (user_id) references Person (u
ser_id), currentSmoker varchar(50) not null, cigsPerDay varchar(50) not null, BPMeds varchar(50) not null, prevalentStr
oke varchar(50) not null, prevalentHyp varchar(50) not null, diabetes varchar(50) not null);
CREATE TABLE
postgres=#
```