
Matthies Abera | September 6, 2020

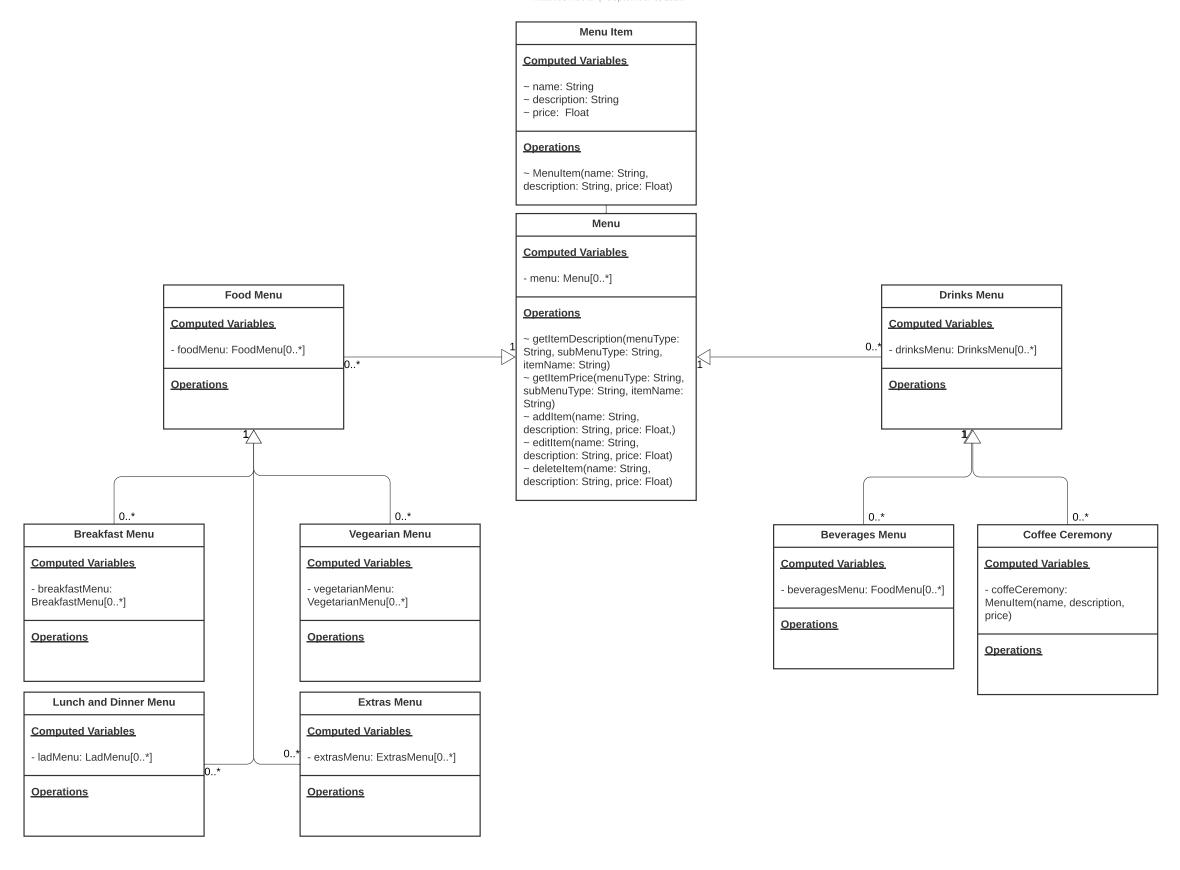

Dockets

Computed Variables

- numberOfDockets: Dictionary[tableNumber: Int, Docket()]

Operations

doesTableHaveDocket(tableNumber: Int)

- ~ newDocket(tableNumber: Int)
- ~ closeDocket(tableNumber: Int)



Docket

Computed Variables

- docketNumber: Int
- tableNumber: Int
- totalAmount: Float - timeClosed: Date?
- date: Date

Operations

~ Docket(docketNumber: Int, tableNumber: Int, totalAmount: Float, timeClosed: Date?, date: Date)

Create Analysis classes at a later stage in the development cycle