

---

# Modular Programming – Practical Work

## Week 4

### Classes and Objects, a deeper look

---

**Notations:** W1Q1 = Week 1, Questions of type 1

**Question types:**

- Type 1: theory, concepts *knowledge*
- Type 2: understanding typically based on code reading *understanding*
- Type 3: producing code yourself *know-how*

A Moodle deposit space is open every week for you to upload your solutions. Solutions to the exercises are provided one week later.

**Important points:**

- 602\_F and 602\_D classes should upload solutions **before Monday 24h00 of the following week**
- **2 or 3 practical works will be corrected** and will count for one quarter of the intermediate test note

## W4Q1 – 1 – Other questions to prepare

1. Why is the main method of a Java application declared as `static`?

.....

.....

.....

.....

.....

.....

2. Can we refer to `this` in a static method?

.....

.....

.....

.....

.....

.....

3. `static`: In a static method, can we access to

- an instance variable
- a class variable
- a local variable of another method
- a local variable of this static method

.....

.....

.....

.....

.....

.....

.....

4. Weshalb ist es allgemein gesehen vorzuziehen, eine Instanzvariable mit einem `private` Zugriff zu deklarieren?

.....

.....

.....

.....

.....

.....

5. Wozu dient das Überladen (Overloading) von Konstruktoren?

.....

.....

.....

.....

.....

.....

## W4Q1 – 2

In the following table, find the correspondences between the terms of column 1 and the descriptions of column 2.

| Term |                 | Description                                                                                                                                                       |
|------|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| —    | final           | a) Called to initialize the objects of a given class.                                                                                                             |
| —    | Array           | b) The fact of limiting the access to members of a class using <code>private</code> and to control the access to these members using <code>public</code> methods. |
| —    | Attributes      | c) Method called by the <i>Garbage Collector</i> when the memory is cleaned from the objects without references.                                                  |
| —    | Class           | d) Is used to make a reference to instance variables and methods of the current object.                                                                           |
| —    | constructor     | e) Modifier used to make a variable unique for all objects of a given class.                                                                                      |
| —    | Object          | f) Another name for instance variables.                                                                                                                           |
| —    | Encapsulation   | g) Modifier to make a variable un-modifiable (constant).                                                                                                          |
| —    | finalize        | h) Group of variables containing objects of the same type.                                                                                                        |
| —    | this            | i) Instance of a class.                                                                                                                                           |
| —    | static variable | j) Define the common attributes and behaviors of objects.                                                                                                         |

## W4Q3 – 1 Vererbung: Fahrzeug

Folgende Fahrzeuggruppe soll modelliert werden:

*Plane, Boat, Carriage, Truck, Motorcycle, Sled, Bicycle, Sailboat, Car*

(Auto, Boot, Fahrrad, Flugzeug, Kutsche, LKW, Motorrad, Schlitten, Segelboot)

Jedes Fahrzeug besteht aus verschiedenen Komponenten:

*Reactor, Wheel, Engine, Handlebars, Oar, Rudder, IceSkating, Horse, Sail, SteeringWheel, Trailer*

(Triebwerk, Rad, Motor, Lenkstange, Ruder, Steuerruder, Kufe, Pferd, Segel, Steuerrad, Anhänger)

Diese Komponenten sind auf dem Netzwerkbereich verfügbar: Moodle (E-Learning) !

Sie sollen diese jedoch nicht verändern, sondern nur benutzen!!!

Das Ziel dieser Übung besteht darin, die Fahrzeugklassen sowie, falls nötig, deren jeweiligen Oberklassen zu schreiben und dabei die Redundanz möglichst zu **reduzieren**. Erstellen Sie überall dort, wo es möglich ist, eine Oberklasse, welche die Teile enthält, die auch andere Klassen **gemeinsam** haben.

Schreiben Sie die Klassen „Fahrzeuge“ und **verwenden Sie die am besten geeignete Vererbung**, um das nachstehende Ergebnis zu erzielen.

Wenn Sie die Datei Exercice\_14.java ausführen, sollen Sie folgendes Ergebnis erhalten:

```
-----
Plane reactor :
Reactor power : 3500.0
Wheel of : 28.0 inch(es)
Wheel of : 28.0 inch(es)
-----
Boat of 2 oars :
Oar width : 0.25
Oar width : 0.25
Rudder depth : 0.85
-----
Carriage of 4 horses :
Horse race : Camargue
Horse race : Camargue
Horse race : Camargue
Horse race : Camargue
Wheel of : 77.0 inch(es)
Wheel of : 77.0 inch(es)
Wheel of : 77.0 inch(es)
Wheel of : 77.0 inch(es)
-----
Truck trailer :
Trailer weight : 27.0
Steering wheel diameter : 0.38
Engine of : 4.85 liter
Wheel of : 35.0 inch(es)
Wheel of : 35.0 inch(es)
Wheel of : 35.0 inch(es)
Wheel of : 35.0 inch(es)
-----
Motorcycle :
Engine of : 0.75 liter
Handlebars width : 0.45
Wheel of : 6.0 inch(es)
Wheel of : 6.0 inch(es)
-----
```

```

Sled with two iceSkatings:
IceSkating length : 3.5
IceSkating length : 3.5
Horse race : Percheron
Horse race : Percheron
Horse race : Percheron
Horse race : Percheron
-----
Bicycle :
Handlebars width : 0.25
Wheel of : 1.5 inch(es)
Wheel of : 1.5 inch(es)
-----
Sailboat :
Sail area : 35.0
Rudder depth : 2.15
-----
Car :
Steering wheel diameter : 0.32
Engine of : 1.65 liter
Wheel of : 18.0 inch(es)
Wheel of : 18.0 inch(es)
Wheel of : 18.0 inch(es)
Wheel of : 18.0 inch(es)
-----

```

## W3Q3 – 2

In the next exercise session you will have to complete a battle system for a very primitive text-mode role playing game. In this exercise, you will design several classes of characters and expose the hierarchy (text or Visio class diagram).

The base class for all the battlers is the class `Character`. Can you design a hierarchy of classes where the top class is `Character` and where there is a distinction between good and bad guys? Design your solution taking into account the good and evil.

Here are the classes that you must have in your hierarchy:

### GOOD:

Player (Human).

### EVIL:

Ogre (Non Human), Troll (Non Human), Barbarian (Human), White Mage (Human) and Black Mage (Human).

Player is a good character, while all the others are enemies. You can also consider that WhiteMage and BlackMage are subclasses of Mage. It's up to you to design the solution you find the best.

### Remarks:


The goal of this exercise is to show you that there is no best solution when working with inheritance. This is the reason why all projects using Object-oriented approaches must first be designed. This is to ensure that the solution you've found correctly covers your needs.

## W4Q3 – 3

The company employing you receives as mandate to redo the website of a golf club: <http://www.golfsierre.ch/fr/>. Your boss believes that similar type of golf club clients will mandate the company to build their websites. Therefore, he opts for a clean implementation that could be re-used for other clients. The boss asks you to propose a basis class design that represents what a golf is and he asks you to do the implementation in Java technology<sup>1</sup>.

As you can see during your visit, a golf (“parcours de golf”) has a given number of holes, typically 9 or 18. Looking at hole descriptions in the web site, you identify different elements that define the entity “hole” (<http://www.golfsierre.ch/fr/parcours/golf1.php>) : hole description, handicap, men distance, ladies distance, par (number of hits you are supposed to accomplish), etc.

A golf player explains you that a hole is also identified by hazards such as bunkers (sand traps) or water hazards. A water hazard is typically shared between different holes, as illustrated below.

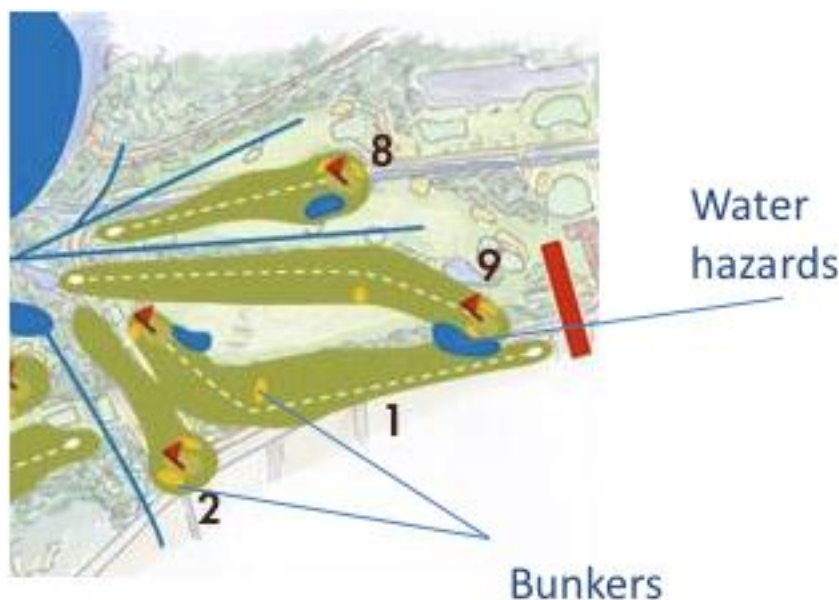

1. Propose a class design.  
Your objective in doing so is to be able to recompose all the information available on the hole description web pages of the golf of Sierre.
2. Implement the classes in Java.
3. In each class, provide a `toString()` method that returns a `String` representing the content of the class.

---

<sup>1</sup> Someone else in the company will be in charge of the html page generation on top of your class (for ex using JSP or simple Java servlets).