


Crear Proyecto

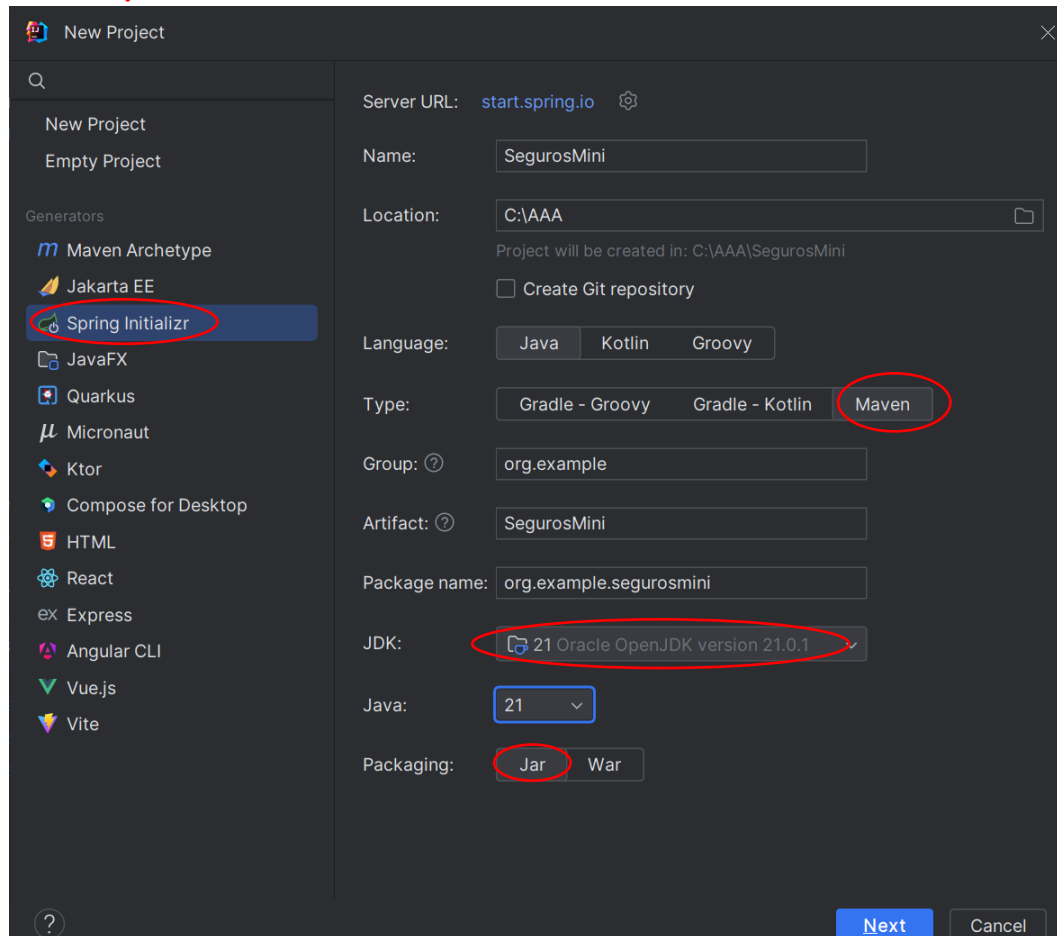

The 'New Project' dialog in IntelliJ IDEA is shown. The 'Generators' list on the left has 'Spring Initializr' selected and circled in red. The main configuration area on the right has several fields: 'Name' is 'SegurosMini', 'Location' is 'C:\AAA', 'Language' is 'Java', 'Type' is 'Maven' (circled in red), 'Group' is 'org.example', 'Artifact' is 'SegurosMini', 'Package name' is 'org.example.segurosmini', 'JDK' is '21 Oracle OpenJDK version 21.0.1' (circled in red), 'Java' is '21', and 'Packaging' is 'Jar' (circled in red). The 'Next' button is at the bottom right.

Server URL: start.spring.io

Name: SegurosMini

Location: C:\AAA

Project will be created in: C:\AAA\SegurosMini

☐ Create Git repository

Language: Java Kotlin Groovy

Type: Gradle - Groovy Gradle - Kotlin Maven

Group: org.example

Artifact: SegurosMini


Package name: org.example.segurosmini

JDK: 21 Oracle OpenJDK version 21.0.1

Java: 21

Packaging: Jar War

Next Cancel

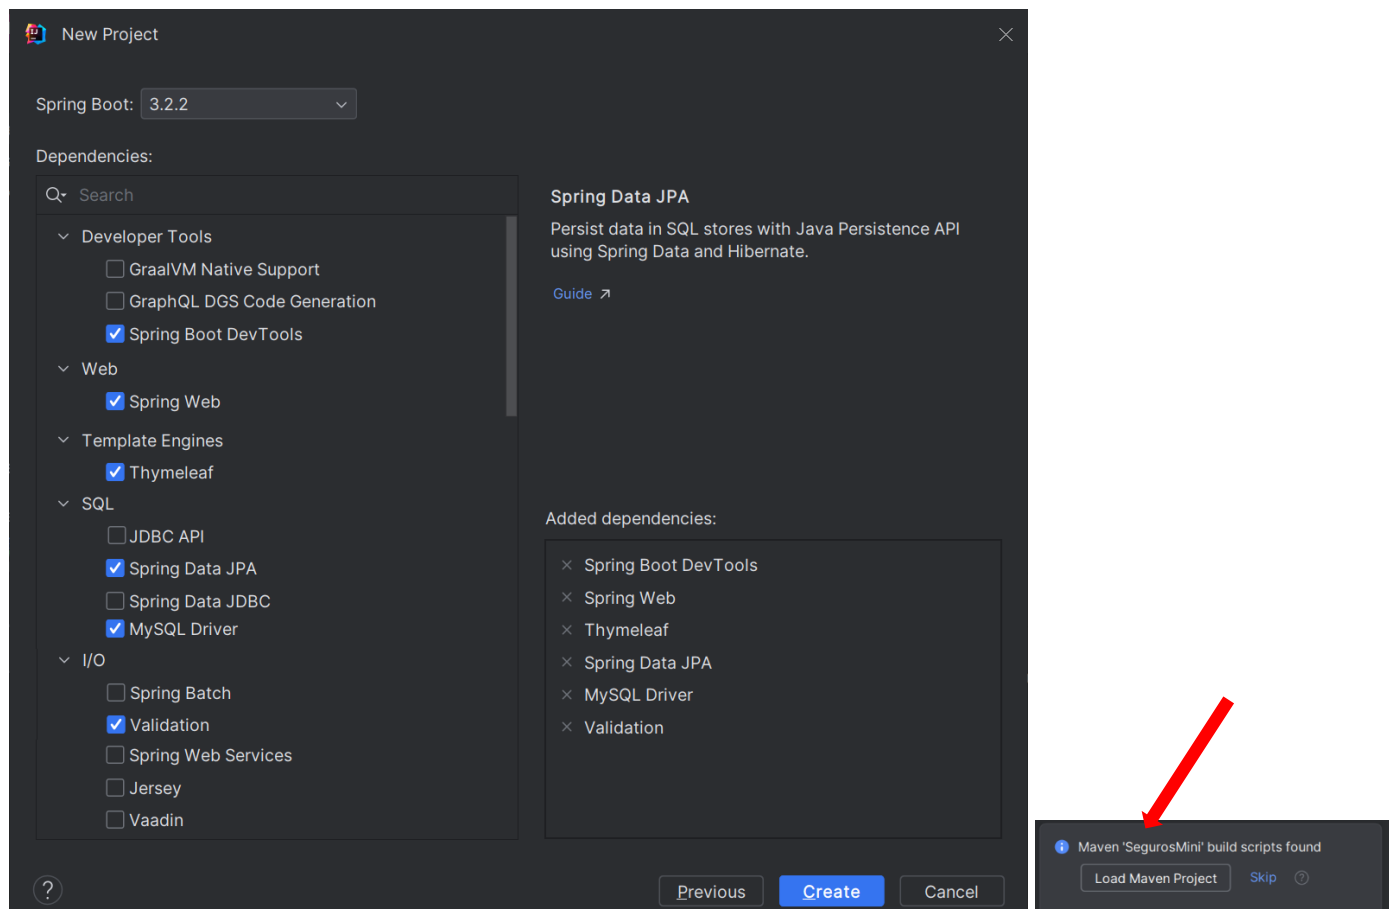

The 'New Project' dialog is shown with the 'Dependencies' tab selected. The 'Spring Boot' version is '3.2.2'. The 'Dependencies' list on the left has several items checked: 'Spring Boot DevTools', 'Spring Web', 'Thymeleaf', 'Spring Data JPA', 'MySQL Driver', and 'Validation'. The 'Added dependencies' list on the right shows the same items. A red arrow points to the 'Load Maven Project' button at the bottom right.

Spring Boot: 3.2.2

Dependencies:

Search

Developer Tools

- ☐ GraalVM Native Support
- ☐ GraphQL DGS Code Generation
- ☒ Spring Boot DevTools

Web

- ☒ Spring Web

Template Engines

- ☒ Thymeleaf

SQL

- ☐ JDBC API
- ☒ Spring Data JPA
- ☐ Spring Data JDBC
- ☒ MySQL Driver

I/O

- ☐ Spring Batch
- ☒ Validation
- ☐ Spring Web Services
- ☐ Jersey
- ☐ Vaadin

Spring Data JPA

Persist data in SQL stores with Java Persistence API using Spring Data and Hibernate.

[Guide](#)

Added dependencies:


- × Spring Boot DevTools
- × Spring Web
- × Thymeleaf
- × Spring Data JPA
- × MySQL Driver
- × Validation

Previous Create Cancel


Maven 'SegurosMini' build scripts found

Load Maven Project Skip


Editar archivo de propiedades

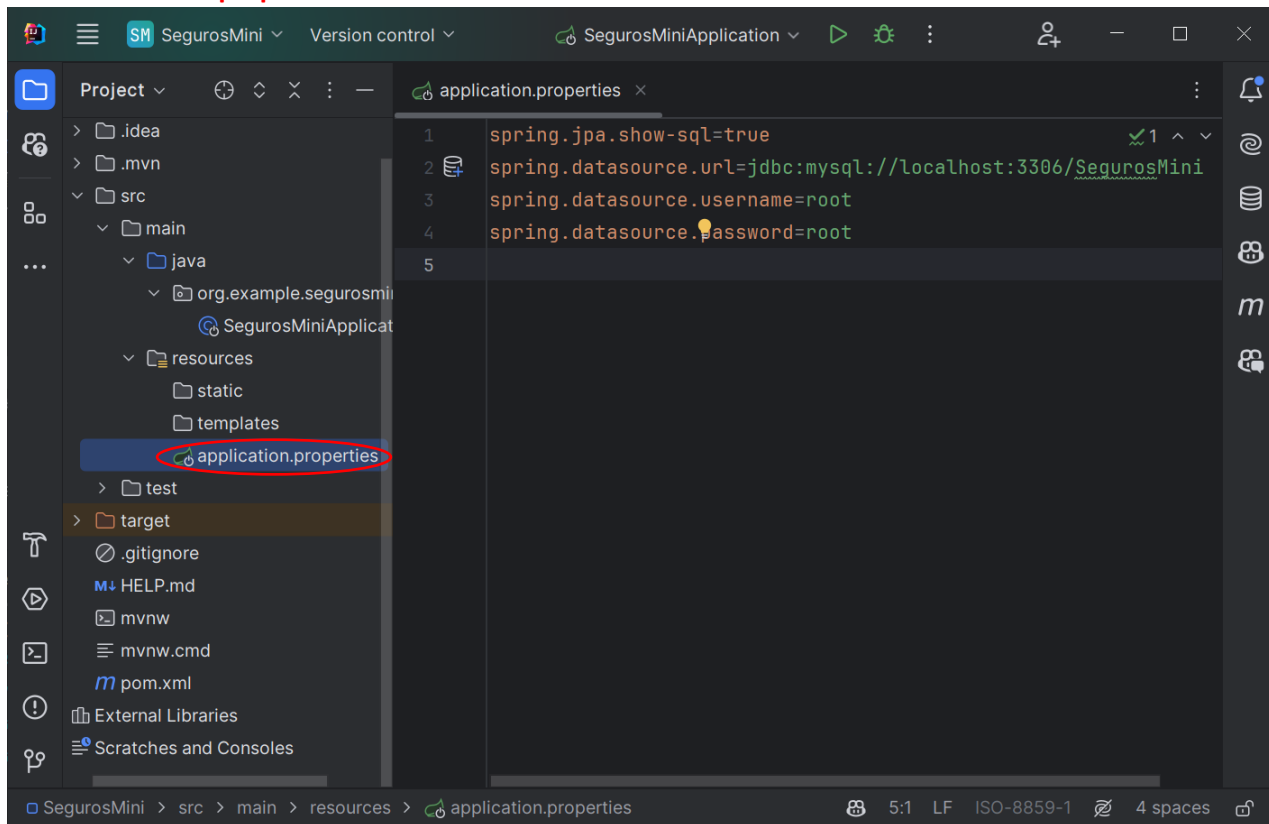



Crear página inicial y correr el proyecto

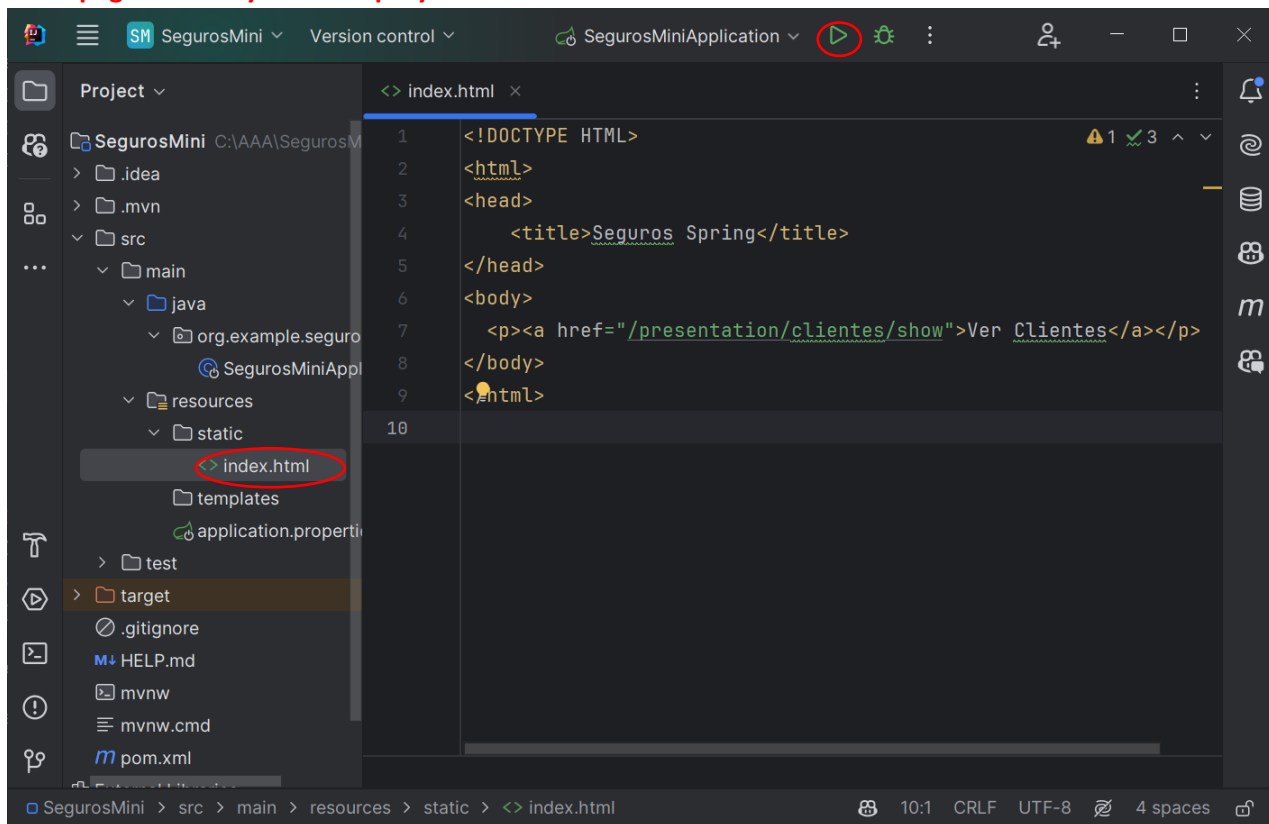





Ver página inicial

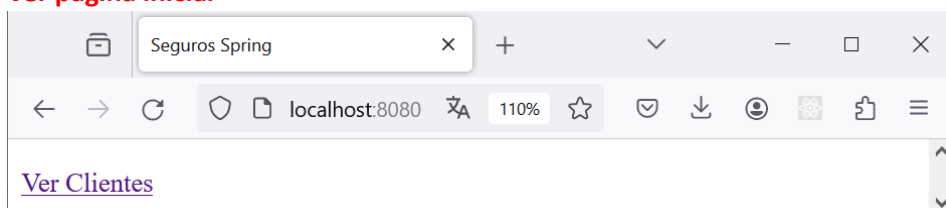


Crear Data Source

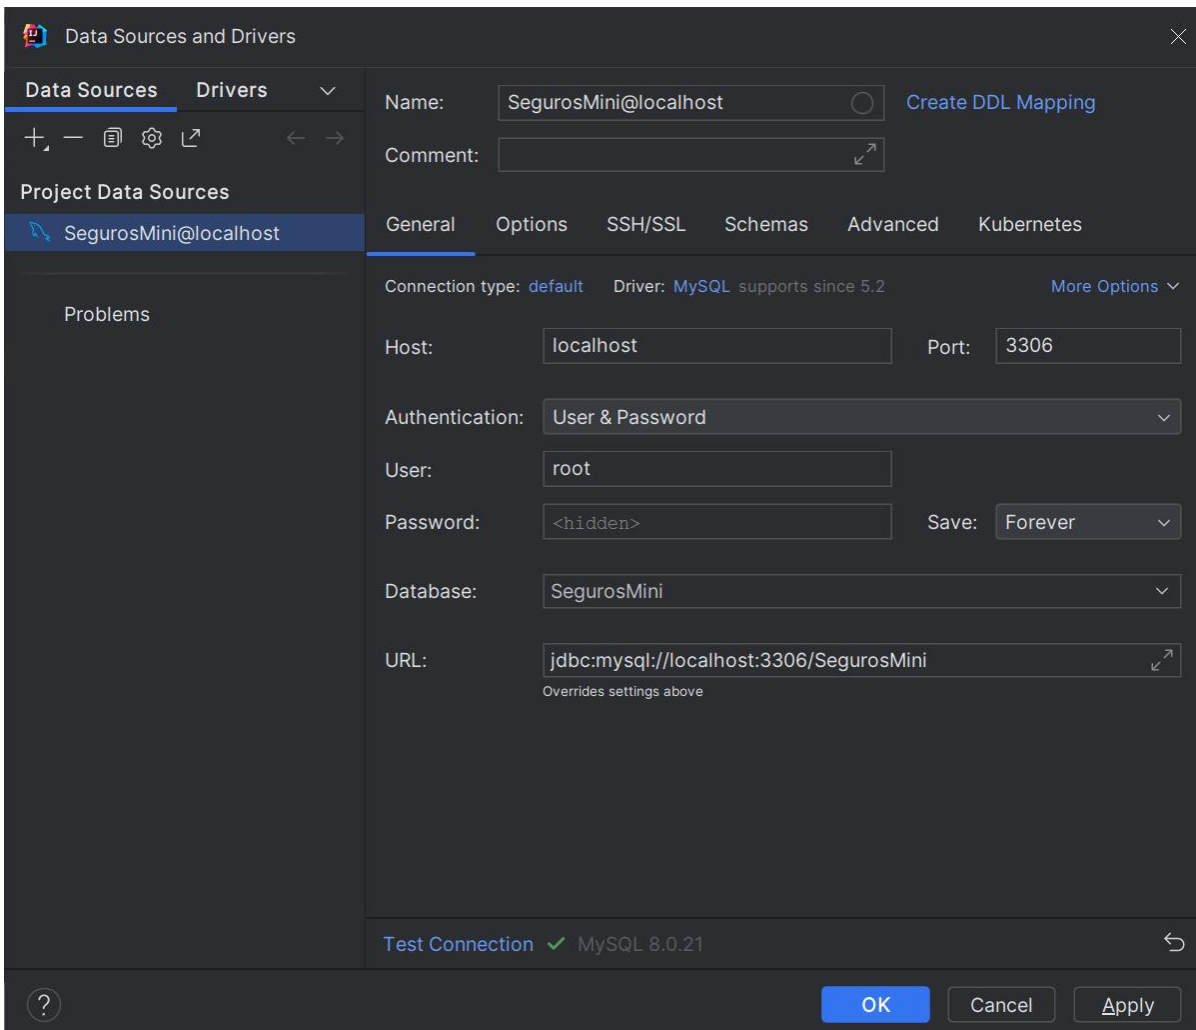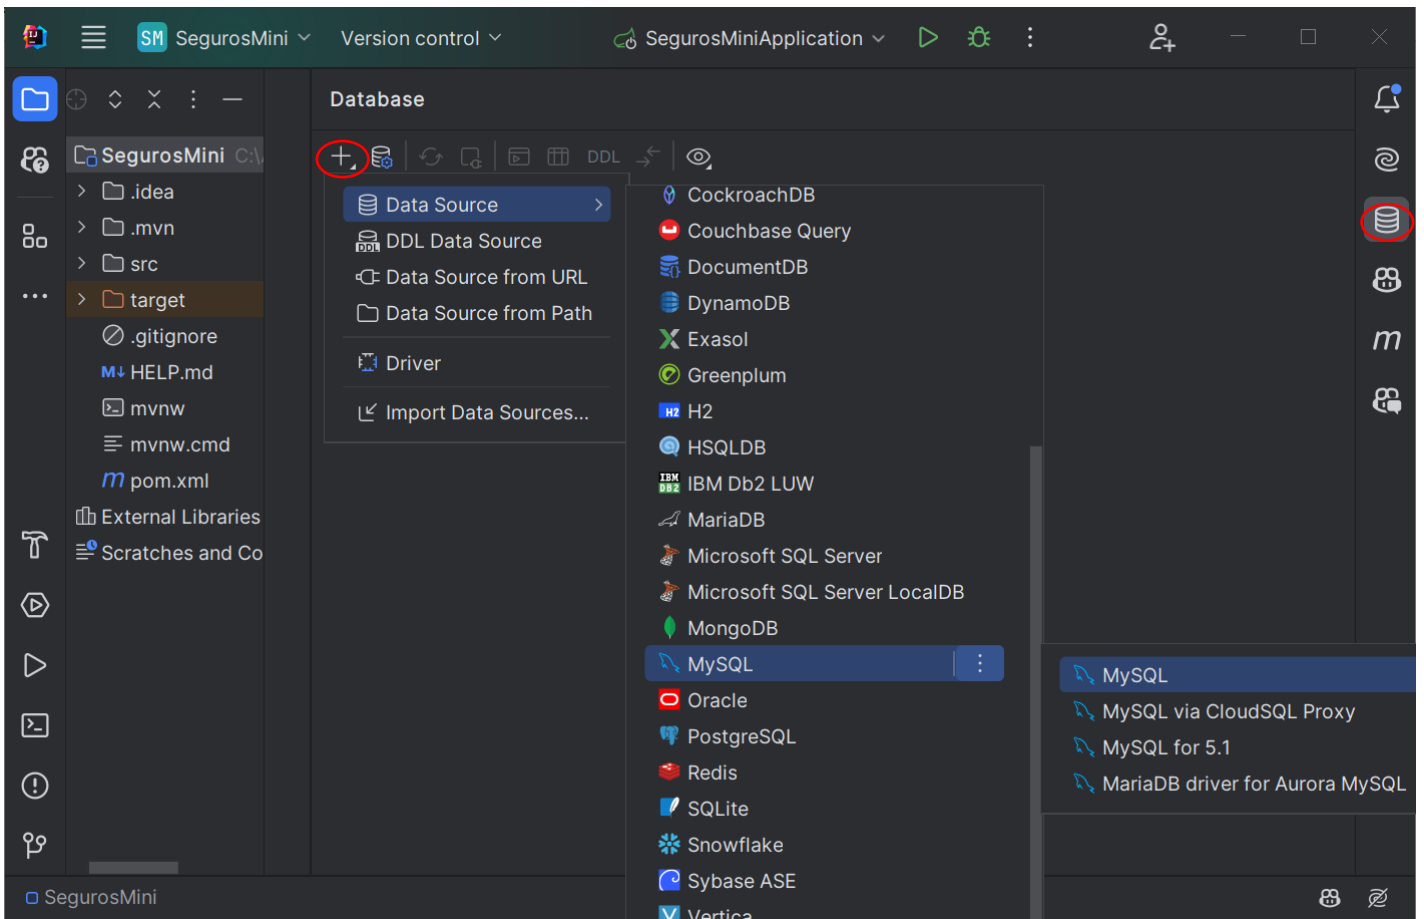


Generar clases a partir de tablas de la base de datos

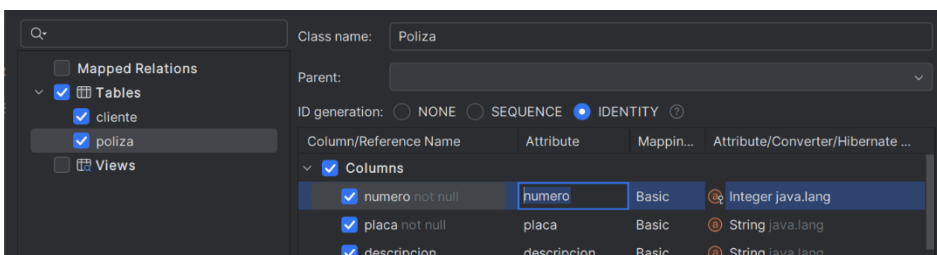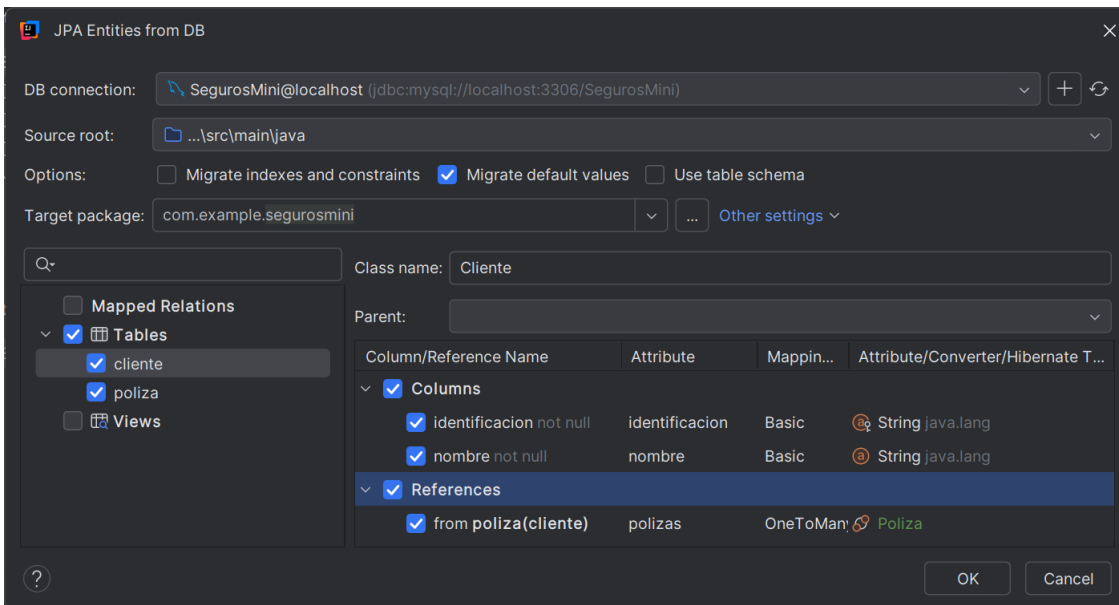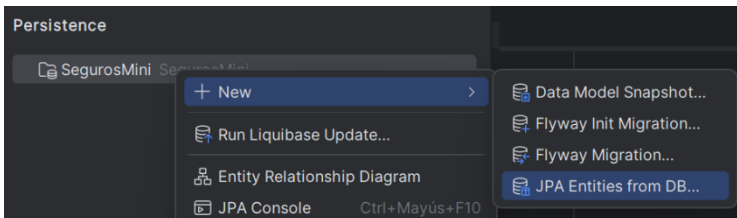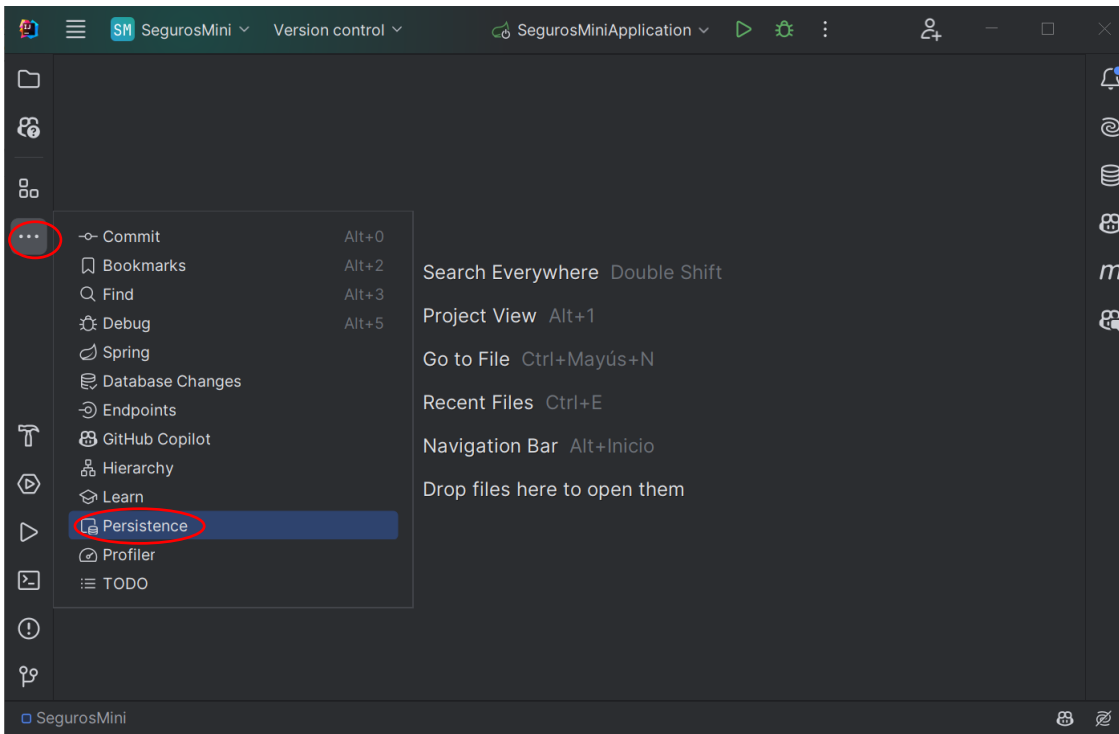



Crear paquete "logic" y mover clases allí





Crear paquete "data"




Crear interfaces CRUD

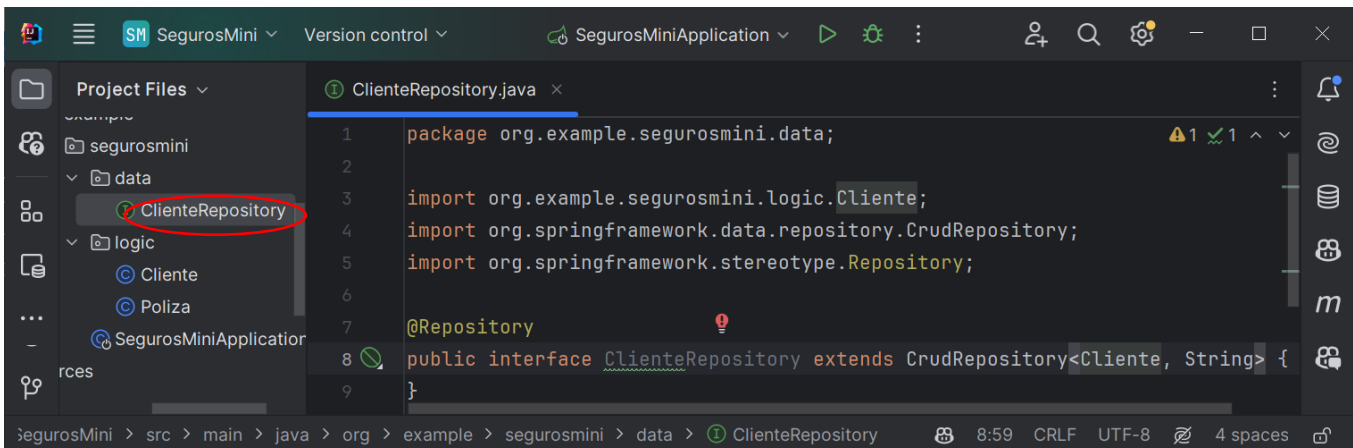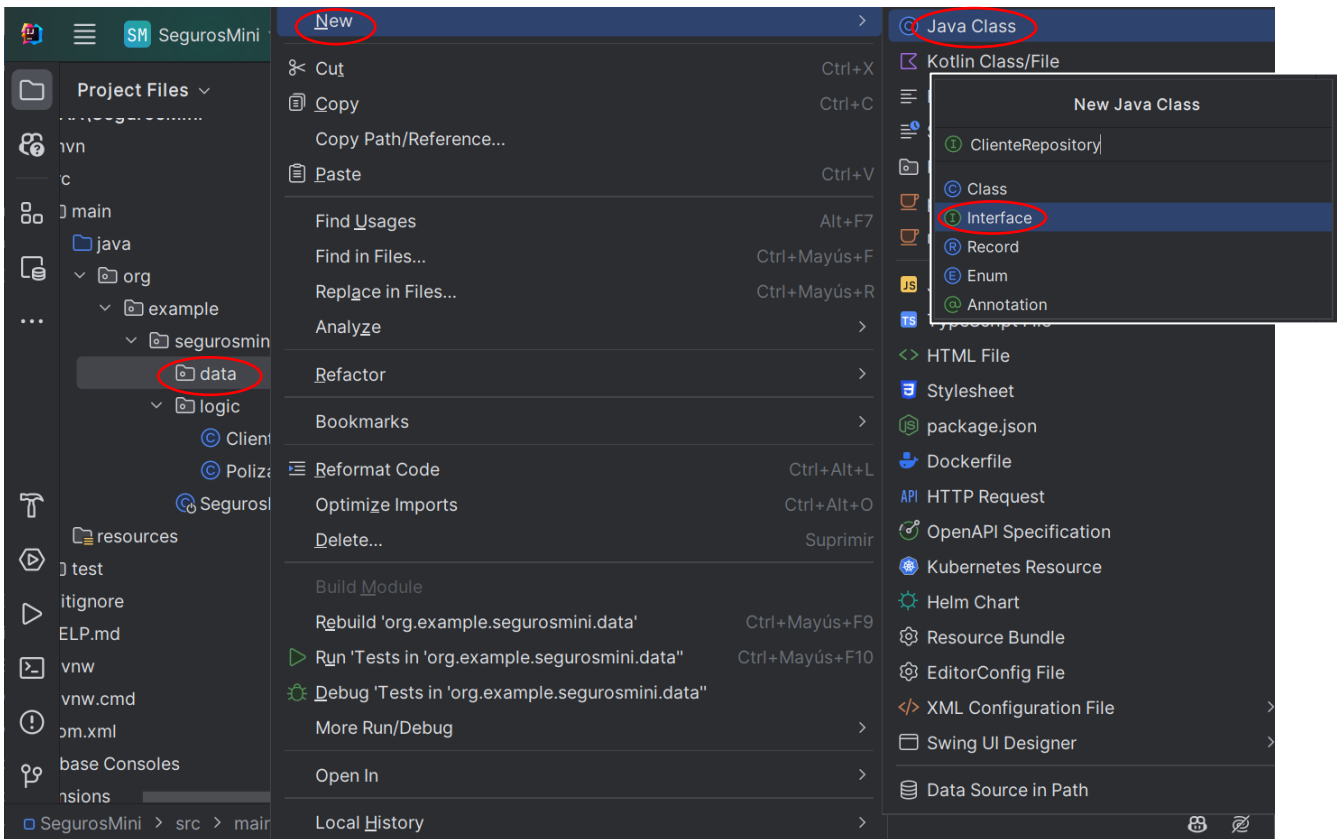


Crear class Service

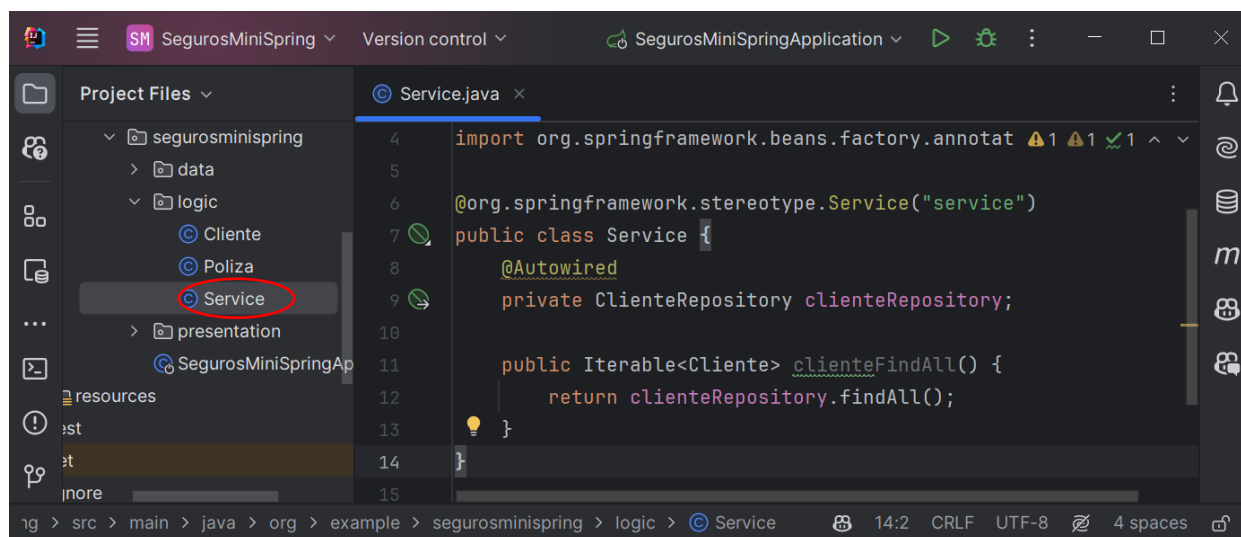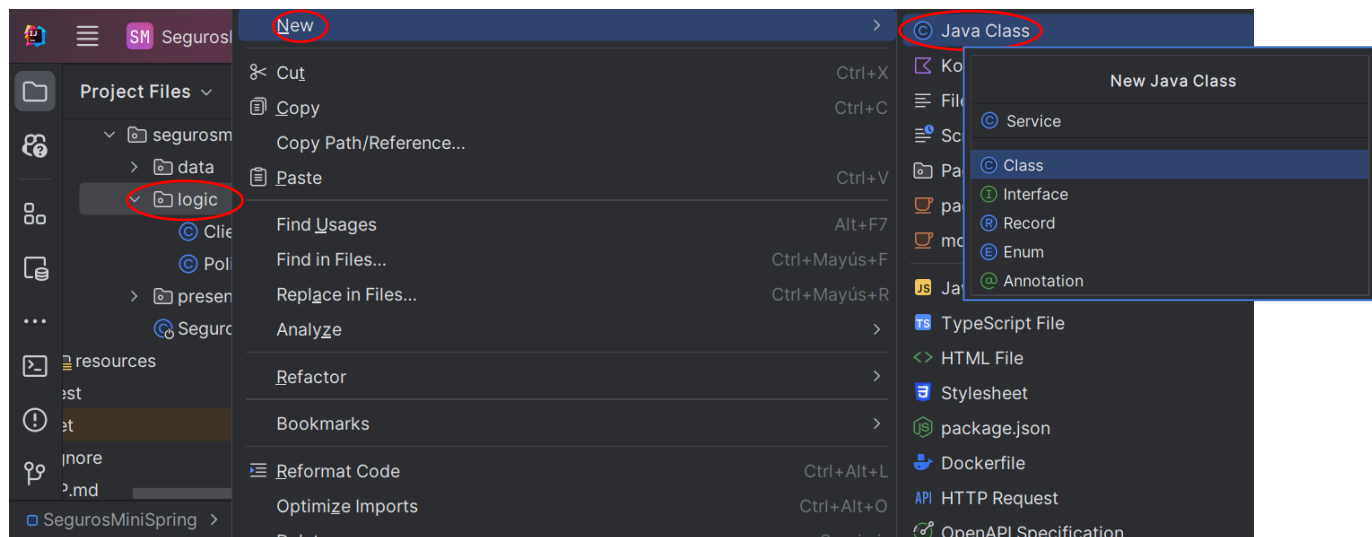



Crear paquete presentation

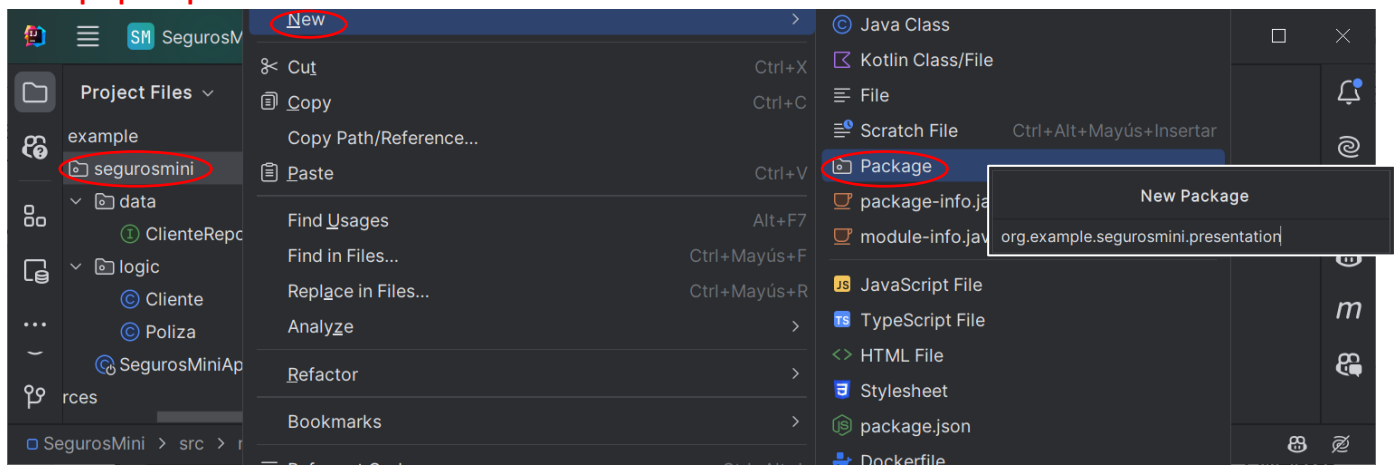




Crear paquete "clientes" dentro de "presentation"

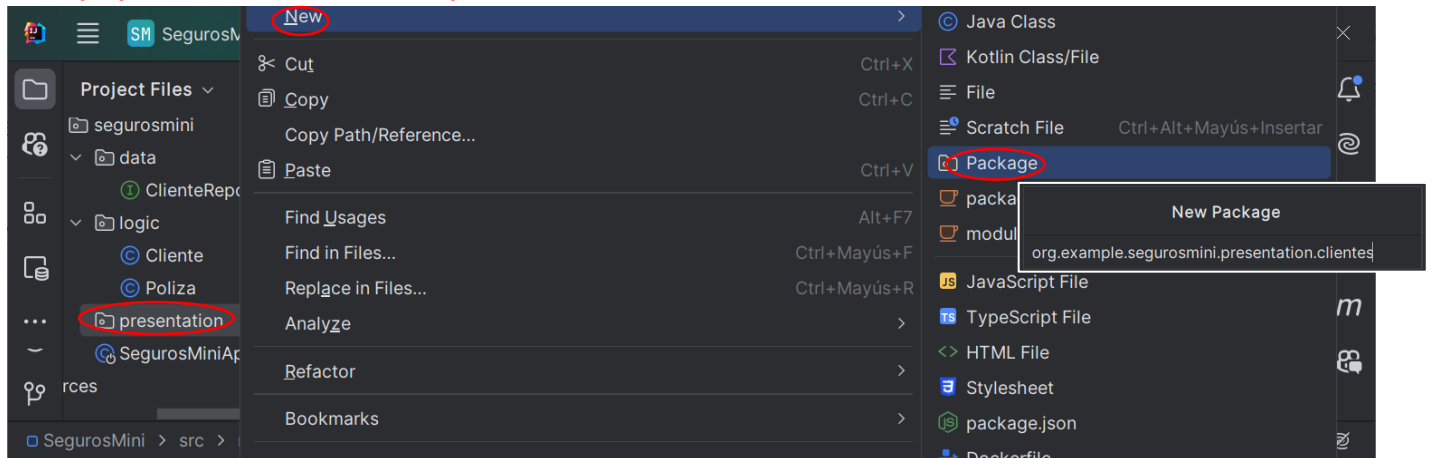

Crear clase "Controller" para clientes

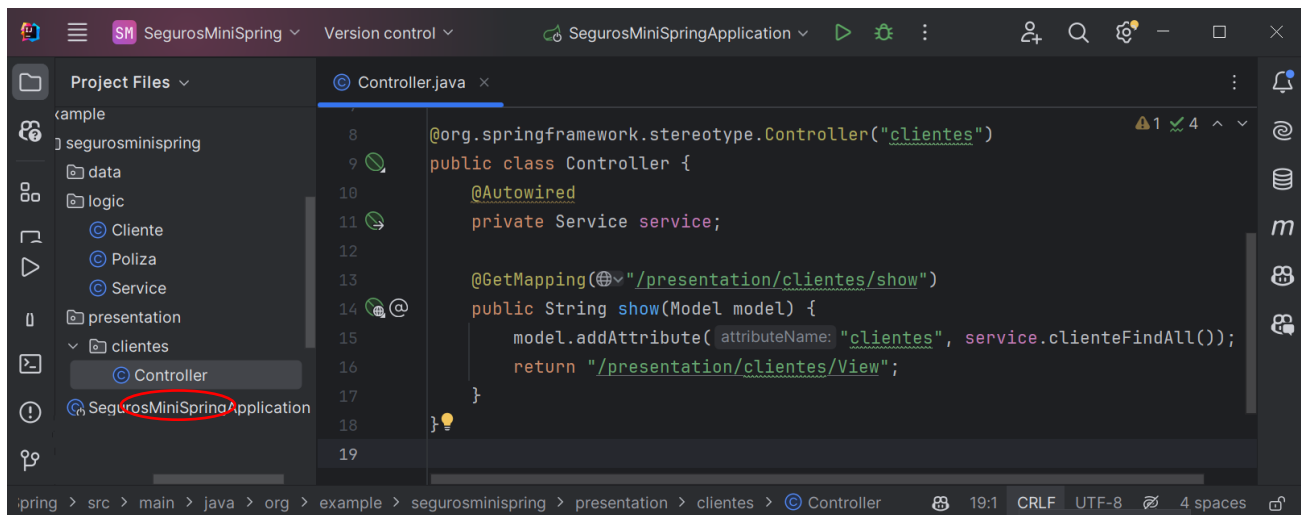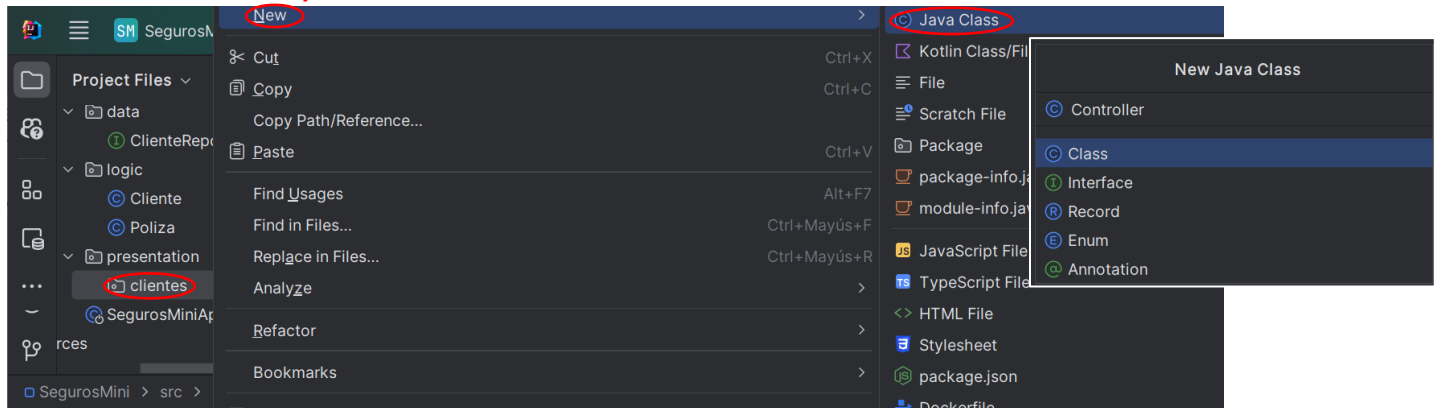

Crear en "templates" el View para clientes

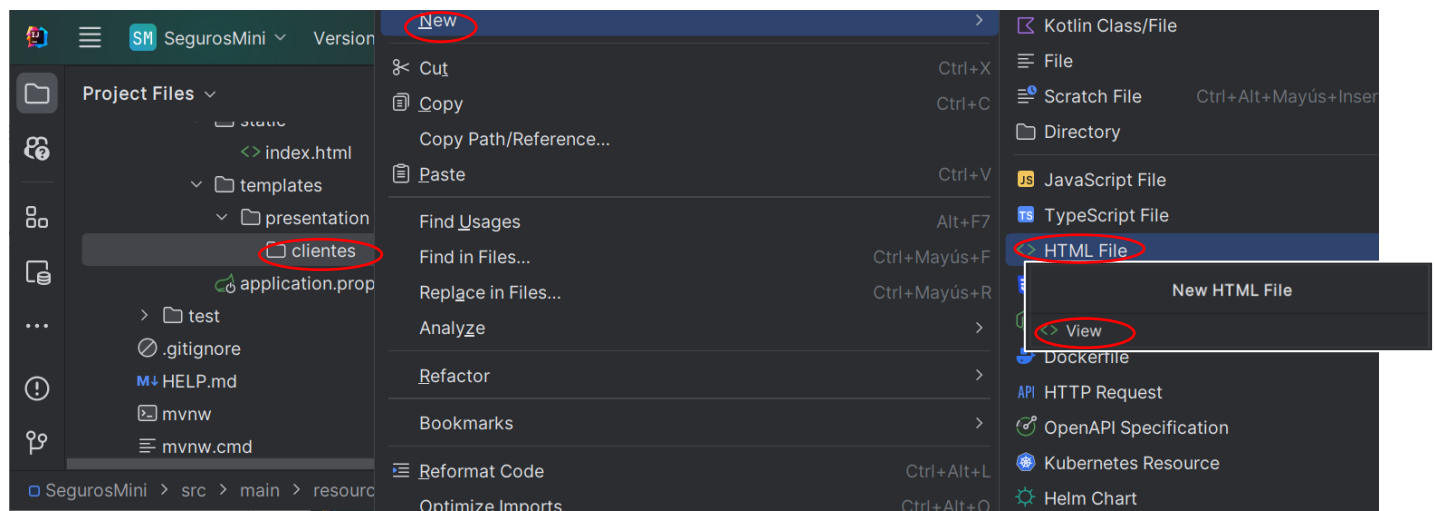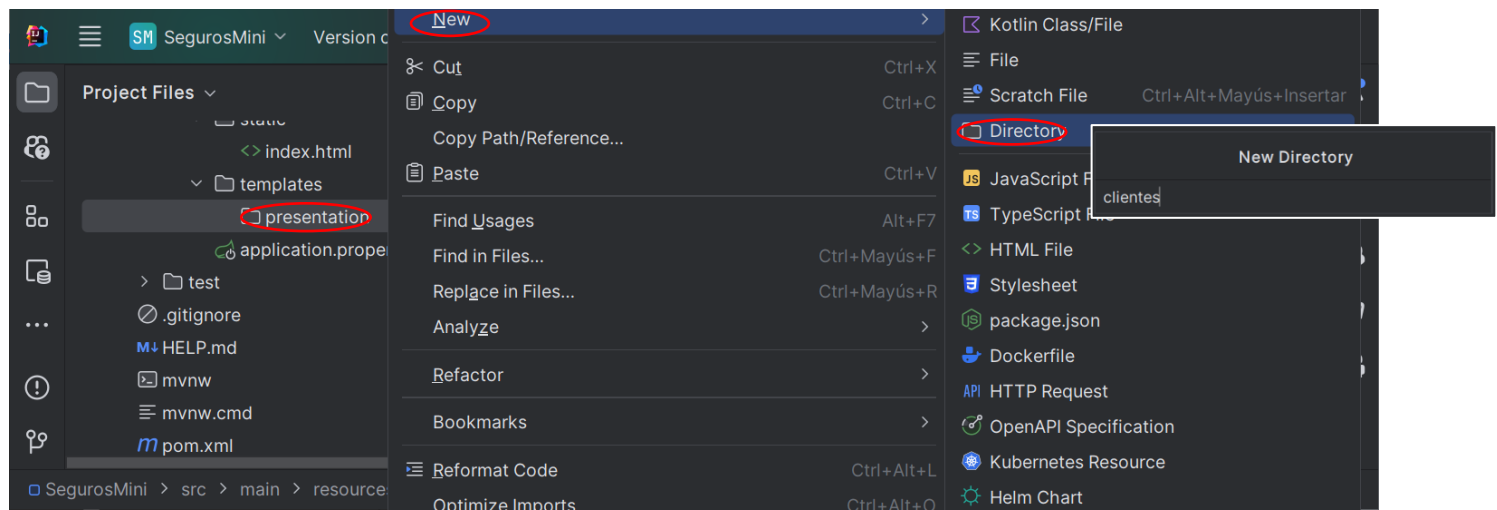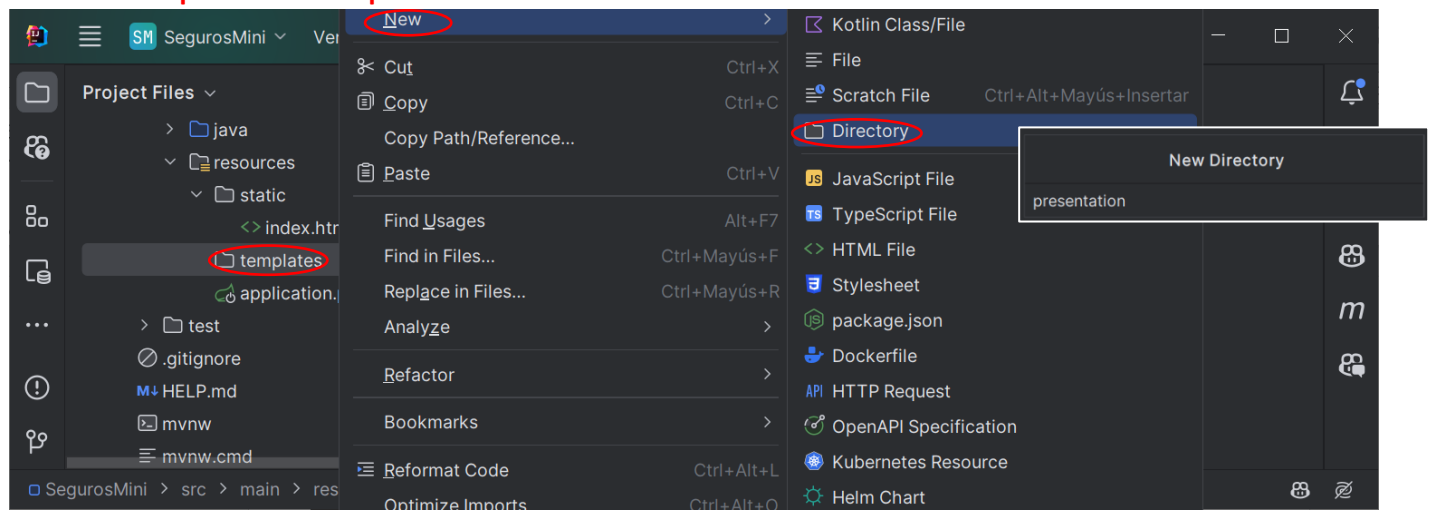


```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4 <title>Seguros Spring</title>
5 <style>
6     table {border-collapse: collapse; width: 100%;}
7     th, td { padding: 8px; text-align: left; border-bottom: 1px solid gray;}
8     tr:hover {background-color:#f5f5f5;}
9 </style>
10 </head>
11 <body>
12 <header>Clientes</header>
13 <div class="centered">
14 <table style="border:1px solid blue">
15 <tr> <th>Id</th> <th>Nombre</th> <th>...</th> </tr>
16 <tr th:each="c: ${clientes}">
17 <td th:text="${c.getIdentificacion()}" />
18 <td th:text="${c.getNombre()}" />
19 <td><a th:href="@{presentation/polizas/show(identificacion=${c.getIdentificacion()})}"> ... </a></td>
20 </tr>
21 </table>
22 </div>
23 <footer>My Company</footer>
24 </body>
25 </html>
```

Ver resultado

