


/home/matty/Документы
/Qt/qt-proj/MattyNotes/constants.cpp

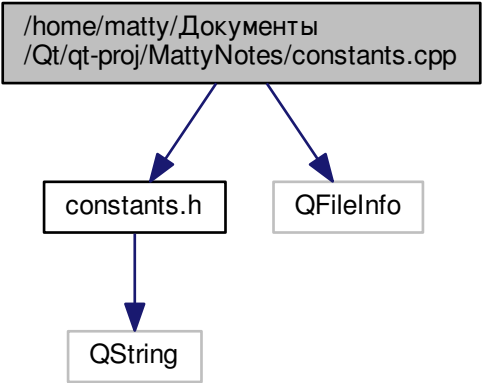

```
graph TD; A["/home/matty/Документы  
/Qt/qt-proj/MattyNotes/constants.cpp"] --> B["constants.h"]; A --> C["QFileInfo"]; B --> D["QString"];
```

The diagram illustrates the dependencies of the file `constants.cpp`. At the top, a grey box contains the file's path: `/home/matty/Документы` and `/Qt/qt-proj/MattyNotes/constants.cpp`. Two blue arrows point from this box to `constants.h` and `QFileInfo`. A third blue arrow points from `constants.h` to `QString`. The boxes for `constants.h` and `QString` have black borders, while the box for `QFileInfo` has a grey border.

constants.h

QFileInfo

QString