

HousePricesPart0

October 14, 2021

1 House Prices: Advanced Regression Techniques (Part 0 - Exploration)

In this notebook we apply linear regression to some data from a Kaggle. The notebook is divided into two sections. First we perform some in-depth data exploration and pre-processing, next we build the actual models.

<https://www.kaggle.com/c/house-prices-advanced-regression-techniques>

This notebook is derived from other existing notebooks by other authors, like,

- <https://www.kaggle.com/serigne/stacked-regressions-top-4-on-leaderboard>

First we import some of the libraries we will need:

```
[ ]: import pandas as pd
import numpy as np
import seaborn as sns
import matplotlib

import matplotlib.pyplot as plt
from scipy import stats
from scipy.stats import skew
from scipy.stats import norm
from scipy.stats.stats import pearsonr

%config InlineBackend.figure_format = 'retina' #set 'png' here when working on_
↪notebook
%matplotlib inline
```

```
[ ]: all_data = pd.read_csv("HousePricesInputVariables.csv")
```

1.1 Missing Values

Let's check how many missing values are in the data set and how can we deal with them.


```
[ ]: all_data_na = (all_data.isnull().sum() / len(all_data)) * 100
all_data_na = all_data_na.drop(all_data_na[all_data_na == 0].index).
↪sort_values(ascending=False)[:30]
missing_data = pd.DataFrame({'Missing Ratio' :all_data_na})
```

```
missing_data.head(10)
```

```
[ ]:      Missing Ratio
PoolQC      99.657417
MiscFeature  96.402878
Alley       93.216855
Fence       80.438506
FireplaceQu  48.646797
LotFrontage  16.649538
GarageFinish  5.447071
GarageYrBlt   5.447071
GarageQual    5.447071
GarageCond    5.447071
```

```
[ ]: f, ax = plt.subplots(figsize=(8,6))
plt.xticks(rotation='90')
sns.barplot(x=all_data_na.index[:10], y=all_data_na[:10])
plt.xlabel('Features', fontsize=15)
plt.ylabel('Percent of Missing Values', fontsize=15)
plt.title('Top Variables for % of Missing Values', fontsize=15)
```

```
[ ]: Text(0.5, 1.0, 'Top Variables for % of Missing Values')
```

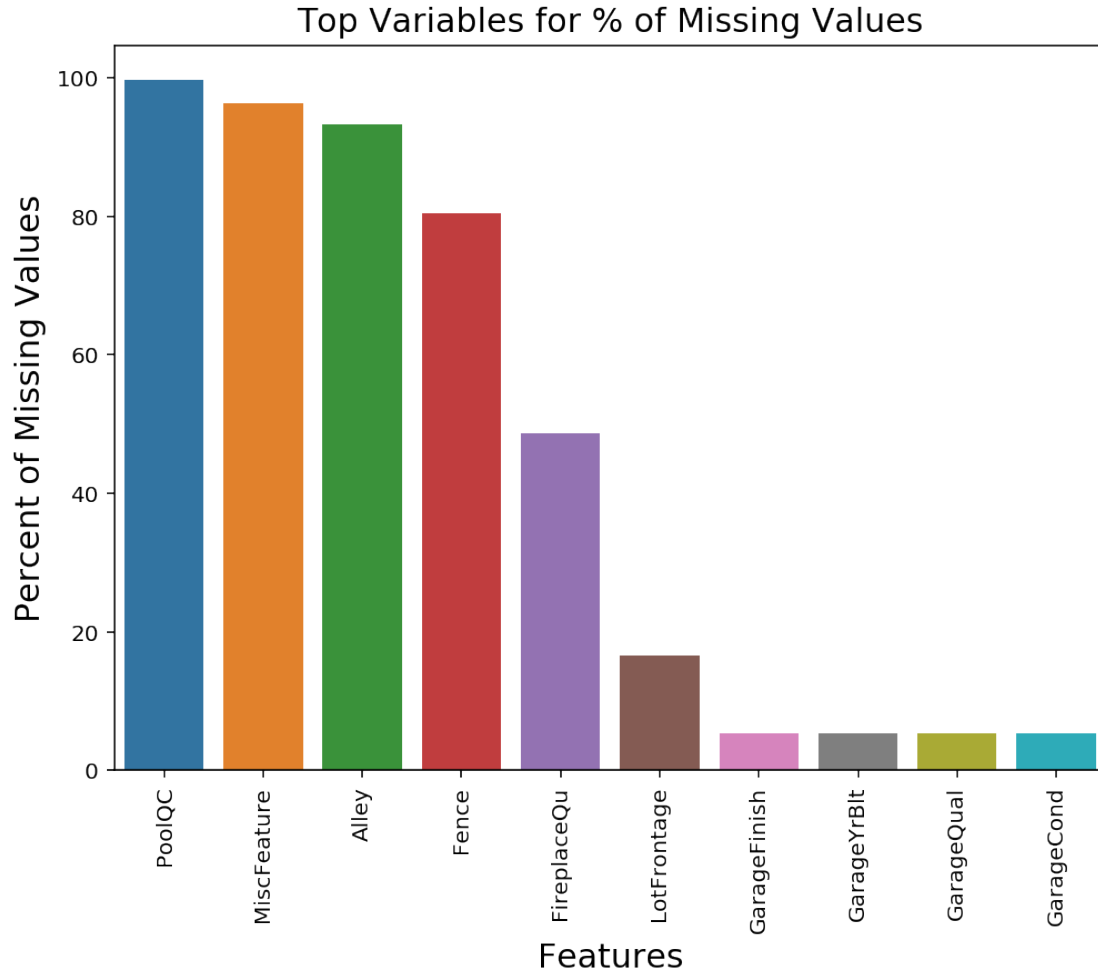

We note that some of the attributes have the vast majority of the values set to unknown. If we apply imputation without any knowledge about the meaning of what a missing value represent, we would end up with attributes set almost completely to the same value. So they would be almost useless.

How can we deal with all these missing values? First, we need to ask the domain expert whether some missing values have a special meaning. We actually don't have a domain expert but we have the data description in which we find out that

- Alley: Type of alley access to property, NA means “No alley access”
- BsmtCond: Evaluates the general condition of the basement, NA means “No Basement”
- BsmtExposure: Refers to walkout or garden level walls, NA means “No Basement”
- BsmtFinType1: Rating of basement finished area, NA means “No Basement”
- BsmtFinType2: Rating of basement finished area (if multiple types), NA means “No Basement”
- FireplaceQu: Fireplace quality, NA means “No Fireplace”
- Functional: data description says NA means typical
- GarageType: Garage location, NA means “No Garage”

- GarageFinish: Interior finish of the garage, NA means “No Garage”
- GarageQual: Garage quality, NA means “No Garage”
- GarageCond: Garage condition, NA means “No Garage”
- PoolQC: Pool quality, NA means “No Pool”
- Fence: Fence quality, NA means “No Fence”
- MiscFeature: Miscellaneous feature not covered in other categories, NA means “None”

Accordingly, we need to keep this information into account when dealing with the missing values of these variables.

1.2 Impute Categorical Values with Known Meaning

Let's impute the missing values for these attributes

```
[ ]: all_data["Alley"] = all_data["Alley"].fillna("None")

# for all basement features a missing value means that there is no basement
for col in ('BsmtQual', 'BsmtCond', 'BsmtExposure', 'BsmtFinType1',
            'BsmtFinType2'):
    all_data[col] = all_data[col].fillna('None')

all_data["FireplaceQu"] = all_data["FireplaceQu"].fillna("None")

all_data["Functional"] = all_data["Functional"].fillna("Typ")

for col in ('GarageType', 'GarageFinish', 'GarageQual', 'GarageCond'):
    all_data[col] = all_data[col].fillna('None')

all_data["PoolQC"] = all_data["PoolQC"].fillna("None")

all_data["Fence"] = all_data["Fence"].fillna("None")

all_data["MiscFeature"] = all_data["MiscFeature"].fillna("None")
```

We can also deal with other numerical variables and use some heuristic to impute them. For instance, for **LotFrontage**, since the area of each street connected to the house property most likely have a similar area to other houses in its neighborhood, we can fill in missing values by the median LotFrontage of the neighborhood.

```
[ ]: all_data["LotFrontage"] = all_data.groupby("Neighborhood")["LotFrontage"].
    transform(
        lambda x: x.fillna(x.median()))
```

We can also set the garage year, area and number of cars to zero for missing values since this means that there is no garage.

```
[ ]: for col in ('GarageYrBlt', 'GarageArea', 'GarageCars'):
    all_data[col] = all_data[col].fillna(0)
```

And we can do the same for basement measures.

```
[ ]: for col in ('BsmtFinSF1', 'BsmtFinSF2', 'BsmtUnfSF', 'TotalBsmtSF',
    ↳ 'BsmtFullBath', 'BsmtHalfBath'):
    all_data[col] = all_data[col].fillna(0)
```

When **MasVnrArea** and **MasVnrType** are missing, it most likely means no masonry veneer for these houses. We can fill 0 for the area and None for the type.

```
[ ]: all_data["MasVnrType"] = all_data["MasVnrType"].fillna("None")
    all_data["MasVnrArea"] = all_data["MasVnrArea"].fillna(0)
```

For **MSZoning** (the general zoning classification), 'RL' is by far the most common value. So we can fill in missing values with 'RL'

```
[ ]: all_data['MSZoning'] = all_data['MSZoning'].fillna(all_data['MSZoning'].
    ↳ mode()[0])
```

Utilities has all records are "AllPub", except for one "NoSeWa" and 2 missing values. Since the house with 'NoSewa' is in the training set, this feature won't help to predict labels in the test set. We can then safely remove it.

```
[ ]: all_data = all_data.drop(['Utilities'], axis=1)
```

KitchenQual has only one missing value, and same as Electrical, we set it to the most frequent values (that is 'TA')

```
[ ]: all_data['KitchenQual'] = all_data['KitchenQual'].
    ↳ fillna(all_data['KitchenQual'].mode()[0])
```

Exterior1st and **Exterior2nd** have only one missing value. We will use the mode (the most common value)

```
[ ]: all_data['Exterior1st'] = all_data['Exterior1st'].
    ↳ fillna(all_data['Exterior1st'].mode()[0])
    all_data['Exterior2nd'] = all_data['Exterior2nd'].
    ↳ fillna(all_data['Exterior2nd'].mode()[0])
```

For **SaleType** we can use the most frequent value (the mode) which correspond to "WD"

```
[ ]: all_data['SaleType'] = all_data['SaleType'].fillna(all_data['SaleType'].
    ↳ mode()[0])
```

For **MSSubClass** a missing value most likely means No building class. We can replace missing values with None

```
[ ]: all_data['MSSubClass'] = all_data['MSSubClass'].fillna("None")
```

Electrical has one missing value. Since this feature has mostly 'SBrkr', we can set that for the missing value.

```
[ ]: all_data['Electrical'] = all_data['Electrical'].fillna(all_data['Electrical'].
    ↳ mode()[0])
```

Any more missing?

```
[ ]: all_data_na = (all_data.isnull().sum() / len(all_data)) * 100
all_data_na = all_data_na.drop(all_data_na[all_data_na == 0].index).
    ↳sort_values(ascending=False)[:30]
missing_data = pd.DataFrame({'Missing Ratio' :all_data_na})
missing_data.head(10)
```

```
[ ]: Empty DataFrame
Columns: [Missing Ratio]
Index: []
```

No more missing values! What would have happened if we did not use or did not have the data description?

1.3 Distribution of Numerical Variables

We now explore the distribution of numerical variables. As we did for the class, we will apply the log1p function to all the skewed numerical variables.

```
[ ]: # take the numerical features
numeric_feats = all_data.dtypes[all_data.dtypes != "object"].index

# compute the skewness but only for non missing variables (we already imputed
    ↳them but just in case ...)
skewed_feats = all_data[numeric_feats].apply(lambda x: skew(x.dropna()))


skewness = pd.DataFrame({"Variable":skewed_feats.index, "Skewness":skewed_feats.
    ↳data})
# select the variables with a skewness above a certain threshold
```

```
/anaconda3/lib/python3.7/site-packages/ipykernel_launcher.py:7: FutureWarning:
Series.data is deprecated and will be removed in a future version
import sys
```

```
[ ]: skewness = skewness.sort_values('Skewness', ascending=[0])

f, ax = plt.subplots(figsize=(8,6))
plt.xticks(rotation='90')
sns.barplot(x=skewness['Variable'], y=skewness['Skewness'])
plt.ylim(0,25)
plt.xlabel('Numerical Variables', fontsize=15)
plt.ylabel('Skewness', fontsize=15)
plt.title('', fontsize=15)
```

```
[ ]: Text(0.5, 1.0, '')
```

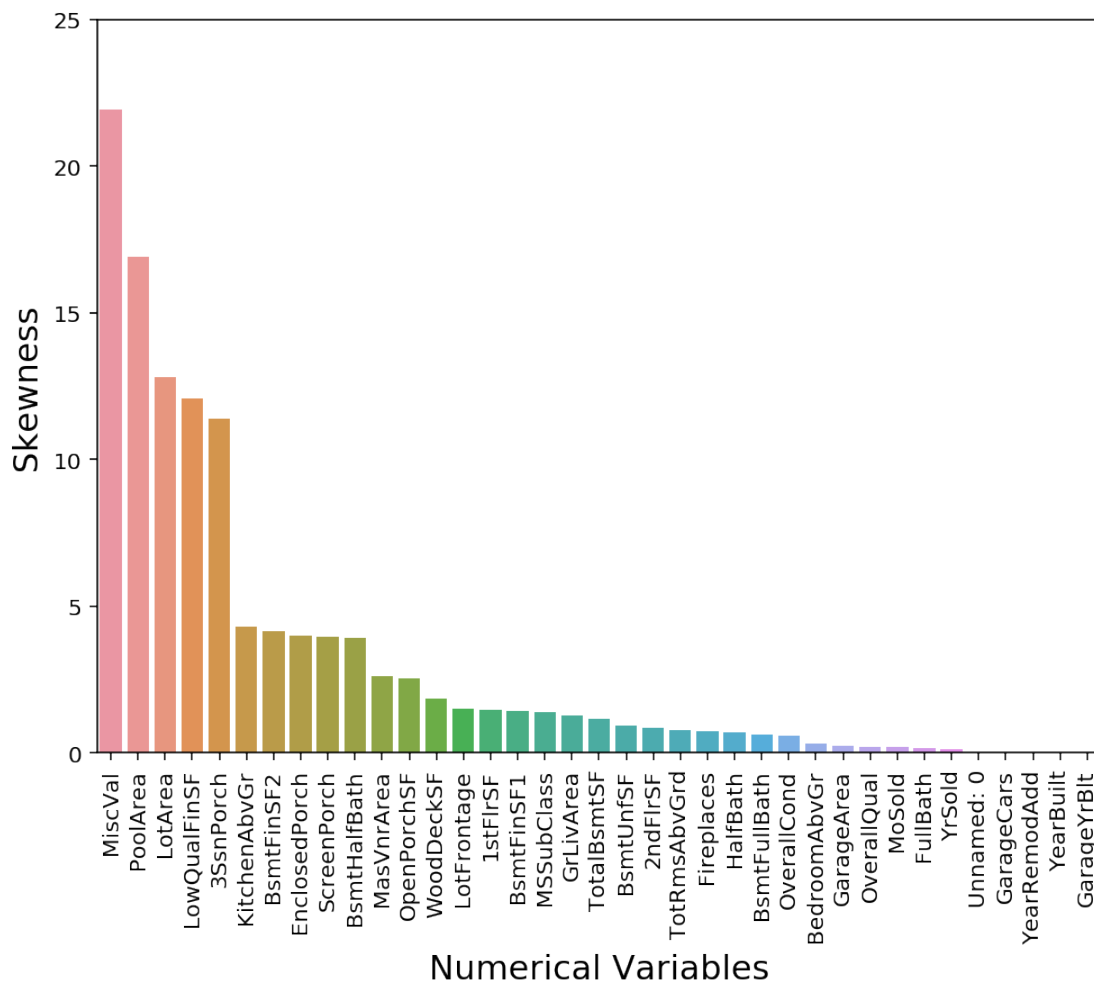

Let's apply the logarithmic transformation to all the variables with a skewness above a certain threshold (0.75). Then, replot the skewness of attributes. Note that to have a fair comparison the two plots should have the same scale.

```
[ ]: skewed_feats = skewed_feats[skewed_feats > 0.75]
all_data[skewed_feats.index] = np.log1p(all_data[skewed_feats.index])

[ ]: # compute the skewness but only for non missing variables (we already imputed
      ↳ them but just in case ...)
skewed_feats = all_data[numeric_feats].apply(lambda x: skew(x.dropna()))
skewness_new = pd.DataFrame({"Variable":skewed_feats.index, "Skewness":
      ↳skewed_feats.data})
# select the variables with a skewness above a certain threshold


skewness_new = skewness_new.sort_values('Skewness', ascending=[0])
```

```
f, ax = plt.subplots(figsize=(8,6))
plt.xticks(rotation='90')
sns.barplot(x=skewness_new['Variable'], y=skewness_new['Skewness'])
plt.ylim(0,25)
plt.xlabel('Numerical Variables', fontsize=15)
plt.ylabel('Skewness', fontsize=15)
plt.title('', fontsize=15)
```

/anaconda3/lib/python3.7/site-packages/ipykernel_launcher.py:3: FutureWarning: Series.data is deprecated and will be removed in a future version

This is separate from the ipykernel package so we can avoid doing imports until

```
[ ]: Text(0.5, 1.0, '')
```

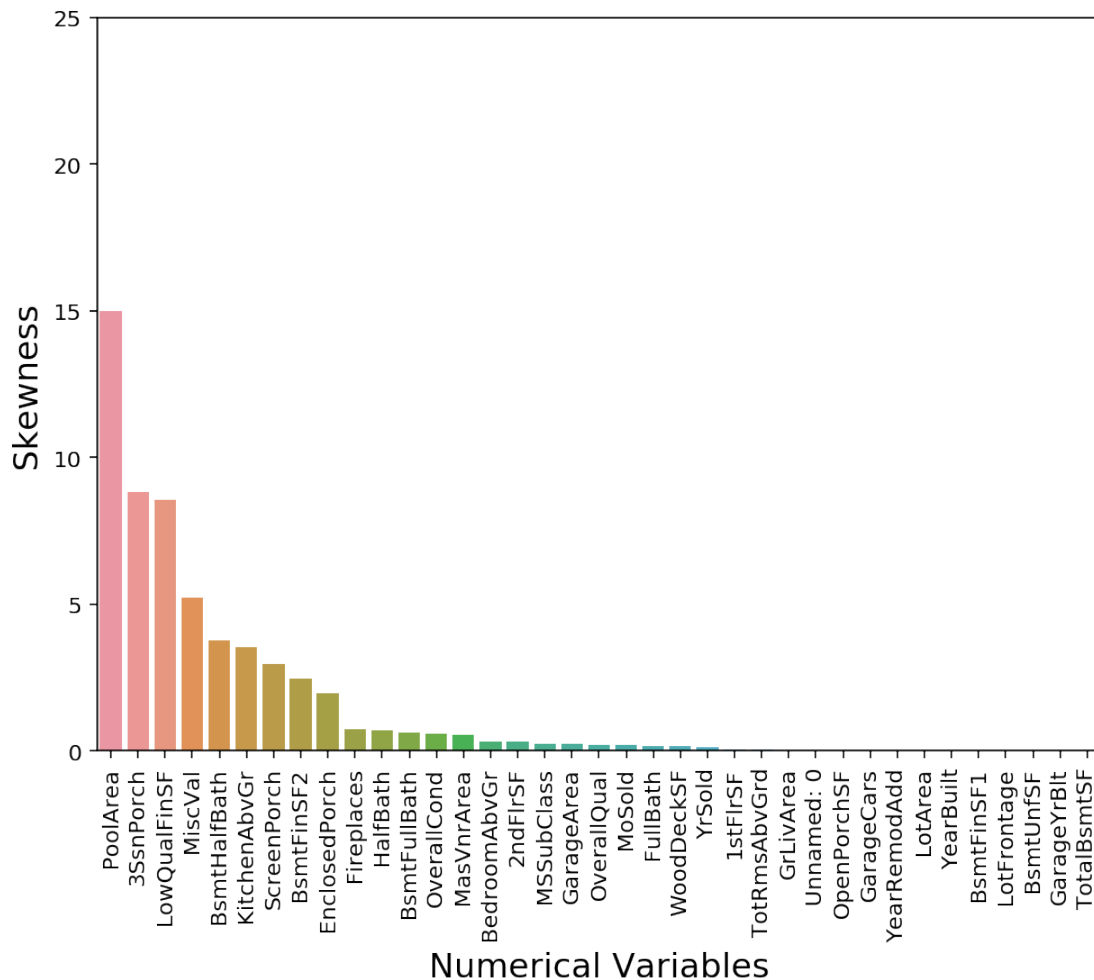


1.4 Correlation Analysis

We can finally perform some correlation analysis.


```
[ ]: corrmat = all_data.corr()
plt.subplots(figsize=(12,9))
sns.heatmap(corrmat, vmax=0.9, square=True)
```

```
[ ]: <matplotlib.axes._subplots.AxesSubplot at 0x1a181b0128>
```

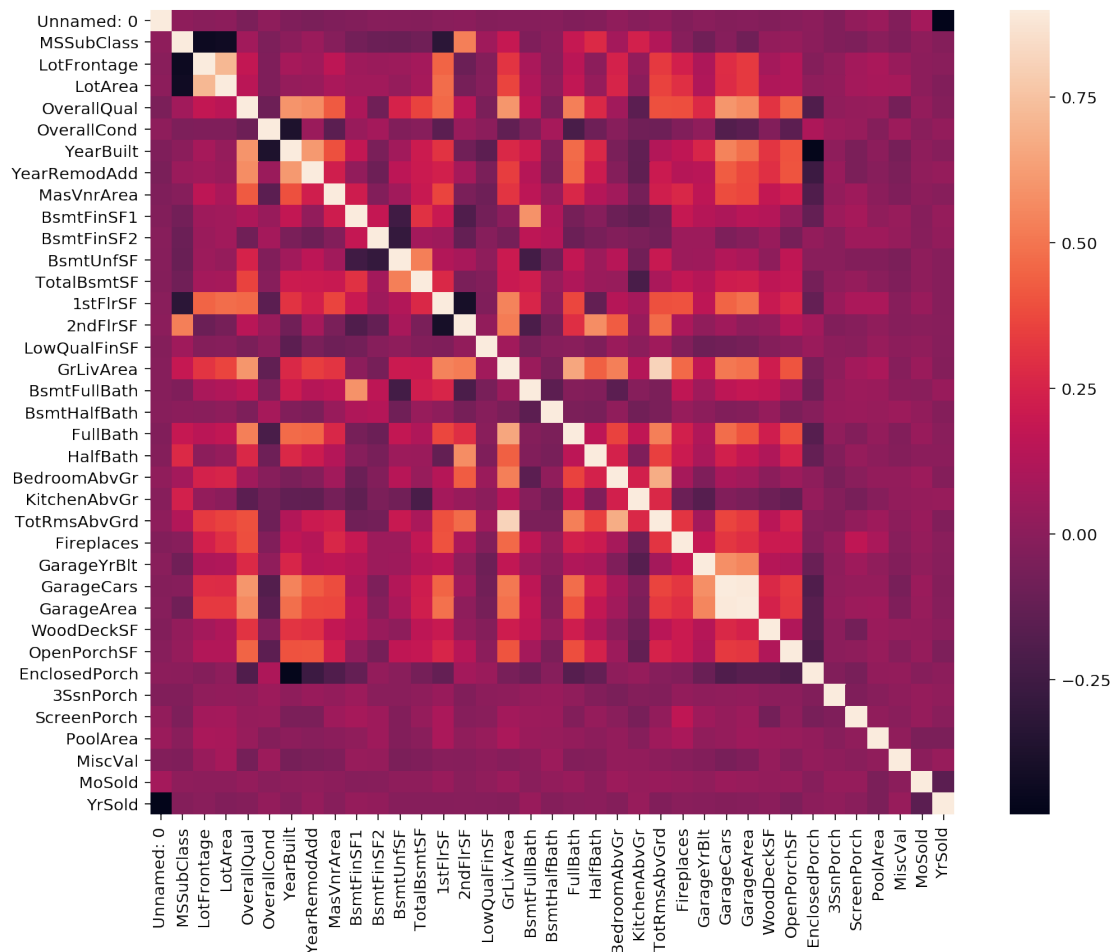

```
[ ]: import seaborn as sns
sns.clustermap(all_data.corr(), square=True, annot=False, cmap="Blues",
               linewidths=.75, figsize=(6, 6))
```

```
[ ]: <seaborn.matrix.ClusterGrid at 0x1a1863bbe0>
```

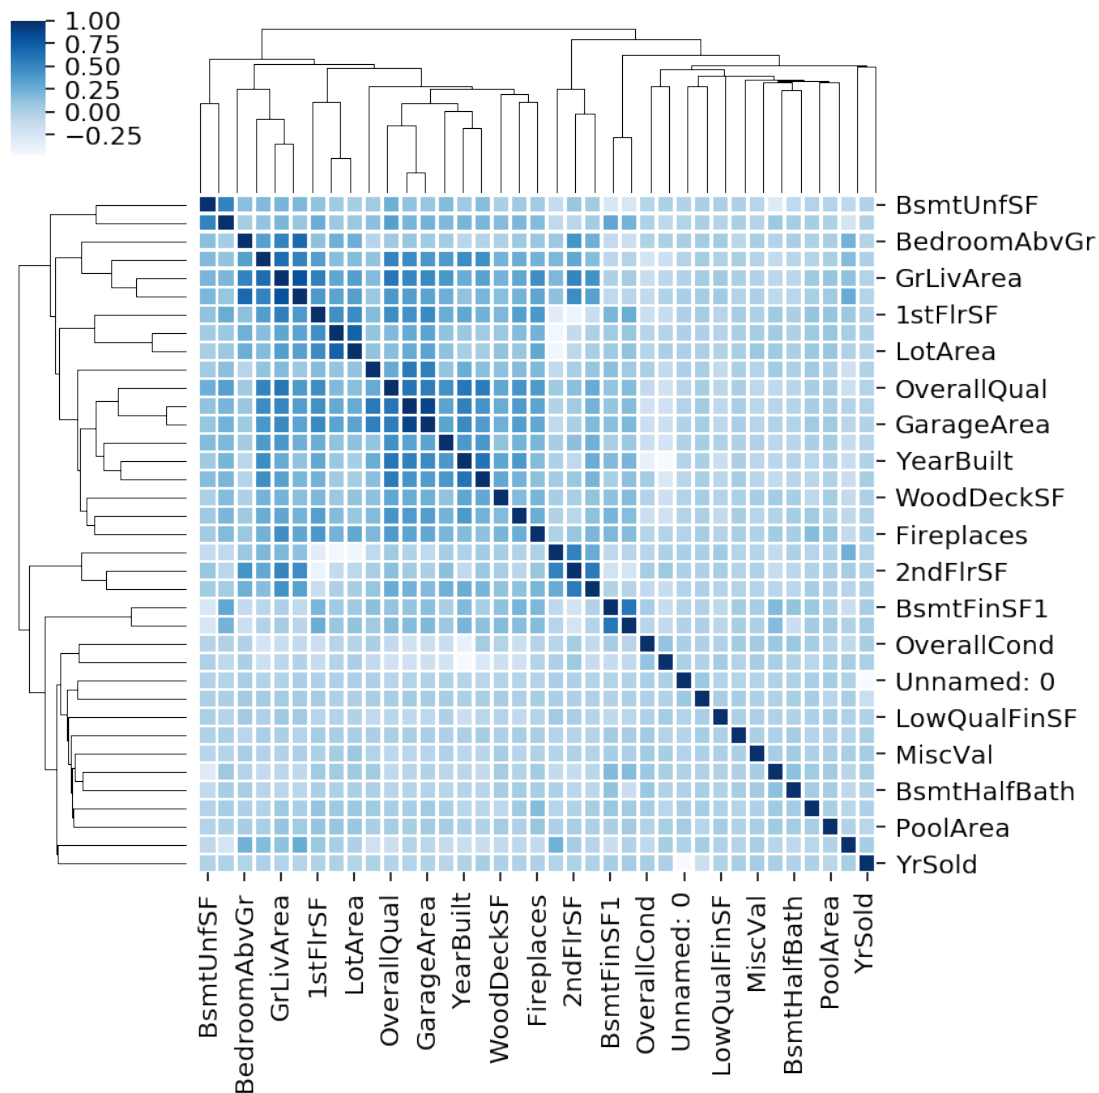

Or we can further analyze the distribution of some variables.

1.5 One Hot Encoding

We now generate the one hot encoding for all the categorical variables. Pandas has the function `get_dummies` that generates the binary variables for all the categorical variables

```
[ ]: print("Number of Variables before OHE: "+str(all_data.shape[1]))
```

Number of Variables before OHE: 79

```
[ ]: all_data = pd.get_dummies(all_data)
```

```
[ ]: print("Number of Variables after OHE: "+str(all_data.shape[1]))
```

Number of Variables after OHE: 301

1.6 Saving the Preprocessed Data

We create the matrices to be used for computing the models and also save the cleaned data so that we can avoid repeating the process.

```
[ ]: all_data.to_csv('HousePricesInputVariablesCleaned.csv')
```