Documentation

Création de la base de données

Avec la commande Laravel : php composer.phar create-project "laravel/laravel" gestion-etudiants

```
C:\Users\venom\Documents\dossier de chaque matière\laravel>php composer.phar create-project "laravel/laravel" gestion-et
udiants
```

Se connecter au serveur : php artisan serve

```
PS C:\Users\venom\Documents\dossier de chaque matière\laravel\gestion-etudiants> php artisan migrate

  INFO  Running migrations.

  0001_01_01_000000_create_users_table ..................................... 219.43ms DONE
  0001_01_01_000001_create_cache_table ..................................... 123.15ms DONE
  0001_01_01_000002_create_jobs_table ...................................... 187.66ms DONE

PS C:\Users\venom\Documents\dossier de chaque matière\laravel\gestion-etudiants>
```

Création de la migration

```
  INFO  Migration [C:\Users\venom\Documents\dossier de chaque matière\laravel\gestion-etudiants\database\migrations\202
6_01_26_150138_create__etudiants.php] created successfully.
```

Création du model étudiant

```
C:\Users\venom\Documents\dossier de chaque matière\laravel\gestion-etudiants>php artisan make:model Etudiants

  INFO  Model [C:\Users\venom\Documents\dossier de chaque matière\laravel\gestion-etudiants\app\Models\Etudiants.php] c
reated successfully.
```

Controller

Dockers dans image

```
C:\Users\venom\Documents\dossier de chaque matière\laravel\gestion-etudiants>docker exec -it 3c6a bash
bash-5.1# ls -a
.    .dockerenv  bin   dev                          etc   lib    media  opt   root  sbin  sys  usr
..   afs         boot  docker-entrypoint-initdb.d  home  lib64  mnt    proc  run   srv   tmp  var
bash-5.1# mysql -u root -p
Enter password:
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 38
Server version: 9.6.0 MySQL Community Server - GPL

Copyright (c) 2000, 2026, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> show databases
```

Le code sur la migration laravel

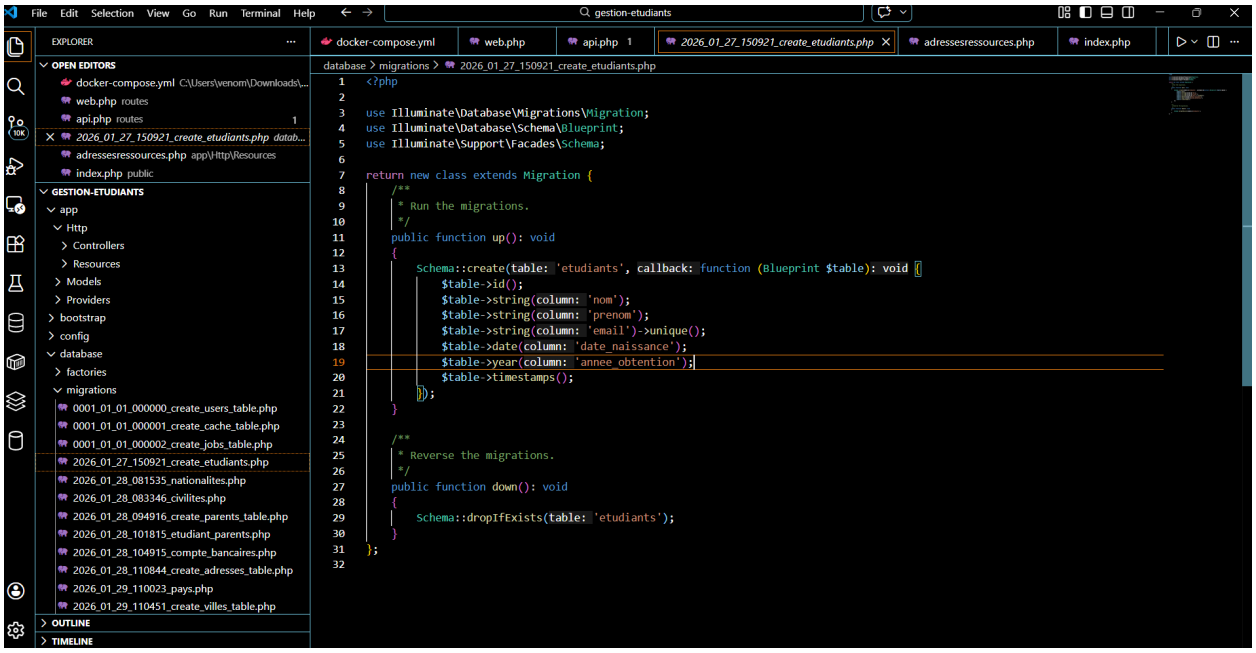

Le code du model en laravel

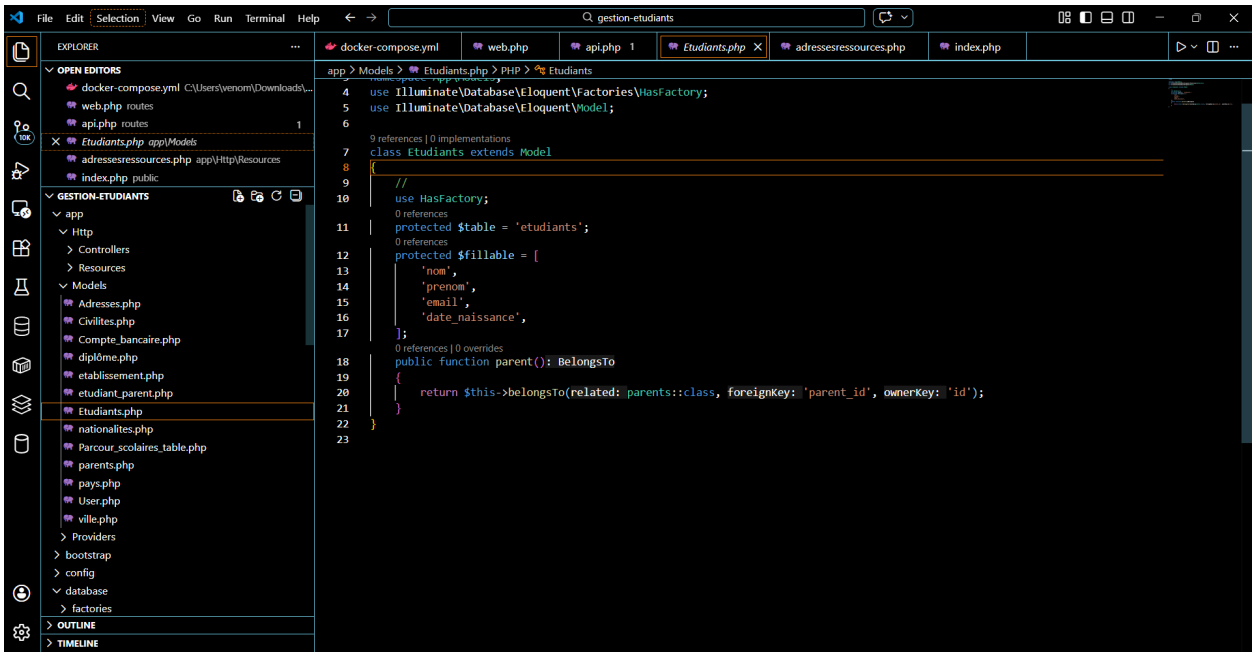

Le code du controller en laravel

```php
<?php

namespace App\Http\Controllers;

use Illuminate\Http\Request;

class etudiant_parents extends Controller
{
    //
    public function index(): View
    {
        return view(view: 'etudiant_parents');
    }
    public function store(Request $request): RedirectResponse
    {
        // Validate the incoming request data
        $validatedData = $request->validate(rules: [
            'etudiant_id' => 'required|exists:etudiants,id',
            'parent_id' => 'required|exists:parents,id',
        ]);

        // Create a new etudiant_parent record in the database
        $etudiantParent = new etudiant_parents();
        $etudiantParent->etudiant_id = $validatedData['etudiant_id'];
        $etudiantParent->parent_id = $validatedData['parent_id'];
        $etudiantParent->save();

        // Redirect back with a success message
        return redirect()->back()->with(key: 'success', value: 'Etudiant-Parent association created successfully!');
    }
    public function show($id): View
    {
        $etudiantParent = etudiant_parents::findOrFail($id);
```

Et le code route

```php
<?php


use Illuminate\Support\Facades\Route;

Route::get(uri: '/', action: function (): View {
    return view(view: 'welcome');
});

Route::get(uri: '/etudiant/index', action: function (): View {
    return view(view: 'etudiant index');
});
route::get(uri: '/edit', action: function (): View {
    return view(view: 'edit');
});
route::get(uri: '/show', action: function (): View {
    return view(view: 'show');
});

Route::get(uri: '/parent', action: function (Request $request): mixed {
    return $request->parent();
})->middleware(middleware: 'auth:sanctum');
```

Etape pour l’api rest