

MauLink · Design System

Neutral gray system · single low-saturation indigo accent · compact desktop density

Buttons

Connect

Test Connection

 Refresh

Delete

+ Add Server

Form Controls

Host

192.168.1.20

Host

192.168.1.300

Enter a valid host address

Password

.....

Status

- Connected
- Connecting
- Disconnected
- Failed

Terminal Tabs

Terminal 1

×

Terminal 2

×

+

Server Items

Web-01
192.168.1.20

Web-01
192.168.1.20

Web-01
192.168.1.20

Selection Controls

Password

SSH Key

☒ Remember securely

☐ Also delete saved credentials

Toast

 File upload complete

Undo

 Connection lost

Undo

Quick Monitor Metric

CPU

24%



Memory

39%



Context Menu

MauLink · 设计系统

中性灰系统 · 单一低饱和靛蓝色强调色 · 紧凑桌面密度

MauLink

Search servers or hosts...

+ Add Server

Search

Production2

Web-01192.168.1.20

DB-01192.168.1.21

Development2

Dev-01dev.example.com

Staging-0110.0.0.14

+ Add Server

Web-01

root@192.168.1.20

Connected

ReconnectDisconnect...

Terminal 1 x Terminal 2 x +

Focus ...

```
root@web-01:/var/www/app$ ls -la
total 48
drwxr-xr-x  8 root root  4096 Sep 28 09:12 .
drwxr-xr-x  3 root root  4096 Sep 20 11:03 ..
-rw-r--r--  1 root root  1220 Sep 20 11:03 .env
drwxr-xr-x 118 root root  4096 Sep 27 21:40 node_modules
-rw-r--r--  1 root root  2154 Sep 28 08:59 package.json
-rwxr-xr-x  1 root root  4830 Sep 27 18:20 deploy.sh
root@web-01:/var/www/app$ ./deploy.sh --env production
▲ Building assets ...
[ ok ] Dependencies installed
→ Uploading bundle (14.2 MB) ...
[ ok ] Release 2.14.0 activated
✓ Deployed in 42.3s
root@web-01:/var/www/app$
```

< ↑ / opt > app

Upload

Name	Size	Modified
app	—	Sep 28 09:12
node_modules	—	Sep 27 21:40
package.json	2.1 KB	Sep 28 08:59
deploy.sh	4.8 KB	Sep 27 18:20
app.tar.gz	14.2 MB	Sep 28 09:10
.env	1.2 KB	Sep 20 11:03

Connected192.168.1.20:22 · SSH · 18ms

Uploading 2 files · 42%View

Search

No servers yet

+ Add Server



MauLink

Connect your first server.
Use the terminal, manage files and check server status in one workspace.

+ Add Server

[Learn about MauLink](#)

Add Server

×

Connect to a new SSH server

Server Name (optional)

e.g. Production Web

Host

192.168.1.10

Port

22

Username

root

Authentication

Password

SSH Key

Password

.....

👁

🔒

 Stored securely in the system keychain / Windows Credential Manager

> Advanced

Jump Host · Proxy · Keep Alive

Test Connection

Connect

Search

Production2

Web-01192.168.1.20

DB-01192.168.1.21

Development2

Dev-01dev.example.com

Staging-0110.0.0.14

Monitor

Web-01 • root@192.168.1.20 • Live

Live

1h

24h



CPU

24%


8 cores • load 0.42



Memory

6.2 / 16 GB


39% used • 9.8 GB available



Disk

61%

/ on 512 GB • 312 GB free



Network

2.4 MB/s ↓

↑ 380 KB/s • latency 18 ms



Load

0.42

0.38 • 0.31 (1 / 5 / 15m)




Uptime

42d 7h 18m

since Aug 16, 21:40

CPU History Last 60 min

Usage 24% now

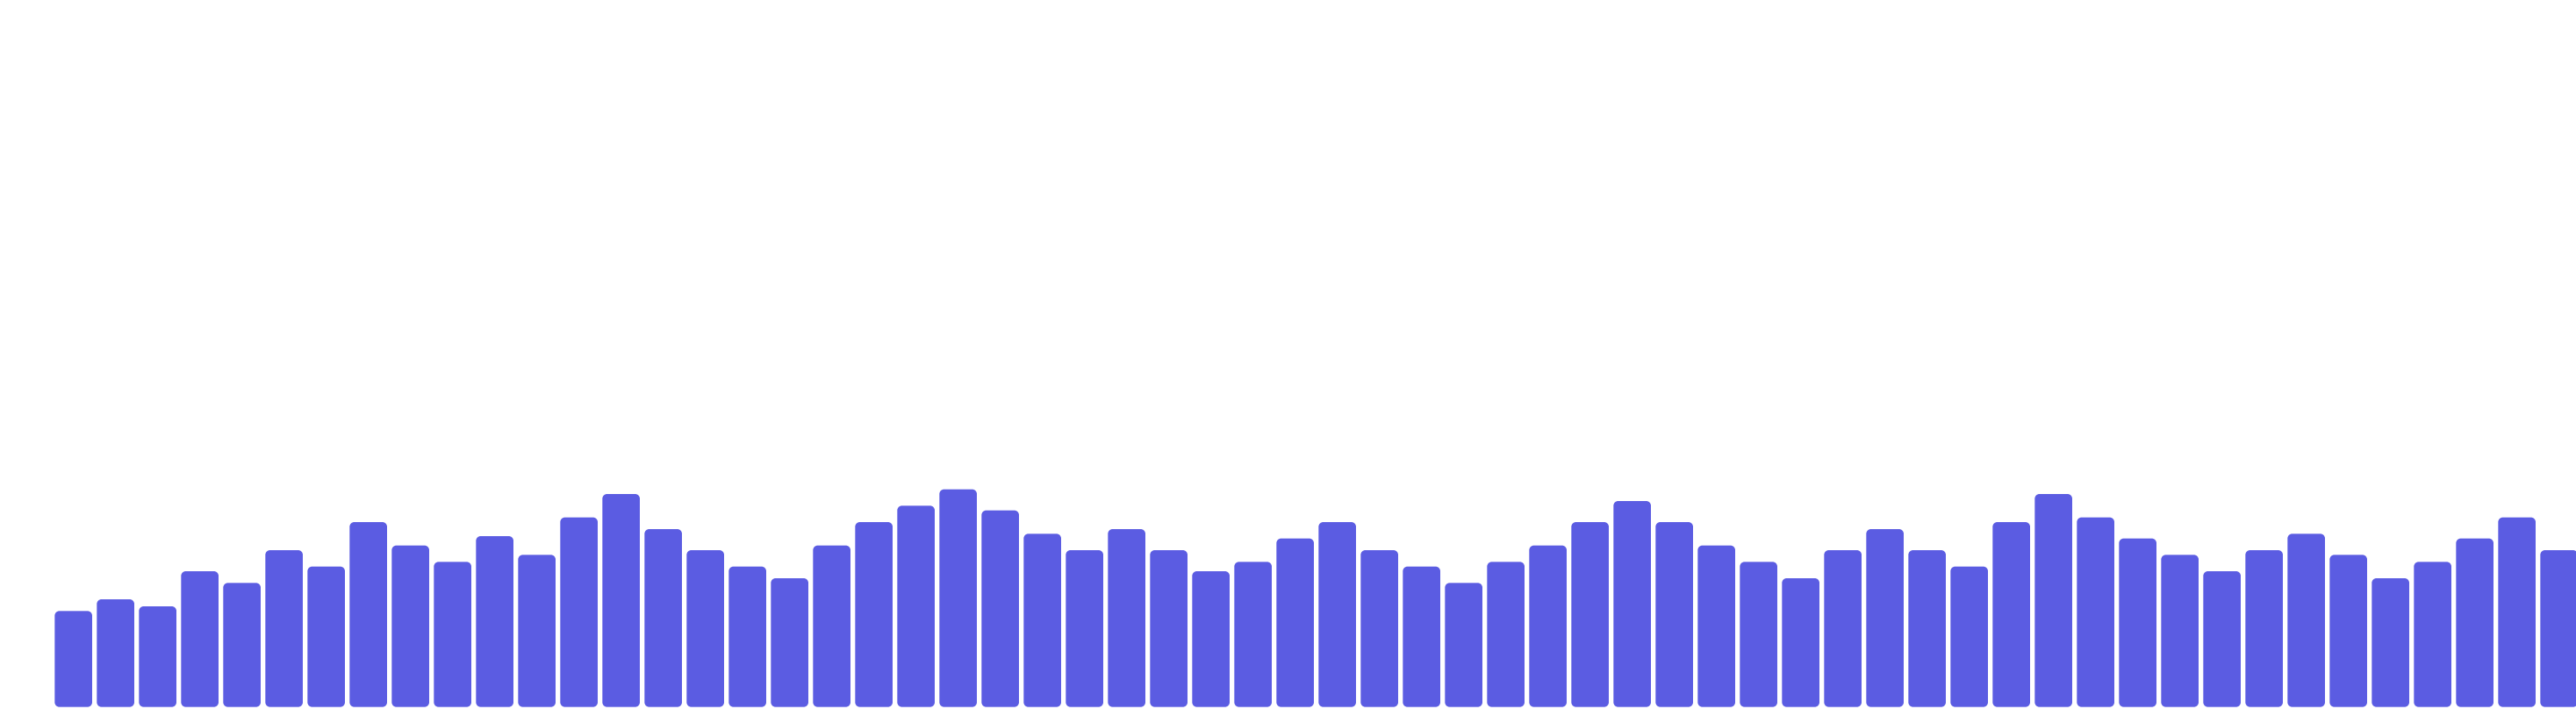

60m ago

45m

30m

15m

now

+ Add Server

Settings

- General
- Appearance
- Terminal
- Language

Appearance

Choose the MauLink theme. Follows system appearance by default.

Theme

☒ System

☐ Light

☐ Dark

Language

Applies immediately. The interface reserves space for longer or shorter text.

☒ Simplified Chinese

☐ English

MauLink

Search servers or hosts...

+ Add Server

Search

Production2

Web-01192.168.1.20

DB-01192.168.1.21

Development2

Dev-01dev.example.com

Staging-0110.0.0.14

Files

Web-01 · SFTP · /opt/app

<

>

/

>

opt

>

app

Refresh

Name	Size	Modified
app	—	Sep 28 09:12
node_modules	—	Sep 27 21:40
public	—	Sep 20 11:03
src	—	Sep 27 18:20
package.json	2.1 KB	Sep 28 08:59
deploy.sh	4.8 KB	Sep 27 18:20
app.tar.gz	14.2 MB	Sep 28 09:10
.env	1.2 KB	Sep 20 11:03

Download

Rename

Copy Path

Delete

Transfers2 active

Clear completed

File	Progress	Speed	Status
app.tar.gz	72%	14 MB/s	Uploading
config.yml	100%	—	Completed
backup.sql	—	—	Failed · timeout



First connection to this server



MauLink is connecting to Web-01 for the first time

First connection to this server. Confirm its identity to continue.

192.168.1.20

ED25519

SHA256:j8Kd2Qp0ZsV4nR7tBxW1yEfHcL9aU3oPq5N6rSdT0w

Once saved, MauLink will warn you if this server's identity changes later.

[What is a server fingerprint?](#)

Cancel

Trust & Connect



Can't connect to Web-01



192.168.1.20:22

Could not establish an SSH connection.

Possible causes:

- Server is not running
- SSH service is not running
- Port is unreachable
- Network connection issue

[^ View details](#)

Connection refused

ECONNREFUSED 192.168.1.20:22

Retry

Edit connection



Web-01 requires credentials



Password

.....

☒ Remember securely

Stored securely in the system keychain / Windows Credential Manager

Cancel

Connect



Delete Web-01?



The server configuration will be removed from MauLink. This action cannot be undone.

☐ Also delete the saved credentials

Cancel

Delete server



Server identity changed



The saved server fingerprint doesn't match the current server. This could be caused by a server reinstall or an SSH configuration change, or it may indicate a security risk.

Previous

SHA256: j8Kd2Qp0ZsV4nR7tBxW1yEfHcL9aU3oPq5N6rSdT0w

Current

SHA256: 3bF9wQ1sLmT6yUcV2nHpXeK8aRdG4oZjM5rN0tS7qBv

Advanced: Update saved fingerprint

Continue

Cancel

Edit Server



Update connection settings for Production Web

Server Name (optional)

Host

Port

Username

Authentication

Password

SSH Key

Password

.....

👁

🔒 Leave empty to keep the saved credential

Delete Server

Remove this server and its configuration from MauLink

Delete

Cancel

Save Changes

MauLink

Web-01

root@192.168.1.20

Exit Focus

Terminal 1 × Terminal 2 × nginx.log × deploy × +

Find

```
root@web-01:/var/www/app$ git pull origin main
remote: Enumerating objects: 42, done.
remote: Counting objects: 100% (42/42), done.
remote: Compressing objects: 100% (28/28), done.
Unpacking objects: 100% (28/28), done.
From github.com:acme/web-app
   a1b2c3d..e4f5a6b  main       → origin/main
Updating a1b2c3d..e4f5a6b
Fast-forward
   src/api/router.ts      | 24 ++++++++-----
   src/components/Shell.tsx | 12 ++++++--
   2 files changed, 31 insertions(+), 5 deletions(-)
root@web-01:/var/www/app$ npm run build
▲ Next.js 15.1.0
   Creating an optimized production build ...
✓ Compiled successfully in 18.4s
   Collecting page data ...
   Generating static pages (0/12) ...
✓ Generating static pages (12/12)
   Finalizing page optimization ...

Route (app)      Size      First Load JS
┌ ○ /            1.2 kB      98 kB
├ ○ /dashboard   3.4 kB     112 kB
└ ○ /settings    2.1 kB     104 kB
✓ Build completed in 27.8s
root@web-01:/var/www/app$
```

Focus Mode · Quick Monitor and Files hidden, Terminal takes most of the space

80×24 UTF-8 zsh

MauLink

搜索服务器或主机...

+ 添加服务器

搜索

生产环境2

Web-01192.168.1.20

DB-01192.168.1.21

开发环境2

Dev-01dev.example.com

Staging-0110.0.0.14

+ 添加服务器

Web-01

root@192.168.1.20 已连接

重新连接

断开连接

终端 1 × 终端 2 × +

聚焦

root@web-01:/var/www/app\$ ls -la

total 48

drwxr-xr-x 8 root root 4096 Sep 28 09:12 .

drwxr-xr-x 3 root root 4096 Sep 20 11:03 ..

-rw-r--r-- 1 root root 1220 Sep 20 11:03 .env

drwxr-xr-x 118 root root 4096 Sep 27 21:40 node_modules

-rw-r--r-- 1 root root 2154 Sep 28 08:59 package.json

-rwxr-xr-x 1 root root 4830 Sep 27 18:20 deploy.sh

root@web-01:/var/www/app\$./deploy.sh --env production

▲ 正在构建资源 ...

[ok] 依赖已安装

→ 正在上传打包文件 (14.2 MB) ...

[ok] 版本 2.14.0 已激活

✓ 部署完成, 用时 42.3s

root@web-01:/var/www/app\$

← ↑ / opt > app

上传

名称	大小	修改时间
app	—	Sep 28 09:12
node_modules	—	Sep 27 21:40
package.json	2.1 KB	Sep 28 08:59
deploy.sh	4.8 KB	Sep 27 18:20
app.tar.gz	14.2 MB	Sep 28 09:10
.env	1.2 KB	Sep 20 11:03

更新于 2 秒前

快速监控

CPU24%

内存6.2 / 16 GB

磁盘61%

网络

↓ 2.4 MB/s

↑ 380 KB/s

平均负载

0.42 0.38 0.31

已连接 192.168.1.20:22 · SSH · 18ms

正在上传 2 个文件 · 42%

查看

🔍

搜索

还没有服务器

+ 添加服务器



MauLink

连接你的第一台服务器。
在一个工作区中使用终端、管理文件并查看服务器状态。

+ 添加服务器

[了解 MauLink](#)

添加服务器

✕

连接到一台新的 SSH 服务器

服务器名称（可选）

例如 Production Web

主机地址

192.168.1.10

端口

22

用户名

root

认证方式

密码

SSH 密钥

密码

.....

👁

🔑 凭据将安全存储在系统钥匙串 / Windows 凭据管理器中

> 高级

跳板机 · 代理 · 保持连接

测试连接

连接

搜索

生产环境2

Web-01
192.168.1.20

DB-01
192.168.1.21

开发环境2

Dev-01
dev.example.com

Staging-01
10.0.0.14

+ 添加服务器

监控

Web-01 • root@192.168.1.20 • 实时

实时

1h

24h

CPU

24 %


8 核 · 负载 0.42



内存

6.2 / 16 GB

已用 39% · 可用 9.8 GB



磁盘

61 %

挂载于 512 GB · 可用 312 GB



网络

2.4 MB/s ↓

↑ 380 KB/s · 延迟 18 ms



负载

0.42

0.38 · 0.31 (1 / 5 / 15m)




运行时间

42d 7h 18m

自 8 月 16 日 21:40

CPU 历史 最近 60 分钟

● 使用率 当前 24%

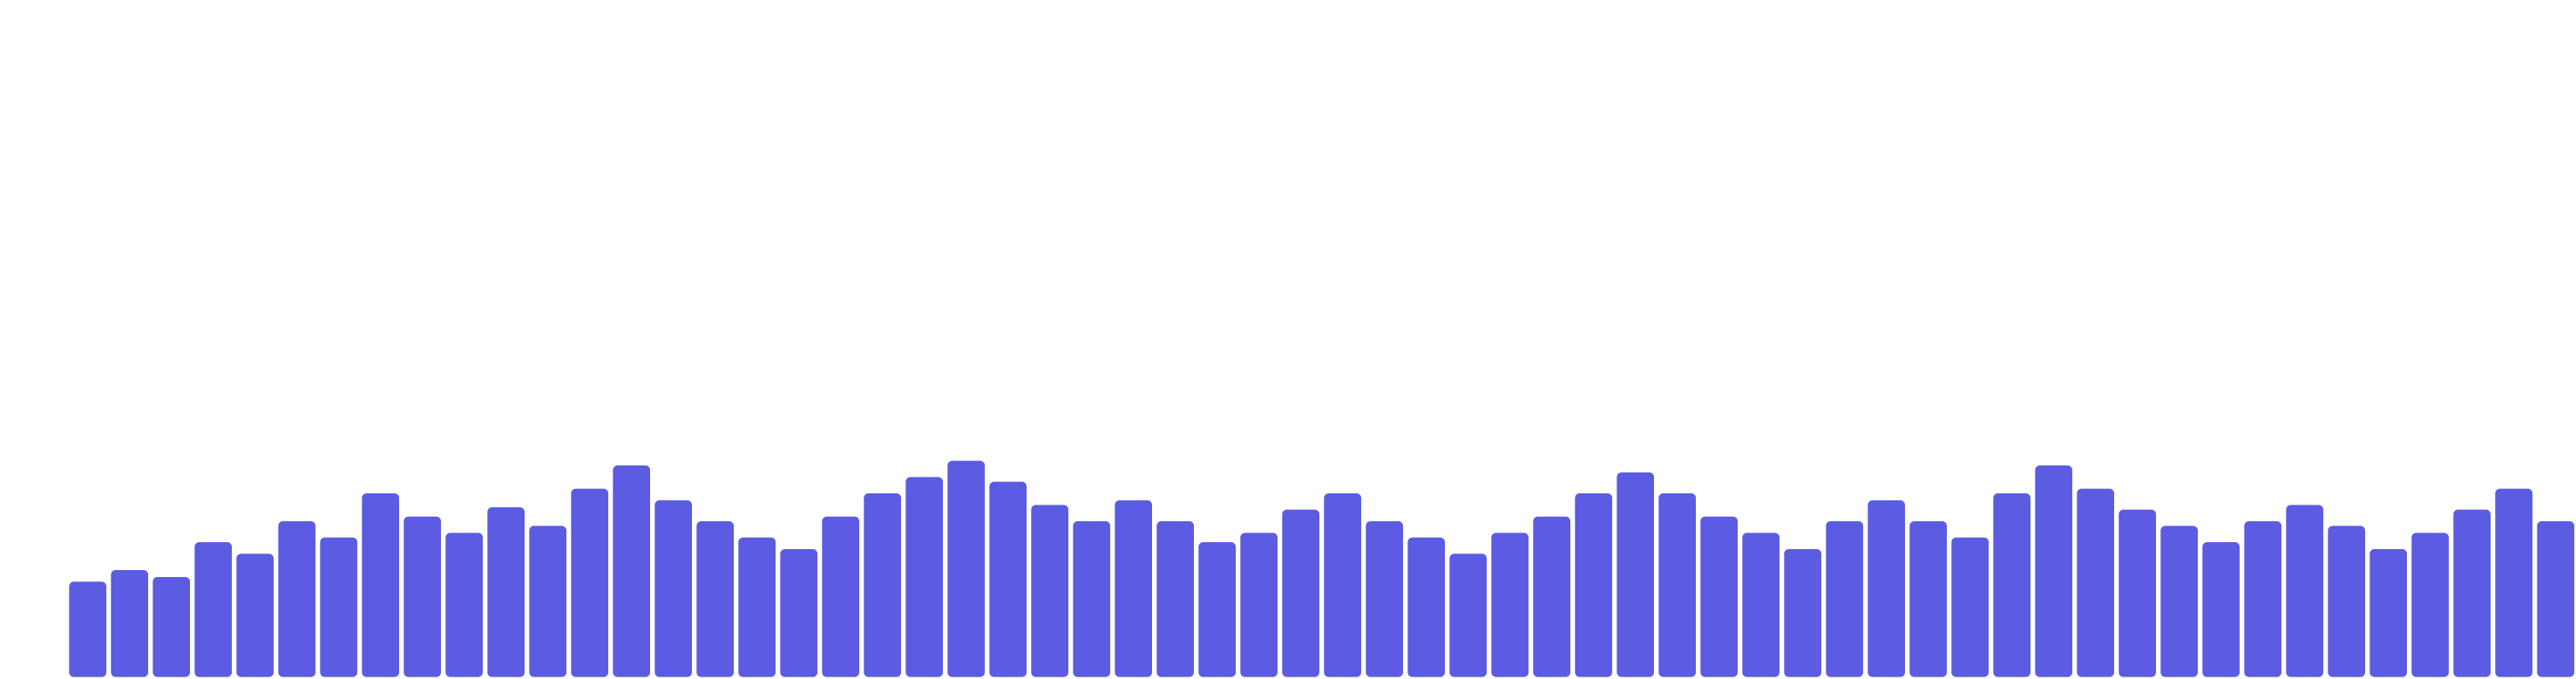

60 分钟前

45 分钟前

30 分钟前

15 分钟前

现在

设置

⚙️ 通用

🎨 外观

>_ 终端

🌐 语言

外观

选择 MauLink 的主题。默认跟随系统外观。

主题

☒ 跟随系统

☐ 浅色

☐ 深色

语言

切换后立即生效。界面会为更长或更短的文本预留空间。

☒ 简体中文

☐ 英语

MauLink

搜索服务器或主机...

+ 添加服务器

搜索

生产2

Web-01192.168.1.20

DB-01192.168.1.21

开发2

Dev-01dev.example.com

Staging-0110.0.0.14

文件

Web-01 · SFTP · /opt/app

<

>

/

>

opt

>

app

名称

大小

修改时间

app-

9月28日 09:12

node_modules-

9月27日 21:40

public-

9月20日 11:03

src-

9月27日 18:20

package.json2.1 KB

9月28日 08:59

deploy.sh4.8 KB

9月27日 18:20

app.tar.gz14.2 MB

9月28日 09:10

.env1.2 KB

9月20日 11:03

下载

重命名

复制路径

删除

刷新

传输2 项进行中

清除已完成

文件

进度

速度

状态

app.tar.gz

72%

14 MB/s

上传中

config.yml

100%

-

已完成

backup.sql

-

-

失败 · 超时

重试



首次连接到此服务器



MauLink 首次连接 Web-01

这是 MauLink 第一次连接这台服务器。请确认服务器身份后继续。

192.168.1.20

ED25519

SHA256: j8Kd2Qp0ZsV4nR7tBxW1yEfHcL9aU3oPq5N6rSdT0w

保存该指纹后，如果服务器身份以后发生变化，MauLink 会进行安全提醒。

[什么是服务器指纹？](#)

取消

信任并连接



无法连接 Web-01



192.168.1.20:22

无法建立 SSH 连接。

可能原因：

- 服务器未启动
- SSH 服务未运行
- 端口无法访问
- 网络连接异常

^ 查看详细信息

连接被拒绝

ECONNREFUSED 192.168.1.20:22

重试

编辑连接



Web-01 需要凭据



密码

.....

👁

☒ 安全记住

🔑 凭据将安全存储在系统钥匙串 / Windows 凭据管理器中。

取消

连接



删除 Web-01 ?



服务器配置将从 MauLink 中移除。此操作无法撤销。

☐ 同时删除已安全保存的凭据

取消

删除服务器



服务器身份发生变化



此前保存的服务器指纹与当前服务器不一致。这可能由服务器重装或 SSH 配置变化引起，也可能意味着连接存在安全风险。

之前
SHA256:j8Kd2Qp0ZsV4nR7tBxW1yEfHcL9aU3oPq5N6rSdT0w
当前
SHA256:3bF9wQ1sLmT6yUcV2nHpXeK8aRdG4oZjM5rN0tS7qBv

高级操作：更新已保存指纹

继续连接

取消连接

编辑服务器

✕

更新 Production Web 的连接配置

服务器名称（可选）

Production Web

主机地址

192.168.1.20

端口

22

用户名

root

认证方式

密码

SSH 密钥

密码

.....

👁

🔒 留空表示不更改已保存的凭据

删除服务器

从 MauLink 中移除此服务器及其配置

删除

取消

保存更改

MauLink

Web-01

root@192.168.1.20

退出专注

终端 1 × 终端 2 × nginx.log × 部署 × +

查找

```
root@web-01:/var/www/app$ git pull origin main
remote: Enumerating objects: 42, done.
remote: Counting objects: 100% (42/42), done.
remote: Compressing objects: 100% (28/28), done.
Unpacking objects: 100% (28/28), done.
From github.com:acme/web-app
   a1b2c3d..e4f5a6b  main       → origin/main
Updating a1b2c3d..e4f5a6b
Fast-forward
   src/api/router.ts      | 24 ++++++++-----
   src/components/Shell.tsx | 12 ++++++--
   2 files changed, 31 insertions(+), 5 deletions(-)
root@web-01:/var/www/app$ npm run build
▲ Next.js 15.1.0
   Creating an optimized production build ...
✓ Compiled successfully in 18.4s
   Collecting page data ...
   Generating static pages (0/12) ...
✓ Generating static pages (12/12)
   Finalizing page optimization ...

Route (app)      Size      First Load JS
┌ ○ /            1.2 kB      98 kB
├ ○ /dashboard   3.4 kB     112 kB
└ ○ /settings    2.1 kB     104 kB
✓ Build completed in 27.8s
root@web-01:/var/www/app$
```

专注模式 · 快速监控与文件已隐藏，终端占据主要空间

80×24 UTF-8 zsh

MauLink · 设计系统

中性灰系统 · 单一低饱和靛蓝色强调色 · 紧凑桌面密度

按钮

连接

测试连接

刷新

删除

+ 添加服务器

表单控件

主机

192.168.1.20

主机

192.168.1.300

请输入有效的主机地址

密码

.....

状态

- 已连接
- 🔄 连接中
- 已断开
- ❗ 失败

终端标签页

终端 1 ×

终端 2 ×

+

服务器项

● Web-01

192.168.1.20

● Web-01

192.168.1.20

🔄 Web-01

192.168.1.20

选择控件

密码

SSH 密钥

☒ 安全记住

☐ 同时删除已保存的凭据

轻提示

✔ 文件上传完成

撤销

ℹ 连接已断开

撤销

快捷监控指标

CPU

24%

内存

39%

上下文菜单

📄 下载

✎ 重命名

🔗 复制路径

🗑 删除

Add Server



Connect to a new SSH server

Server Name (optional)

Host

Port

Username

Authentication

Password

SSH Key

Password

.....

👁

🔒 Stored securely in the system keychain / Windows Credential Manager

▼ Advanced

Jump Host

Jump Port

Proxy

Keep Alive Interval

Test Connection

Connect

添加服务器



连接到一台新的 SSH 服务器

服务器名称（可选）

例如 Production Web

主机地址

端口

192.168.1.10

22

用户名

root

认证方式

密码SSH 密钥

密码

.....👁

🔑 凭据将安全存储在系统钥匙串 / Windows 凭据管理器中

▼ 高级

跳板机

user@bastion.example.com

跳板机端口

代理

22

无

保活间隔（秒）

30

测试连接

连接

Add Server



Connect to a new SSH server

Server Name (optional)

e.g. Production Web

Host

Port

192.168.1.10

22

Username

root

Authentication

Password

SSH Key

Password

.....



Stored securely in the system keychain / Windows Credential Manager

Advanced

Jump Host · Proxy · Keep Alive

Connection successful
Password authentication · 82 ms

Test Connection

Connect

Add Server

×

Connect to a new SSH server

Server Name (optional)

e.g. Production Web

Host

Port

192.168.1.10

22

Username

root

Authentication

Password

SSH Key

Password

.....

👁

🔒

 Stored securely in the system keychain / Windows Credential Manager

> Advanced

Jump Host · Proxy · Keep Alive

❗

 Connection failed
Connection refused (ECONNREFUSED 192.168.1.10:22)

Test Connection

Connect

添加服务器

×

连接到一台新的 SSH 服务器

服务器名称（可选）

例如 Production Web

主机地址

192.168.1.10

端口

22

用户名

root

认证方式

密码

SSH 密钥

密码

.....

👁

🔑 凭据将安全存储在系统钥匙串 / Windows 凭据管理器中

> 高级

跳板机 · 代理 · 保持连接

✔ 连接成功

密码认证 · 82 毫秒

测试连接

连接

添加服务器

×

连接到一台新的 SSH 服务器

服务器名称（可选）

例如 Production Web

主机地址

192.168.1.10

端口

22

用户名

root

认证方式

密码

SSH 密钥

密码

.....

👁

🔑 凭据将安全存储在系统钥匙串 / Windows 凭据管理器中

> 高级

跳板机 · 代理 · 保持连接

❗ 连接失败

连接被拒绝 (ECONNREFUSED 192.168.1.10:22)

测试连接

连接

MauLink · Design System

Neutral gray system · single low-saturation indigo accent · compact desktop density

Buttons

Connect

Test Connection

 Refresh

Delete

+ Add Server

Form Controls

Host

192.168.1.20

Host

192.168.1.300

Enter a valid host address

Password

.....

Status

- Connected
- Connecting
- Disconnected
- Failed

Terminal Tabs

Terminal 1

×

Terminal 2

×

+

Server Items

Web-01
192.168.1.20

Web-01
192.168.1.20

Web-01
192.168.1.20

Selection Controls

Password

SSH Key

☒ Remember securely

☐ Also delete saved credentials

Toast

 File upload complete

Undo

 Connection lost

Undo

Quick Monitor Metric

CPU

24%



Memory

39%



Context Menu

MauLink · 设计系统

中性灰系统 · 单一低饱和靛蓝色强调色 · 紧凑桌面密度

MauLink

Search servers or hosts...

+ Add Server

Search

Production2

Web-01192.168.1.20

DB-01192.168.1.21

Development2

Dev-01dev.example.com

Staging-0110.0.0.14

+ Add Server

Web-01root@192.168.1.20Connected

ReconnectDisconnect

Terminal 1Terminal 2

Focus

root@web-01:/var/www/app\$ ls -la

total 48

drwxr-xr-x 8 root root 4096 Sep 28 09:12 .

drwxr-xr-x 3 root root 4096 Sep 20 11:03 ..

-rw-r--r-- 1 root root 1220 Sep 20 11:03 .env

drwxr-xr-x 118 root root 4096 Sep 27 21:40 node_modules

-rw-r--r-- 1 root root 2154 Sep 28 08:59 package.json

-rwxr-xr-x 1 root root 4830 Sep 27 18:20 deploy.sh

root@web-01:/var/www/app\$./deploy.sh --env production

▲ Building assets ...

[ok] Dependencies installed

→ Uploading bundle (14.2 MB) ...

[ok] Release 2.14.0 activated

✓ Deployed in 42.3s

root@web-01:/var/www/app\$

< ↑ / opt > app

Upload

Name	Size	Modified
app	—	Sep 28 09:12
node_modules	—	Sep 27 21:40
package.json	2.1 KB	Sep 28 08:59
deploy.sh	4.8 KB	Sep 27 18:20
app.tar.gz	14.2 MB	Sep 28 09:10
.env	1.2 KB	Sep 20 11:03

Quick Monitor

CPU24%

Memory6.2 / 16 GB

Disk61%

Network

↓ 2.4 MB/s

↑ 380 KB/s

Load Average

0.42 0.38 0.31

Updated 2s ago

Connected192.168.1.20:22SSH18ms

Uploading 2 files · 42%

View

>_ MauLink

Q Search servers or hosts...

+ Add Server

Q Search

No servers yet

MauLink

Connect your first server.
Use the terminal, manage files and check server status in one workspace.

+ Add Server

[Learn about MauLink](#)

+ Add Server

No server connected

v0.1.0

Add Server

×

Connect to a new SSH server

Server Name (optional)

e.g. Production Web

Host

Port

192.168.1.10

22

Username

root

Authentication

Password

SSH Key

Password

••••••••••

👁

🔒 Stored securely in the system keychain / Windows Credential Manager

> Advanced

Jump Host · Proxy · Keep Alive

Test Connection

Connect

MauLink

Q Search servers or hosts...

+ Add Server

Q Search

Production2

Web-01192.168.1.20

DB-01192.168.1.21

Development2

Dev-01dev.example.com

Staging-0110.0.0.14

Monitor

Web-01 • root@192.168.1.20 • Live

Live1h24h

CPU

24%

8 cores • load 0.42

Memory

6.2 / 16 GB

39% used • 9.8 GB available

Disk

61%

/ on 512 GB • 312 GB free

Network

2.4 MB/s ↓

↑ 380 KB/s • latency 18 ms

Load

0.42

0.38 • 0.31 (1 / 5 / 15m)

Uptime

42d7h 18m

since Aug 16, 21:40

CPU HistoryLast 60 min

Usage24% now

60m ago45m30m15mnow

+ Add Server

MauLink

Q Search settings...

+ Add Server

Settings

General

Appearance

Terminal

Language

Appearance

Choose the MauLink theme. Follows system appearance by default.

Theme

System

Light

Dark

Language

Applies immediately. The interface reserves space for longer or shorter text.

Simplified Chinese

English

MauLink

Q Search servers or hosts...

+ Add Server

Q Search

Production2

Web-01192.168.1.20

DB-01192.168.1.21

Development2

Dev-01dev.example.com

Staging-0110.0.0.14

Files

Web-01 · SFTP · /opt/app

←↑/ > opt > app

Refresh

Name	Size	Modified
app	—	Sep 28 09:12
node_modules	—	Sep 27 21:40
public	—	Sep 20 11:03
src	—	Sep 27 18:20
package.json	2.1 KB	Sep 28 08:59
deploy.sh	4.8 KB	Sep 27 18:20
app.tar.gz	14.2 MB	Sep 28 09:10
.env	1.2 KB	Sep 20 11:03

Download

Rename

Copy Path

Delete

Transfers2 active

Clear completed

File	Progress	Speed	Status	
app.tar.gz	72%	14 MB/s	Uploading	
config.yml	100%	—	Completed	
backup.sql	—	—	Failed · timeout	Retry



First connection to this server



MauLink is connecting to Web-01 for the first time

First connection to this server. Confirm its identity to continue.

192.168.1.20

ED25519

SHA256: j8Kd2Qp0ZsV4nR7tBxW1yEfHcL9aU3oPq5N6rSdT0w

Once saved, MauLink will warn you if this server's identity changes later.

[What is a server fingerprint?](#)

Cancel

Trust & Connect



Can't connect to Web-01



192.168.1.20:22

Could not establish an SSH connection.

Possible causes:

- Server is not running
- SSH service is not running
- Port is unreachable
- Network connection issue

[^ View details](#)

Connection refused

ECONNREFUSED 192.168.1.20:22

Retry

Edit connection



Web-01 requires credentials



Password

.....



☒ Remember securely

 Stored securely in the system keychain / Windows Credential Manager.

Cancel

Connect



Delete Web-01?



The server configuration will be removed from MauLink. This action cannot be undone.

☐ Also delete the saved credentials

Cancel

Delete server



Server identity changed



The saved server fingerprint doesn't match the current server. This could be caused by a server reinstall or an SSH configuration change, or it may indicate a security risk.

Previous

SHA256:j8Kd2Qp0ZsV4nR7tBxW1yEfHcL9aU3oPq5N6rSdT0w

Current

SHA256:3bF9wQ1sLmT6yUcV2nHpXeK8aRdG4oZjM5rN0tS7qBv

Advanced: Update saved fingerprint

Continue

Cancel

Edit Server

×

Update connection settings for Production Web

Server Name (optional)

Production Web

Host

192.168.1.20

Port

22

Username

root

Authentication

Password

SSH Key

Password

.....

👁

🔒 Leave empty to keep the saved credential

Delete Server

Remove this server and its configuration from MauLink

Delete

Cancel

Save Changes

MauLink

Web-01

root@192.168.1.20

Exit Focus

Terminal 1 ×

Terminal 2 ×

nginx.log ×

deploy ×

+

Find

```
root@web-01:/var/www/app$ git pull origin main
remote: Enumerating objects: 42, done.
remote: Counting objects: 100% (42/42), done.
remote: Compressing objects: 100% (28/28), done.
Unpacking objects: 100% (28/28), done.
From github.com:acme/web-app
   a1b2c3d..e4f5a6b  main       -> origin/main
Updating a1b2c3d..e4f5a6b
Fast-forward
   src/api/router.ts      | 24 ++++++++-----
   src/components/Shell.tsx | 12 ++++++--
   2 files changed, 31 insertions(+), 5 deletions(-)
root@web-01:/var/www/app$ npm run build
▲ Next.js 15.1.0
   Creating an optimized production build ...
✓ Compiled successfully in 18.4s
   Collecting page data ...
   Generating static pages (0/12) ...
✓ Generating static pages (12/12)
   Finalizing page optimization ...

Route (app)      Size      First Load JS
┌ ○ /            1.2 kB      98 kB
├ ○ /dashboard   3.4 kB     112 kB
└ ○ /settings    2.1 kB     104 kB
✓ Build completed in 27.8s
root@web-01:/var/www/app$
```

Focus Mode · Quick Monitor and Files hidden, Terminal takes most of the space

80×24 UTF-8 zsh

Add Server

×

Connect to a new SSH server

Server Name (optional)

e.g. Production Web

Host

192.168.1.10

Port

22

Username

root

Authentication

Password

SSH Key

Password

.....

👁

🔒 Stored securely in the system keychain / Windows Credential Manager

⌵ Advanced

Jump Host

user@bastion.example.com

Jump Port

22

Proxy

None

Keep Alive Interval

30

Test Connection

Connect

Add Server

×

Connect to a new SSH server

Server Name (optional)

e.g. Production Web

Host

Port

192.168.1.10

22

Username

root

Authentication

Password

SSH Key

Password

.....

👁

🔒 Stored securely in the system keychain / Windows Credential Manager

> Advanced

Jump Host · Proxy · Keep Alive

✔ Connection successful

Password authentication · 82 ms

Test Connection

Connect

Add Server

×

Connect to a new SSH server

Server Name (optional)

e.g. Production Web

Host

192.168.1.10

Port

22

Username

root

Authentication

Password

SSH Key

Password

.....

👁

🔒 Stored securely in the system keychain / Windows Credential Manager

> Advanced

Jump Host · Proxy · Keep Alive

❗ Connection failed

Connection refused (ECONNREFUSED 192.168.1.10:22)

Test Connection

Connect

MauLink · 设计系统

中性灰系统 · 单一低饱和靛蓝色强调色 · 紧凑桌面密度

按钮

连接

测试连接

刷新

删除

+ 添加服务器

表单控件

主机

192.168.1.20

主机

192.168.1.300

请输入有效的主机地址

密码

.....

状态

- 已连接
- 🔄 连接中
- 已断开
- ❗ 失败

终端标签页

终端 1 ×

终端 2 ×

+

服务器项

● Web-01192.168.1.20

● Web-01192.168.1.20

🔄 Web-01192.168.1.20

选择控件

密码

SSH 密钥

☒ 安全记住

☐ 同时删除已保存的凭据

轻提示

✔ 文件上传完成

撤销

ℹ 连接已断开

撤销

快捷监控指标

CPU24%

内存39%

上下文菜单

⬇ 下载

✎ 重命名

🔗 复制路径

🗑 删除

MauLink

搜索服务器或主机...

+ 添加服务器

搜索

生产环境2

Web-01192.168.1.20

DB-01192.168.1.21

开发环境2

Dev-01dev.example.com

Staging-0110.0.0.14

+ 添加服务器

Web-01

root@192.168.1.20 已连接

终端 1 ×

终端 2 ×

+

聚焦

...

root@web-01:/var/www/app\$ ls -la

total 48

drwxr-xr-x 8 root root 4096 Sep 28 09:12 .

drwxr-xr-x 3 root root 4096 Sep 20 11:03 ..

-rw-r--r-- 1 root root 1220 Sep 20 11:03 .env

drwxr-xr-x 118 root root 4096 Sep 27 21:40 node_modules

-rw-r--r-- 1 root root 2154 Sep 28 08:59 package.json

-rwxr-xr-x 1 root root 4830 Sep 27 18:20 deploy.sh

root@web-01:/var/www/app\$./deploy.sh --env production

▲ 正在构建资源 ...

[ok] 依赖已安装

→ 正在上传打包文件 (14.2 MB) ...

[ok] 版本 2.14.0 已激活

✓ 部署完成, 用时 42.3s

root@web-01:/var/www/app\$

← ↑ / opt > app

↺ 上传

名称	大小	修改时间
app	—	Sep 28 09:12
node_modules	—	Sep 27 21:40
package.json	2.1 KB	Sep 28 08:59
deploy.sh	4.8 KB	Sep 27 18:20
app.tar.gz	14.2 MB	Sep 28 09:10
.env	1.2 KB	Sep 20 11:03

快速监控

...

CPU

24%

内存

6.2 / 16 GB

磁盘

61%

网络

↓ 2.4 MB/s

↑ 380 KB/s

平均负载

0.42 0.38 0.31

更新于 2 秒前

已连接 192.168.1.20:22 · SSH · 18ms

正在上传 2 个文件 · 42%

查看

>_ MauLink

Q 搜索服务器或主机...

+ 添加服务器

Q 搜索

还没有服务器

MauLink

连接你的第一台服务器。
在一个工作区中使用终端、管理文件并查看服务器状态。

+ 添加服务器

了解 MauLink

+ 添加服务器

未连接任何服务器

v0.1.0

添加服务器

✕

连接到一台新的 SSH 服务器

服务器名称（可选）

例如 Production Web

主机地址

192.168.1.10

端口

22

用户名

root

认证方式

密码

SSH 密钥

密码

.....

👁

🔑 凭据将安全存储在系统钥匙串 / Windows 凭据管理器中

> 高级

跳板机 · 代理 · 保持连接

测试连接

连接

> MauLink

Q 搜索服务器或主机...

+ 添加服务器

Q 搜索

生产环境2

Web-01192.168.1.20

DB-01192.168.1.21

开发环境2

Dev-01dev.example.com

Staging-0110.0.0.14

监控

Web-01 • root@192.168.1.20 • 实时

实时1h24h

CPU

24%

8核 · 负载 0.42

内存

6.2 / 16 GB

已用 39% · 可用 9.8 GB

磁盘

61%

挂载于 512 GB · 可用 312 GB

网络

2.4 MB/s ↓

↑ 380 KB/s · 延迟 18 ms

负载

0.42

0.38 · 0.31 (1 / 5 / 15m)

运行时间

42d7h 18m

自 8 月 16 日 21:40

CPU 历史最近 60 分钟

● 使用率 当前 24%

60 分钟前45 分钟前30 分钟前15 分钟前现在

> MauLink

搜索设置...

+ 添加服务器

设置

通用

外观

终端

语言

外观

选择 MauLink 的主题。默认跟随系统外观。

主题

跟随系统

浅色

深色

语言

切换后立即生效。界面会为更长或更短的文本预留空间。

简体中文

英语

MauLink

搜索服务器或主机...

+ 添加服务器

搜索

生产2

Web-01192.168.1.20

DB-01192.168.1.21

开发2

Dev-01dev.example.com

Staging-0110.0.0.14

文件

Web-01 · SFTP · /opt/app

<

>

/

>

opt

>

app

名称

大小

修改时间

app—9月28日 09:12

node_modules—9月27日 21:40

public—9月20日 11:03

src—9月27日 18:20

package.json2.1 KB9月28日 08:59

deploy.sh4.8 KB9月27日 18:20

app.tar.gz14.2 MB9月28日 09:10

.env1.2 KB9月20日 11:03

下载

重命名

复制路径

删除

新建文件夹

上传

刷新

传输2 项进行中

清除已完成

文件	进度	速度	状态	
app.tar.gz	72%	14 MB/s	上传中	×
config.yml	100%	—	已完成	
backup.sql	—	—	失败 · 超时	重试



首次连接到此服务器



MauLink 首次连接 Web-01

这是 MauLink 第一次连接这台服务器。请确认服务器身份后继续。

192.168.1.20

ED25519

SHA256: j8Kd2Qp0ZsV4nR7tBxW1yEfHcL9aU3oPq5N6rSdT0w

保存该指纹后，如果服务器身份以后发生变化，MauLink 会进行安全提醒。

[什么是服务器指纹？](#)

取消

信任并连接



无法连接 Web-01



192.168.1.20:22

无法建立 SSH 连接。

可能原因：

- 服务器未启动
- SSH 服务未运行
- 端口无法访问
- 网络连接异常

^ 查看详细信息

连接被拒绝

ECONNREFUSED 192.168.1.20:22

重试

编辑连接



Web-01 需要凭据



密码

.....



☒ 安全记住

 凭据将安全存储在系统钥匙串 / Windows 凭据管理器中。

取消

连接



删除 Web-01 ?



服务器配置将从 MauLink 中移除。此操作无法撤销。

☐ 同时删除已安全保存的凭据

取消

删除服务器



服务器身份发生变化



此前保存的服务器指纹与当前服务器不一致。这可能由服务器重装或 SSH 配置变化引起，也可能意味着连接存在安全风险。

之前
SHA256:j8Kd2Qp0ZsV4nR7tBxW1yEfHcL9aU3oPq5N6rSdT0w
当前
SHA256:3bF9wQ1sLmT6yUcV2nHpXeK8aRdG4oZjM5rN0tS7qBv

高级操作：更新已保存指纹

继续连接

取消连接

编辑服务器

✕

更新 Production Web 的连接配置

服务器名称（可选）

Production Web

主机地址

192.168.1.20

端口

22

用户名

root

认证方式

密码

SSH 密钥

密码

.....

👁

🔑 留空表示不更改已保存的凭据

删除服务器

从 MauLink 中移除此服务器及其配置

删除

取消

保存更改

MauLink

Web-01

root@192.168.1.20

退出专注

终端 1 ×

终端 2 ×

nginx.log ×

部署 ×

+

查找

```
root@web-01:/var/www/app$ git pull origin main
remote: Enumerating objects: 42, done.
remote: Counting objects: 100% (42/42), done.
remote: Compressing objects: 100% (28/28), done.
Unpacking objects: 100% (28/28), done.
From github.com:acme/web-app
   a1b2c3d..e4f5a6b  main       → origin/main
Updating a1b2c3d..e4f5a6b
Fast-forward
   src/api/router.ts      | 24 ++++++-----
   src/components/Shell.tsx | 12 ++++++--
   2 files changed, 31 insertions(+), 5 deletions(-)
root@web-01:/var/www/app$ npm run build
▲ Next.js 15.1.0
   Creating an optimized production build ...
✓ Compiled successfully in 18.4s
   Collecting page data ...
   Generating static pages (0/12) ...
✓ Generating static pages (12/12)
   Finalizing page optimization ...

Route (app)      Size      First Load JS
┌ ○ /            1.2 kB      98 kB
├ ○ /dashboard   3.4 kB     112 kB
└ ○ /settings    2.1 kB     104 kB
✓ Build completed in 27.8s
root@web-01:/var/www/app$
```

专注模式 · 快速监控与文件已隐藏，终端占据主要空间

80×24 UTF-8 zsh

添加服务器



连接到一台新的 SSH 服务器

服务器名称（可选）

例如 Production Web

主机地址

端口

192.168.1.10

22

用户名

root

认证方式

密码

SSH 密钥

密码

.....

👁

🔑 凭据将安全存储在系统钥匙串 / Windows 凭据管理器中

高级

跳板机

user@bastion.example.com

跳板机端口

代理

22

无

保活间隔（秒）

30

测试连接

连接

添加服务器

✕

连接到一台新的 SSH 服务器

服务器名称（可选）

例如 Production Web

主机地址

192.168.1.10

端口

22

用户名

root

认证方式

密码

SSH 密钥

密码

.....

👁

🔑 凭据将安全存储在系统钥匙串 / Windows 凭据管理器中

> 高级

跳板机 · 代理 · 保持连接

✔ 连接成功

密码认证 · 82 毫秒

测试连接

连接

添加服务器

✕

连接到一台新的 SSH 服务器

服务器名称（可选）

例如 Production Web

主机地址

192.168.1.10

端口

22

用户名

root

认证方式

密码

SSH 密钥

密码

.....

👁

🔑 凭据将安全存储在系统钥匙串 / Windows 凭据管理器中

> 高级

跳板机 · 代理 · 保持连接

❗ 连接失败

连接被拒绝 (ECONNREFUSED 192.168.1.10:22)

测试连接

连接