

MauLink · Design System

Neutral gray system · single low-saturation indigo accent · compact desktop density

Buttons

Connect

Test Connection

 Refresh

Delete

+ Add Server

Form Controls

Host

192.168.1.20

Host

192.168.1.300

Enter a valid host address

Password

.....

Status

- Connected
- Connecting
- Disconnected
- Failed

Terminal Tabs

Terminal 1

×

Terminal 2

×

+

Server Items

Web-01
192.168.1.20

Web-01
192.168.1.20

Web-01
192.168.1.20

Selection Controls

Password

SSH Key

☒ Remember securely

☐ Also delete saved credentials

Toast

 File upload complete

Undo

 Connection lost

Undo

Quick Monitor Metric

CPU

24%



Memory

39%



Context Menu

MauLink · 设计系统

中性灰系统 · 单一低饱和靛蓝色强调色 · 紧凑桌面密度

MauLink

Search servers or hosts...

+ Add Server

Search

Production2

Web-01192.168.1.20

DB-01192.168.1.21

Development2

Dev-01dev.example.com

Staging-0110.0.0.14

+ Add Server

Web-01

root@192.168.1.20

Connected

ReconnectDisconnect...

Terminal 1Terminal 2+

Focus...

```
root@web-01:/var/www/app$ ls -la
total 48
drwxr-xr-x  8 root root  4096 Sep 28 09:12 .
drwxr-xr-x  3 root root  4096 Sep 20 11:03 ..
-rw-r--r--  1 root root  1220 Sep 20 11:03 .env
drwxr-xr-x 118 root root  4096 Sep 27 21:40 node_modules
-rw-r--r--  1 root root  2154 Sep 28 08:59 package.json
-rwxr-xr-x  1 root root  4830 Sep 27 18:20 deploy.sh
root@web-01:/var/www/app$ ./deploy.sh --env production
▲ Building assets ...
[ ok ] Dependencies installed
→ Uploading bundle (14.2 MB) ...
[ ok ] Release 2.14.0 activated
✓ Deployed in 42.3s
root@web-01:/var/www/app$
```

↑ / > opt > app

Upload

Name	Size	Modified
app	—	Sep 28 09:12
node_modules	—	Sep 27 21:40
public	—	Sep 20 11:03
src	—	Sep 27 18:20
logs	—	Sep 28 09:14
package.json	2.1 KB	Sep 28 08:59

Quick Monitor

CPU24%

Memory6.2 / 16 GB

Disk61%

Network · Down2.4 MB/s

Network · Up380 KB/s

Load Average0.42 0.38 0.31

Updated 2s ago

Processes & Threads

ProcessesThreads

CPU	Memory	Disk	Up	Down
node	#4821	24.6%		
postgres	#3120	12.4%		
deploy.sh	#5520	8.8%		
rsync	#6104	6.1%		
nginx	#908	4.2%		
redis-server	#1150	3.1%		
dockerd	#2201	2.4%		
pm2	#4302	1.2%		
sshd	#7701	0.6%		
cron	#8802	0.2%		

Connected192.168.1.20:22 · SSH · 18ms

Uploading 2 files · 42%

View

Search

No servers yet



No servers yet

Connect your first server.

Use the terminal, manage files and check server status in one workspace.

+ Add Server

[Learn about MauLink](#)

+ Add Server

Add Server

×

Connect to a new SSH server

Server Name (optional)

e.g. Production Web

Host

192.168.1.10

Port

22

Username

root

Authentication

Password

SSH Key

Password

.....

👁

🔒

 Stored securely in the system keychain / Windows Credential Manager

> Advanced

Jump Host · Proxy · Keep Alive

Test Connection

Connect

Search

Production2

Web-01
192.168.1.20

DB-01
192.168.1.21

Development2

Dev-01
dev.example.com

Staging-01
10.0.0.14

Monitor

Web-01 • root@192.168.1.20 • Live

Live

1h

24h



CPU

24%


8 cores • load 0.42



Memory

6.2 / 16 GB


39% used • 9.8 GB available



Disk

61%

/ on 512 GB • 312 GB free



Network

2.4 MB/s ↓

↑ 380 KB/s • latency 18 ms



Load

0.42

0.38 • 0.31 (1 / 5 / 15m)




Uptime

42d 7h 18m

since Aug 16, 21:40

CPU History Last 60 min

Usage 24% now

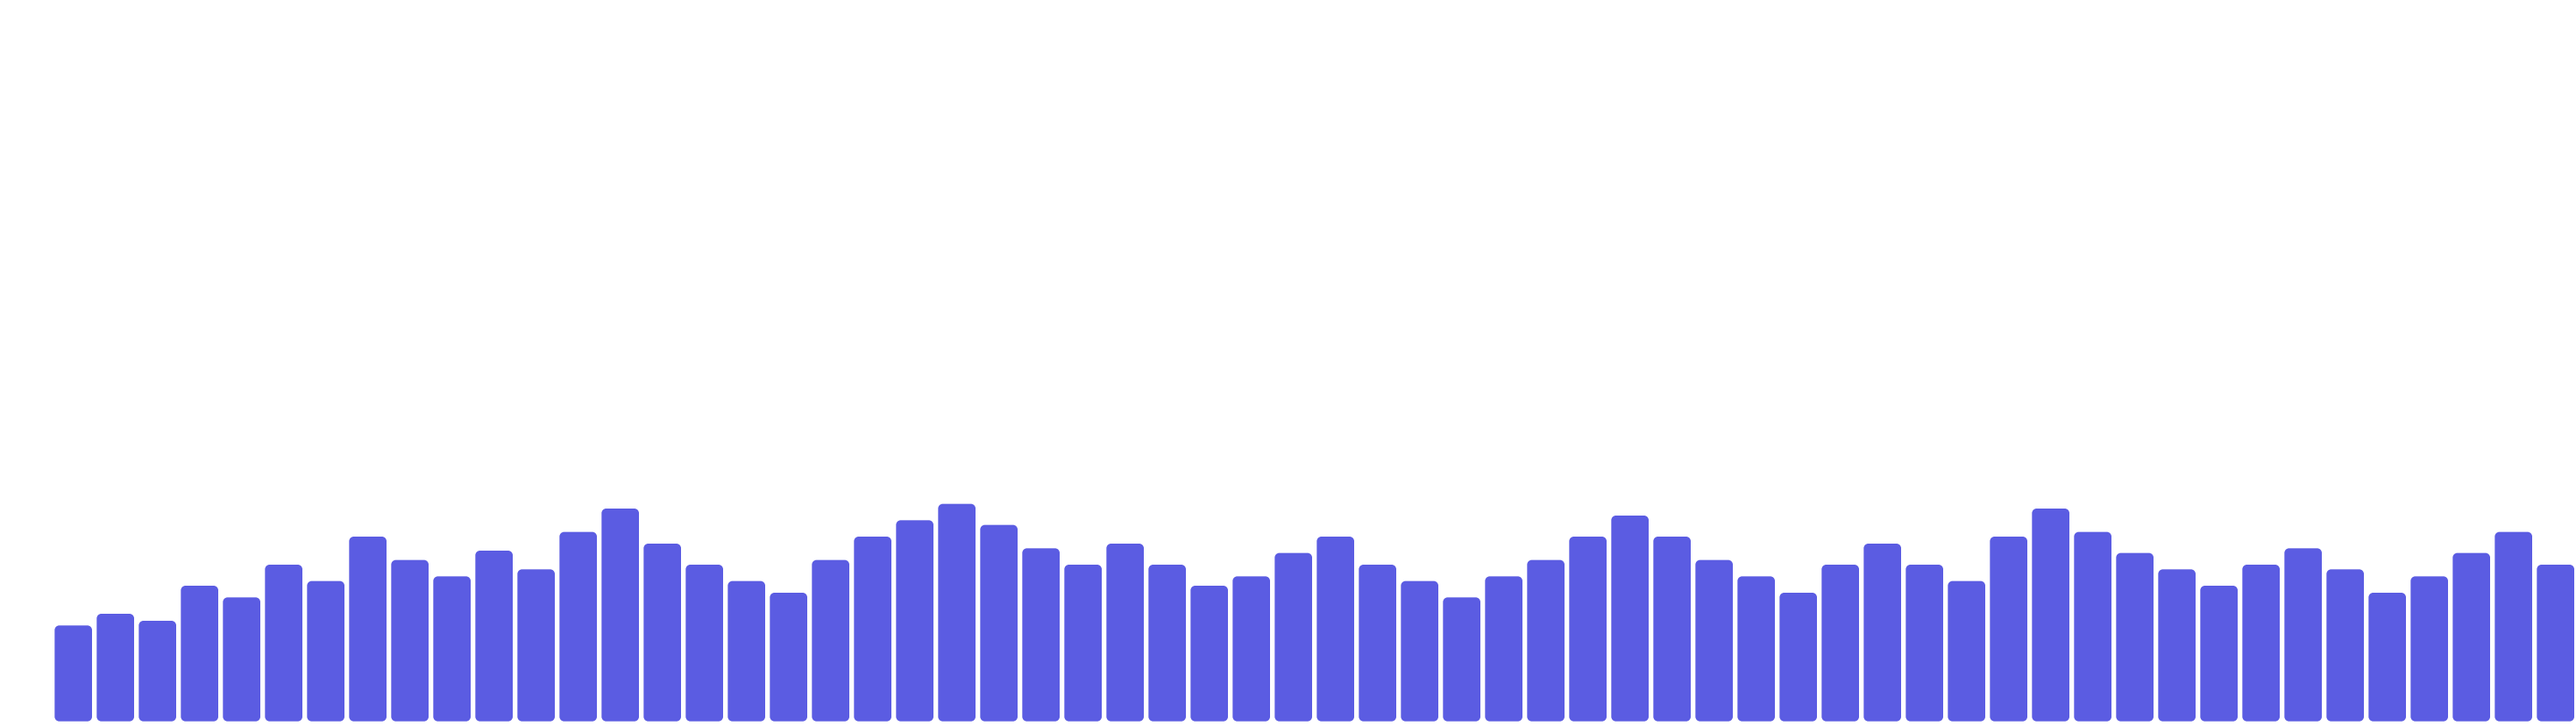

60m ago

45m

30m

15m

now

+ Add Server

Settings

- General
- Appearance
- >_

Terminal
- 🔗A

Language

Terminal

Choose where you type terminal commands.

Command input

Bottom input bar

A fixed input row below the terminal output.

Inline in terminal

Type directly on the last line, like a real terminal.

Font size

12131415

Cursor style

BlockBarUnderline

Copy on select

Copy terminal selections to the clipboard automatically.



MauLink

Search servers or hosts...

+ Add Server

Search

Production2

Web-01192.168.1.20

DB-01192.168.1.21

Development2

Dev-01dev.example.com

Staging-0110.0.0.14

Files

Web-01 · SFTP · /opt/app

<

>

/

>

opt

>

app

Refresh

Name	Size	Modified
app	—	Sep 28 09:12
node_modules	—	Sep 27 21:40
public	—	Sep 20 11:03
src	—	Sep 27 18:20
package.json	2.1 KB	Sep 28 08:59
deploy.sh	4.8 KB	Sep 27 18:20
app.tar.gz	14.2 MB	Sep 28 09:10
.env	1.2 KB	Sep 20 11:03

View

Edit

Download

Copy Path

Delete

Transfers2 active

Clear completed

File	Progress	Speed	Status	
app.tar.gz	72%	14 MB/s	Uploading	
config.yml	100%	—	Completed	
backup.sql	—	—	Failed · timeout	Retry



First connection to this server



MauLink is connecting to Web-01 for the first time

First connection to this server. Confirm its identity to continue.

192.168.1.20

ED25519

SHA256:j8Kd2Qp0ZsV4nR7tBxW1yEfHcL9aU3oPq5N6rSdT0w

Once saved, MauLink will warn you if this server's identity changes later.

[What is a server fingerprint?](#)

Cancel

Trust & Connect



Can't connect to Web-01



192.168.1.20:22

Could not establish an SSH connection.

Possible causes:

- Server is not running
- SSH service is not running
- Port is unreachable
- Network connection issue

[^ View details](#)

Connection refused

ECONNREFUSED 192.168.1.20:22

Retry

Edit connection



Web-01 requires credentials



Password

.....

☒ Remember securely

Stored securely in the system keychain / Windows Credential Manager

Cancel

Connect



Delete Web-01?



The server configuration will be removed from MauLink. This action cannot be undone.

☐ Also delete the saved credentials

Cancel

Delete server



Server identity changed



The saved server fingerprint doesn't match the current server. This could be caused by a server reinstall or an SSH configuration change, or it may indicate a security risk.

Previous

SHA256: j8Kd2Qp0ZsV4nR7tBxW1yEfHcL9aU3oPq5N6rSdT0w

Current

SHA256: 3bF9wQ1sLmT6yUcV2nHpXeK8aRdG4oZjM5rN0tS7qBv

Advanced: Update saved fingerprint

Continue

Cancel

Edit Server



Update connection settings for Production Web

Server Name (optional)

Production Web

Host

Port

192.168.1.20

22

Username

root

Authentication

Password
 SSH Key

Password

.....

Leave empty to keep the saved credential

Delete Server
 Remove this server and its configuration from MauLink
 Delete

Cancel

Save Changes

MauLink

Web-01

root@192.168.1.20

Exit Focus

Terminal 1 × Terminal 2 × nginx.log × deploy × +

Find

```
root@web-01:/var/www/app$ git pull origin main
remote: Enumerating objects: 42, done.
remote: Counting objects: 100% (42/42), done.
remote: Compressing objects: 100% (28/28), done.
Unpacking objects: 100% (28/28), done.
From github.com:acme/web-app
   a1b2c3d..e4f5a6b  main       → origin/main
Updating a1b2c3d..e4f5a6b
Fast-forward
   src/api/router.ts      | 24 ++++++-----
   src/components/Shell.tsx | 12 ++++++--
   2 files changed, 31 insertions(+), 5 deletions(-)
root@web-01:/var/www/app$ npm run build
▲ Next.js 15.1.0
   Creating an optimized production build ...
✓ Compiled successfully in 18.4s
   Collecting page data ...
   Generating static pages (0/12) ...
✓ Generating static pages (12/12)
   Finalizing page optimization ...

Route (app)      Size      First Load JS
┌ ○ /            1.2 kB      98 kB
├ ○ /dashboard   3.4 kB     112 kB
└ ○ /settings    2.1 kB     104 kB
✓ Build completed in 27.8s

root@web-01:/var/www/app$
```

Focus Mode · Quick Monitor and Files hidden, Terminal takes most of the space

80×24 UTF-8 zsh

MauLink

搜索服务器或主机...

+ 添加服务器

搜索

生产环境2

Web-01192.168.1.20

DB-01192.168.1.21

开发环境2

Dev-01dev.example.com

Staging-0110.0.0.14

+ 添加服务器

Web-01

root@192.168.1.20 已连接

重新连接

断开连接

终端 1 × 终端 2 × +

聚焦

root@web-01:/var/www/app\$ ls -la

total 48

drwxr-xr-x 8 root root 4096 Sep 28 09:12 .

drwxr-xr-x 3 root root 4096 Sep 20 11:03 ..

-rw-r--r-- 1 root root 1220 Sep 20 11:03 .env

drwxr-xr-x 118 root root 4096 Sep 27 21:40 node_modules

-rw-r--r-- 1 root root 2154 Sep 28 08:59 package.json

-rwxr-xr-x 1 root root 4830 Sep 27 18:20 deploy.sh

root@web-01:/var/www/app\$./deploy.sh --env production

▲ 正在构建资源 ...

[ok] 依赖已安装

→ 正在上传打包文件 (14.2 MB) ...

[ok] 版本 2.14.0 已激活

✓ 部署完成, 用时 42.3s

root@web-01:/var/www/app\$

↑ / > opt > app

名称

大小

修改时间

app

—

Sep 28 09:12

node_modules

—

Sep 27 21:40

public

—

Sep 20 11:03

src

—

Sep 27 18:20

logs

—

Sep 28 09:14

package.json

2.1 KB

Sep 28 08:59

上传

快速监控

CPU

24%

内存

6.2 / 16 GB

磁盘

61%

网络 · 下行

2.4 MB/s

网络 · 上行

380 KB/s

平均负载

0.42 0.38 0.31

更新于 2 秒前

进程与线程

↓

进程

线程

CPU

内存

磁盘

上行

下行

node

#4821

24.6%

postgres

#3120

12.4%

deploy.sh

#5520

8.8%

rsync

#6104

6.1%

nginx

#908

4.2%

redis-server

#1150

3.1%

dockerd

#2201

2.4%

pm2

#4302

1.2%

sshd

#7701

0.6%

cron

#8802

0.2%

已连接 192.168.1.20:22 · SSH · 18ms

正在上传 2 个文件 · 42%

查看

 搜索

还没有服务器



还没有服务器

连接你的第一台服务器。
在一个工作区中使用终端、管理文件并查看服务器状态。

+ 添加服务器

[了解 MauLink](#)

+ 添加服务器

添加服务器

✕

连接到一台新的 SSH 服务器

服务器名称（可选）

例如 Production Web

主机地址

192.168.1.10

端口

22

用户名

root

认证方式

密码

SSH 密钥

密码

.....

👁

🔑 凭据将安全存储在系统钥匙串 / Windows 凭据管理器中

> 高级

跳板机 · 代理 · 保持连接

测试连接

连接

搜索

生产环境2

Web-01
192.168.1.20

DB-01
192.168.1.21

开发环境2

Dev-01
dev.example.com

Staging-01
10.0.0.14

+ 添加服务器

监控

Web-01 • root@192.168.1.20 • 实时

实时

1h

24h

CPU

24 %


8 核 · 负载 0.42



内存

6.2 / 16 GB

已用 39% · 可用 9.8 GB



磁盘

61 %

挂载于 512 GB · 可用 312 GB



网络

2.4 MB/s ↓

↑ 380 KB/s · 延迟 18 ms



负载

0.42

0.38 · 0.31 (1 / 5 / 15m)




运行时间

42d 7h 18m

自 8 月 16 日 21:40

CPU 历史 最近 60 分钟

● 使用率 当前 24%

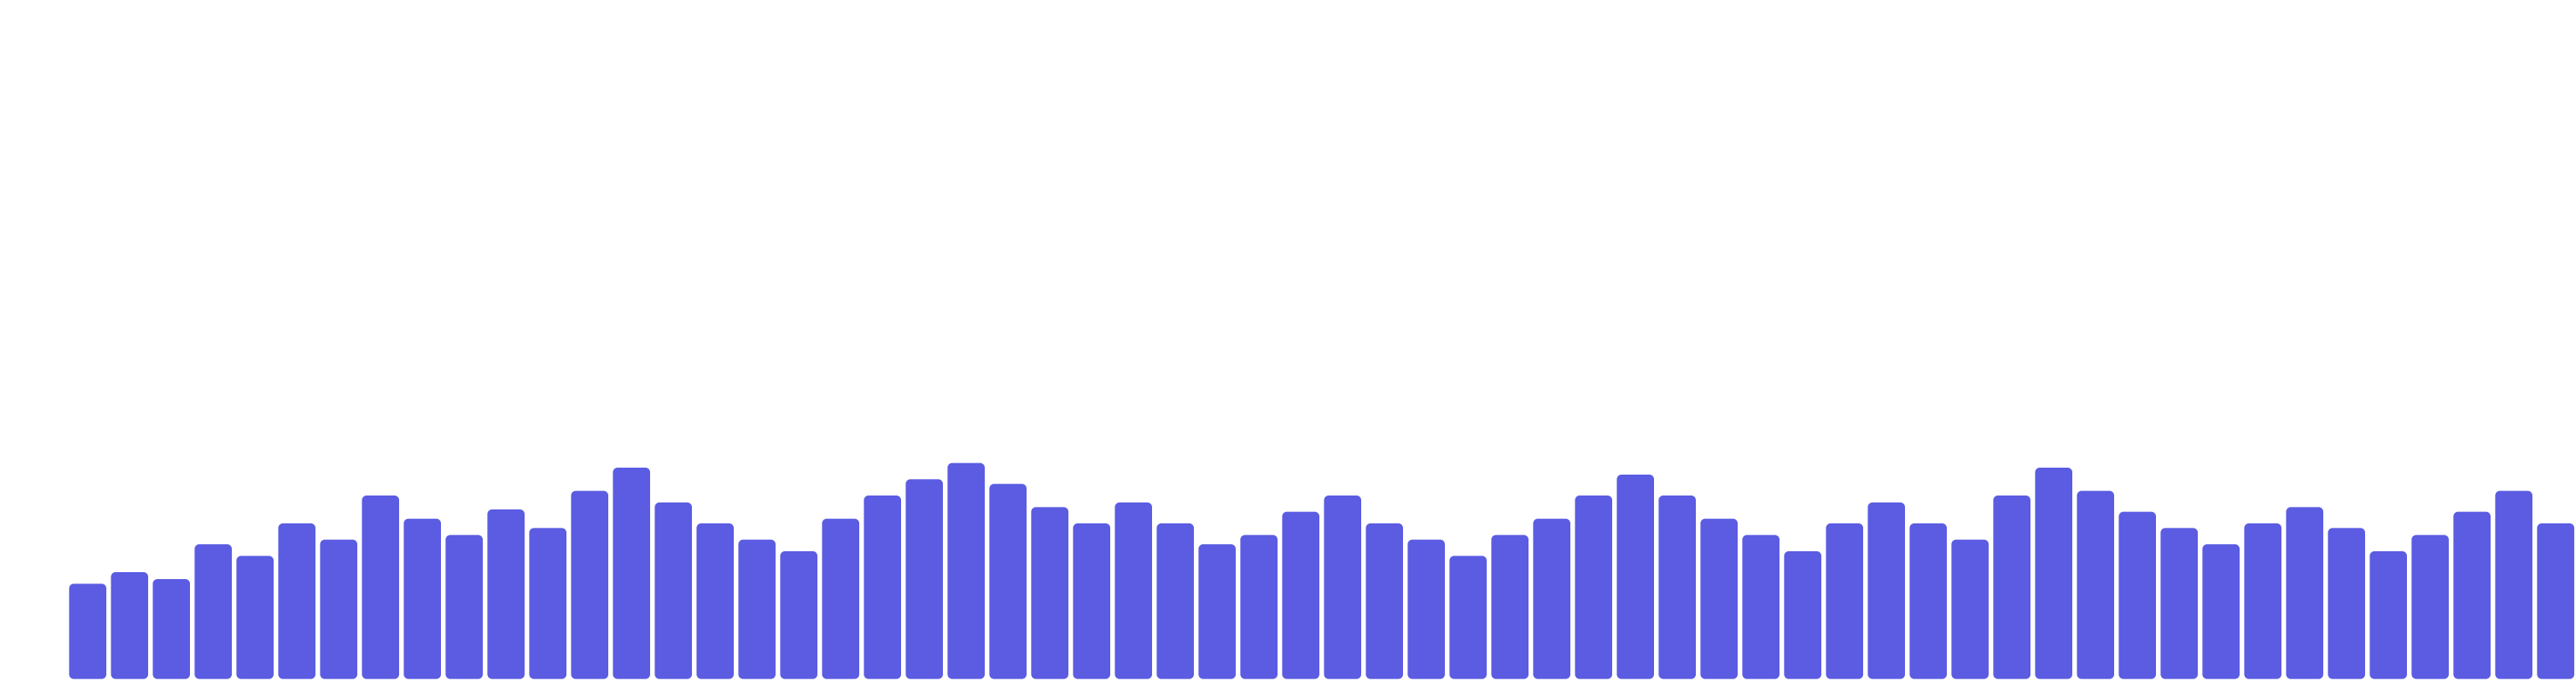

60 分钟前

45 分钟前

30 分钟前

15 分钟前

现在

设置

- ≡

通用
- 🎨

外观
- >_

终端
- 🌐

语言

终端

选择在何处输入终端命令。

命令输入方式

- ☒

底部输入栏

在终端输出下方固定一行输入框。
- ☐

终端内联输入

直接在终端最后一行输入，像真实终端一样。

字号

12

13

14

15

光标样式

方块

竖线

下划线

选中即复制

自动将终端中选中的内容复制到剪贴板。

MauLink

搜索服务器或主机...

+ 添加服务器

搜索

生产2

Web-01192.168.1.20

DB-01192.168.1.21

开发2

Dev-01dev.example.com

Staging-0110.0.0.14

文件

Web-01 · SFTP · /opt/app

< > / > opt > app

刷新

名称	大小	修改时间
app	—	9月28日 09:12
node_modules	—	9月27日 21:40
public	—	9月20日 11:03
src	—	9月27日 18:20
package.json	2.1 KB	9月28日 08:59
deploy.sh	4.8 KB	9月27日 18:20
app.tar.gz	14.2 MB	9月28日 09:10
.env	1.2 KB	9月20日 11:03

查看

编辑

下载

复制路径

删除

传输2 项进行中

清除已完成



首次连接到此服务器



MauLink 首次连接 Web-01

这是 MauLink 第一次连接这台服务器。请确认服务器身份后继续。

192.168.1.20

ED25519

SHA256: j8Kd2Qp0ZsV4nR7tBxW1yEfHcL9aU3oPq5N6rSdT0w

保存该指纹后，如果服务器身份以后发生变化，MauLink 会进行安全提醒。

[什么是服务器指纹？](#)

取消

信任并连接



无法连接 Web-01



192.168.1.20:22

无法建立 SSH 连接。

可能原因：

- 服务器未启动
- SSH 服务未运行
- 端口无法访问
- 网络连接异常

^ 查看详细信息

连接被拒绝

ECONNREFUSED 192.168.1.20:22

重试

编辑连接



Web-01 需要凭据



密码

.....



☒ 安全记住

凭据将安全存储在系统钥匙串 / Windows 凭据管理器中。

取消

连接



删除 Web-01 ?



服务器配置将从 MauLink 中移除。此操作无法撤销。

☐ 同时删除已安全保存的凭据

取消

删除服务器



服务器身份发生变化



此前保存的服务器指纹与当前服务器不一致。这可能由服务器重装或 SSH 配置变化引起，也可能意味着连接存在安全风险。

之前
SHA256:j8Kd2Qp0ZsV4nR7tBxW1yEfHcL9aU3oPq5N6rSdT0w
当前
SHA256:3bF9wQ1sLmT6yUcV2nHpXeK8aRdG4oZjM5rN0tS7qBv

高级操作：更新已保存指纹

继续连接

取消连接

编辑服务器



更新 Production Web 的连接配置

服务器名称（可选）

Production Web

主机地址

端口

192.168.1.20

22

用户名

root

认证方式

密码

SSH 密钥

密码

.....

👁

🔑 留空表示不更改已保存的凭据

删除服务器

从 MauLink 中移除此服务器及其配置

删除

取消

保存更改

MauLink

Web-01

root@192.168.1.20

退出专注

终端 1 × 终端 2 × nginx.log × 部署 × +

查找

```
root@web-01:/var/www/app$ git pull origin main
remote: Enumerating objects: 42, done.
remote: Counting objects: 100% (42/42), done.
remote: Compressing objects: 100% (28/28), done.
Unpacking objects: 100% (28/28), done.
From github.com:acme/web-app
   a1b2c3d..e4f5a6b  main       → origin/main
Updating a1b2c3d..e4f5a6b
Fast-forward
   src/api/router.ts      | 24 ++++++++-----
   src/components/Shell.tsx | 12 ++++++--
   2 files changed, 31 insertions(+), 5 deletions(-)
root@web-01:/var/www/app$ npm run build
▲ Next.js 15.1.0
   Creating an optimized production build ...
✓ Compiled successfully in 18.4s
   Collecting page data ...
   Generating static pages (0/12) ...
✓ Generating static pages (12/12)
   Finalizing page optimization ...

Route (app)      Size      First Load JS
┌ ○ /            1.2 kB      98 kB
├ ○ /dashboard   3.4 kB     112 kB
└ ○ /settings    2.1 kB     104 kB
✓ Build completed in 27.8s

root@web-01:/var/www/app$
```

专注模式 · 快速监控与文件已隐藏，终端占据主要空间

80×24 UTF-8 zsh

MauLink · 设计系统

中性灰系统 · 单一低饱和靛蓝色强调色 · 紧凑桌面密度

按钮

连接

测试连接

刷新

删除

+ 添加服务器

表单控件

主机

192.168.1.20

主机

192.168.1.300

请输入有效的主机地址

密码

.....

状态

- 已连接
- 连接中
- 已断开
- 失败

终端标签页

终端 1

×

终端 2

×

+

服务器项

Web-01

192.168.1.20

Web-01

192.168.1.20

Web-01

192.168.1.20

选择控件

密码

SSH 密钥

安全记住

同时删除已保存的凭据

轻提示

文件上传完成

撤销

连接已断开

撤销

快捷监控指标

CPU

24%

内存

39%

上下文菜单

下载

重命名

复制路径

删除

Add Server



Connect to a new SSH server

Server Name (optional)

e.g. Production Web

Host

Port

192.168.1.10

22

Username

root

Authentication

PasswordSSH Key

Password

.....

Stored securely in the system keychain / Windows Credential Manager

Advanced

Jump Host

user@bastion.example.com

Jump Port

22

Proxy

None

Keep Alive Interval

30

Test Connection

Connect

添加服务器



连接到一台新的 SSH 服务器

服务器名称（可选）

例如 Production Web

主机地址

端口

192.168.1.10

22

用户名

root

认证方式

密码SSH 密钥

密码

.....👁

🔑 凭据将安全存储在系统钥匙串 / Windows 凭据管理器中

高级

跳板机

user@bastion.example.com

跳板机端口

22

代理

无

保活间隔（秒）

30

测试连接

连接

Add Server

×

Connect to a new SSH server

Server Name (optional)

e.g. Production Web

Host

Port

192.168.1.10

22

Username

root

Authentication

Password

SSH Key

Password

.....

👁

🔒

Stored securely in the system keychain / Windows Credential Manager

> Advanced

Jump Host · Proxy · Keep Alive

✔

Connection successful
Password authentication · 82 ms

Test Connection

Connect

Add Server

×

Connect to a new SSH server

Server Name (optional)

e.g. Production Web

Host

192.168.1.10

Port

22

Username

root

Authentication

Password

SSH Key

Password

.....

👁

🔒

 Stored securely in the system keychain / Windows Credential Manager

> Advanced

Jump Host · Proxy · Keep Alive

❗

 Connection failed
Connection refused (ECONNREFUSED 192.168.1.10:22)

Test Connection

Connect

添加服务器

×

连接到一台新的 SSH 服务器

服务器名称（可选）

例如 Production Web

主机地址

192.168.1.10

端口

22

用户名

root

认证方式

密码

SSH 密钥

密码

.....

👁

🔑 凭据将安全存储在系统钥匙串 / Windows 凭据管理器中

> 高级

跳板机 · 代理 · 保持连接

✔ 连接成功

密码认证 · 82 毫秒

测试连接

连接

添加服务器

×

连接到一台新的 SSH 服务器

服务器名称（可选）

例如 Production Web

主机地址

192.168.1.10

端口

22

用户名

root

认证方式

密码

SSH 密钥

密码

.....

👁

🔑 凭据将安全存储在系统钥匙串 / Windows 凭据管理器中

> 高级

跳板机 · 代理 · 保持连接

❗ 连接失败

连接被拒绝 (ECONNREFUSED 192.168.1.10:22)

测试连接

连接

MauLink · Design System

Neutral gray system · single low-saturation indigo accent · compact desktop density

Buttons

Connect

Test Connection

 Refresh

Delete

+ Add Server

Form Controls

Host

192.168.1.20

Host

192.168.1.300

Enter a valid host address

Password

.....

Status

- Connected
- Connecting
- Disconnected
- Failed

Terminal Tabs

Terminal 1 

Terminal 2 



Server Items

Web-01
192.168.1.20

Web-01
192.168.1.20

Web-01
192.168.1.20

Selection Controls

Password

SSH Key

☒ Remember securely

☐ Also delete saved credentials

Toast



 File upload complete

Undo



 Connection lost

Undo

Quick Monitor Metric

CPU24%



Memory39%



Context Menu

MauLink · 设计系统

中性灰系统 · 单一低饱和靛蓝色强调色 · 紧凑桌面密度

MauLink

Q Search servers or hosts...

+ Add Server

Q Search

Production2

Web-01192.168.1.20

DB-01192.168.1.21

Development2

Dev-01dev.example.com

Staging-0110.0.0.14

+ Add Server

Web-01

root@192.168.1.20

Connected

ReconnectDisconnect...

Terminal 1 x Terminal 2 x +

Focus ...

```
root@web-01:/var/www/app$ ls -la

total 48

drwxr-xr-x  8 root root  4096 Sep 28 09:12 .
drwxr-xr-x  3 root root  4096 Sep 20 11:03 ..
-rw-r--r--  1 root root  1220 Sep 20 11:03 .env
drwxr-xr-x 118 root root  4096 Sep 27 21:40 node_modules
-rw-r--r--  1 root root  2154 Sep 28 08:59 package.json
-rwxr-xr-x  1 root root  4830 Sep 27 18:20 deploy.sh

root@web-01:/var/www/app$ ./deploy.sh --env production
▲ Building assets ...
[ ok ] Dependencies installed
→ Uploading bundle (14.2 MB) ...
[ ok ] Release 2.14.0 activated
✓ Deployed in 42.3s

root@web-01:/var/www/app$
```

↑ / > opt > app

↻

Upload

Name	Size	Modified
app	—	Sep 28 09:12
node_modules	—	Sep 27 21:40
package.json	2.1 KB	Sep 28 08:59
deploy.sh	4.8 KB	Sep 27 18:20
app.tar.gz	14.2 MB	Sep 28 09:10
.env	1.2 KB	Sep 20 11:03

Quick Monitor

...

CPU24%

Memory6.2 / 16 GB

Disk61%

Network · Down2.4 MB/s

Network · Up380 KB/s

Load Average0.42 0.38 0.31

Updated 2s ago

Processes & Threads

↓

ProcessesThreads

CPU

Memory

Disk

Up

Down

node	#4821		24.6%
postgres	#3120		12.4%
deploy.sh	#5520		8.8%
rsync	#6104		6.1%
nginx	#908		4.2%
redis-server	#1150		3.1%
dockerd	#2201		2.4%
pm2	#4302		1.2%
sshd	#7701		0.6%
cron	#8802		0.2%

Connected

192.168.1.20:22

SSH

18ms

Uploading 2 files · 42%

View

>_ MauLink

Q Search servers or hosts...

+ Add Server

Q Search

No servers yet

No servers yet

Connect your first server.
Use the terminal, manage files and check server status in one workspace.

+ Add Server

[Learn about MauLink](#)

+ Add Server

No server connected

v0.1.0

Add Server

×

Connect to a new SSH server

Server Name (optional)

e.g. Production Web

Host

Port

192.168.1.10

22

Username

root

Authentication

Password

SSH Key

Password

.....

👁

🔒 Stored securely in the system keychain / Windows Credential Manager

> Advanced

Jump Host · Proxy · Keep Alive

Test Connection

Connect

MauLink

Q Search servers or hosts...

+ Add Server

Q Search

Production2

Web-01192.168.1.20

DB-01192.168.1.21

Development2

Dev-01dev.example.com

Staging-0110.0.0.14

Monitor

Web-01 • root@192.168.1.20 • Live

Live1h24h

CPU

24%

8 cores • load 0.42

Memory

6.2 / 16 GB

39% used • 9.8 GB available

Disk

61%

/ on 512 GB • 312 GB free

Network

2.4 MB/s ↓

↑ 380 KB/s • latency 18 ms

Load

0.42

0.38 • 0.31 (1 / 5 / 15m)

Uptime

42d7h 18m

since Aug 16, 21:40

CPU HistoryLast 60 min

Usage24% now

60m ago45m30m15mnow

+ Add Server

>_ MauLink

Q Search settings...

+ Add Server

Settings

≡ General

☺ Appearance

>_ Terminal

🌐 Language

Terminal

Choose where you type terminal commands.

Command input

☒

Bottom input bar

A fixed input row below the terminal output.

☐

Inline in terminal

Type directly on the last line, like a real terminal.

Font size

12

13

14

15

Cursor style

Block

Bar

Underline

Copy on select

Copy terminal selections to the clipboard automatically.

MauLink

Search servers or hosts...

+ Add Server

Search

Production2

Web-01192.168.1.20

DB-01192.168.1.21

Development2

Dev-01dev.example.com

Staging-0110.0.0.14

Files

Web-01 · SFTP · /opt/app

←

↑

/

>

opt

>

app

New Folder

Upload

Refresh

Name	Size	Modified
app	—	Sep 28 09:12
node_modules	—	Sep 27 21:40
public	—	Sep 20 11:03
src	—	Sep 27 18:20
package.json	2.1 KB	Sep 28 08:59
deploy.sh	4.8 KB	Sep 27 18:20
app.tar.gz	14.2 MB	Sep 28 09:10
.env	1.2 KB	Sep 20 11:03

View

Edit

Download

Copy Path

Delete

Transfers2 active

Clear completed

File	Progress	Speed	Status	
app.tar.gz	72%	14 MB/s	Uploading	
config.yml	100%	—	Completed	
backup.sql	—	—	Failed · timeout	Retry



First connection to this server



MauLink is connecting to Web-01 for the first time

First connection to this server. Confirm its identity to continue.

192.168.1.20

ED25519

SHA256: j8Kd2Qp0ZsV4nR7tBxW1yEfHcL9aU3oPq5N6rSdT0w

Once saved, MauLink will warn you if this server's identity changes later.

[What is a server fingerprint?](#)

Cancel

Trust & Connect



Can't connect to Web-01



192.168.1.20:22

Could not establish an SSH connection.

Possible causes:

- Server is not running
- SSH service is not running
- Port is unreachable
- Network connection issue

^ View details

Connection refused

ECONNREFUSED 192.168.1.20:22

Retry

Edit connection



Web-01 requires credentials



Password

.....



☒ Remember securely

Stored securely in the system keychain / Windows Credential Manager.

Cancel

Connect



Delete Web-01?



The server configuration will be removed from MauLink. This action cannot be undone.

☐

Also delete the saved credentials

Cancel

Delete server



Server identity changed



The saved server fingerprint doesn't match the current server. This could be caused by a server reinstall or an SSH configuration change, or it may indicate a security risk.

Previous

SHA256:j8Kd2Qp0ZsV4nR7tBxW1yEfHcL9aU3oPq5N6rSdT0w

Current

SHA256:3bF9wQ1sLmT6yUcV2nHpXeK8aRdG4oZjM5rN0tS7qBv

Advanced: Update saved fingerprint

Continue

Cancel

Edit Server

×

Update connection settings for Production Web

Server Name (optional)

Production Web

Host

192.168.1.20

Port

22

Username

root

Authentication

Password

SSH Key

Password

.....

👁

🔒 Leave empty to keep the saved credential

Delete Server

Remove this server and its configuration from MauLink

Delete

Cancel

Save Changes

MauLink

Web-01

root@192.168.1.20

Exit Focus

Terminal 1 ×

Terminal 2 ×

nginx.log ×

deploy ×

+

Find

```
root@web-01:/var/www/app$ git pull origin main
remote: Enumerating objects: 42, done.
remote: Counting objects: 100% (42/42), done.
remote: Compressing objects: 100% (28/28), done.
Unpacking objects: 100% (28/28), done.
From github.com:acme/web-app
   a1b2c3d..e4f5a6b  main       -> origin/main
Updating a1b2c3d..e4f5a6b
Fast-forward
   src/api/router.ts      | 24 ++++++++-----
   src/components/Shell.tsx | 12 ++++++--
   2 files changed, 31 insertions(+), 5 deletions(-)
root@web-01:/var/www/app$ npm run build
▲ Next.js 15.1.0
   Creating an optimized production build ...
✓ Compiled successfully in 18.4s
   Collecting page data ...
   Generating static pages (0/12) ...
✓ Generating static pages (12/12)
   Finalizing page optimization ...

Route (app)      Size      First Load JS
┌ ○ /            1.2 kB      98 kB
├ ○ /dashboard   3.4 kB     112 kB
└ ○ /settings    2.1 kB     104 kB
✓ Build completed in 27.8s
```

root@web-01 : /var/www/app \$

Focus Mode · Quick Monitor and Files hidden, Terminal takes most of the space

80×24 UTF-8 zsh

Add Server

×

Connect to a new SSH server

Server Name (optional)

e.g. Production Web

Host

192.168.1.10

Port

22

Username

root

Authentication

Password

SSH Key

Password

.....

👁

🔒 Stored securely in the system keychain / Windows Credential Manager

⌵ Advanced

Jump Host

user@bastion.example.com

Jump Port

22

Proxy

None

Keep Alive Interval

30

Test Connection

Connect

Add Server

×

Connect to a new SSH server

Server Name (optional)

e.g. Production Web

Host

192.168.1.10

Port

22

Username

root

Authentication

Password

SSH Key

Password

.....

👁

🔒 Stored securely in the system keychain / Windows Credential Manager

> Advanced

Jump Host · Proxy · Keep Alive

✔ Connection successful

Password authentication · 82 ms

Test Connection

Connect

Add Server

×

Connect to a new SSH server

Server Name (optional)

e.g. Production Web

Host

192.168.1.10

Port

22

Username

root

Authentication

Password

SSH Key

Password

.....

👁

🔒 Stored securely in the system keychain / Windows Credential Manager

> Advanced

Jump Host · Proxy · Keep Alive

❗ Connection failed

Connection refused (ECONNREFUSED 192.168.1.10:22)

Test Connection

Connect

MauLink · 设计系统

中性灰系统 · 单一低饱和靛蓝色强调色 · 紧凑桌面密度

按钮

连接

测试连接

刷新

删除

+ 添加服务器

表单控件

主机

192.168.1.20

主机

192.168.1.300

请输入有效的主机地址

密码

.....

状态

- 已连接
- ◡ 连接中
- 已断开
- ⚠ 失败

终端标签页

终端 1 ×

终端 2 ×

+

服务器项

● Web-01
192.168.1.20

● Web-01
192.168.1.20

◡ Web-01
192.168.1.20

选择控件

密码

SSH 密钥

☒ 安全记住

☐ 同时删除已保存的凭据

轻提示

✔ 文件上传完成

撤销

ⓘ 连接已断开

撤销

快捷监控指标

CPU

24%

内存

39%

上下文菜单

⬇ 下载

✎ 重命名

🔗 复制路径

🗑 删除

MauLink

搜索服务器或主机...

+ 添加服务器

搜索

生产环境2

Web-01192.168.1.20

DB-01192.168.1.21

开发环境2

Dev-01dev.example.com

Staging-0110.0.0.14

+ 添加服务器

Web-01

root@192.168.1.20 已连接

重新连接

断开连接

终端 1 × 终端 2 × +

聚焦

root@web-01:/var/www/app\$ ls -la

total 48

drwxr-xr-x 8 root root 4096 Sep 28 09:12 .

drwxr-xr-x 3 root root 4096 Sep 20 11:03 ..

-rw-r--r-- 1 root root 1220 Sep 20 11:03 .env

drwxr-xr-x 118 root root 4096 Sep 27 21:40 node_modules

-rw-r--r-- 1 root root 2154 Sep 28 08:59 package.json

-rwxr-xr-x 1 root root 4830 Sep 27 18:20 deploy.sh

root@web-01:/var/www/app\$./deploy.sh --env production

▲ 正在构建资源 ...

[ok] 依赖已安装

→ 正在上传打包文件 (14.2 MB) ...

[ok] 版本 2.14.0 已激活

✓ 部署完成, 用时 42.3s

root@web-01:/var/www/app\$

↑ / > opt > app

名称大小修改时间

app- Sep 28 09:12

node_modules- Sep 27 21:40

package.json2.1 KB Sep 28 08:59

deploy.sh4.8 KB Sep 27 18:20

app.tar.gz14.2 MB Sep 28 09:10

.env1.2 KB Sep 20 11:03

快速监控

CPU24%

内存6.2 / 16 GB

磁盘61%

网络 · 下行2.4 MB/s

网络 · 上行380 KB/s

平均负载0.42 0.38 0.31

更新于 2 秒前

进程与线程

进程线程

CPU内存磁盘上行下行

node#482124.6%

postgres#312012.4%

deploy.sh#55208.8%

rsync#61046.1%

nginx#9084.2%

redis-server#11503.1%

dockerd#22012.4%

pm2#43021.2%

sshd#77010.6%

...

已连接 192.168.1.20:22 · SSH · 18ms

正在上传 2 个文件 · 42%

查看

>_ MauLink

Q 搜索服务器或主机...

+ 添加服务器

Q 搜索

还没有服务器

还没有服务器

连接你的第一台服务器。
在一个工作区中使用终端、管理文件并查看服务器状态。

+ 添加服务器

了解 MauLink

+ 添加服务器

未连接任何服务器

v0.1.0

添加服务器

✕

连接到一台新的 SSH 服务器

服务器名称（可选）

例如 Production Web

主机地址

192.168.1.10

端口

22

用户名

root

认证方式

密码

SSH 密钥

密码

.....

👁

🔑 凭据将安全存储在系统钥匙串 / Windows 凭据管理器中

> 高级

跳板机 · 代理 · 保持连接

测试连接

连接

> MauLink

Q 搜索服务器或主机...

+ 添加服务器

Q 搜索

生产环境2

Web-01192.168.1.20

DB-01192.168.1.21

开发环境2

Dev-01dev.example.com

Staging-0110.0.0.14

监控

Web-01 • root@192.168.1.20 • 实时

实时1h24h

CPU

24%

8核 · 负载 0.42

内存

6.2 / 16 GB

已用 39% · 可用 9.8 GB

磁盘

61%

挂载于 512 GB · 可用 312 GB

网络

2.4 MB/s ↓

↑ 380 KB/s · 延迟 18 ms

负载

0.42

0.38 · 0.31 (1 / 5 / 15m)

运行时间

42d7h 18m

自 8 月 16 日 21:40

CPU 历史最近 60 分钟

● 使用率 当前 24%

60 分钟前45 分钟前30 分钟前15 分钟前现在

+ 添加服务器

>_ MauLink

Q 搜索设置...

+ 添加服务器

设置

≡ 通用

☺ 外观

>_ 终端

🗺 语言

终端

选择在何处输入终端命令。

命令输入方式

底部输入栏

在终端输出下方固定一行输入框。

终端内联输入

直接在终端最后一行输入，像真实终端一样。

字号

12

13

14

15

光标样式

方块

竖线

下划线

选中即复制

自动将终端中选中的内容复制到剪贴板。

MauLink

搜索服务器或主机...

+ 添加服务器

搜索

生产2

Web-01192.168.1.20

DB-01192.168.1.21

开发2

Dev-01dev.example.com

Staging-0110.0.0.14

文件

Web-01 · SFTP · /opt/app

<

>

/

opt

>

app

名称

大小

修改时间

app-

9月28日 09:12

node_modules-

9月27日 21:40

public-

9月20日 11:03

src-

9月27日 18:20

package.json2.1 KB

9月28日 08:59

deploy.sh4.8 KB

9月27日 18:20

app.tar.gz14.2 MB

9月28日 09:10

.env1.2 KB

9月20日 11:03

查看

编辑

下载

复制路径

删除

刷新

传输2 项进行中

清除已完成

文件

进度

速度

状态

app.tar.gz

72%

14 MB/s

上传中

config.yml

100%

-

已完成

backup.sql

-

-

失败 · 超时

重试



首次连接到此服务器



MauLink 首次连接 Web-01

这是 MauLink 第一次连接这台服务器。请确认服务器身份后继续。

192.168.1.20

ED25519

SHA256: j8Kd2Qp0ZsV4nR7tBxW1yEfHcL9aU3oPq5N6rSdT0w

保存该指纹后，如果服务器身份以后发生变化，MauLink 会进行安全提醒。

[什么是服务器指纹？](#)

取消

信任并连接



无法连接 Web-01



192.168.1.20:22

无法建立 SSH 连接。

可能原因：

- 服务器未启动
- SSH 服务未运行
- 端口无法访问
- 网络连接异常

^ 查看详细信息

连接被拒绝

ECONNREFUSED 192.168.1.20:22

重试

编辑连接



Web-01 需要凭据

×

密码

.....



☒ 安全记住



凭据将安全存储在系统钥匙串 / Windows 凭据管理器中。

取消

连接



删除 Web-01 ?



服务器配置将从 MauLink 中移除。此操作无法撤销。

☐ 同时删除已安全保存的凭据

取消

删除服务器



服务器身份发生变化



此前保存的服务器指纹与当前服务器不一致。这可能由服务器重装或 SSH 配置变化引起，也可能意味着连接存在安全风险。

之前
SHA256:j8Kd2Qp0ZsV4nR7tBxW1yEfHcL9aU3oPq5N6rSdT0w
当前
SHA256:3bF9wQ1sLmT6yUcV2nHpXeK8aRdG4oZjM5rN0tS7qBv

高级操作：更新已保存指纹

继续连接

取消连接

编辑服务器

✕

更新 Production Web 的连接配置

服务器名称（可选）

Production Web

主机地址

192.168.1.20

端口

22

用户名

root

认证方式

密码

SSH 密钥

密码

.....

👁

🔑 留空表示不更改已保存的凭据

删除服务器

从 MauLink 中移除此服务器及其配置

删除

取消

保存更改

MauLink

Web-01

root@192.168.1.20

退出专注

终端 1 ×

终端 2 ×

nginx.log ×

部署 ×

+

查找

```
root@web-01:/var/www/app$ git pull origin main
remote: Enumerating objects: 42, done.
remote: Counting objects: 100% (42/42), done.
remote: Compressing objects: 100% (28/28), done.
Unpacking objects: 100% (28/28), done.
From github.com:acme/web-app
   a1b2c3d..e4f5a6b  main       → origin/main
Updating a1b2c3d..e4f5a6b
Fast-forward
   src/api/router.ts      | 24 ++++++++-----
   src/components/Shell.tsx | 12 ++++++--
   2 files changed, 31 insertions(+), 5 deletions(-)
root@web-01:/var/www/app$ npm run build
▲ Next.js 15.1.0
   Creating an optimized production build ...
✓ Compiled successfully in 18.4s
   Collecting page data ...
   Generating static pages (0/12) ...
✓ Generating static pages (12/12)
   Finalizing page optimization ...

Route (app)      Size      First Load JS
┌ ○ /            1.2 kB      98 kB
├ ○ /dashboard   3.4 kB     112 kB
└ ○ /settings    2.1 kB     104 kB
✓ Build completed in 27.8s
```

root@web-01 : /var/www/app \$

专注模式 · 快速监控与文件已隐藏，终端占据主要空间80×24 UTF-8 zsh

添加服务器



连接到一台新的 SSH 服务器

服务器名称（可选）

例如 Production Web

主机地址

端口

192.168.1.10

22

用户名

root

认证方式

密码

SSH 密钥

密码

.....

👁

🔑 凭据将安全存储在系统钥匙串 / Windows 凭据管理器中

高级

跳板机

user@bastion.example.com

跳板机端口

22

代理

无

保活间隔（秒）

30

测试连接

连接

添加服务器

×

连接到一台新的 SSH 服务器

服务器名称（可选）

例如 Production Web

主机地址

192.168.1.10

端口

22

用户名

root

认证方式

密码

SSH 密钥

密码

.....

👁

🔑 凭据将安全存储在系统钥匙串 / Windows 凭据管理器中

> 高级

跳板机 · 代理 · 保持连接

✔ 连接成功

密码认证 · 82 毫秒

测试连接

连接

添加服务器

✕

连接到一台新的 SSH 服务器

服务器名称（可选）

例如 Production Web

主机地址

192.168.1.10

端口

22

用户名

root

认证方式

密码

SSH 密钥

密码

.....

👁

🔑 凭据将安全存储在系统钥匙串 / Windows 凭据管理器中

> 高级

跳板机 · 代理 · 保持连接

❗ 连接失败

连接被拒绝 (ECONNREFUSED 192.168.1.10:22)

测试连接

连接



package.json

/opt/app/package.json



2.1 KB · Modified Sep 28 08:59 · rw-r--r--

```
1  {
2    "name": "web-app",
3    "version": "2.14.0",
4    "private": true,
5    "scripts": {
6      "dev": "next dev",
7      "build": "next build"
8    },
9    "dependencies": {
10     "next": "15.1.0"
11   }
12 }
```

编辑

下载

关闭



package.json

/opt/app/package.json



● 未保存的更改 · 42 行 · UTF-8

```
1  {  
2    "name": "web-app",  
3    "version": "2.14.0",  
4    "scripts": {  
5      "build": "next build"  
6    },  
7  }
```

取消

保存更改

16 · Download Toast / 下载提示



正在下载 package.json

2.1 KB · 12 MB/s

64%



package.json 下载完成

已保存到 ~/Downloads

[打开文件夹](#)

 删除 package.json ?



该文件将从服务器上永久删除，此操作无法撤销。

取消

删除