

*Universitatea Tehnică din Cluj-Napoca
Facultatea de Automatică și Calculatoare
Secția de Automatică și Informatică Aplicată*

Noissete

~ Restaurant ~

Membrii echipei:

- Team Leader: Păcurar Meda-Carmen
- Developer: Narița Mihaela
- Developer: Lazarec Andreia Maria
- Tester: Danciu Joelle Mirela

Anul universitar 2020 – 2021

Conținut

Introducere	3
Enunțul problemei	3
Obiective	3
Specificații.....	3
Arhitectura aplicației	5
Diagrama claselor	5
Diagrama use-case	6
Diagrama bazei de date	7
Implementarea aplicației	8
Testarea aplicației.....	15
Anexa (Cod Sursa)	25
Baza de date	25
Webform	26
Proiect_client_template	38



Introducere

Enunțul problemei

Cerința pentru acest proiect se rezumă la crearea unei aplicații complexe proiectate multinivel, cu bază de date, cu un nivel logic implementat ca serviciu web și cu nivelul de prezentare în format ASP.net.

Obiective

Obiectivul proiectului este de a crea o aplicație Desktop care administrează activitatea restaurantului Noisette, care prezintă trei concepte de restaurante.

Specificații

Aplicația curentă se adresează atât clienților restaurantului, cât și bucătarilor, ea prezentând funcționalități diferite în funcție de tipul utilizatorului.

În cazul utilizatorilor de tip client, aceștia pot:

- *Efectua operația de Sign-Up* – înregistrarea în baza de date a unui nou client;
- *Efectua operația de Log In* – verificarea existenței unui cont valid în baza de date și accesarea contului curent în cadrul aplicației;
- *Vizualiza locațiile curente ale restaurantelor* – pagina care conține locațiile restaurantelor și alte detalii despre acestea;
- *Vizualiza meniul* – pagina care conține meniul pentru fiecare concept de restaurant;
- *Vizualiza lista bucătarilor* – pagina care conține lista bucătarilor și detalii despre aceștia;
- *Efectua rezervări* – clientul poate efectua o rezervare ținând cont de rezervările deja existente, aceștia având opțiunile de a alege restaurantul, data, ora și bucătarul dorit;
- *Șterge rezervări* – clientul poate șterge o rezervare existentă după index, aceasta fiind ștersă din baza de date;
- *Vizualiza rezervările curente* – clientul poate accesa lista rezervărilor curente;
- *Vizualiza datele din cont* – pagina conține informațiile personale ale utilizatorului;
- *Actualiza datele din cont* – clientul poate actualiza datele personale, parola sau alte detalii ale contului;
- *Șterge contul* – contul clientului este șters din baza de date, odată cu potențialele rezervări active pe care acesta le-ar putea avea;
- *Efectua operația de Log Out* – clientul este scos din cont și revine la pagina principală.

În cazul utilizatorilor de tip bucătar, aceștia pot:

- *Efectua operația de Log In* – verificarea existenței unui cont valid în baza de date și accesarea contului curent în cadrul aplicației;
- *Vizualiza locațiile curente ale restaurantelor* – pagina care conține locațiile restaurantelor și alte detalii despre acestea;



Industrial Informatics – Project

- *Vizualiza meniul* – pagina care conține meniul pentru fiecare concept de restaurant;
- *Vizualiza lista bucătarilor* – pagina care conține lista bucătarilor și detalii despre aceștia;
- *Vizualiza rezervările curente* – bucătarii pot vedea rezervările făcute de client la care trebuie să fie prezenți;
- *Vizualiza datele din cont* – pagina conține informațiile personale ale bucătarului;
- *Actualiza datele din cont* – bucătarul poate actualiza datele personale, parola sau alte detalii ale contului;
- *Sterge contul* – contul bucătarului este șters din baza de date, odată cu potențialele rezervări active pe care acesta le-ar putea avea;
- *Efectua operația de Log Out* – bucătarul este scos din cont și revine la pagina principală.

În cazul în care utilizatorii nu au cont sau nu se autentifică, aceștia au acces doar la pagina principală, cea cu locațiile restaurantelor, cu bucătarii și la meniu. Pentru orice altă acțiune este nevoie de autentificare sau înregistrare.



Arhitectura aplicației

Diagrama claselor

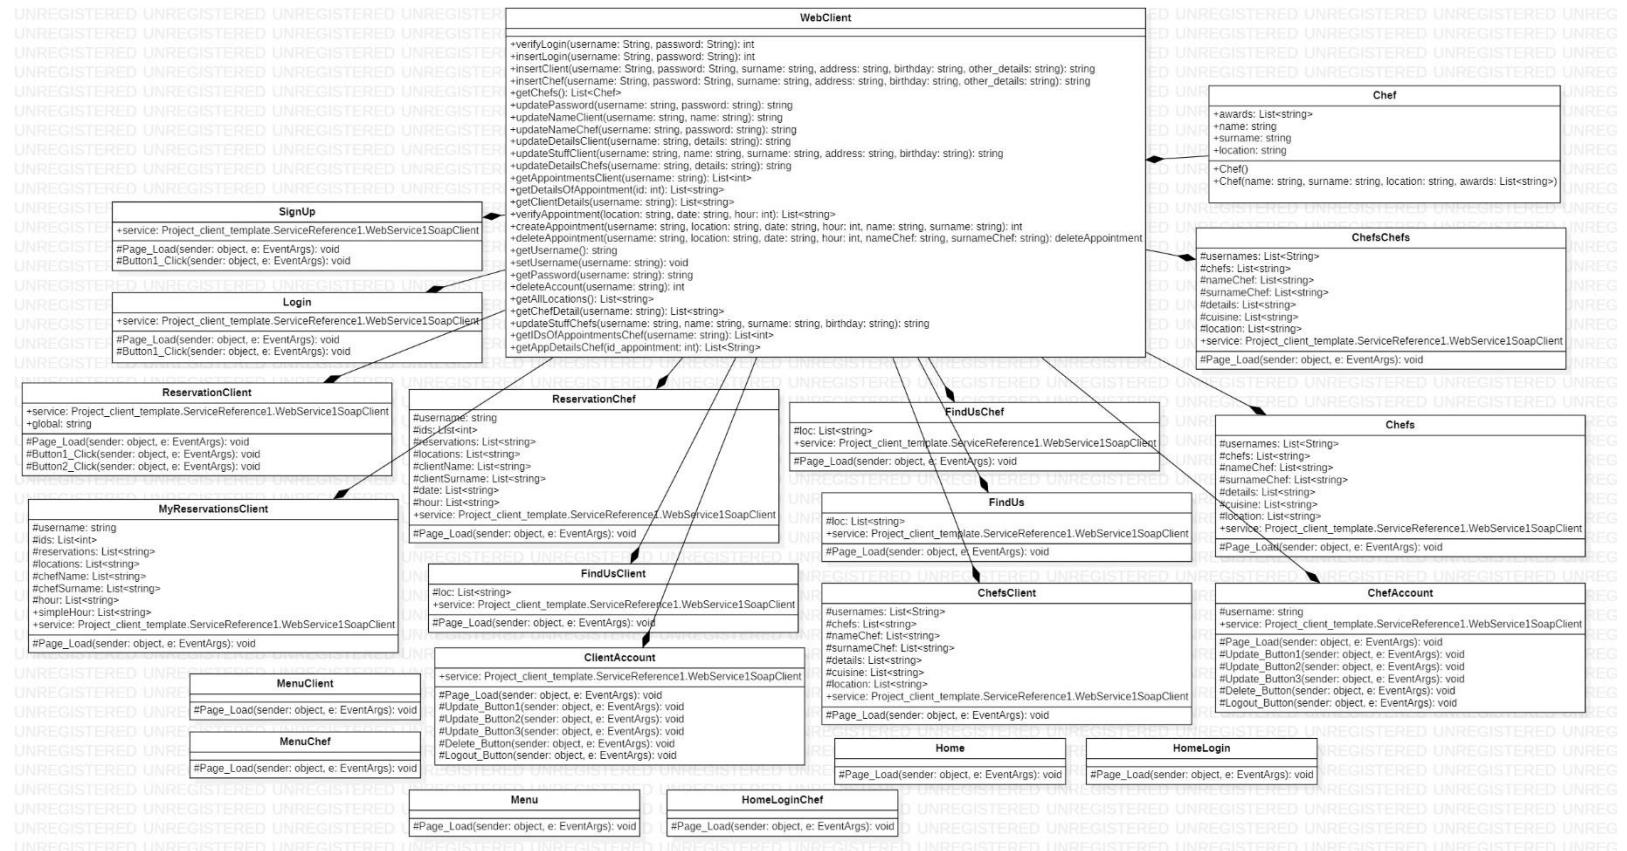


Diagrama use-case


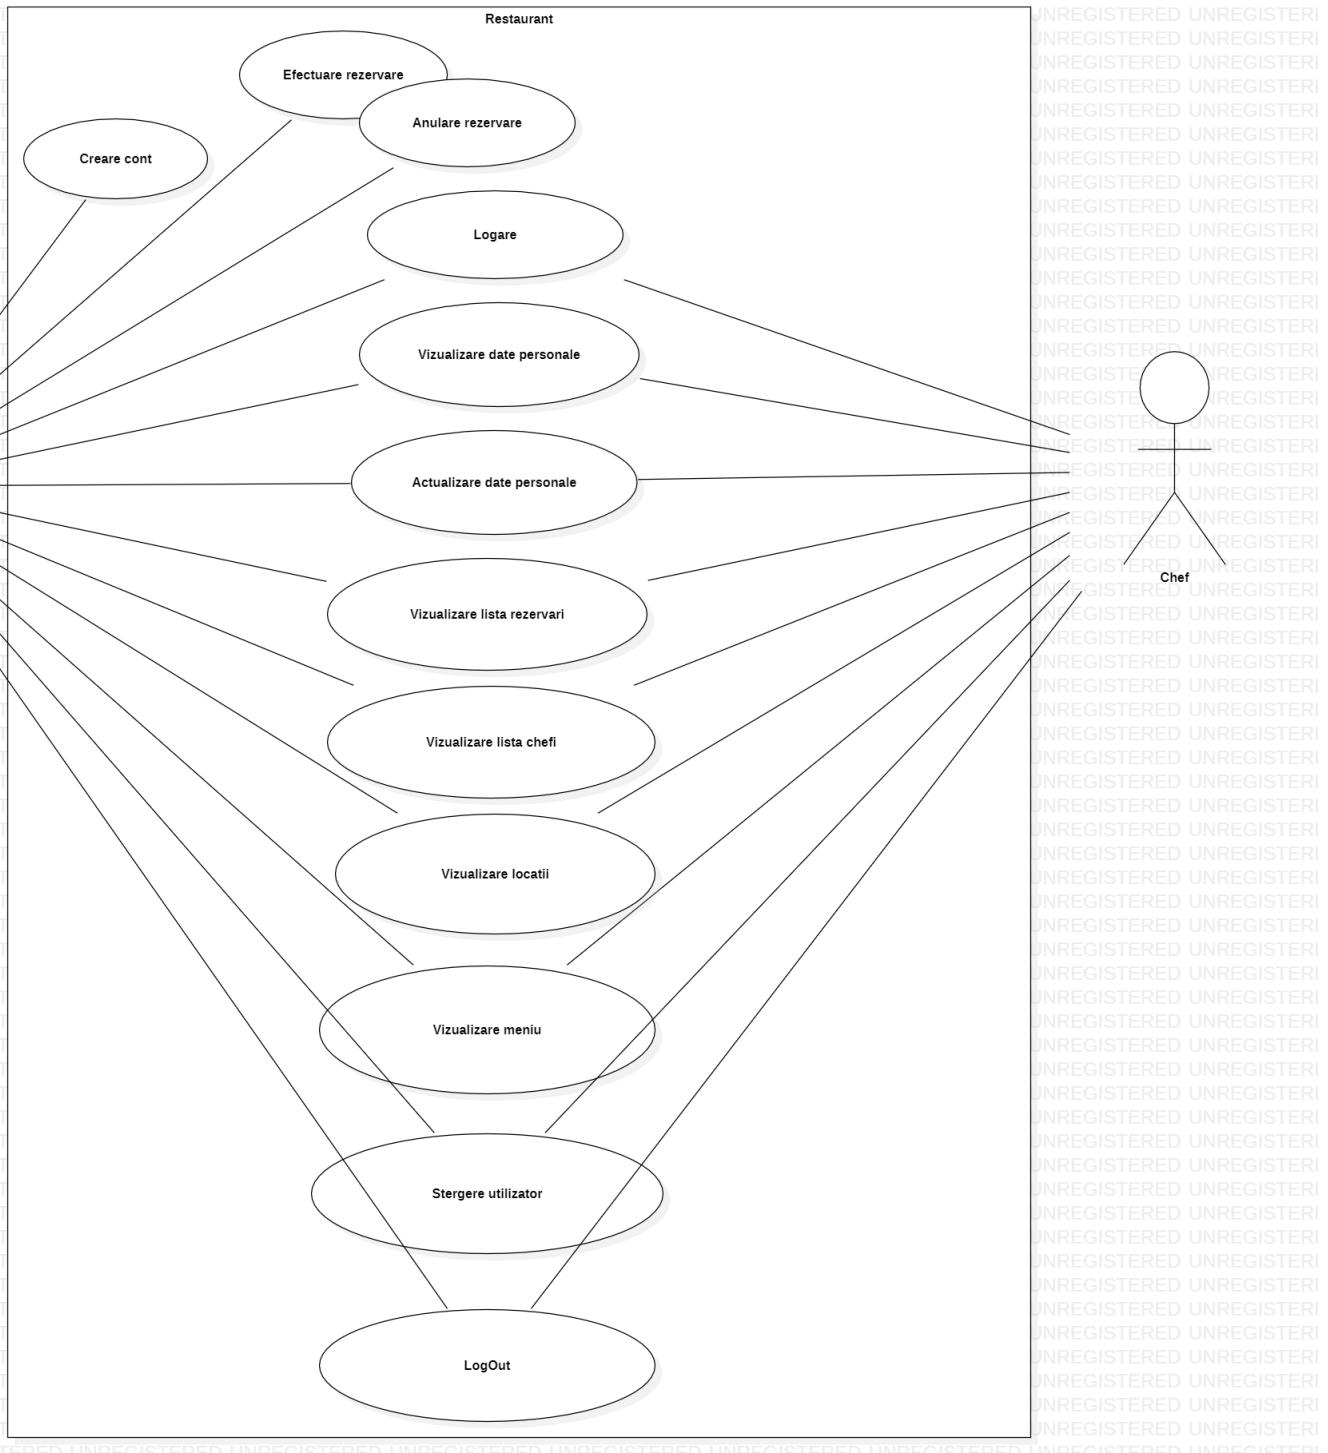


Diagrama bazei de date

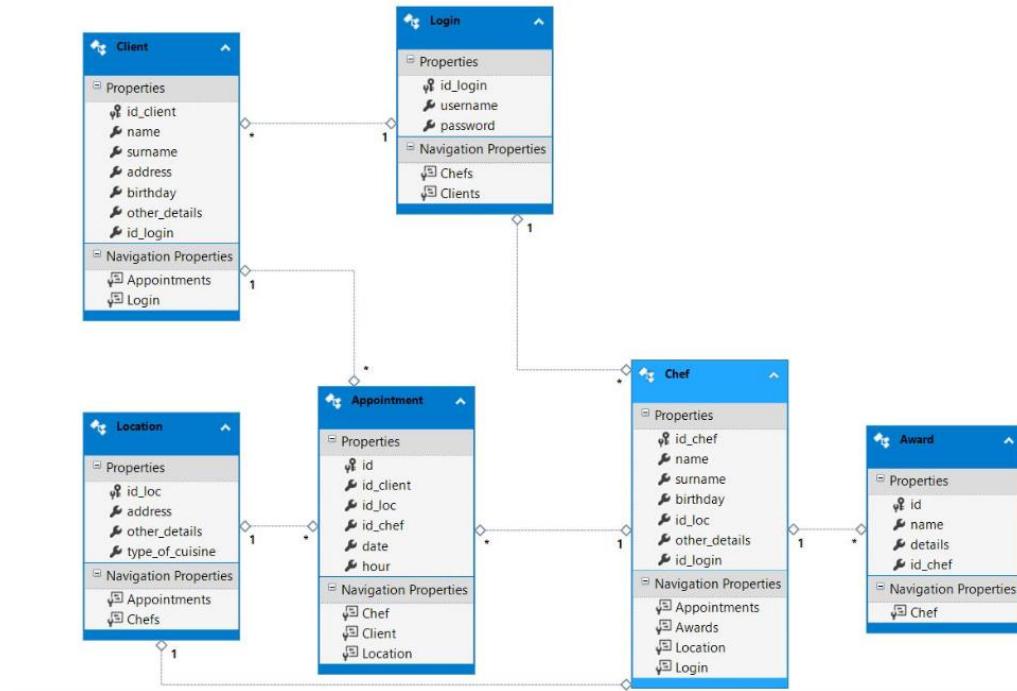

Implementarea aplicației


Aplicația a fost implementată folosind următoarele limbaje : C#, HTML, CSS și XAML. În dezvoltarea acesteia s-a folosit o bază de date de tip Microsoft SQL Server care conține următoarele tabele: Login, Locations, Clients, Chefs, Awards și Appointments.

Metodele care utilizează baza de date au fost implementate în cadrul unui serviciu web, acesta prezentând următoarele metode: createAppointment, deleteAccount, deleteAppointment, getAllLocations, getAllUsernamesOfChefs, getAppDetailsChef, getAppointmentsClient, getChefDetails, getChefs, getClientDetails, getDetailsOfAppointment, getIDsOfAppointmentsChef, getPassword, getUsername, insertChef, insertClient, insertLogin, setUsername, updateDetailsChefs, updateDetailsClient, updateNameChef, updateNameClient, updatePassword, updateStuffChefs, updateStuffClient, verifyAppointment și verifyLogin.


Totodată, pentru implementare s-au folosit trei master-page-uri: Site.Master, LoginMasterPage.Master, LoginChef.Master – pentru utilizatori care nu sunt autentificați, pentru clienți autentificați și pentru bucătari autentificați. Ele au rolul de a modifica navigația paginii și locația unde va duce fiecare webform. Webform-urile au fost realizate în HTML cu formatare în CSS, interfață fiind realizată în ASP.net.

Principalele elemente ale aplicației sunt:

- ❖ Pagina principală:

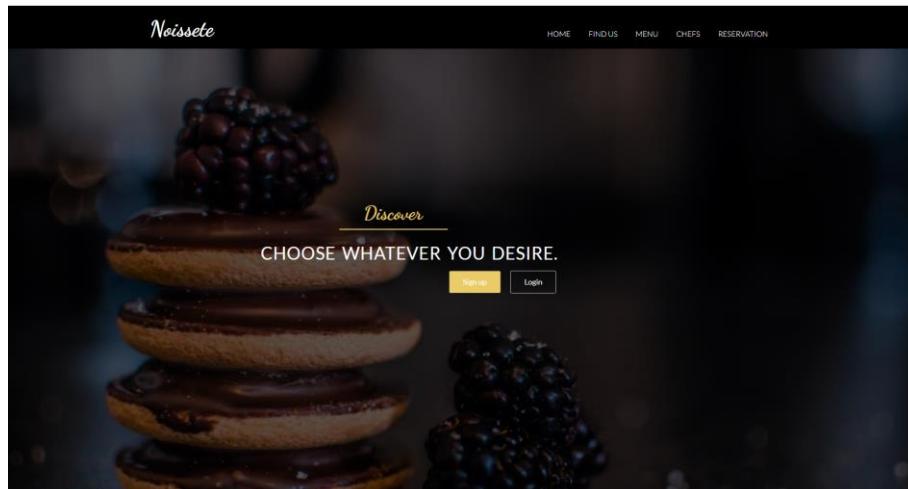


Industrial Informatics – Project

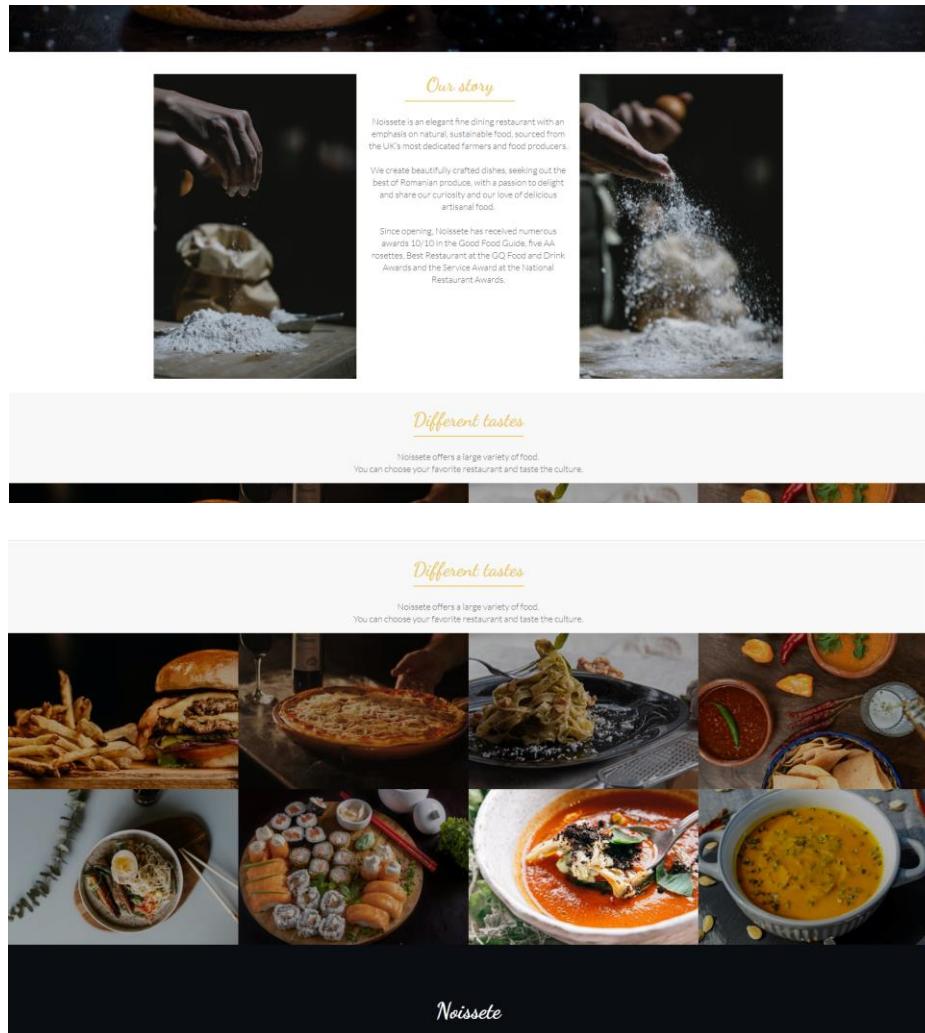

The image shows the homepage of the Noisette restaurant website. The top section features a dark background with a hand pouring flour onto a wooden surface, with a smaller inset image showing a hand sprinkling flour. To the right, there is text about the restaurant's story and awards. Below this, a banner with the text "Different tastes" and a grid of nine food images (including a burger, pizza, pasta, ramen, sushi, soups, and bread) is displayed against a dark background.

Noisette

❖ Pagina de Sign-Up:

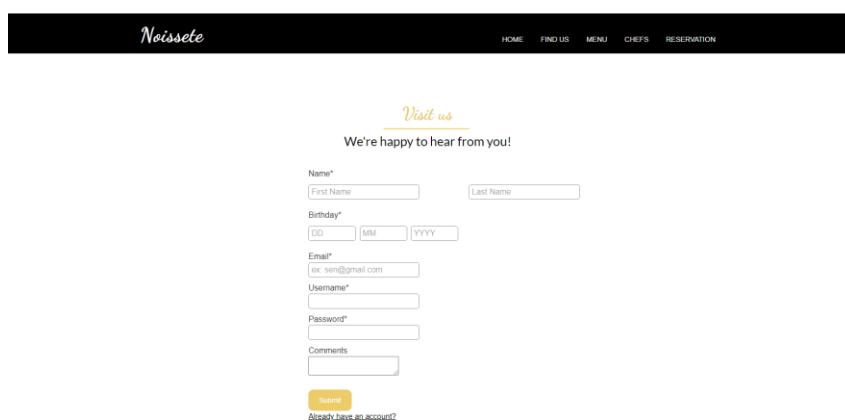

The image shows the sign-up page of the Noisette restaurant website. At the top, there is a navigation bar with links to HOME, FIND US, MENU, CHEFS, and RESERVATION. Below this, a "Visit us" section encourages users to share their thoughts. The form fields include Name*, Birthday*, Email*, Username*, Password*, and Comments. A "Submit" button and a link for existing users ("Already have an account?") are also present.



Industrial Informatics – Project

❖ Pagina de Log In:

The screenshot shows the Noisette login interface. At the top, there's a black header bar with the brand name "Noisette" in white. Below it, a yellow banner says "Visit us" and "Sign in to continue". The main area has two input fields for "Username" and "Password", followed by a blue "Login" button. Below the buttons is a link "Don't have an account yet?".

❖ Pagina cu locațiile restaurantelor:

This screenshot displays the locations section of the Noisette website. It features a black header with "Noisette" and a navigation menu with links like "HOME", "FIND US", "MENU", "CHEFS", "RESERVATION", and "ACCOUNT". Below the header, a yellow banner reads "We're currently in these places". Three restaurant locations are shown with images and details: STR.BUCURESTI (2400+ happy eaters, 5 stars, @noisette_english), STR.EROILOR (3700+ happy eaters, 5 stars, @noisette_italian), and STR.HOREA (2300+ happy eaters, 5 stars, @noisette_chinese).

❖ Pagina cu meniul disponibil:

The menu page for Noisette. It has a black header with "Noisette" and a "Menu" link. Below the header, a yellow banner says "Menu". The main content is titled "English Place" and lists several dishes with small images and descriptions: Shepherd's Pie, Beef Wellington, Steak and Kidney Pie, Fish and Chips, Cornish Pasty, and English Breakfast.

Industrial Informatics – Project

beer stock:			
	Cornish Pasty Traditional English Cornish Pasties with Chicken, Onion, Potatoes, Celery and Carrots.		English Breakfast A greasy fry-up with all the fixings - salty, greasy sausage and bacon, the perfect egg, saucy beans, grilled mushrooms and blistered tomatoes all served up with crusty bread.
	Roast Dinner Enhance the flavour of roast lamb with herbs and garlic, or you could try slices of anchovy, slivers of chilli or nuggets of feta pushed into the slits		Toad in the Hole A British classic that everybody loves - this toad in the hole consists of meaty pork sausages nestled in a giant crispy Yorkshire pudding. All served up with a rich red onion gravy.
	Yorkshire Pudding Succulent pieces of chicken nestled in a golden Yorkshire pudding with crispy diced potatoes, British pork, onion and sage stuffing, chipolata sausages, carrots and peas in a rich chicken gravy.		Lancashire Hot Pot Succulent lamb in a meaty gravy, topped with potatoes that are tender underneath and crisp on top.
Chinese Place			
	Chow Mein Stir-fried dish consists of noodles, meat (usually chicken, beef, shrimp, or pork), onions and celery.		Peking Roasted Duck Peking duck is favored for its thin and crispy skin. The Sliced Peking duck is often eaten with pancakes, sweet bean sauce, or soy with mashed garlic.
	Steamed Vermicelli Rolls White sheets of rice starch are rolled with various fillings. Some popular choices are beef/pork, shrimp, even oyster; with mushroom, egg, lettuce or watercress.		Fried Shrimp with Cashew Nuts You get the tenderness of peeled shrimps and the crispiness of cashew nuts. The shrimp is always tender and juicy and easy to deal with. If you are traveling with kids, this is both a nutritional and smart choice!
	Sweet and Sour Pork Sweet and sour pork has a bright orange-red color, and a delicious sweet and sour taste.		Kung Pao Chicken Kung Pao Chicken is a famous Sichuan-style specialty, popular with both Chinese and foreigners. The major ingredients are diced chicken, dried chili, and fried peanuts.
	Spring Rolls Spring rolls are a Cantonese dim sum of cylindrical shape. The filling of spring rolls could be vegetables or meat, and the taste could be either sweet or savory.		Yangchow Fried Rice The standard flavorful ingredients of Yangchow fried rice are peeled shrimp, diced ham, carrot, mushroom, baby bamboo shoots, crumbled egg, and corn.
	Sichuan Pork The meaty broth is typical Sichuan cuisine, featuring a peppery and spicy taste. When eating, you'll find each piece of meat contains abundant juices with a fresh and fragrant spicy aroma.		Dumplings Popular fillings are mince pork, diced shrimp, ground chicken, beef and vegetables. They can be cooked by boiling, steaming, or frying. Dumplings are a traditional dish eaten on Chinese New Year's Eve.
Indian Place			
	Naan Naan, a puffy flatbread, is a staple in the Indian kitchen and can go with everything you make. The ingredient list includes yeast, flour, sugar, and water, as well as yogurt and ghee.		Palak Paneer One of the most popular paneer recipes at Indian restaurants is palak paneer, a mildly flavored dish made with spinach and cottage cheese (the paneer), along with the typical Indian spices.
	Chole A classic and easy chole chickpea curry, is a favorite in Northern India and has become a worldwide sensation.		Malai Kofta Malai kofta (vegetable "meatballs" in a thick sauce) is the vegetarian alternative to meatballs. The koftas are made with a mix of potatoes, carrots, beans, peas, and sweet corn, which are cooked and mashed before mixing with spices and paneer.
	Rogan Josh Rogan Josh, the name of this dish from Kashmir, translates roughly to "red lamb." The color comes from Kashmiri dry red chilies. While the name may sound fiery, the heat of the dish is toned down by the cream that is added at the end.		Chicken Vindaloo Curry "Vindaloo" is a popular Indian curry dish that calls for meat to be marinated in a highly flavorful spicy mixture with vinegar, then quickly cooked up when you're ready to eat.
	Chicken Tikka Masala Chicken tikka masala is a delicious grilled chicken dish with a thick, creamy gravy that is unforgettable after the first bite. A tomato-yogurt sauce is spiced with chili, garlic, ginger, and garam masala, the ubiquitous Indian spice blend.		Tandoori Chicken Tandoori chicken, a dish of roasted chicken marinated in yogurt and generously spiced, giving the meat its trademark red colour.

Industrial Informatics – Project

The screenshot shows a dark-themed website for a restaurant. At the top, there are two menu items: "Murgh Makhani" (Butter Chicken or murgh makhani is a curry of chicken in a spiced tomato, butter and cream sauce) and "Papdi Chaat" (These wafers are then topped with potatoes and chickpeas and drizzled with a tangy, spicy, and sweet sauce). Below these, the word "Noisette" is prominently displayed in white. Underneath "Noisette", there is a section for "WORKING HOURS" with times: MON-FRI: 08:00 AM - 11:00 PM; SAT-SUN: 10:00 AM - 11:00 PM. At the bottom of the page, there are links for "HOME", "FIND US", "MENU", "CHEFS", "RESERVATION", and "ACCOUNT", along with social media icons for Facebook, Twitter, Google+, and Instagram.

- ❖ Pagina cu bucătarii restaurantelor:

The screenshot shows a website with a dark header containing the word "Noisette". Below the header, there is a section titled "Chefs" with a yellow underline. The page lists several chefs with their names in blue, each followed by a short biography and details about their cuisine type and location. The chefs listed are: **Joel Robuchon**, **Alain Ducasse**, **Martin Berasategui**, **Anne Sophie**, **Carme Ruscalleda**, and **Yoshihiro Murata**. Each chef's entry includes a "TYPE OF CUISINE" section (e.g., English, French) and a "LOCATION" section (e.g., Str.Bucuresti). The background of the page features a subtle grid pattern.



Industrial Informatics – Project

Thomas Keller

Thomas Keller, an American chef has seven stars 6 of which he has constantly held. Apart from his stars and restaurants, he is also an accomplished cookbook writer with his cookbook "Bouchon Bakery" being on the "The New York Times" best sellers list for almost two months in the year 2012.

TYPE OF CUISINE
French
LOCATION
Str.Horea

Heston Blumenthal

Blumenthal more than the other chefs in the Michelin star chef list has always been fascinated by the science behind food making. So much, so that he became a fellow of The Royal Society of Chemistry. He takes a keen interest in the chemical makeup of different ingredients, and that is how to combine them in the best way possible.

TYPE OF CUISINE
French
LOCATION
Str.Horea

Joan Roca

Like most of the best chefs in the world, Joan was introduced to cooking at an early age when he used to help the parents in their restaurant. He utilizes modern techniques to prepare traditional cuisines. Some of the techniques he uses are "perfume-cooking" and distillation.

TYPE OF CUISINE
French
LOCATION
Str.Horea

Hiroyuki Yoneeda

Born in Osaka, Japan, in 1972, Hiroyuki Yoneeda actually began his career as an engineer, working to save money to attend Osaka's culinary academy. Training at restaurants in his home city and Kobe, he earned his first Michelin stars (three of them!) in 2010, helming a French-style restaurant.

TYPE OF CUISINE
French
LOCATION
Str.Horea

Joachim Wissler

Growing up on a farm in the mountains of Bavaria, German-born Joachim Wissler learned early about farm-to-table cuisine. Wissler began his career at Traube Toblach in the Black Forest, where he learned to cook on site. He eventually received his first Michelin star as head chef of Reinhartshausen Castle, outside of Frankfurt.

TYPE OF CUISINE
French
LOCATION
Str.Horea

Yusuke Takada

Studying at the Tezzi Culinary Institute, Yusuke Takada moved to France to train at Taillevent and Le Meurice before he opened his first restaurant, La Cime. Born on the island of Amami Oshima in Japan, Takada is inspired by the dishes he grew up with and creates new takes on recipes once prepared by his grandmother.

TYPE OF CUISINE
French
LOCATION
Str.Horea

Noisette

- ❖ Pagina pentru realizarea rezervărilor:

The screenshot shows the Noisette restaurant website. At the top, there is a black header bar with the restaurant's name "Noisette" in white. Below the header, there is a navigation menu with links to "HOME", "FIND US", "MENU", "CHEFS", "RESERVATION", and "ACCOUNT". The main content area features a large image of the restaurant's interior with tables set for dining. To the right of this image, there is a "Reservation" section titled "BOOK YOUR TABLE". This section includes dropdown menus for "English Str.Bucuresti", "12.02.2021", "2:00 pm", and a "Check availability" button. There is also a dropdown menu for "Guests" and a yellow "Find a table" button. Below this form, there is a link to "My reservations". To the right of the reservation form, there is a smaller image showing the restaurant's outdoor seating area at night, with tables and chairs arranged on a cobblestone street under streetlights.

Industrial Informatics – Project

- ❖ Pagina cu rezervările curente, de unde se poate realiza și stergerea acestora pe baza numărului de identificare afișat:

Noisette

HOME FIND US MENU CHEFS RESERVATION ACCOUNT

My reservations

1 STR EROILOR Helen Blumenthal 19/05/2021 3:00 pm	2 STR EROILOR Helen Blumenthal 25/05/2021 3:00 pm	3 STR EROILOR Carine Rosellada 25/05/2021 3:00 pm	4 STR EROILOR Thomas Keller 25/05/2021 3:00 pm
5 STR EROILOR Carine Rosellada 20/12/2021 3:00 pm	6 STR BUCURESTI Joel Robuchon 19/05/2021 3:00 pm		

Logout Delete

- ❖ Pagina cu detaliile contului, de unde se pot modifica detaliile, șterge contul sau ieșe din cont:

Noisette

HOME FIND US MENU CHEFS RESERVATION ACCOUNT

Account settings

Personal information

Name: Jane San
Email: jane@gmail.com
Birthday: 21 07 1998

Change your password

Password: Current password New password

Your details

no details

Logout Delete account

- ❖ Pagina cu rezervările bucătarului:

Noisette

HOME FIND US MENU CHEFS RESERVATION ACCOUNT

My reservations

STR EROILOR Jane San 19/05/2021 3:00 pm	STR EROILOR Jane San 25/05/2021 3:00 pm
--	--

Noisette

WORKING HOURS
MON - FRI 08:00 AM - 11:00 PM
SAT - SUN 10:00 AM - 11:00 PM

HOME FIND US MENU CHEFS RESERVATION ACCOUNT



Testarea aplicației

Pentru a testa funcționalitatea aplicației s-au realizat următoarele: efectuarea operației de Sign-Up a unui nou client, efectuarea operației de Log In a clientului, realizarea unor rezervări, vizualizarea rezervărilor făcute, ștergerea unor rezervări active, actualizarea datelor contului, operația de Log-out și operația de ștergere a contului utilizatorului, iar pentru contul de bucătar s-a verificat vizualizarea rezervărilor făcute de noul client înregistrat.

Pentru operația de Sign-up s-au introdus datele:

Noisette

HOME FIND US MENU CHEFS RESERVATION

Visit us
We're happy to hear from you!

Name*

Birthday*

Email*

Username*

Password*

Comments

Already have an account?

Name: Josh, Last Name: White, Birthday: 05/06/1992, email: josh.white@gmail.com, Username: josh, Password: password, Comments: No comment.

După această înregistrare se poate observa faptul că în baza de date a fost adăugat noul client, atât în tabela Clients:

WebService1.asmx.cs dbo.Chefs [Data] dbo.Appointments [Design] dbo.Appointments [Data] dbo.Login [Data] dbo.Clients [Data] dbo.Login [Design]

id_client	name	surname	address	birthday	other_details	id_login
5	Jane	San	jane@gmail.com	21/07/1998	no details	17
6	Andreia	Lazarec	andreia99ec@y...	08/08/1999	none	18
7	Mihaela	Narita	miha@yahoo.c...	27/10/1999	nothing	19
8	Joelle	Danciu	danciujoelle@g...	07/02/2000	I like Indian food	20
10	Media	Pacurar	meda@gmail.c...	06/07/1999		22
11	Josh	White	josh.white@gm...	05/06/1992	No comments	23
NULL	NULL	NULL	NULL	NULL	NULL	NULL

Industrial Informatics – Project

cât și în tabela Login:

dbo.Login [Data]			
	id_login	username	password
1	1	Joel	chef
2	2	Alain	chef
3	3	Martin	chef
4	4	Anne	chef
6	6	Carme	chef
7	7	Yoshihiro	chef
8	8	Thomas	chef
9	9	Heston	chef
10	10	Joan	chef
11	11	Hajme	chef
12	12	Joachim	chef
13	13	Yusuke	chef
17	17	Jane	1234
18	18	andreia99ec	1234
19	19	miha99	1234
20	20	danciujoelle	parola
22	22	medacarmen	sefa
23	23	josh	password
	NULL	NULL	NULL

Cu aceste date înregistrate în baza de date, putem efectua operația de Log In:


Noisseste

HOME FIND US MENU CHEFS RESERVATION



Industrial Informatics – Project

Apăsând butonul de Login cu datele de mai sus vom fi redirecționați la pagina principală a aplicației care corespunde utilizatorului Josh:

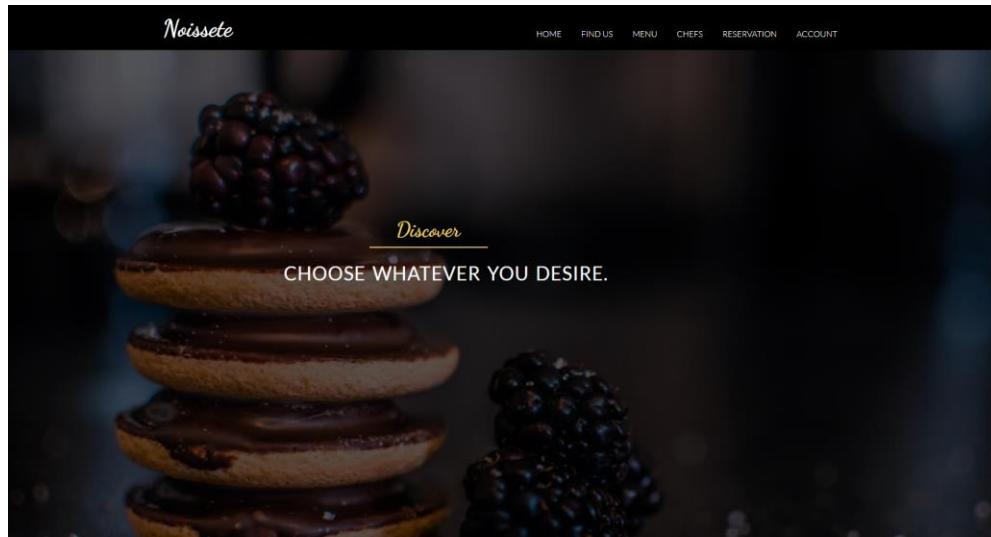

În continuare, vom verifica operația de efectuare a unor rezervări. Cu următoarele date introduse putem verifica dacă există disponibilitate pentru realizarea rezervării prin apăsarea butonului „Check availability”:

The image shows the reservation page of the Noisette restaurant website. The page has a dark header with the restaurant's name. Below the header, there are two images: one showing the interior of the restaurant with tables set for dinner, and another showing the restaurant's exterior at night with lights on. The main section is titled "Reservation" and contains a "BOOK YOUR TABLE" form. The form includes dropdown menus for location ("English: Str.Bucuresti"), date ("09/06/2021"), time ("4:00 pm"), and chef selection ("Chefs"). It also features a "Check availability" button and a "Find a table" button. At the bottom of the form, there is a link "My reservations".

Industrial Informatics – Project

Dacă există disponibilitate pentru efectuarea rezervării vom putea vizualiza o listă a bucătarilor disponibili, de unde alegem numele bucătarului care să ne onoreze rezervarea:

The screenshot shows the Noisette restaurant website's reservation page. At the top, there is a navigation bar with links for HOME, FIND US, MENU, CHEFS, RESERVATION, and ACCOUNT. Below the navigation is a header with the restaurant's name, "Noisette". On the left, there is a photograph of the restaurant's interior. In the center, there is a "Reservation" section titled "BOOK YOUR TABLE". It includes dropdown menus for language ("English: Str.Bucuresti"), date ("09/06/2021"), and time ("4:00 pm"). A "Check availability" button is present. A dropdown menu for selecting a chef is open, showing "Joel Robuchon" at the top, followed by "Joel Robuchon", "Alain Ducasse", "Martin Berasategui", and "Anne Sophie". At the bottom of this dropdown is a link to "My reservations". To the right of the reservation form is another photograph of the restaurant's outdoor seating area at night.

Cu următoarele date alese putem finaliza procesul de rezervare apăsând pe butonul „Find a table”:

This screenshot shows the continuation of the reservation process. The "Find a table" button has been clicked, and the dropdown menu for selecting a chef now shows "Alain Ducasse" as the selected option. The other options remain visible below it. The rest of the page layout, including the header, interior photo, and night photo, remains the same as in the previous screenshot.

Industrial Informatics – Project

După ce rezervarea a fost finalizată, dacă apăsăm butonul „My reservation”, vom putea vedea rezervările făcute până la acest moment:

The screenshot shows the 'My reservations' section of the Noisette website. At the top, there is a navigation bar with links: HOME, FIND US, MENU, CHEFS, RESERVATION, and ACCOUNT. Below the navigation bar, the heading 'My reservations' is displayed. A single reservation is listed in a card format: '1 STR BUCURESTI Alain Ducasse 09/06/2021 4.00 pm'. Below the card are two buttons: a white 'Delete' button and a dark grey 'Edit' button.

Cu această rezervare activă, dacă se încearcă efectuarea unei noi rezervări cu aceleasi detalii, bucătarul prezent în rezervarea de mai sus nu va mai fi disponibil:

The screenshot shows the 'Reservation' section of the Noisette website. At the top, there is a navigation bar with links: HOME, FIND US, MENU, CHEFS, RESERVATION, and ACCOUNT. On the left, there is a photograph of a restaurant interior. In the center, the heading 'Reservation' is displayed above a form titled 'BOOK YOUR TABLE'. The form includes dropdown menus for 'Language: English: Str.Bucuresti', 'Date: 09/06/2021', and 'Time: 4:00 pm'. Below the form is a 'Check availability' button. A dropdown menu is open, listing several chefs: Joel Robuchon, Joël Robuchon, Martin Beratagel, and Anne Sophie. The name 'Joël Robuchon' is highlighted with a blue background. To the right of the form is a photograph of an outdoor restaurant seating area at night. At the bottom, the heading 'Noisette' is displayed above a 'WORKING HOURS' section.

Industrial Informatics – Project

După efectuarea mai multor rezervări vom avea:

The screenshot shows a user interface for managing reservations. At the top, there's a navigation bar with the restaurant name "Noisette" and links for HOME, FIND US, MENU, CHEFS, RESERVATION, and ACCOUNT. Below this, a section titled "My reservations" lists four entries:

Order	Date	Guest Name	Time
1	09/06/2021	Alain Ducasse	4:00 pm
2	12/07/2021	Heston Blumenthal	9:00 pm
3	27/06/2021	Yoshihiro Murata	6:00 pm
4	16/06/2021	Thomas Keller	5:00 pm

Below the list are two buttons: a white one labeled "Delete" and a dark one labeled "Delete".

Dacă dorim să ștergem a doua rezervare, vom completa câmpul textbox-ul cu numărul rezervării și vom apăsa butonul „Delete”:

This screenshot shows the same reservation list as the previous one, but the second entry (Heston Blumenthal) has been selected. The number "2" is entered into the "Delete" button's input field.



Industrial Informatics – Project

În urma finalizării operației de ștergere a rezervării, lista rezervărilor se va actualiza:

The screenshot shows the 'My reservations' section of the Noisette website. At the top, there is a navigation bar with links: HOME, FIND US, MENU, CHEFS, RESERVATION, and ACCOUNT. Below the navigation bar, the heading 'My reservations' is displayed. Three reservation cards are listed:

- 1 STR.BUCURESTI Alain Duccasse 09/06/2021 4:00 pm
- 2 STR.HOREA Yoshikazu Morita 27/06/2021 6:00 pm
- 3 STR.EROLIOR Thomas Keller 16/06/2021 5:00 pm

Below the cards, there is a 'Delete' button.

În acest moment se poate observa că utilizatorul are o rezervare făcută la bucătarul Alain Duccasse. Dacă intrăm în contul acestui bucătar, putem vedea rezervarea clientului Josh White la secțiunea „My Reservation”:

The screenshot shows the 'My reservations' section of the Noisette website, specifically for the chef Alain Duccasse. At the top, there is a navigation bar with links: HOME, FIND US, MENU, CHEFS, RESERVATION, and ACCOUNT. Below the navigation bar, the heading 'My reservations' is displayed. One reservation card is listed:


- STR.BUCURESTI Josh White 09/06/2021 4:00 pm

Below the card, there is a 'Delete' button. At the bottom of the page, there is a 'WORKING HOURS' section with the following information:
MON - FRI: 08:00 AM - 11:00 PM
SAT - SUN: 10:00 AM - 11:00 PM




Industrial Informatics – Project

Clientul poate vedea detaliile contului:

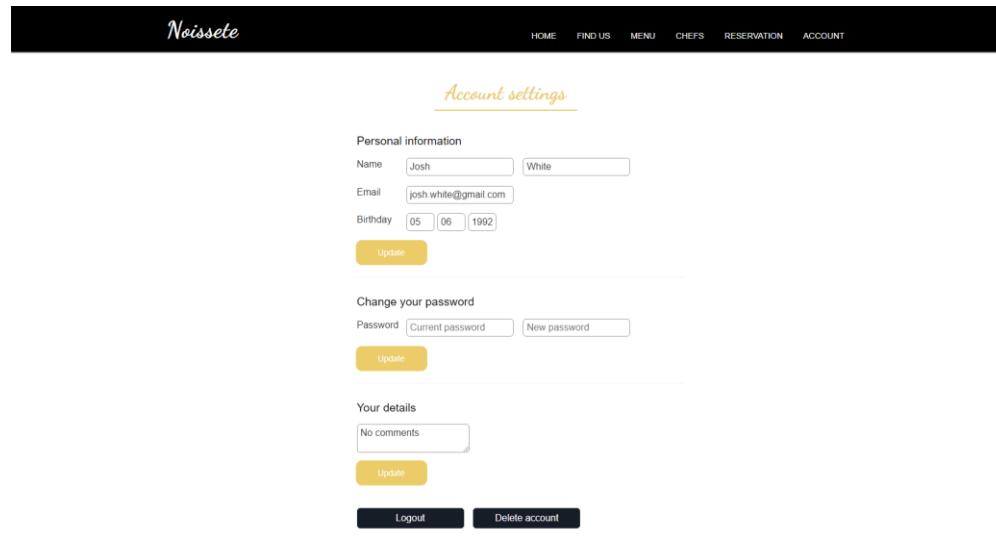


The screenshot shows the 'Account settings' page for a user named 'Josh White'. The 'Personal information' section displays the name 'Josh White', email 'josh.white@gmail.com', and birthday '05/06/1992'. Below this is a 'Change your password' section with fields for 'Current password' and 'New password', and a 'Update' button. The 'Your details' section contains a text area with 'No comments' and an 'Update' button. At the bottom are 'Logout' and 'Delete account' buttons.

Din această pagină se pot modifica diverse date ale contului. Înțâi se va modifica data nașterii și numele clientului, ele fiind înlocuite cu următoarele date:

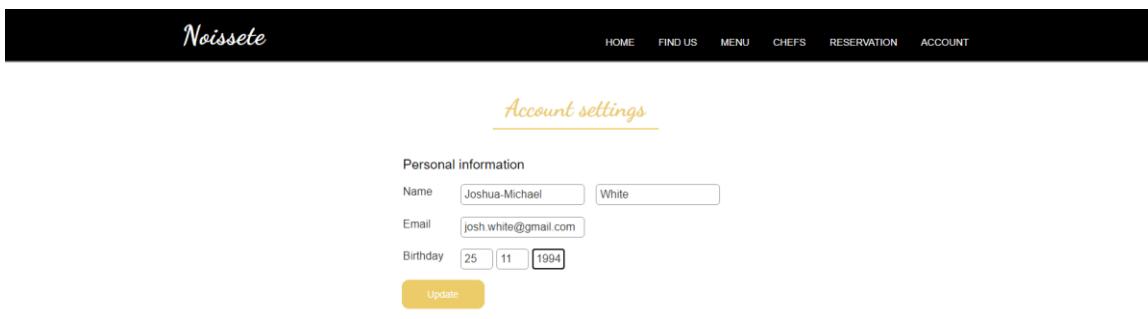

The screenshot shows the same 'Account settings' page after updating the personal information. The 'Personal information' section now shows the name 'Joshua-Michael White', email 'josh.white@gmail.com', and birthday '25/11/1994'. The 'Update' button has been clicked. The rest of the page remains the same.

După apăsarea butonui de Update, se poate observa că modificarea a fost realizată și la nivelul bazei de date:

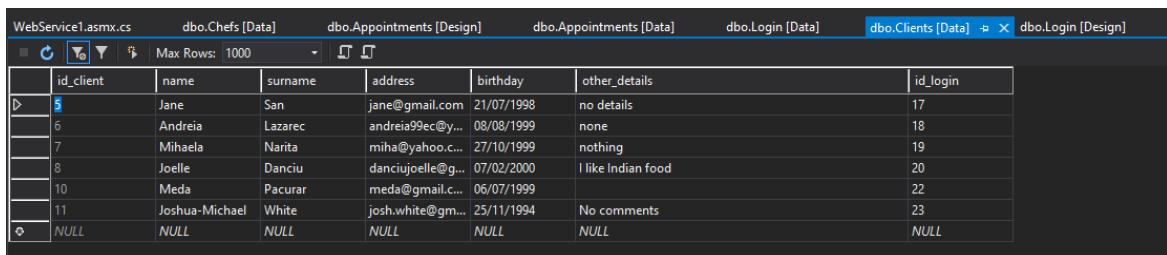

A screenshot of a database management tool showing the 'Clients' table from the 'dbo' schema. The table has columns: id_client, name, surname, address, birthday, other_details, and id_login. The data shows 11 rows of client information, including names like Jane, Andreia, Mihela, Joelle, Meda, and Joshua-Michael, along with their respective details and login IDs.

	id_client	name	surname	address	birthday	other_details	id_login
▶	5	Jane	San	jane@gmail.com	21/07/1998	no details	17
	6	Andreia	Lazarec	andrei99ec@y...	08/08/1999	none	18
	7	Mihela	Narita	mihal@yahoo.c...	27/10/1999	nothing	19
	8	Joelle	Danciu	danciujoelle@g...	07/02/2000	I like Indian food	20
	10	Meda	Pacurar	meda@gmail.c...	06/07/1999		22
	11	Joshua-Michael	White	josh.white@gm...	25/11/1994	No comments	23
❖	NULL	NULL	NULL	NULL	NULL	NULL	NULL

Pentru a actualiza parola, se va completa primul câmp cu actuala parolă: password, iar al doilea câmp, cu noua parola dorită, în acest caz : pass. După apăsarea butonului de Update, modificarea va fi activă. Dacă se apasă pe butonul de Log out din partea de jos a paginii, clientul va fi scos din contul curent:

Account settings

Personal information

Name	Joshua-Michael	White	
Email	josh.white@gmail.com		
Birthday	25	11	1994

Update

Change your password

Password	Current password	New password
----------	------------------	--------------

Update

Your details

No comments

Update

Logout **Delete account**

Pentru a ne loga înapoi, dacă se va încerca introducerea datelor de logare vechi, vom primii atenționarea:



Prin logarea cu username: josh și parola: pass vom putea accesa din nou contul:

Visit us

Sign in to continue

Username
josh

Password
.....


Login

[Don't have an account yet?](#)

Din pagina Account, dacă se va apăsa pe butonul de Delete Account, contul utilizatorului josh va fi șters din baza de date:

	id_client	name	surname	address	birthday	other_details	id_login
▶	5	Jane	San	jane@gmail.com	21/07/1998	no details	17
	6	Andreia	Lazarec	andreia99ec@y...	08/08/1999	none	18
	7	Mihaila	Narita	miha@yahoo.c...	27/10/1999	nothing	19
	8	Joelle	Danciu	danciujoelle@g...	07/02/2000	I like Indian food	20
❖	10	Meda	Pacurar	meda@gmail.c...	06/07/1999		22
	NULL	NULL	NULL	NULL	NULL	NULL	NULL

Dacă se va încerca utilizarea datelor utilizatorui șters pentru operația de Log In, se va primi următorul advertisment:

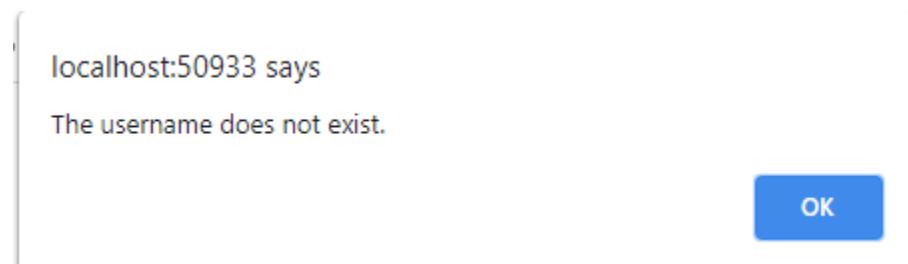

În urma testării functionalității aplicației, s-au identificat anumite probleme precum: erori în ștergerea clienților care au rezervări active și probleme de centrage a unor butoane din pagină, care au fost rezolvate ulterior.

Anexa (Cod Sursa)

Baza de date

Tabela Login:

```
CREATE TABLE [dbo].[Appointments] (
    [id]      INT      IDENTITY (1, 1) NOT NULL,
    [id_client] INT      NOT NULL,
    [id_loc]   INT      NOT NULL,
    [id_chef]  INT      NOT NULL,
    [date]     VARCHAR (50) NOT NULL,
    [hour]     INT      NOT NULL,
    PRIMARY KEY CLUSTERED ([id] ASC),
    CONSTRAINT [id_chef] FOREIGN KEY ([id_chef])
        REFERENCES [dbo].[Chefs] ([id_chef]),
    CONSTRAINT [id_client] FOREIGN KEY ([id_client])
        REFERENCES [dbo].[Clients] ([id_client]),
    CONSTRAINT [id_loc] FOREIGN KEY ([id_loc])
        REFERENCES [dbo].[Locations] ([id_loc])
);
```

Tabela Locations:

```
CREATE TABLE [dbo].[Locations] (
    [id_loc]   INT      IDENTITY (1, 1) NOT NULL,
    [address]  VARCHAR (50) NOT NULL,
    [other_details] TEXT      NOT NULL,
    [type_of_cuisine] VARCHAR (50) NOT NULL,
    PRIMARY KEY CLUSTERED ([id_loc] ASC)
);
```

Tabela Clients:

```
CREATE TABLE [dbo].[Clients] (
    [id_client] INT      IDENTITY (1, 1) NOT NULL,
    [name]      VARCHAR (50) NOT NULL,
    [surname]   VARCHAR (50) NOT NULL,
    [address]   VARCHAR (50) NOT NULL,
    [birthday]  VARCHAR (50) NOT NULL,
    [other_details] TEXT      NOT NULL,
    [id_login]  INT      NOT NULL,
    PRIMARY KEY CLUSTERED ([id_client] ASC),
    CONSTRAINT [id_login2] FOREIGN KEY ([id_login])
        REFERENCES [dbo].[Login] ([id_login])
);
```

Tabela Chefs:

```
CREATE TABLE [dbo].[Chefs] (
    [id_chef]  INT      IDENTITY (1, 1) NOT NULL,
```

```
    [name]      VARCHAR (50) NOT NULL,
    [surname]   VARCHAR (50) NOT NULL,
    [birthday]  NCHAR (10) NOT NULL,
    [id_loc]   INT      NOT NULL,
    [other_details] TEXT      NOT NULL,
    [id_login]  INT      NOT NULL,
    PRIMARY KEY CLUSTERED ([id_chef] ASC),
    CONSTRAINT [id_loc2] FOREIGN KEY ([id_loc])
        REFERENCES [dbo].[Locations] ([id_loc]),
    CONSTRAINT [id_login] FOREIGN KEY ([id_login])
        REFERENCES [dbo].[Login] ([id_login])
);
```

Tabela Appointments:

```
CREATE TABLE [dbo].[Appointments] (
    [id]      INT      IDENTITY (1, 1) NOT NULL,
    [id_client] INT      NOT NULL,
    [id_loc]   INT      NOT NULL,
    [id_chef]  INT      NOT NULL,
    [date]     VARCHAR (50) NOT NULL,
    [hour]     INT      NOT NULL,
    PRIMARY KEY CLUSTERED ([id] ASC),
    CONSTRAINT [id_chef] FOREIGN KEY ([id_chef])
        REFERENCES [dbo].[Chefs] ([id_chef]),
    CONSTRAINT [id_client] FOREIGN KEY ([id_client])
        REFERENCES [dbo].[Clients] ([id_client]),
    CONSTRAINT [id_loc] FOREIGN KEY ([id_loc])
        REFERENCES [dbo].[Locations] ([id_loc])
);
```

Tabela Awards:

```
CREATE TABLE [dbo].[Awards] (
    [id]      INT      IDENTITY (1, 1) NOT NULL,
    [name]   VARCHAR (50) NOT NULL,
    [details] TEXT      NOT NULL,
    [id_chef] INT      NOT NULL,
    PRIMARY KEY CLUSTERED ([id] ASC),
    CONSTRAINT [id_chef2] FOREIGN KEY ([id_chef])
        REFERENCES [dbo].[Chefs] ([id_chef])
);
```

Webform

```

using System;
using System.Collections.Generic;
using System.Data;
using System.Data.SqlClient;
using System.Linq;
using System.Web;
using System.Web.Services;

namespace WebService
{
    public class WebClient : System.ComponentModel.Component
    {
        /// <summary>
        /// Summary description for WebService1
        /// </summary>
        [WebService(Namespace =
        "http://tempuri.org/")]
        [WebServiceBinding(ConformsTo =
        WsProfiles.BasicProfile1_1)]

        [System.ComponentModel.ToolboxItem(false)]
        // To allow this Web Service to be called from
        script, using ASP.NET AJAX, uncomment the
        following line.
        // [System.Web.Script.Services.ScriptService]
        public class WebService1 :
        System.Web.Services.WebService
        {
            SqlConnection myCon = new
            SqlConnection();
            SqlCommand com;
            DataSet dsL, dsC, dsA;
            SqlDataAdapter daL, daC, daA;
            string message;
            string qry;
            string connectionString = @"Data
            Source=(LocalDB)\MSSQLLocalDB;AttachDb
            Filename=C:\Users\meda\Desktop\Sem2\II\Pro
            ect\Project II updated\Project II\Project
            II\WebService\WebService\App_Data\Database
            1.mdf;Integrated Security=True";
            public static string usernameGlobal = "";
            // modify the connection string with the
            path of the Database on your computer

```

```

[WebMethod]
public string HelloWorld()
{
    return "Hello World";
}
[WebMethod]
// returns 0 if the verification failed
// 1 if login successful and User is Client
// 2 if login successful and User is Chef
// -1 if wrong password
// -2 if user does not exist
public int verifyLogin(string username,
string password)
{
    int response = 0;
    myCon.ConnectionString =
connectionString;
    myCon.Open();

    dsL = new DataSet();
    daL = new SqlDataAdapter(@"SELECT
COUNT(*) FROM Login WHERE username ="
+ username + "", myCon);
    daL.Fill(dsL, "Login");
    DataRow dr =
dsL.Tables["Login"].Rows[0];
    int noU =
int.Parse(dr.ItemArray.GetValue(0).ToString());
    if (noU != 0)
    {
        dsL = new DataSet();
        daL = new
SqlDataAdapter(@"SELECT password, id_login
FROM Login WHERE username ="
+ username + "", myCon);
        daL.Fill(dsL, "Login");
        dr = dsL.Tables["Login"].Rows[0];
        string passwordDatabase =
dr.ItemArray.GetValue(0).ToString();
        if (passwordDatabase != password)
            response = -1;
        else
        {
            int id =
int.Parse(dr.ItemArray.GetValue(1).ToString());
            dsC = new DataSet();

```

```

daC = new
SqlDataAdapter(@"SELECT Count(*) FROM
Clients WHERE id_login ='" + id + "'", myCon);
daC.Fill(dsC, "Clients");
dr =
dsC.Tables["Clients"].Rows[0];
noU =
int.Parse(dr.ItemArray.GetValue(0).ToString());
if (noU != 0)
    response = 1; // a client logged in
else
    response = 2; // a chef logged in
}
else
    response = -2;
myCon.Close();
Console.WriteLine(response);
return response;
}
[WebMethod]
public int insertLogin(string username,
string password)
{
    int id = -1;
    myCon.ConnectionString =
connectionString;
    myCon.Open();

    dsL = new DataSet();
    daL = new SqlDataAdapter(@"SELECT
COUNT(id_login) FROM Login WHERE
username ='" + username + "'", myCon);
    daL.Fill(dsL, "Login");
    DataRow dr =
dsL.Tables["Login"].Rows[0];
    if
(int.Parse(dr.ItemArray.GetValue(0).ToString())
== 0)
    {
        com = new SqlCommand();
        com.Connection = myCon;
        qry = "INSERT INTO Login
VALUES('" + username + "','" + password +
"')";
        com.CommandText = qry;
        com.ExecuteNonQuery();
    }
    dsL = new DataSet();
}

```

```

daL = new
SqlDataAdapter(@"SELECT id_login FROM
Login WHERE username ='" + username + "'", myCon);
daL.Fill(dsL, "Login");
dr = dsL.Tables["Login"].Rows[0];
id =
int.Parse(dr.ItemArray.GetValue(0).ToString());
}
myCon.Close();
return id;
}
[WebMethod]
public string insertClient(string username,
string password, string name, string surname,
string address, string birthday, string
other_details)
{
    message = "";
    int id_login; // autogenerated by the next
function
    id_login = insertLogin(username,
password);
    if (id_login == -1) // username exists
    {
        message += "Username taken!";
    }
    else
    {
        myCon.ConnectionString =
connectionString;
        myCon.Open();
        qry = "INSERT INTO Clients
VALUES ('" + name + "','" + surname + "','" +
address + "','" + birthday + "','" + other_details +
"', '" + id_login + "')";
        com.CommandText = qry;
        com.ExecuteNonQuery();
        message += "Client added
successfully!";
        myCon.Close();
    }
    return message;
}
[WebMethod]
public string insertChef(string username,
string password, string name, string surname,
string birthday, int id_loc, string other_details)
{
}

```

```

        message = "";
        int id_login; // autogenerated by the next
function
        id_login = insertLogin(username,
password);
        if (id_login == -1) // username exists
        {
            message += "Username taken!";
        }
        else
        {
            myCon.ConnectionString =
connectionString;
            myCon.Open();
            qry = "INSERT INTO Chefs
VALUES (" + name + ", " + surname + ", " +
birthday + ", " + id_loc + ", " + other_details + +
", " + id_login + ")";
            com.CommandText = qry;
            com.ExecuteNonQuery();
            message += "Chef added
successfully!";
            myCon.Close();
        }
        return message;
    }

    [WebMethod]
    public List<Chef> getChefs()
    {
        message = "";
        myCon.ConnectionString =
connectionString;
        myCon.Open();
        dsC = new DataSet();
        daC = new SqlDataAdapter(@"SELECT
id_chef, name, surname, id_loc FROM Chefs",
myCon);
        daC.Fill(dsC, "Chefs");
        List<Chef> chefs = new List<Chef>();
        foreach (DataRow ds in
dsC.Tables["Chefs"].Rows)
        {
            string location;
            dsL = new DataSet();
            dal = new
SqlDataAdapter(@"SELECT address FROM
Locations WHERE id_loc = " +
int.Parse(ds.ItemArray.GetValue(3).ToString()),
myCon);
            dal.Fill(dsL, "Locations");
            DataRow dr =
dsL.Tables["Locations"].Rows[0];
            location =
dr.ItemArray.GetValue(0).ToString();

            List<string> awards = new
List<string>();
            dsA = new DataSet();
            daA = new
SqlDataAdapter(@"SELECT name FROM
Award WHERE id_chef = " +
int.Parse(ds.ItemArray.GetValue(0).ToString()),
myCon);
            daA.Fill(dsA, "Awards");
            foreach (DataRow ds2 in
dsA.Tables["Awards"].Rows)
            {
                awards.Add(ds2.ItemArray.GetValue(1).ToStrin
g());
            }

            string name =
ds.ItemArray.GetValue(1).ToString();
            string surname =
ds.ItemArray.GetValue(2).ToString();
            chefs.Add(new Chef(name, surname,
location, awards));
        }
        dsL = new DataSet();
        daL = new SqlDataAdapter(@"SELECT
id_chef, name, surname, id_location FROM
Chefs", myCon);
        daC.Fill(dsC, "Chefs");

        myCon.Close();
        return chefs;
    }

    [WebMethod]
    public string updatePassword(string
username, string password)
{
    message = "";
}

```

Industrial Informatics – Project

```
myCon.ConnectionString =  
connectionString;  
myCon.Open();  
com = new SqlCommand();  
com.Connection = myCon;  
com.CommandText = "UPDATE Login  
SET password = '" + password + "' WHERE  
username = '" + username + "'";  
com.ExecuteNonQuery();  
message += "Password Updated!";  
  
myCon.Close();  
return message;  
}  
[WebMethod]  
public string updateNameClient(string  
username, string name)  
{  
    message = "";  
    myCon.Open();  
    com.Connection = myCon;  
    com.CommandText = "UPDATE Clients  
SET name = '" + name + "' WHERE id_login =  
(SELECT id_login FROM Login WHERE  
username = '" + username + "');  
com.ExecuteNonQuery();  
message += "Name updated!";  
  
myCon.Close();  
return message;  
}  
[WebMethod]  
public string updateNameChef(string  
username, string name)  
{  
    message = "";  
    myCon.Open();  
    com.Connection = myCon;  
    com.CommandText = "UPDATE Chefs  
SET name = '" + name + "' WHERE id_login =  
(SELECT id_login FROM Login WHERE  
username = '" + username + "');  
com.ExecuteNonQuery();  
message += "Name updated!";  
  
myCon.Close();  
return message;  
}  
[WebMethod]
```

```
public string updateDetailsClient(string  
username, string details)  
{  
    message = "";  
    myCon.ConnectionString =  
connectionString;  
    myCon.Open();  
    com = new SqlCommand();  
    com.Connection = myCon;  
    com.CommandText = "UPDATE Clients  
SET other_details = '" + details + "' WHERE  
id_login = (SELECT id_login FROM Login  
WHERE username = '" + username + "');  
com.ExecuteNonQuery();  
message += "Details updated!";  
  
myCon.Close();  
return message;  
}  
[WebMethod]  
public string updateStuffClient(string  
username, string name, string surname, string  
address, string birthday)  
{  
    message = "";  
    myCon.ConnectionString =  
connectionString;  
    myCon.Open();  
    com = new SqlCommand();  
    com.Connection = myCon;  
    com.CommandText = "UPDATE Clients  
SET name = '" + name + "', surname = '" +  
surname + "' +  
    ", address = '" + address + "', birthday  
= '" + birthday + "' WHERE id_login =  
(SELECT id_login FROM Login WHERE  
username = '" + username + "');  
com.ExecuteNonQuery();  
message += "Updated!";  
myCon.Close();  
return message;  
}  
[WebMethod]  
public string updateDetailsChefs(string  
username, string details)  
{  
    message = "";
```

Industrial Informatics – Project

```

myCon.Open();
com.Connection = myCon;
com.CommandText = "UPDATE Clients
SET details = '" + details + "' WHERE id_login
= (SELECT id_login FROM Login WHERE
username = '" + username + "')";
com.ExecuteNonQuery();
message += "Details updated!";

myCon.Close();
return message;
}

[WebMethod]
public List<int>
getAppointmentsClient(string username)
{
    myCon.ConnectionString =
connectionString;
    myCon.Open();
    List<int> appointments = new
List<int>();
    dsA = new DataSet();
    daA = new SqlDataAdapter(@"SELECT
id FROM Appointments WHERE id_client =
(SELECT id_client from Clients WHERE
id_login = "
        + "(SELECT id_login FROM Login
Where username = '" + username + "'))",
myCon);
    daA.Fill(dsA, "Appointments");
    foreach (DataRow ds in
dsA.Tables["Appointments"].Rows)
    {

appointments.Add(int.Parse(ds.ItemArray.GetV
alue(0).ToString()));
    }

    myCon.Close();
    return appointments;
}

[WebMethod]
public List<string>
getDetailsOfAppointment(int id)
{
    myCon.ConnectionString =
connectionString;
    myCon.Open();

```

```

    List<string> details = new
List<string>();
    dsA = new DataSet();
    daA = new SqlDataAdapter(@"SELECT
id_loc, id_chef, date, hour FROM Appointments
WHERE id = " + id, myCon);
    daA.Fill(dsA, "Appointments");
    DataRow dr =
dsA.Tables["Appointments"].Rows[0];

    dsL = new DataSet();
    daL = new SqlDataAdapter("SELECT
address from Locations WHERE id_loc = " +
int.Parse(dr.ItemArray.GetValue(0).ToString()),
myCon);
    daL.Fill(dsL, "Locations");
    DataRow dr2 =
dsL.Tables["Locations"].Rows[0];

details.Add(dr2.ItemArray.GetValue(0).ToStrin
g()); // address of the location

    dsC = new DataSet();
    daC = new SqlDataAdapter("SELECT
name, surname from Chefs WHERE id_chef = "
+
int.Parse(dr.ItemArray.GetValue(1).ToString()),
myCon);
    daC.Fill(dsL, "Chefs");
    dr2 = dsL.Tables["Chefs"].Rows[0];

details.Add(dr2.ItemArray.GetValue(0).ToStrin
g()); //name of the reserved chef

details.Add(dr2.ItemArray.GetValue(1).ToStrin
g()); //surname of the reserved chef

details.Add(dr.ItemArray.GetValue(2).ToString(
)); // date of the appointment

details.Add(dr.ItemArray.GetValue(3).ToString(
)); // hour of the appointment

    myCon.Close();
    return details;
}

[WebMethod]

```

```

public List<string> getClientDetails(string
username)
{
    List<string> details = new
List<string>();
    myCon.ConnectionString =
connectionString;
    myCon.Open();
    dsC = new DataSet();
    daC = new SqlDataAdapter(@"SELECT
name, surname, address, birthday, other_details
FROM Clients " +
    "WHERE id_login = (SELECT
id_login FROM Login WHERE username = '" +
username + "')", myCon);
    daC.Fill(dsC, "Clients");

    DataRow dr =
dsC.Tables["Clients"].Rows[0];
    for (int i = 0; i < dr.ItemArray.Length;
i++)
    {
        details.Add(dr.ItemArray.GetValue(i).ToString());
    }
    myCon.Close();
    return details;
}
[WebMethod]
public List<string>
verifyAppointment(string location, string date,
int hour)
{
    List<string> availableChefs = new
List<string>();

    myCon.ConnectionString =
connectionString;
    myCon.Open();
    dsL = new DataSet();
    daL = new SqlDataAdapter(@"Select
id_loc from Locations where address='"
+ location + "", myCon);
    daL.Fill(dsL, "Locations");
    DataRow dr3 =
dsL.Tables["Locations"].Rows[0];
    int id_loc =
int.Parse(dr3.ItemArray.GetValue(0).ToString());
;

```

```

dsA = new DataSet();
daA = new SqlDataAdapter(@"SELECT
COUNT(*) FROM Chefs WHERE id_chef NOT
in " +
    "(SELECT id_chef FROM
Appointments WHERE hour = " + hour + "
AND date = '" + date + "' AND id_loc = " +
        "(SELECT id_loc FROM Locations
WHERE address = '" + location + "')") AND
id_loc=" + id_loc + "", myCon);
daA.Fill(dsA, "Chefs");
DataRow dr =
dsA.Tables["Chefs"].Rows[0];
if
(int.Parse(dr.ItemArray.GetValue(0).ToString()) ==
0)
    availableChefs = null;
else {
    dsA = new DataSet();
    daA = new
SqlDataAdapter(@"SELECT name, surname
FROM Chefs WHERE id_chef NOT in " +
    "(SELECT id_chef FROM
Appointments WHERE hour = " + hour + "
AND date = '" + date + "' AND id_loc = " +
        "(SELECT id_loc FROM Locations
WHERE address = '" + location + "')") AND
id_loc=" + id_loc + "", myCon);
    daA.Fill(dsA, "Chefs");
    foreach (DataRow dr2 in
dsA.Tables["Chefs"].Rows)
    {
        availableChefs.Add(dr2.ItemArray.GetValue(0) +
" " + dr2.ItemArray.GetValue(1));
    }
    myCon.Close();
    return availableChefs;
}
[WebMethod]
public int createAppointment(string
username, string location, string date, int hour,
string name, string surname)
{
    int created = 0;
    myCon.ConnectionString =
connectionString;
    myCon.Open();
    com = new SqlCommand();
    com.Connection = myCon;

```

Industrial Informatics – Project

```

        //string[] name = nameChef.Split(' ');
        split choosen chef's name into name and
        surname for finding id_chef

        dsC = new DataSet();
        daC = new SqlDataAdapter("Select
id_chef from Chefs WHERE name = '" + name
+ " AND surname= '" +
        surname + "'", myCon);
        daC.Fill(dsC, "Chefs");
        DataRow dr =
dsC.Tables["Chefs"].Rows[0];
        int id_chef =
int.Parse(dr.ItemArray.GetValue(0).ToString());

        dsC = new DataSet();
        daC = new SqlDataAdapter("Select
id_client from Clients WHERE id_login = " +
        "(SELECT id_login from Login where
username = '" + username + "')", myCon);
        daC.Fill(dsC, "Clients");
        dr = dsC.Tables["Clients"].Rows[0];
        int id_client =
int.Parse(dr.ItemArray.GetValue(0).ToString());

        dsL = new DataSet();
        daL = new SqlDataAdapter("Select
id_loc from Locations WHERE address = '" +
location + "'", myCon);
        daL.Fill(dsC, "Locations");
        dr = dsC.Tables["Locations"].Rows[0];
        int id_loc =
int.Parse(dr.ItemArray.GetValue(0).ToString());

        com.CommandText = "INSERT INTO
Appointments Values(" + id_client + ", " +
        id_loc + ", " + id_chef + ", '" + date +
", " + hour + ")";
        com.ExecuteNonQuery();
        created = 1;
        myCon.Close();

        return created;
    }
    [WebMethod]
    public int deleteAppointment(string
username, string location, string date, int hour,
string nameChef, string surnameChef)
{

```

```

        int deleted = 0;
        myCon.ConnectionString =
connectionString;
        myCon.Open();
        com = new SqlCommand();
        com.Connection = myCon;
        //string[] name = nameChef.Split(' ');
        split choosen chef's name into name and
        surname for finding id_chef

        dsC = new DataSet();
        daC = new SqlDataAdapter("Select
id_chef from Chefs WHERE name = '" + nameChef
+ " AND surname= '" +
surnameChef + "'", myCon);
        daC.Fill(dsC, "Chefs");
        DataRow dr =
dsC.Tables["Chefs"].Rows[0];
        int id_chef =
int.Parse(dr.ItemArray.GetValue(0).ToString());

        dsC = new DataSet();
        daC = new SqlDataAdapter("Select
id_client from Clients WHERE id_login = " +
        "(SELECT id_login from Login where
username = '" + username + "')", myCon);
        daC.Fill(dsC, "Clients");
        dr = dsC.Tables["Clients"].Rows[0];
        int id_client =
int.Parse(dr.ItemArray.GetValue(0).ToString());

        dsL = new DataSet();
        daL = new SqlDataAdapter("Select
id_loc from Locations WHERE address = '" +
location + "'", myCon);
        daL.Fill(dsC, "Locations");
        dr = dsC.Tables["Locations"].Rows[0];
        int id_loc =
int.Parse(dr.ItemArray.GetValue(0).ToString());

        com.CommandText = "DELETE From
Appointments WHERE id_client = " + id_client
+ " AND id_loc=" +
        id_loc + " AND id_chef=" + id_chef +
" AND date=" + date + " AND hour=" + hour +
";";

        com.ExecuteNonQuery();

```

```

        deleted = 1;
        myCon.Close();

        return deleted;
    }

    [WebMethod]
    public string getUsername()
    {
        return usernameGlobal;
    }

    [WebMethod]
    public void setUsername(string username)
    {
        usernameGlobal = username;
    }

    [WebMethod]
    public string getPassword(string username)
    {
        myCon.ConnectionString =
connectionString;
        myCon.Open();

        dsL = new DataSet();
        daL = new SqlDataAdapter(@"SELECT
password FROM Login WHERE username ='" +
username + "'", myCon);
        daL.Fill(dsL, "Login");
        DataRow dr =
dsL.Tables["Login"].Rows[0];
        string password =
dr.ItemArray.GetValue(0).ToString();

        myCon.Close();
        return password;
    }

    [WebMethod]
    public int deleteAccount(string username)
    {
        int response = 0;
        myCon.ConnectionString =
connectionString;

```

```

        myCon.Open();
        com = new SqlCommand();
        com.Connection = myCon;

        // verify if the user is a client or a chef (in
        which table does the id_login find itself?)
        dsC = new DataSet();
        daC = new SqlDataAdapter(@"SELECT
Count(*) FROM Clients WHERE id_login =" +
"(SELECT id_login from Login where
username ='" + username + "')", myCon);
        daC.Fill(dsC, "Clients");
        DataRow dr =
dsC.Tables["Clients"].Rows[0];
        int userType =
int.Parse(dr.ItemArray.GetValue(0).ToString());
        if (userType == 1) // you are a client and
you wanna delete yourself
        {
            com.CommandText = "DELETE
FROM Appointments WHERE id_client = " +
"(SELECT id_client from Clients
where id_login = (SELECT id_login FROM
Login WHERE username ='" + username + "'))";
            com.ExecuteNonQuery();
            com.CommandText = "DELETE
FROM Clients WHERE id_login = " +
"(SELECT id_login from Login where
username ='" + username + "')";
            response = 1;
            // deleted a client
        }
        else // you are a chef and you wanna
delete yourself
        {
            com.CommandText = "DELETE
FROM Appointments WHERE id_client = " +
"(SELECT id_client from Clients where
id_login = (SELECT id_login FROM Login
WHERE username ='" + username + "'))";
            com.ExecuteNonQuery();

            com.CommandText = "DELETE
FROM Chefs WHERE id_login = " +
"(SELECT id_login from Login where
username ='" + username + "')";

```

```

        response = 2; // deleted a chef
    }
    com.ExecuteNonQuery();

    //after deleting the entry from the Chefs/
    Clients, delete the entry from Login
    com.CommandText = "DELETE From
    Login where username = '" + username + "'";
    com.ExecuteNonQuery();

    myCon.Close();
    return response;
}

[WebMethod]
public List<string> getAllLocations()
{
    List<string> listOfLocations = new
    List<string>();
    myCon.ConnectionString =
    connectionString;
    myCon.Open();
    dsL = new DataSet();
    daL = new SqlDataAdapter(@"SELECT
    address FROM Locations", myCon);
    daL.Fill(dsL, "Locations");
    foreach (DataRow dr in
    dsL.Tables["Locations"].Rows)
    {

listOfLocations.Add(dr.ItemArray.GetValue(0).
ToString());
    }

    myCon.Close();
    return listOfLocations;
}

[WebMethod]
public List<string> getChefDetails(string
username)
{
    List<string> list = new List<string>();

```

```

    myCon.ConnectionString =
    connectionString;
    myCon.Open();
    dsC = new DataSet();
    daC = new SqlDataAdapter(@"SELECT
    id_chef, name, surname,birthday, other_details,
    id_loc FROM Chefs where id_login = " +
    "(SELECT id_login from Login
    WHERE username = '" + username + "')",
    myCon);
    daC.Fill(dsC, "Chefs");
    DataRow dr =
    dsC.Tables["Chefs"].Rows[0];

    list.Add(dr.ItemArray.GetValue(1).ToString());
    // name on 0 in list

    list.Add(dr.ItemArray.GetValue(2).ToString());
    // surname on 1 in list

    list.Add(dr.ItemArray.GetValue(3).ToString());
    // birthday on 2 in list

    list.Add(dr.ItemArray.GetValue(4).ToString());
    // other_details on 3 in list

    dsL = new DataSet();
    daL = new SqlDataAdapter(@"SELECT
    address, type_of_cuisine FROM Locations
    where id_loc = " +
    int.Parse(dr.ItemArray.GetValue(5).ToString()),
    myCon);
    daL.Fill(dsL, "Locations");
    DataRow dr2 =
    dsL.Tables["Locations"].Rows[0];

    list.Add(dr2.ItemArray.GetValue(0).ToString());
    // location on 4 in list

    list.Add(dr2.ItemArray.GetValue(1).ToString());
    // type of cuisine on 5 in list

    dsA = new DataSet();

```

Industrial Informatics – Project

```

daA = new SqlDataAdapter(@"SELECT
Count(*) from Awards where id_chef = " +
int.Parse(dr.ItemArray.GetValue(0).ToString()), myCon);
daA.Fill(dsA, "Awards");
DataRow dr4 =
dsA.Tables["Awards"].Rows[0];
int numberOfAwards =
int.Parse(dr4.ItemArray.GetValue(0).ToString())
;
if (numberOfAwards == 0)
    list.Add("No awards yet.");
else
{
    dsA = new DataSet();
    daA = new
SqlDataAdapter(@"SELECT name from
Awards where id_chef = " +
int.Parse(dr.ItemArray.GetValue(0).ToString()), myCon);
    daA.Fill(dsA, "Awards");
    foreach (DataRow dr3 in
dsA.Tables["Awards"].Rows)

list.Add(dr3.ItemArray.GetValue(0).ToString());
// from position 6 until the end, the list will
contain the name of the awards of the chef
}
myCon.Close();

return list;
}

[WebMethod]
public string updateStuffChefs(string
username, string name, string surname, string
birthday)
{
    message = "";
    myCon.ConnectionString =
connectionString;
    myCon.Open();
    com = new SqlCommand();
    com.Connection = myCon;
    com.CommandText = "UPDATE Chefs
SET name = " + name + ", surname = " +
surname + "" + "
", birthday = "" + birthday + ""
WHERE id_login = (SELECT id_login FROM
Login WHERE username = "" + username + ""));
    com.ExecuteNonQuery();
    message += "Updated!";
}

myCon.Close();
return message;
}

[WebMethod]
public List<int>
getIDsOfAppointmentsChef(string username)
{
    List<int> list = new List<int>();
    myCon.ConnectionString =
connectionString;
    myCon.Open();

    dsA = new DataSet();
    daA = new SqlDataAdapter(@"SELECT
COUNT(*) from Appointments where id_chef =
" +
"(SELECT id_chef FROM Chefs
WHERE id_login = (SELECT id_login from
Login WHERE username = "" + username +
""))", myCon);
    daA.Fill(dsA, "Appointments");
    DataRow dr =
dsA.Tables["Appointments"].Rows[0];
    int numberOfAppointments =
int.Parse(dr.ItemArray.GetValue(0).ToString());
    if (numberOfAppointments == 0)
        list.Add(-1); // daca lista de id-uri
returnata contine doar -1 pe prima pozitie => nu
exista rezervari pt. seful respectiv.
    else
    {
        dsA = new DataSet();
        daA = new
SqlDataAdapter(@"SELECT id from
Appointments where id_chef = " +
"(SELECT id_chef FROM Chefs
WHERE id_login = (SELECT id_login from
Login WHERE username = "" + username +
""))", myCon);
        daA.Fill(dsA, "Appointments");
    }
}

```

Industrial Informatics – Project

```
foreach (DataRow rd1 in
dsA.Tables["Appointments"].Rows)

list.Add(int.Parse(rd1.ItemArray.GetValue(0).T
oString()));
}

myCon.Close();
return list;
}

[WebMethod]
public List<string> getAppDetailsChef(int
id_appointment)
{
    List<string> list = new List<string>();

    myCon.ConnectionString =
connectionString;
    myCon.Open();

    dsA = new DataSet();
    daA = new SqlDataAdapter(@"SELECT
id_loc, id_client, date, hour from Appointments
where id= " + id_appointment, myCon);
    daA.Fill(dsA, "Appointments");
    DataRow dr =
dsA.Tables["Appointments"].Rows[0];
    int id_loc =
int.Parse(dr.ItemArray.GetValue(0).ToString());
    int id_client =
int.Parse(dr.ItemArray.GetValue(1).ToString());

    dsL = new DataSet();
    daL = new SqlDataAdapter(@"SELECT
address from Locations where id_loc= " +
id_loc, myCon);
    daL.Fill(dsL, "Locations");
    DataRow dr2 =
dsL.Tables["Locations"].Rows[0];

    dsC = new DataSet();
    daC = new SqlDataAdapter(@"SELECT
name, surname from Clients where id_client= "
+ id_client, myCon);
```

```
daC.Fill(dsC, "Clients");
    DataRow dr3 =
dsC.Tables["Clients"].Rows[0];

list.Add(dr2.ItemArray.GetValue(0).ToString());
// location at 0

list.Add(dr3.ItemArray.GetValue(0).ToString());
// name client at 0

list.Add(dr3.ItemArray.GetValue(1).ToString());
// surname client at 0

list.Add(dr.ItemArray.GetValue(2).ToString());
// date at 0

list.Add(dr.ItemArray.GetValue(3).ToString());
// hour at 0

myCon.Close();
return list;
}

[WebMethod]
public List<string>
getAllUsernamesOfChefs()
{
    List<string> list = new List<string>();
    myCon.ConnectionString =
connectionString;
    myCon.Open();
    dsC = new DataSet();
    daC = new SqlDataAdapter(@"SELECT
username from Login where id_login in
(SELECT id_login FROM Chefs)", myCon);
    daC.Fill(dsC, "Chefs");
    foreach (DataRow dr in
dsC.Tables["Chefs"].Rows)

list.Add(dr.ItemArray.GetValue(0).ToString());
    myCon.Close();
    return list;
}

public class Chef
{
    List<string> awards;
```



Industrial Informatics – Project

```
string name, surname;  
string location;  
public Chef()  
{  
    this.awards = null;  
    this.name = null;  
    this.surname = null;  
    this.location = null;  
}  
public Chef(string name, string surname,  
string location, List<string> awards)
```

{
 this.name = name;
 this.surname = surname;
 this.location = location;
 this.awards = awards;
}
}



Project_client_template

About.aspx

```
<%@ Page Title="About" Language="C#"
MasterPageFile="~/Site.Master"
AutoEventWireup="true"
CodeBehind="About.aspx.cs"
Inherits="Project_client_template.About" %>
```

```
<asp:Content ID="BodyContent"
ContentPlaceHolderID="MainContent"
runat="server">
    <h2><%: Title %>.</h2>
    <h3>Your application description page.</h3>
    <p>Use this area to provide additional
information.</p>
</asp:Content>
```

About.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace Project_client_template
{
```

```
public partial class About : Page
{
    protected void Page_Load(object sender,
EventArgs e)
    {
    }
}
```

ChefAccount.aspx

```
<%@ Page Title="" Language="C#"
MasterPageFile="~/LoginChefs.Master"
AutoEventWireup="true"
CodeBehind="ChefAccount.aspx.cs"
Inherits="Project_client_template.ChefAccount" %>
<asp:Content ID="Content1"
ContentPlaceHolderID="MainContent"
runat="server">

<section>
    <h2>Account settings</h2>
    <div class="row account">
        <div class="row">
            <h3>Personal information</h3>
        </div>
        <div class="row margins flex1">
            <div class="col span-1-of-10 labels">
                <asp:Label CssClass="left-label"
Text="Name" runat="server"/>
            </div>
            <div class="col span-2-of-10">
                <asp:TextBox CssClass="name"
type="text" ID="name" name="name"
runat="server"/>
            </div>
        
```

```
<div class="col span-3-of-10">
    <asp:TextBox CssClass="surname"
type="text" ID="surname" name="surname"
runat="server"/>
</div>
</div>
<div class="row margins">
    <div class="col span-1-of-10 birthday-
boxes">
        <asp:Label Text="Birthday"
runat="server"/>
    </div>
    <div class="col span-2-of-10">
        <asp:TextBox CssClass="birthday1
birthday" type="text" ID="day" name="day"
runat="server"/>
        <asp:TextBox CssClass="birthday2
birthday" type="text" ID="month" name="month"
runat="server"/>
        <asp:TextBox CssClass="birthday3
birthday" type="text" ID="year" name="year"
runat="server"/>
    </div>
</div>
```

```
<div class="row">
    <asp:Button class="btn full-btn"
Text="Update" ID="update_btn1"
OnClick="Update_Button1" runat="server"/>
</div>
<div class="row">
    <h3 class="bf">Change your password</h3>
</div>
<div class="row margins">
    <div class="col span-1-of-10">
        <asp:Label class="left-label"
Text="Password" runat="server"/>
        </div>
        <div class="col span-2-of-10">
            <asp:TextBox CssClass="name"
type="password" ID="current_pass"
name="current_pass" PlaceHolder="Current
password" runat="server"/>
        </div>
        <div class="col span-3-of-10">
            <asp:TextBox CssClass="surname"
type="password" ID="new_pass" name="new_pass"
PlaceHolder="New password" runat="server"/>
        </div>
    </div>
<div class="row">
    <asp:Button class="btn full-btn"
Text="Update" ID="update_btn2"
OnClick="Update_Button2" runat="server"/>
```

```
</div>
<div class="row">
    <h3 class="bf">Your details</h3>
</div>
<div class="row margins">
    <textarea name="other_details"
ID="other_details" runat="server"></textarea>
</div>
<div class="row">
    <asp:Button class="btn full-btn"
Text="Update" ID="update_btn3"
OnClick="Update_Button3" runat="server"/>
</div>
<div class="row">
    <div class="col span-1-of-10">
        <asp:Button class="full-blue btn1"
Text="Logout" ID="logout"
OnClick="Logout_Button" runat="server"/>
    </div>
    <div class="col span-2-of-10">
        <asp:Button class="full-blue btn2"
Text="Delete account" ID="delete"
OnClick="Delete_Button" runat="server"/>
    </div>
    </div>
</div>
</section>
```

ChefAccount.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace Project_client_template
{
    public partial class ChefAccount :
System.Web.UI.Page
    {

Project_client_template.ServiceReference1.WebServic
ce1SoapClient service =
        new
Project_client_template.ServiceReference1.WebServic
ce1SoapClient();
        string username = "";
```

```
protected void Page_Load(object sender,
EventArgs e)
{
    System.Web.UI.HtmlControls.HtmlLink css
= new System.Web.UI.HtmlControls.HtmlLink();
    css.Href = "~/Content/style_Account.css";
    css.Attributes["rel"] = "stylesheet";
    css.Attributes["type"] = "text/css";
    // css.Attributes["media"] = "all"; //add any
attributes as needed
    Master.Page.Header.Controls.Add(css);

    username = service.getUsername();
    List<string> chefAccount = new
List<string>();
    chefAccount =
service.getChefDetails(username);
    if (name.Text == "")
    {
        name.Text = chefAccount[0];
    }
    if (surname.Text == "")
```

```

    {
        surname.Text = chefAccount[1];
    }
    if (day.Text == "")
    {
        day.Text = chefAccount[2].Substring(0, 2);
    }
    if (month.Text == "")
    {
        month.Text = chefAccount[2].Substring(3,
2);
    }
    if (year.Text == "")
    {
        year.Text = chefAccount[2].Substring(6);
    }
    if (other_details.Value == "")
    {
        other_details.Value = chefAccount[3];
    }

//ClientScript.RegisterStartupScript(this.GetType(),
"myalert", "alert('" + clientAccount[3] + "');", true);

}

protected void Update_Button1(object sender,
EventArgs e)
{
    username = service.getUsername();
    string nameChef = name.Text;
    string surnameChef = surname.Text;
    string birthday = day.Text + "/" + month.Text
+ "/" + year.Text;
    service.updateStuffChefs(username,
nameChef, surnameChef, birthday);
}

```

```

protected void Update_Button2(object sender,
EventArgs e)
{
    username = service.getUsername();
    string pass = service.getPassword(username);
    if (pass == current_pass.Text)
    {
        service.updatePassword(username,
new_pass.Text);
    }
}

protected void Update_Button3(object sender,
EventArgs e)
{
    username = service.getUsername();
    string details = other_details.Value;
    service.updateDetailsClient(username,
details);
}

protected void Delete_Button(object sender,
EventArgs e)
{
    username = service.getUsername();
    service.deleteAccount(username);
    Response.Redirect("~/Home.aspx");
}

protected void Logout_Button(object sender,
EventArgs e)
{
    Response.Redirect("~/Home.aspx");
}
}

```

Chefs.aspx

```

<%@ Page Title="" Language="C#"
MasterPageFile="~/Site.Master"
AutoEventWireup="true"
CodeBehind="Chefs.aspx.cs"
Inherits="Project_client_template.Chefs" %>
<asp:Content ID="Content1"
ContentPlaceHolderID="MainContent"
runat="server">

<section>
    <h2>Chefs</h2>
    <div class="row boxes">
        <%for (int i = 0; i < location.Count; i++)>

```

```

        { %>
        <h3><%=nameChef[i] + " " +
surnameChef[i]%> </h3>
        <p>
            <%=details[i]%>
        </p>
        <div class="row">
            <h4>Type of Cuisine</h4>
            <h5><%=cuisine[i] %></h5>
        </div>
        <div class="row">
            <h4>Location</h4>
            <h5><%=location[i] %></h5>

```



```
</div>
<% } %>
</div>
</section>
```

```
</asp:Content>
```

Chefs.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace Project_client_template
{
    public partial class Chefs : System.Web.UI.Page
    {
        static
Project_client_template.ServiceReference1.WebServ
ce1SoapClient service =
        new
Project_client_template.ServiceReference1.WebServ
ce1SoapClient();
        protected static List<string> usernames =
service.getAllUsernamesOfChefs();
        protected List<string>[] chefs = new
List<string>[usernames.Count];
        protected List<string> nameChef = new
List<string>();
        protected List<string> surnameChef = new
List<string>();
        protected List<string> details = new
List<string>();
        protected List<string> cuisine = new
List<string>();
        protected List<string> location = new
List<string>();
    }
}
```

```
protected void Page_Load(object sender,
EventArgs e)
{
    System.Web.UI.HtmlControls.HtmlLink css
= new System.Web.UI.HtmlControls.HtmlLink();
css.Href = "~/Content/style_chefs.css";
css.Attributes["rel"] = "stylesheet";
css.Attributes["type"] = "text/css";
// css.Attributes["media"] = "all"; //add any
attributes as needed
Master.Page.Header.Controls.Add(css);

int no = usernames.Count;

for (int i = 0; i < no; i++)
{
    chefs[i] =
service.getChefDetails(usernames[i]);
}
for (int i = 0; i < no; i++)
{
    nameChef.Add(chefs[i][0]);
    surnameChef.Add(chefs[i][1]);
    details.Add(chefs[i][3]);
    cuisine.Add(chefs[i][5]);
    location.Add(chefs[i][4]);
}
}
```

ChefsChefs.aspx

```
<%@ Page Title="" Language="C#"
MasterPageFile="~/LoginChefs.Master"
AutoEventWireup="true"
CodeBehind="ChefsChefs.aspx.cs"
Inherits="Project_client_template.ChefsChefs" %>
<asp:Content ID="Content1"
ContentPlaceHolderID="MainContent"
runat="server">

<section>
<h2>Chefs</h2>
<div class="row boxes">
```

```
<%for (int i = 0; i < location.Count; i++) {
%>
<h3><%=nameChef[i] + " " +
surnameChef[i]%></h3>
<p>
<%=details[i]%>
</p>
<div class="row">
<h4>Type of Cuisine</h4>
<h5><%=cuisine[i] %></h5>
</div>
<div class="row">
```



Industrial Informatics – Project

```

<h4>Location</h4>
<h5><%=location[i] %></h5>
</div>
<% } %>
```

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace Project_client_template
{
    public partial class ChefsChefs : System.Web.UI.Page
    {
        static
Project_client_template.ServiceReference1.WebService1SoapClient service =
        new
Project_client_template.ServiceReference1.WebService1SoapClient();
        protected static List<string> usernames =
service.getAllUsernamesOfChefs();
        protected List<string>[] chefs = new
List<string>[usernames.Count];
        protected List<string> nameChef = new
List<string>();
        protected List<string> surnameChef = new
List<string>();
        protected List<string> details = new
List<string>();
        protected List<string> cuisine = new
List<string>();
    }
}
```

```

</div>
</section>
</asp:Content>
```

ChefsChefs.aspx.cs

```

protected List<string> location = new
List<string>();

protected void Page_Load(object sender,
EventArgs e)
{
    System.Web.UI.HtmlControls.HtmlLink css
= new System.Web.UI.HtmlControls.HtmlLink();
    css.Href = "~/Content/style_chefs.css";
    css.Attributes["rel"] = "stylesheet";
    css.Attributes["type"] = "text/css";
    // css.Attributes["media"] = "all"; //add any
attributes as needed
    Master.Page.Header.Controls.Add(css);

    int no = usernames.Count;

    for (int i = 0; i < no; i++)
    {
        chefs[i] =
service.getChefDetails(usernames[i]);
    }
    for (int i = 0; i < no; i++)
    {
        nameChef.Add(chefs[i][0]);
        surnameChef.Add(chefs[i][1]);
        details.Add(chefs[i][3]);
        cuisine.Add(chefs[i][5]);
        location.Add(chefs[i][4]);
    }
}
}
```

ChefsClient.aspx

```

<%@ Page Title="" Language="C#"
MasterPageFile="~/LoginMasterPage.Master"
AutoEventWireup="true"
CodeBehind="ChefsClient.aspx.cs"
Inherits="Project_client_template.ChefsClient" %>
<asp:Content ID="Content1"
ContentPlaceHolderID="MainContent"
runat="server">

<section>
    <h2>Chefs</h2>
```

```

<div class="row boxes">
    <%for (int i = 0; i < location.Count; i++)>
        { %>
            <h3><%=nameChef[i] + " " +
surnameChef[i]%></h3>
            <p>
                <%=details[i]%>
            </p>
        <div class="row">
            <h4>Type of Cuisine</h4>
            <h5><%=cuisine[i] %></h5>
```



```

</div>
<div class="row">
    <h4>Location</h4>
    <h5><%=location[i] %></h5>
</div>
<% } %>
</div>

</section>

</asp:Content>

```

ChefsClient.aspx.cs

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace Project_client_template
{
    public partial class ChefsClient : System.Web.UI.Page
    {
        static
Project_client_template.ServiceReference1.WebServ
ce1SoapClient service =
        new
Project_client_template.ServiceReference1.WebServ
ce1SoapClient();
        protected static List<string> usernames =
service.getAllUsernamesOfChefs();
        protected List<string>[] chefs = new
List<string>[usernames.Count];
        protected List<string> nameChef = new
List<string>();
    }
}

```

```

protected List<string> surnameChef = new
List<string>();
protected List<string> details = new
List<string>();
protected List<string> cuisine = new
List<string>();
protected List<string> location = new
List<string>();

protected void Page_Load(object sender,
EventArgs e)
{
    System.Web.UI.HtmlControls.HtmlLink css
= new System.Web.UI.HtmlControls.HtmlLink();
    css.Href = "~/Content/style_chefs.css";
    css.Attributes["rel"] = "stylesheet";
    css.Attributes["type"] = "text/css";
    // css.Attributes["media"] = "all"; //add any
attributes as needed
    Master.Page.Header.Controls.Add(css);

    int no = usernames.Count;

    for (int i = 0; i < no; i++)
    {
        chefs[i] =
service.getChefDetails(usernames[i]);
    }
    for (int i = 0; i < no; i++)
    {
        nameChef.Add(chefs[i][0]);
        surnameChef.Add(chefs[i][1]);
        details.Add(chefs[i][3]);
        cuisine.Add(chefs[i][5]);
        location.Add(chefs[i][4]);
    }
}
}
}

```

ClientAccount.aspx

```

<%@ Page Title="" Language="C#"
MasterPageFile="~/LoginMasterPage.Master"
AutoEventWireup="true"
CodeBehind="ClientAccount.aspx.cs"
Inherits="Project_client_template.ClientAccount"
%>
<asp:Content ID="Content1"
ContentPlaceHolderID="MainContent"
runat="server">
    <section>
        <h2>Account settings</h2>
        <div class="row account">

```

```

<div class="row">
    <h3>Personal information</h3>
</div>
<div class="row margins flex1">
    <div class="col span-1-of-10 labels">
        <asp:Label CssClass="left-label"
Text="Name" runat="server"/>
    </div>
    <div class="col span-2-of-10">
        <asp:TextBox CssClass="name"
type="text" ID="name" name="name"
runat="server"/>

```



```

</div>
<div class="col span-3-of-10">
    <asp:TextBox CssClass="surname"
    type="text" ID="surname" name="surname"
    runat="server"/>
</div>
</div>
<div class="row margins">
    <div class="col span-1-of-10">
        <asp:Label CssClass="left-label"
        Text="Email" runat="server"/>
    </div>
    <div class="col span-2-of-10">
        <asp:TextBox CssClass="email"
        type="text" ID="email" name="name"
        runat="server"/>
    </div>
</div>
<div class="row margins">
    <div class="col span-1-of-10 birthday-
boxes">
        <asp:Label Text="Birthday"
        runat="server"/>
    </div>
    <div class="col span-2-of-10">
        <asp:TextBox CssClass="birthday1
birthday" type="text" ID="day" name="day"
        runat="server"/>
        <asp:TextBox CssClass="birthday2
birthday" type="text" ID="month" name="month"
        runat="server"/>
        <asp:TextBox CssClass="birthday3
birthday" type="text" ID="year" name="year"
        runat="server"/>
    </div>
</div>

<div class="row">
    <asp:Button class="btn full-btn"
    Text="Update" ID="update_btn1"
    OnClick="Update_Button1" runat="server"/>
</div>
<div class="row">
    <h3 class="bf">Change your password</h3>
</div>
<div class="row margins">
    <div class="col span-1-of-10">
        <asp:Label class="left-label"
        Text="Password" runat="server"/>
    </div>
    <div class="col span-2-of-10">
        <asp:TextBox CssClass="name"
        type="password" ID="current_pass"
        name="current_pass" PlaceHolder="Current
        password" runat="server"/>
    </div>
    <div class="col span-3-of-10">
        <asp:TextBox CssClass="surname"
        type="password" ID="new_pass" name="new_pass"
        PlaceHolder="New password" runat="server"/>
    </div>
</div>
<div class="row">
    <asp:Button class="btn full-btn"
    Text="Update" ID="update_btn2"
    OnClick="Update_Button2" runat="server"/>
</div>
<div class="row">
    <h3 class="bf">Your details</h3>
</div>
<div class="row margins">
    <textarea name="other_details"
    ID="other_details" runat="server" ></textarea>
</div>

<div class="row">
    <asp:Button class="btn full-btn"
    Text="Update" ID="update_btn3"
    OnClick="Update_Button3" runat="server"/>
</div>
<div class="row">
    <div class="col span-1-of-10">
        <asp:Button class="full-blue btn1"
        Text="Logout" ID="logout"
        OnClick="Logout_Button" runat="server"/>
    </div>
    <div class="col span-2-of-10">
        <asp:Button class="full-blue btn2"
        Text="Delete account" ID="delete"
        OnClick="Delete_Button" runat="server"/>
    </div>
</div>
</div>
</section>
</asp:Content>

```

ClientAccount.aspx.cs

```

using System;
using System.Collections.Generic;
using System.Linq;

```

```

using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

```



Industrial Informatics – Project

```
namespace Project_client_template
{
    public partial class ClientAccount : System.Web.UI.Page
    {

        Project_client_template.ServiceReference1.WebService1SoapClient service =
            new Project_client_template.ServiceReference1.WebService1SoapClient();
        string username = "";

        protected void Page_Load(object sender, EventArgs e)
        {
            System.Web.UI.HtmlControls.HtmlLink css
= new System.Web.UI.HtmlControls.HtmlLink();
            css.Href = "~/Content/style_Account.css";
            css.Attributes["rel"] = "stylesheet";
            css.Attributes["type"] = "text/css";
            // css.Attributes["media"] = "all"; //add any attributes as needed
            Master.Page.Header.Controls.Add(css);

            username = service.getUsername();
            List<string> clientAccount = new List<string>();
            clientAccount =
service.getClientDetails(username);
            if (name.Text == "")
            {
                name.Text = clientAccount[0];
            }
            if (surname.Text == "")
            {
                surname.Text = clientAccount[1];
            }
            if (email.Text == "")
            {
                email.Text = clientAccount[2];
            }
            if (day.Text == "")
            {
                day.Text = clientAccount[3].Substring(0, 2);
            }
            if (month.Text == "")
            {
                month.Text =
clientAccount[3].Substring(3, 2);
            }
            if (year.Text == "")
```

```
        {
            year.Text = clientAccount[3].Substring(6);
        }
        if (other_details.Value == "")
        {
            other_details.Value = clientAccount[4];
        }

//ClientScript.RegisterStartupScript(this.GetType(),
"myalert", "alert(" + clientAccount[3] + ")"; true);

    }

    protected void Update_Button1(object sender, EventArgs e)
    {
        username = service.getUsername();
        string nameClient = name.Text;
        string surnameClient = surname.Text;
        string address = email.Text;
        string birthday = day.Text + "/" + month.Text
+ "/" + year.Text;
        service.updateStuffClient(username,
nameClient, surnameClient, address, birthday);
    }

    protected void Update_Button2(object sender, EventArgs e)
    {
        username = service.getUsername();
        string pass = service.getPassword(username);
        if (pass == current_pass.Text)
        {
            service.updatePassword(username,
new_pass.Text);
        }
    }

    protected void Update_Button3(object sender, EventArgs e)
    {
        string details = other_details.Value;
        service.updateDetailsClient(username,
details);
    }

    protected void Delete_Button(object sender, EventArgs e)
    {
        username = service.getUsername();
        service.deleteAccount(username);
        Response.Redirect("~/Home.aspx");
    }
}
```



```
        Response.Redirect( ~/Home.aspx );  
    }  
}
```

Contact.aspx

```
<%@ Page Title="Contact" Language="C#"
MasterPageFile="~/Site.Master"
AutoEventWireup="true"
CodeBehind="Contact.aspx.cs"
Inherits="Project_client_template.Contact" %>

<asp:Content ID="BodyContent"
ContentPlaceHolderID="MainContent"
runat="server">
    <h2><%: Title %>.</h2>
    <h3>Your contact page.</h3>
    <address>
        One Microsoft Way<br />
        Redmond, WA 98052-6399<br />
```

```
- <abbr title="Phone">P:</abbr>
  425.555.0100
</address>

<address>
  <strong>Support:</strong> <a
  href="mailto:Support@example.com">Support@exa
  mple.com</a><br />
  <strong>Marketing:</strong> <a
  href="mailto:Marketing@example.com">Marketing
  @example.com</a>
</address>
</asp:Content>
```

Contact.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace Project_client_template
{
```

```
public partial class Contact : Page
{
    protected void Page_Load(object sender,
EventArgs e)
    {
        }
    }
}
```

Default.aspx

```
<%@ Page Title="Home Page" Language="C#"
MasterPageFile="~/Site.Master"
AutoEventWireup="true"
CodeBehind="Default.aspx.cs"
Inherits="Project_client_template._Default" %>

<asp:Content ID="BodyContent"
ContentPlaceHolderID="MainContent"
runat="server">

    <div class="jumbotron">
        <h1>ASP.NET</h1>
        <p class="lead">ASP.NET is a free web
framework for building great Web sites and Web
applications using HTML, CSS, and JavaScript.</p>
        <p><a href="http://www.asp.net" class="btn
btn-primary btn-lg">Learn more &raquo;</a></p>
    </div>

```

```
<div class="row">
  <div class="col-md-4">
    <h2>Getting started</h2>
    <p>
      ASP.NET Web Forms lets you build
      dynamic websites using a familiar drag-and-drop,
      event-driven model.
      A design surface and hundreds of controls and
      components let you rapidly build sophisticated,
      powerful UI-driven sites with data access.
    </p>
    <p>
      <a class="btn btn-default"
        href="https://go.microsoft.com/fwlink/?LinkId=3019
        48">Learn more &raquo;</a>
    </p>
  </div>
```



Industrial Informatics – Project

```
<div class="col-md-4">
    <h2>Get more libraries</h2>
    <p>
        NuGet is a free Visual Studio extension
        that makes it easy to add, remove, and update
        libraries and tools in Visual Studio projects.
    </p>
    <p>
        <a class="btn btn-default"
        href="https://go.microsoft.com/fwlink/?LinkId=3019
        49">Learn more &raquo;</a>
    </p>
</div>
<div class="col-md-4">
    <h2>Web Hosting</h2>
```

```
<p>
    You can easily find a web hosting company
    that offers the right mix of features and price for your
    applications.
</p>
<p>
    <a class="btn btn-default"
    href="https://go.microsoft.com/fwlink/?LinkId=3019
    50">Learn more &raquo;</a>
</p>
</div>
</div>

</asp:Content>
```

Default.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace Project_client_template
{
```

```
public partial class _Default : Page
{
    protected void Page_Load(object sender,
    EventArgs e)
    {
    }
}
```

FindUs.aspx

```
<%@ Page Title="" Language="C#"
MasterPageFile="~/Site.Master"
AutoEventWireup="true"
CodeBehind="FindUs.aspx.cs"
Inherits="Project_client_template.FindUs" %>
<asp:Content ID="Content1"
ContentPlaceHolderID="MainContent"
runat="server">

<section class="section-cities" id="cities">
    <div class="row js--wp-3">
        <h2>We're currently in these places</h2>
    </div>
    <div class="row">
        <div class="col span-1-of-3 box">
            
            <h3><%=loc[0]%></h3>
            <div class="city-feature">
                
                1600+ happy eaters
            </div>
        </div>
    </div>

```

```
<div class="city-feature">
    
    top chefs
</div>
<div class="city-feature">
    
    <a href="#">@noissete_english</a>
</div>
</div>

<div class="col span-1-of-3 box">
    
    <h3><%=loc[1]%></h3>
    <div class="city-feature">
        
            3700+ happy eaters
    </div>
    <div class="city-feature">
        
```

Industrial Informatics – Project

```

        top chefs
    </div>
    <div class="city-feature">
        
            <a href="#">@noisette_indian</a>
        </div>
    </div>

    <div class="col span-1-of-3 box">
        
            <h3><%=loc[2]%></h3>
            <div class="city-feature">
                
                    2300+ happy eaters
            </div>

```

```

        <div class="city-feature">
            
                top chefs
            </div>
            <div class="city-feature">
                
                    <a href="#">@noisette_chinese</a>
                </div>
            </div>

        </div>
    </section>

</asp:Content>

```

FindUs.aspx.cs

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace Project_client_template
{
    public partial class FindUs : System.Web.UI.Page
    {

Project_client_template.ServiceReference1.WebServi
ce1SoapClient service =
        new
Project_client_template.ServiceReference1.WebServi
ce1SoapClient();
    }
}

```

```

protected List<string> loc = new List<string>();

protected void Page_Load(object sender,
EventArgs e)
{
    System.Web.UI.HtmlControls.HtmlLink css
= new System.Web.UI.HtmlControls.HtmlLink();
    css.Href = "~/Content/style_findus.css";
    css.Attributes["rel"] = "stylesheet";
    css.Attributes["type"] = "text/css";
    // css.Attributes["media"] = "all"; //add any
    attributes as needed
    Master.Page.Header.Controls.Add(css);
    loc = service.getAllLocations();
}
}
}

```

FindUsChef.aspx

```

<%@ Page Title="" Language="C#"
MasterPageFile="~/LoginChefs.Master"
AutoEventWireup="true"
CodeBehind="FindUsChef.aspx.cs"
Inherits="Project_client_template.FindUsChef" %>
<asp:Content ID="Content1"
ContentPlaceHolderID="MainContent"
runat="server">

<section class="section-cities" id="cities">
<div class="row js--wp-3">
    <h2>We're currently in these places</h2>

```

```

        </div>
        <div class="row">
            <div class="col span-1-of-3 box">

                
                    <h3><%=loc[0]%></h3>
                    <div class="city-feature">
                        
                            1600+ happy eaters
                    </div>
                    <div class="city-feature">

```

Industrial Informatics – Project

```


    top chefs
</div>
<div class="city-feature">
    
        <a href="#">@noissete_english</a>
    </div>
</div>

<div class="col span-1-of-3 box">
    
        <h3><%=loc[1]%></h3>
        <div class="city-feature">
            
                3700+ happy eaters
            </div>
            <div class="city-feature">
                
                    top chefs
                </div>
                <div class="city-feature">
                    
                        <a href="#">@noissete_indian</a>
                </div>
            </div>
        </div>
    </div>
</div>

```

```

    </div>
    </div>

    <div class="col span-1-of-3 box">
        
            <h3><%=loc[2]%></h3>
            <div class="city-feature">
                
                    2300+ happy eaters
                </div>
                <div class="city-feature">
                    
                        <a href="#">@noissete_chinese</a>
                    </div>
                </div>
            </div>
        </div>
    </div>

```

</asp:Content>

FindUsChef.aspx.cs

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace Project_client_template
{
    public partial class FindUsChef : System.Web.UI.Page
    {

Project_client_template.ServiceReference1.WebServ
ce1SoapClient service =
        new
Project_client_template.ServiceReference1.WebServ
ce1SoapClient();

```

```

protected List<string> loc = new List<string>();

protected void Page_Load(object sender,
EventArgs e)
{
    System.Web.UI.HtmlControls.HtmlLink css
= new System.Web.UI.HtmlControls.HtmlLink();
    css.Href = "~/Content/style_findus.css";
    css.Attributes["rel"] = "stylesheet";
    css.Attributes["type"] = "text/css";
    // css.Attributes["media"] = "all"; //add any
attributes as needed
    Master.Page.Header.Controls.Add(css);
    loc = service.getAllLocations();
}
}
}

```

FindUsClient.aspx



```

<%@ Page Title="" Language="C#"
MasterPageFile="~/LoginMasterPage.Master"
AutoEventWireup="true"
CodeBehind="FindUsClient.aspx.cs"
Inherits="Project_client_template.FindUsClient" %>
<asp:Content ID="Content1"
ContentPlaceHolderID="MainContent"
runat="server">

    <section class="section-cities" id="cities">
        <div class="row js--wp-3">
            <h2>We're currently in these places</h2>
        </div>
        <div class="row">
            <div class="col span-1-of-3 box">

                
                <h3><%=loc[0]%></h3>
                <div class="city-feature">
                    
                    1600+ happy eaters
                </div>
                <div class="city-feature">
                    
                    top chefs
                </div>
                <div class="city-feature">
                    
                    <a href="#">@noissete_english</a>
                </div>
            </div>

            <div class="col span-1-of-3 box">
                
                <h3><%=loc[1]%></h3>
                <div class="city-feature">

```

```

                    
                    3700+ happy eaters
                </div>
                <div class="city-feature">
                    
                    top chefs
                </div>
                <div class="city-feature">
                    
                    <a href="#">@noissete_indian</a>
                </div>
            </div>

            <div class="col span-1-of-3 box">
                
                <h3><%=loc[2]%></h3>
                <div class="city-feature">
                    
                    2300+ happy eaters
                </div>
                <div class="city-feature">
                    
                    top chefs
                </div>
                <div class="city-feature">
                    
                    <a href="#">@noissete_chinese</a>
                </div>
            </div>
        </div>
    </section>
</asp:Content>

```

FindUsClient.aspx.cs

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace Project_client_template
{
    public partial class FindUsClient : System.Web.UI.Page
    {

```

```

        Project_client_template.ServiceReference1.WebService1SoapClient service =
            new Project_client_template.ServiceReference1.WebService1SoapClient();
        protected List<string> loc = new List<string>();

        protected void Page_Load(object sender, EventArgs e)
        {

```

```
System.Web.UI.HtmlControls.HtmlLink css  
= new System.Web.UI.HtmlControls.HtmlLink();  
    css.Href = "~/Content/style_findus.css";  
    css.Attributes["rel"] = "stylesheet";  
    css.Attributes["type"] = "text/css";  
    // css.Attributes["media"] = "all"; //add any  
attributes as needed
```

```
Master.Page.Header.Controls.Add(css);  
loc = service.getAllLocations();
```

Global.asax/ Global.asax.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.Optimization;
using System.Web.Routing;
using System.Web.Security;
using System.Web.SessionState;

namespace Project_client_template
{
    public class Global : HttpApplication
    {
```

```
void Application_Start(object sender, EventArgs e)
{
    // Code that runs on application startup

    RouteConfig.RegisterRoutes(RouteTable.Routes);

    BundleConfig.RegisterBundles(BundleTable.Bundles);
}
```

Home.aspx

```
<%@ Page Title="" Language="C#"
MasterPageFile("~/Site.Master"
AutoEventWireup="true"
CodeBehind="Home.aspx.cs"
Inherits="Project_client_template.Home" %>
<asp:Content ID="Content1"
ContentPlaceHolderID="MainContent"
runat="server">

<header>
<div class="text-box">
    <h2 class="title1">Discover</h2>
    <h3>Choose whatever you desire.</h3>
    <a href="../SignUp.aspx" class="btn full-btn" runat="server">Sign up</a>
    <a href="../Login.aspx" class="btn ghost-btn" runat="server">Login</a>
</div>
</header>

<section class="section-story">
<div class="row">
    <div class="col span-1-of-3 story-box">
        <asp:Image ID="before" alt="before" class="cooking" runat="server"
ImageUrl="~/fonts/before.jpeg"/>
    </div>
```

```
<div class="col span-1-of-3 story-box">
    <h2 class="title2">Our story</h2>
    <p>Noissette is an elegant fine dining
restaurant with an emphasis on natural, sustainable
food, sourced from the UK's most dedicated farmers
and food producers.
    </p><br>
    <p>We create beautifully crafted dishes,
seeking out the best of Romanian produce, with a
passion to delight and share our curiosity and our
love of delicious artisanal food.</p> <br>
    <p>Since opening, Noissette has received
numerous awards 10/10 in the Good Food Guide, five
AA rosettes, Best Restaurant at the GQ Food and
Drink Awards and the Service Award at the National
Restaurant Awards.</p>
    </div>
    <div class="col span-1-of-3 story-box">
        <asp:Image ID="Image2" alt="after"
class="cooking" runat="server"
ImageUrl "~/fonts/after.jpeg"/>
    </div>
    </div>
</section>

<section class="section-food">
    <div class="row text-food">
        <h2 class="title3">Different tastes</h2>
```

Industrial Informatics – Project

```
<p>Noissette offers a large variety of food.</p><p>You can choose your favorite restaurant and taste the culture.</p>
</div>
<ul class="meals-showcase clearfix">
    <li>
        <figure class="meal-photo">
            <asp:Image ID="Image3" alt="american" runat="server" ImageUrl="~/fonts/american.jpeg"/>
        </figure>
    </li>
    <li>
        <figure class="meal-photo">
            <asp:Image ID="Image1" alt="pizza" runat="server" ImageUrl="~/fonts/pizza.jpeg"/>
        </figure>
    </li>
    <li>
        <figure class="meal-photo">
            <asp:Image ID="Image4" alt="pasta" runat="server" ImageUrl="~/fonts/pasta.jpeg"/>
        </figure>
    </li>
    <li>
        <figure class="meal-photo">
            <asp:Image ID="Image5" alt="mexican" runat="server" ImageUrl="~/fonts/mexican.jpeg"/>
        </figure>
    </li>
```

```
</ul>
<ul class="meals-showcase clearfix">
    <li>
        <figure class="meal-photo">
            <asp:Image ID="Image6" alt="thai" runat="server" ImageUrl="~/fonts/thai.jpeg"/>
        </figure>
    </li>
    <li>
        <figure class="meal-photo">
            <asp:Image ID="Image7" alt="japanese" runat="server" ImageUrl="~/fonts/japanese.jpeg"/>
        </figure>
    </li>
    <li>
        <figure class="meal-photo">
            <asp:Image ID="Image8" alt="indian" runat="server" ImageUrl="~/fonts/indian.jpeg"/>
        </figure>
    </li>
    <li>
        <figure class="meal-photo">
            <asp:Image ID="Image9" alt="soup" runat="server" ImageUrl="~/fonts/soup.jpeg"/>
        </figure>
    </li>
</ul>
</section>
</asp:Content>
```

Home.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace Project_client_template
{
    public partial class Home : System.Web.UI.Page
    {
```

```
    protected void Page_Load(object sender, EventArgs e)
    {
        System.Web.UI.HtmlControls.HtmlLink css
        = new System.Web.UI.HtmlControls.HtmlLink();
        css.Href = "~/Content/style.css";
        css.Attributes["rel"] = "stylesheet";
        css.Attributes["type"] = "text/css";
        // css.Attributes["media"] = "all"; //add any
        attributes as needed
        Master.Page.Header.Controls.Add(css);
    }
}
```

HomeLogin.aspx

```
<%@ Page Title="" Language="C#"
MasterPageFile="~/LoginMasterPage.Master"
```

```
AutoEventWireup="true"
CodeBehind="HomeLogin.aspx.cs"
Inherits="Project_client_template.HomeLogin" %>
```



```

<asp:Content ID="Content1"
ContentPlaceHolderID="MainContent"
runat="server">

<header>
    <div class="text-box">
        <h2 class="title1">Discover</h2>
        <h3>Choose whatever you desire.</h3>
    </div>
</header>

<section class="section-story">
    <div class="row">
        <div class="col span-1-of-3 story-box">
            <asp:Image ID="before" alt="before" runat="server" class="cooking" ImageUrl="~/fonts/before.jpeg"/>
        </div>
        <div class="col span-1-of-3 story-box">
            <h2 class="title2">Our story</h2>
            <p>Noissette is an elegant fine dining restaurant with an emphasis on natural, sustainable food, sourced from the UK's most dedicated farmers and food producers.</p>
            <br>
            <p>We create beautifully crafted dishes, seeking out the best of Romanian produce, with a passion to delight and share our curiosity and our love of delicious artisanal food.</p>
            <br>
            <p>Since opening, Noissette has received numerous awards 10/10 in the Good Food Guide, five AA rosettes, Best Restaurant at the GQ Food and Drink Awards and the Service Award at the National Restaurant Awards.</p>
        </div>
        <div class="col span-1-of-3 story-box">
            <asp:Image ID="Image2" alt="after" runat="server" class="cooking" ImageUrl="~/fonts/after.jpeg"/>
        </div>
    </div>
</section>

<section class="section-food">
    <div class="row text-food">
        <h2 class="title3">Different tastes</h2>
        <p>Noissette offers a large variety of food.</p>
        <p>You can choose your favorite restaurant and taste the culture.</p>
    </div>
    <ul class="meals-showcase clearfix">
        <li>

```

```

            <figure class="meal-photo">
                <asp:Image ID="Image3" alt="american" runat="server" ImageUrl="~/fonts/american.jpeg"/>
            </figure>
        </li>
        <li>
            <figure class="meal-photo">
                <asp:Image ID="Image1" alt="pizza" runat="server" ImageUrl="~/fonts/pizza.jpeg"/>
            </figure>
        </li>
        <li>
            <figure class="meal-photo">
                <asp:Image ID="Image4" alt="pasta" runat="server" ImageUrl="~/fonts/pasta.jpeg"/>
            </figure>
        </li>
        <li>
            <figure class="meal-photo">
                <asp:Image ID="Image5" alt="mexican" runat="server" ImageUrl="~/fonts/mexican.jpeg"/>
            </figure>
        </li>
    </ul>

    <ul class="meals-showcase clearfix">
        <li>
            <figure class="meal-photo">
                <asp:Image ID="Image6" alt="thai" runat="server" ImageUrl="~/fonts/thai.jpeg"/>
            </figure>
        </li>
        <li>
            <figure class="meal-photo">
                <asp:Image ID="Image7" alt="japanese" runat="server" ImageUrl="~/fonts/japanese.jpeg"/>
            </figure>
        </li>
        <li>
            <figure class="meal-photo">
                <asp:Image ID="Image8" alt="indian" runat="server" ImageUrl="~/fonts/indian.jpeg"/>
            </figure>
        </li>
        <li>
            <figure class="meal-photo">
                <asp:Image ID="Image9" alt="soup" runat="server" ImageUrl="~/fonts/soup.jpeg"/>
            </figure>
        </li>
    </ul>

```

```
</section>
</asp:Content>
```

HomeLogin.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace Project_client_template
{
    public partial class HomeLogin : System.Web.UI.Page
    {
}
```

```
protected void Page_Load(object sender,
EventArgs e)
{
    System.Web.UI.HtmlControls.HtmlLink css
= new System.Web.UI.HtmlControls.HtmlLink();
css.Href = "~/Content/style.css";
css.Attributes["rel"] = "stylesheet";
css.Attributes["type"] = "text/css";
// css.Attributes["media"] = "all"; //add any
attributes as needed
Master.Page.Header.Controls.Add(css);
}
}
```

HomeLoginChef.aspx

```
<%@ Page Title="" Language="C#"
MasterPageFile="~/LoginChefs.Master"
AutoEventWireup="true"
CodeBehind="HomeLoginChef.aspx.cs"
Inherits="Project_client_template.HomeLoginChef"
%>
<asp:Content ID="Content1"
ContentPlaceHolderID="MainContent"
runat="server">
<header>
    <div class="text-box">
        <h2 class="title1">Discover</h2>
        <h3>Choose whatever you desire.</h3>
    </div>
</header>

<section class="section-story">
    <div class="row">
        <div class="col span-1-of-3 story-box">
            <asp:Image ID="before" alt="before"
class="cooking" runat="server"
ImageUrl="~/fonts/before.jpeg"/>
        </div>
        <div class="col span-1-of-3 story-box">
            <h2 class="title2">Our story</h2>
            <p>Noissette is an elegant fine dining
restaurant with an emphasis on natural, sustainable
food, sourced from the UK's most dedicated farmers
and food producers.
            </p><br>
            <p>We create beautifully crafted dishes,
seeking out the best of Romanian produce, with a

```

passion to delight and share our curiosity and our love of delicious artisanal food.</p>
 <p>Since opening, Noissette has received numerous awards 10/10 in the Good Food Guide, five AA rosettes, Best Restaurant at the GQ Food and Drink Awards and the Service Award at the National Restaurant Awards.</p>
</div>
<div class="col span-1-of-3 story-box">
<asp:Image ID="Image2" alt="after"
class="cooking" runat="server"
ImageUrl="~/fonts/after.jpeg"/>
</div>
</div>
</section>

<section class="section-food">
<div class="row text-food">
 <h2 class="title3">Different tastes</h2>
 <p>Noissette offers a large variety of
food.</p><p>You can choose your favorite
restaurant and taste the culture.</p>
</div>
<ul class="meals-showcase clearfix">

 <figure class="meal-photo">
 <asp:Image ID="Image3"
alt="american" runat="server"
ImageUrl="~/fonts/american.jpeg"/>
 </figure>

Industrial Informatics – Project

```

<figure class="meal-photo">
    <asp:Image ID="Image1" alt="pizza"
runat="server" ImageUrl="~/fonts/pizza.jpeg"/>
</figure>
</li>
<li>
    <figure class="meal-photo">
        <asp:Image ID="Image4" alt="pasta"
runat="server" ImageUrl="~/fonts/pasta.jpeg"/>
    </figure>
</li>
<li>
    <figure class="meal-photo">
        <asp:Image ID="Image5"
alt="mexican" runat="server"
ImageUrl="~/fonts/mexican.jpeg"/>
    </figure>
</li>
</ul>

<ul class="meals-showcase clearfix">
<li>
    <figure class="meal-photo">
        <asp:Image ID="Image6" alt="thai"
runat="server" ImageUrl="~/fonts/thai.jpeg"/>
    </figure>
</li>
</ul>

```



```

</figure>
</li>
<li>
    <figure class="meal-photo">
        <asp:Image ID="Image7"
alt="japanese" runat="server"
ImageUrl="~/fonts/japanese.jpeg"/>
    </figure>
</li>
<li>
    <figure class="meal-photo">
        <asp:Image ID="Image8" alt="indian"
runat="server" ImageUrl="~/fonts/indian.jpeg"/>
    </figure>
</li>
<li>
    <figure class="meal-photo">
        <asp:Image ID="Image9" alt="soup"
runat="server" ImageUrl="~/fonts/soup.jpeg"/>
    </figure>
</li>
</ul>
</section>

```

</asp:Content>

HomeLoginChef.aspx.cs

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace Project_client_template
{
    public partial class HomeLoginChef : System.Web.UI.Page
    {
        protected void Page_Load(object sender,
EventArgs e)
    }
}

```

```

    {
        System.Web.UI.HtmlControls.HtmlLink css
= new System.Web.UI.HtmlControls.HtmlLink();
        css.Href = "~/Content/style.css";
        css.Attributes["rel"] = "stylesheet";
        css.Attributes["type"] = "text/css";
        // css.Attributes["media"] = "all"; //add any
        attributes as needed
        Master.Page.Header.Controls.Add(css);
    }
}

```

Login.aspx

```

<%@ Page Title="" Language="C#"
MasterPageFile="~/Site.Master"
AutoEventWireup="true"
CodeBehind="Login.aspx.cs"
Inherits="Project_client_template.Login" %>
<asp:Content ID="Content1"
ContentPlaceHolderID="MainContent"
runat="server">
<header>

```

```

<section class="form">
    <div class="row">
        <h3>Visit us</h3>
        <h2 class="title">Sign in to continue</h2>
    </div>
    <div class="row login">
        <form method="post" action="#">
            <div class="contact-form">
                <div class="row">

```



```

<asp:Label CssClass="labels"
Text="Username" runat="server"/>
<div class="row">
    <asp:TextBox class="username"
type="text" ID="username" name="username"
runat="server" required="1"/>
</div>
</div>
<div class="row">
    <asp:Label CssClass="labels"
Text="Password" runat="server"/>
<div class="row">
    <asp:TextBox class="password"
type="password" ID="password" name="password"
runat="server" required="1"/>
</div>
</div>
<div class="row">
    <Label>&nbsp;</Label>
<div class="row">

```

```

<asp:button Text="Login"
class="btn full-btn" ID="login"
OnClick="Button1_Click" runat="server" />
</div>
<div class="row">
    <a class="login-ref"
href="../SignUp.aspx" runat="server">Don't have an
account yet?</a>
</div>
</div>

</form>
</div>
</section>

</header>
</asp:Content>
```

Login.aspx.cs

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace Project_client_template
{
    public partial class Login : System.Web.UI.Page
    {

        Project_client_template.ServiceReference1.WebService1SoapClient service =
            new Project_client_template.ServiceReference1.WebService1SoapClient();

        protected void Page_Load(object sender,
EventArgs e)
        {
            System.Web.UI.HtmlControls.HtmlLink css
= new System.Web.UI.HtmlControls.HtmlLink();
            css.Href = "~/Content/style_login.css";
            css.Attributes["rel"] = "stylesheet";
            css.Attributes["type"] = "text/css";
            // css.Attributes["media"] = "all"; //add any
attributes as needed
            Master.Page.Header.Controls.Add(css);
        }
    }

```

```

protected void Button1_Click(object sender,
EventArgs e)
{
    string user = username.Text;
    string pass = password.Text;
    int response = service.verifyLogin(user, pass);

//ClientScript.RegisterStartupScript(this.GetType(),
"myalert", "alert('" + "*" + global + "*" + "');", true);

if (response == 1)
{
    service.setUsername(user);
    Response.Redirect("HomeLogin.aspx");
}
else if (response == 2) {
    service.setUsername(user);
    Response.Redirect("HomeLoginChef.aspx");
}
else if (response == -1)
{
    ClientScript.RegisterStartupScript(this.GetType(),
"myalert", "alert('" + "The password is incorrect." +
"');", true);
}
```



```
        else if (response == -2)
    {
        ClientScript.RegisterStartupScript(this.GetType(),
            "myalert", "alert('" + The username does not exist.
            + "');");
    }
}
```

LoginChefs.Master

```
<%@ Master Language="C#"%
AutoEventWireup="true"
CodeBehind="LoginChefs.master.cs"
Inherits="Project_client_template.LoginChefs" %>

<!DOCTYPE html>

<html lang="en">
<head runat="server">
    <meta charset="utf-8" />
    <meta name="viewport" content="width=device-width, initial-scale=1.0" />
    <title>Noissete</title>

    <asp:PlaceHolder runat="server">
        <%: Scripts.Render("~/bundles/modernizr") %>
    </asp:PlaceHolder>

    <webopt:bundlereference runat="server"
path="~/Content/css" />
    <link href="~/favicon.ico" rel="shortcut icon"
type="image/x-icon" />
    <link rel="stylesheet" type="text/css"
href="~/Content/normalize.css">
    <link rel="stylesheet" type="text/css"
href="~/Content/grid.css">

    <link rel="stylesheet" type="text/css"
href="~/Content/style_master.css">
    <link rel="preconnect"
href="https://fonts.gstatic.com">
    <link
href="https://fonts.googleapis.com/css2?family=Lato
:ital,wght@0,300;0,400;0,700;1,100&display=swap"
rel="stylesheet">
    <link
href="https://fonts.googleapis.com/css2?family=Dan
cing+Script:wght@700&display=swap"
rel="stylesheet">

</head>
<body>
    <form id="form1" runat="server">
        <asp:ScriptManager runat="server">
            <Scripts>
```

```
<%--To learn more about bundling scripts  
in ScriptManager see  
https://go.microsoft.com/fwlink/?LinkID=301884--%>  
<%--Framework Scripts--%>  
<asp:ScriptReference  
Name="MsAjaxBundle" />  
    <asp:ScriptReference Name="jquery" />  
    <asp:ScriptReference Name="bootstrap" />  
    <asp:ScriptReference  
Name="WebForms.js" Assembly="System.Web"  
Path="~/Scripts/WebForms/WebForms.js" />  
    <asp:ScriptReference  
Name="WebUIValidation.js"  
Assembly="System.Web"  
Path="~/Scripts/WebForms/WebUIValidation.js" />  
    <asp:ScriptReference  
Name="MenuStandards.js"  
Assembly="System.Web"  
Path="~/Scripts/WebForms/MenuStandards.js" />  
    <asp:ScriptReference Name="GridView.js"  
Assembly="System.Web"  
Path="~/Scripts/WebForms/GridView.js" />  
    <asp:ScriptReference  
Name="DetailsView.js" Assembly="System.Web"  
Path="~/Scripts/WebForms/DetailsView.js" />  
    <asp:ScriptReference Name="TreeView.js"  
Assembly="System.Web"  
Path="~/Scripts/WebForms/TreeView.js" />  
    <asp:ScriptReference Name="WebParts.js"  
Assembly="System.Web"  
Path="~/Scripts/WebForms/WebParts.js" />  
    <asp:ScriptReference Name="Focus.js"  
Assembly="System.Web"  
Path="~/Scripts/WebForms/Focus.js" />  
    <asp:ScriptReference  
Name="WebFormsBundle" />  
<%--Site Scripts--%>  
</Scripts>  
</asp:ScriptManager>
```

Industrial Informatics – Project

```

<li><a runat="server"
href("~/HomeLoginChef.aspx">Home</a></li> <!--
list element-->
    <li><a runat="server"
href "~/FindUsChef.aspx">Find us</a></li>
        <li><a runat="server"
href "~/MenuChef.aspx">Menu</a></li>
            <li><a runat="server"
href "~/ChefsChefs.aspx">Chefs</a></li>
                <li><a runat="server"
href "~/ReservationChef.aspx">Reservation</a></li>
            >
                <li><a runat="server"
href "~/ChefAccount.aspx">Account</a></li>
                    <ul> <!--unordered list-->
                </div>
            </nav>

<asp:ContentPlaceHolder ID="MainContent"
runat="server"/>

<footer>
    <div class="row">
        <h1 class="footer-logo">Noissete</h1>
    </div>
    <div class="row">
        <p class="working-hours">WORKING
HOURS:</p>
        <p>MON - FRI: 08:00 AM - 11:00
PM</p>
        <p>SAT - SUN: 10:00 AM - 11:00
PM</p>
    </div>
    <div class="row">
        <div class="col span-1-of-2">
            <ul class="footer-nav">
                <li><a runat="server"
href "~/HomeLoginChef.aspx">HOME</a></li>
                <li><a runat="server"
href "~/FindUsChef.aspx">FIND US</a></li>
            </ul>
        </div>
    </div>
</footer>

```

```

<li><a runat="server"
href "~/MenuChef.aspx">MENU</a></li>
    <li><a runat="server"
href "~/ChefsChefs.aspx">CHEFS</a></li>
        <li><a runat="server"
href "~/ReservationChef.aspx">RESERVATION</a>
    </li>
    <li><a runat="server"
href "~/ChefAccount.aspx">ACCOUNT</a></li>
        <ul>
    </div>
    <div class="col span-1-of-2">
        <ul class="social-icons">
            <li><a href="#" class="icon-
contact4"><asp:Image ID="Image11"
alt="instagram" runat="server"
ImageUrl "~/fonts/logo-instagram.svg"/></a></li>
            <li><a href="#" class="icon-
contact3"><asp:Image ID="Image12" alt="google"
runat="server" ImageUrl "~/fonts/logo-
google.svg"/></a></li>
            <li><a href="#" class="icon-
contact2"><asp:Image ID="Image13" alt="twitter"
runat="server" ImageUrl "~/fonts/logo-
twitter.svg"/></a></li>
            <li><a href="#" class="icon-
contact1"><asp:Image ID="Image14" alt="facebook"
runat="server" ImageUrl "~/fonts/logo-
facebook.svg"/></a></li>
        </ul>
    </div>
</div>
</form>
</body>
</html>

```

LoginChef.Master.cs

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace Project_client_template
{

```

```

    public partial class LoginChefs : 
System.Web.UI.MasterPage
    {
        protected void Page_Load(object sender,
EventArgs e)
        {
        }
    }
}

```

LoginMasterPage.Master

```

<%@ Master Language="C#"
AutoEventWireup="true"
CodeBehind="LoginMasterPage.master.cs"
Inherits="Project_client_template.LoginMasterPage"
%>

<!DOCTYPE html>

<html lang="en">
<head runat="server">
    <meta charset="utf-8" />
    <meta name="viewport" content="width=device-width, initial-scale=1.0" />
    <title>Noissete</title>

    <asp:PlaceHolder runat="server">
        <%: Scripts.Render("~/bundles/modernizr") %>
    </asp:PlaceHolder>

    <webopt:bundlereference runat="server"
path="~/Content/css" />
        <link href="~/favicon.ico" rel="shortcut icon"
type="image/x-icon" />
        <link rel="stylesheet" type="text/css"
href="~/Content/normalize.css">
        <link rel="stylesheet" type="text/css"
href="~/Content/grid.css">

        <link rel="stylesheet" type="text/css"
href="~/Content/style_master.css">
        <link rel="preconnect"
href="https://fonts.gstatic.com">
        <link
href="https://fonts.googleapis.com/css2?family=Lato
:ital,wght@0,300;0,400;0,700;1,100&display=swap"
rel="stylesheet">
        <link
href="https://fonts.googleapis.com/css2?family=Dan
cing+Script:wght@700&display=swap"
rel="stylesheet">

</head>
<body>
    <form id="form1" runat="server">
        <asp:ScriptManager runat="server">
            <Scripts>
                <%--To learn more about bundling scripts
in ScriptManager see
https://go.microsoft.com/fwlink/?LinkID=301884 --%
                <%--Framework Scripts--%>
                <asp:ScriptReference
Name="MsAjaxBundle" />
            </Scripts>
        </asp:ScriptManager>
    </form>
</body>
</html>

```

```

<asp:ScriptReference Name="jquery" />
<asp:ScriptReference Name="bootstrap" />
<asp:ScriptReference
Name="WebForms.js" Assembly="System.Web"
Path="~/Scripts/WebForms/WebForms.js" />
<asp:ScriptReference
Name="WebUIValidation.js"
Assembly="System.Web"
Path="~/Scripts/WebForms/WebUIValidation.js" />
<asp:ScriptReference
Name="MenuStandards.js"
Assembly="System.Web"
Path="~/Scripts/WebForms/MenuStandards.js" />
<asp:ScriptReference Name="GridView.js"
Assembly="System.Web"
Path="~/Scripts/WebForms/Gridview.js" />
<asp:ScriptReference
Name="DetailsView.js" Assembly="System.Web"
Path="~/Scripts/WebForms/DetailsView.js" />
<asp:ScriptReference Name="TreeView.js"
Assembly="System.Web"
Path="~/Scripts/WebForms/TreeView.js" />
<asp:ScriptReference Name="WebParts.js"
Assembly="System.Web"
Path="~/Scripts/WebForms/WebParts.js" />
<asp:ScriptReference Name="Focus.js"
Assembly="System.Web"
Path="~/Scripts/WebForms/Focus.js" />
<asp:ScriptReference
Name="WebFormsBundle" />
<%--Site Scripts--%>
</Scripts>
</asp:ScriptManager>

<nav class="navigation">
<div class="row">
    <h1 class="logo">Noissete</h1>
    <ul class="navi">
        <li><a runat="server"
href="~/HomeLogin.aspx">Home</a></li> <!--list
element-->
        <li><a runat="server"
href="~/FindUsClient.aspx">Find us</a></li>
        <li><a runat="server"
href="~/MenuClient.aspx">Menu</a></li>
        <li><a runat="server"
href="~/ChefsClient.aspx">Chefs</a></li>
        <li><a runat="server"
href="~/ReservationClient.aspx">Reservation</a></li>
        <li><a runat="server"
href="~/ClientAccount.aspx">Account</a></li>
    </ul> <!--unordered list-->

```

Industrial Informatics – Project

```

        </div>
    </nav>

    <asp:ContentPlaceHolder ID="MainContent"
runat="server"/>

    <footer>
        <div class="row">
            <h1 class="footer-logo">Noissete</h1>
        </div>
        <div class="row">
            <p class="working-hours">WORKING
HOURS:</p>
            <p>MON - FRI: 08:00 AM - 11:00
PM</p>
            <p>SAT - SUN: 10:00 AM - 11:00
PM</p>
        </div>
        <div class="row">
            <div class="col span-1-of-2">
                <ul class="footer-nav">
                    <li><a runat="server"
href="~/HomeLogin.aspx">HOME</a></li>
                    <li><a runat="server"
href="~/FindUsClient.aspx">FIND US</a></li>
                    <li><a runat="server"
href="~/MenuClient.aspx">MENU</a></li>
                    <li><a runat="server"
href="~/ChefsClient.aspx">CHEFS</a></li>
                    <li><a runat="server"
href="~/ReservationClient.aspx">RESERVATION</
a></li>
                </ul>
            </div>
            <div class="col span-1-of-2" style="text-align: right;">
                <ul class="social-icons">
                    <li><a href="#" class="icon-
contact4"><asp:Image ID="Image11" alt="instagram" runat="server"
ImageUrl="~/fonts/logo-instagram.svg"/></a></li>
                    <li><a href="#" class="icon-
contact3"><asp:Image ID="Image12" alt="google" runat="server"
ImageUrl="~/fonts/logo-google.svg"/></a></li>
                    <li><a href="#" class="icon-
contact2"><asp:Image ID="Image13" alt="twitter" runat="server"
ImageUrl="~/fonts/logo-twitter.svg"/></a></li>
                    <li><a href="#" class="icon-
contact1"><asp:Image ID="Image14" alt="facebook" runat="server"
ImageUrl="~/fonts/logo-facebook.svg"/></a></li>
                </ul>
            </div>
        </div>
    </footer>

</form>
</body>
</html>

```

LoginMasterPage.Master.cs

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace Project_client_template
{
    public partial class LoginMasterPage : System.Web.UI.MasterPage

```

```

    {
        protected void Page_Load(object sender,
EventArgs e)
        {
        }
    }
}

```

Menu.aspx

```

<%@ Page Title="" Language="C#"
MasterPageFile="~/Site.Master"
AutoEventWireup="true"
CodeBehind="Menu.aspx.cs"
Inherits="Project_client_template.Menu" %>

```

```

<asp:Content ID="Content1"
ContentPlaceHolderID="MainContent"
runat="server">
<div class="wrapper">


```



```

<div class="title">
    <h2>Menu</h2>
</div>
<div class="title">
    <h4>English Place</h4>
</div>
<div class="menu">
    <div class="single-menu">
        
        <div class="menu-content">
            <h4>Shepherd's Pie </h4>
            <p>A hearty mixture of ground beef, prime rib and vegetables with a thick gravy. Topped with mashed potatoes, mixed cheeses and served with garlic toast. Enjoy it with a Guinness Stout!</p>
        </div>
    </div>
    <div class="single-menu">
        
        <div class="menu-content">
            <h4>Beef Wellington</h4>
            <p>Beef tenderloin wrapped in layers of pâté, duxelles, parma ham, and puff pastry, then baked, served with pumpkin puree and steamed broccolini.</p>
        </div>
    </div>
    <div class="single-menu">
        
        <div class="menu-content">
            <h4>Fish and Chips</h4>
            <p>Filets of Basa lightly breaded in panko and cooked to a crisp. Served with steak fries and mushy peas. Goes great with Blue Moon, a Belgian Style Wheat Ale!</p>
        </div>
    </div>
    <div class="single-menu">
        
        <div class="menu-content">
            <h4>Steak and Kidney Pie</h4>
            <p>You can't get more traditional than a Steak & Kidney pie, and ours has been handmade using grass-fed British beef for optimum flavour. A flaky and buttery crust that covers a decadent savory filling of beef chuck and beef kidneys flavored by vegetables and beef stock.</p>
        </div>
    </div>
    <div class="single-menu">

```


 <div class="menu-content">
 <h4>Cornish Pasty</h4>
 <p>Traditional English Cornish Pasties with Chicken, Onion, Potatoes, Celery and Carrots.</p>
 </div>

```

        <div class="single-menu">
            
            <div class="menu-content">
                <h4>English Breakfast</h4>
                <p>A greasy fry-up with all the fixings - salty, greasy sausage and bacon, the perfect egg, saucy beans, grilled mushrooms and blistered tomatoes all served up with crusty bread.</p>
            </div>
        </div>
        <div class="single-menu">
            
            <div class="menu-content">
                <h4>Roast Dinner</h4>
                <p>Enhance the flavour of roast lamb with herbs and garlic, or you could try slices of anchovy, slivers of chilli or nuggets of feta pushed into the slits</p>
            </div>
        </div>
        <div class="single-menu">
            
            <div class="menu-content">
                <h4>Toad in the Hole</h4>
                <p>A British classic that everybody loves - this toad in the hole consists of meaty pork sausages nestled in a giant crispy Yorkshire pudding. All served up with a rich red onion gravy.</p>
            </div>
        </div>
        <div class="single-menu">
            
            <div class="menu-content">
                <h4>Yorkshire Pudding</h4>
                <p>Succulent pieces of chicken nestled in a golden Yorkshire pudding with crispy diced potatoes, British pork, onion and sage stuffing, chipolata sausages, carrots and peas in a rich chicken gravy.</p>
            </div>
        </div>
    
```

Industrial Informatics – Project

```
<div class="single-menu">
  
    <div class="menu-content">
      <h4>Lancashire Hot Pot</h4>
      <p>Succulent lamb in a meaty gravy,  
topped with potatoes that are tender underneath and  
crisp on top.</p>
    </div>
  </div>

</div>

<div class="title">
  <h4>Chinese Place</h4>
</div>
<div class="menu">
  <div class="single-menu">
    
      <div class="menu-content">
        <h4>Chow Mein</h4>
        <p>Stir-fried dish consists of noodles, meat  
(usually chicken, beef, shrimp, or pork), onions and  
celery.</p>
      </div>
    </div>
    <div class="single-menu">
      
        <div class="menu-content">
          <h4>Peking Roasted Duck</h4>
          <p>Peking duck is savored for its thin and  
crispy skin. The Sliced Peking duck is often eaten  
with pancakes, sweet bean sauce, or soy with mashed  
garlic.</p>
        </div>
      </div>
      <div class="single-menu">
        
          <div class="menu-content">
            <h4>Steamed Vermicelli Rolls</h4>
            <p>White sheets of rice starch are rolled  
with various fillings. Some popular choices are  
beef/pork, shrimp, even oyster, with mushroom, egg,  
lettuce or watercress.</p>
          </div>
        </div>
        <div class="single-menu">
          
            <div class="menu-content">
              <h4>Fried Shrimp with Cashew Nuts</h4>
            </div>
          </div>
        <div class="single-menu">
          
            <div class="menu-content">
              <h4>Sweet and Sour Pork</h4>
              <p>Sweet and sour pork has a bright  
orange-red color, and a delicious sweet and sour  
taste.</p>
            </div>
          </div>
        <div class="single-menu">
          
            <div class="menu-content">
              <h4>Kung Pao Chicken</h4>
              <p>Kung Pao Chicken is a famous  
Sichuan-style specialty, popular with both Chinese  
and foreigners. The major ingredients are diced  
chicken, dried chili, and fried peanuts.</p>
            </div>
          </div>
        <div class="single-menu">
          
            <div class="menu-content">
              <h4>Spring Rolls</h4>
              <p>Spring rolls are a Cantonese dim sum  
of cylindrical shape. The filling of spring rolls could  
be vegetables or meat, and the taste could be either  
sweet or savory.</p>
            </div>
          </div>
        <div class="single-menu">
          
            <div class="menu-content">
              <h4>Yangchow Fried Rice</h4>
              <p>The standard flavorsome ingredients of  
Yangchow fried rice are peeled shrimp, diced ham,  
carrot, mushroom, baby bamboo shoots, crumbled  
egg, and corn.</p>
            </div>
          </div>
        <div class="single-menu">
          
            <div class="menu-content">

```

```

<h4>Sichuan Pork</h4>
<p>The meaty broth is typical Sichuan
cuisine, featuring a peppery and spicy taste. When
eating, you'll find each piece of meat contains
abundant juices with a fresh and fragrant spicy
aroma.</p>
</div>
</div>
<div class="single-menu">

<div class="menu-content">
<h4>Dumplings</h4>
<p>Popular fillings are mince pork, diced
shrimp, ground chicken, beef, and vegetables. They
can be cooked by boiling, steaming, or frying.
Dumplings are a traditional dish eaten on Chinese
New Year's Eve.</p>
</div>
</div>
</div>

<div class="title">
<h4>Indian Place</h4>
</div>
<div class="menu">
<div class="single-menu">

<div class="menu-content">
<h4>Naan</h4>
<p>Naan, a puffy flatbread, is a staple in
the Indian kitchen and can go with everything you
make, the ingredient list includes yeast, flour, sugar,
and water, as well as yogurt and ghee.</p>
</div>
</div>
<div class="single-menu">

<div class="menu-content">
<h4>Palak Paneer</h4>
<p>One of the most popular paneer recipe
at Indian restaurants is palak paneer, a mildly
flavored dish made with spinach and cottage cheese
(the paneer), along with the typical Indian
spices.</p>
</div>
</div>
<div class="single-menu">

<div class="menu-content">

```

```

<h4>Chole</h4>
<p>A classic and easy chole chickpea
curry, is a favorite in Northern India and has become
a worldwide sensation.</p>
</div>
</div>
<div class="single-menu">

<div class="menu-content">
<h4>Malai Kofta</h4>
<p>Malai kofta (vegetable "meatballs" in a
thick sauce) is the vegetarian alternative to meatballs.
The koftas are made with a mix of potatoes, carrots,
beans, peas, and sweet corn, which are cooked and
mashed before mixing with spices and paneer.</p>
</div>
</div>
<div class="single-menu">

<div class="menu-content">
<h4>Rogan Josh</h4>
<p>Rogan Josh, the name of this dish from
Kashmir, translates roughly to "red lamb." The color
comes from Kashmiri dry red chilies. While the name
may sound fiery, the heat of the dish is toned down
by the cream that is added at the end.</p>
</div>
</div>
<div class="single-menu">

<div class="menu-content">
<h4>Chicken Vindaloo Curry</h4>
<p>"Vindaloo" is a popular Indian curry
dish that calls for meat to be marinated in a highly
flavorful spicy mixture with vinegar, then quickly
cooked up when you're ready to eat.</p>
</div>
</div>
<div class="single-menu">

<div class="menu-content">
<h4>Chicken Tikka Masala</h4>
<p>Chicken tikka masala is a delicious
grilled chicken dish with a thick, creamy gravy that is
unforgettable after the first bite. A tomato-yogurt
sauce is spiced with chili, garlic, ginger, and garam
masala, the ubiquitous Indian spice blend.</p>
</div>
</div>
<div class="single-menu">
```

```


<div class="menu-content">
    <h4>Tandoori Chicken</h4>
    <p>Tandoori chicken, a dish of roasted
chicken marinated in yogurt and generously spiced,
giving the meat its trademark red colour.</p>
</div>
</div>
<div class="single-menu">
    
    <div class="menu-content">
        <h4>Murgh Makhani</h4>
        <p>Butter Chicken or murgh makhani is a
curry of chicken in a spiced tomato, butter and cream
sauce.</p>

```

```

</div>
</div>
<div class="single-menu">
    
    <div class="menu-content">
        <h4>Papdi Chaat</h4>
        <p>These wafers are then topped with
potatoes and chickpeas and drizzled with a tangy,
spicy, and sweet sauce.</p>
    </div>
</div>
</div>
</asp:Content>

```

Menu.aspx.css

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace Project_client_template
{
    public partial class Menu : System.Web.UI.Page
    {

```

```

protected void Page_Load(object sender,
EventArgs e)
{
    System.Web.UI.HtmlControls.HtmlLink css
= new System.Web.UI.HtmlControls.HtmlLink();
    css.Href = "~/Content/style_menu.css";
    css.Attributes["rel"] = "stylesheet";
    css.Attributes["type"] = "text/css";
    // css.Attributes["media"] = "all"; //add any
attributes as needed
    Master.Page.Header.Controls.Add(css);
}
}
}

```

MenuChef.aspx

```

<%@ Page Title="" Language="C#"
MasterPageFile="~/LoginChefs.Master"
AutoEventWireup="true"
CodeBehind="MenuChef.aspx.cs"
Inherits="Project_client_template.MenuChef" %>
<asp:Content ID="Content1"
ContentPlaceHolderID="MainContent"
runat="server">

<div class="wrapper">
<div class="title">
    <h2>Menu</h2>
</div>
<div class="title">
    <h4>English Place</h4>
</div>

```

```

<div class="menu">
    <div class="single-menu">
        
        <div class="menu-content">
            <h4>Shepherd's Pie </h4>
            <p>A hearty mixture of ground beef, prime
rib and vegetables with a thick gravy. Topped with
mashed potatoes, mixed cheeses and served with
garlic toast. Enjoy it with a Guinness Stout!</p>
        </div>
    </div>
    <div class="single-menu">
        
        <div class="menu-content">
            <h4>Beef Wellington</h4>

```

<p>Beef tenderloin wrapped in layers of pâté, duxelles, parma ham, and puff pastry, then baked, served with pumpkin puree and steamed broccolini.</p>

```
</div>
</div>
<div class="single-menu">
    
        <div class="menu-content">
            <h4>Fish and Chips</h4>
            <p>Filets of Basa lightly breaded in panko and cooked to a crisp. Served with steak fries and mushy peas. Goes great with Blue Moon, a Belgian Style Wheat Ale!</p>
        </div>
    </div>
    <div class="single-menu">
        
            <div class="menu-content">
                <h4>Steak and Kidney Pie</h4>
                <p>You can't get more traditional than a Steak & Kidney pie, and ours has been handmade using grass-fed British beef for optimum flavour. A flaky and buttery crust that covers a decadent savory filling of beef chuck and beef kidneys flavored by vegetables and beef stock.</p>
            </div>
        </div>
        <div class="single-menu">
            
                <div class="menu-content">
                    <h4>Cornish Pasty</h4>
                    <p>Traditional English Cornish Pasties with Chicken, Onion, Potatoes, Celery and Carrots.</p>
                </div>
            </div>
            <div class="single-menu">
                
                    <div class="menu-content">
                        <h4>English Breakfast</h4>
                        <p>A greasy fry-up with all the fixings - salty, greasy sausage and bacon, the perfect egg, saucy beans, grilled mushrooms and blistered tomatoes all served up with crusty bread.</p>
                    </div>
            </div>
            <div class="single-menu">
                
            </div>
        </div>
    </div>

```

<div class="menu-content">
 <h4>Roast Dinner</h4>
 <p>Enhance the flavour of roast lamb with herbs and garlic, or you could try slices of anchovy, slivers of chilli or nuggets of feta pushed into the slits</p>
</div>
</div>
<div class="single-menu">

 <div class="menu-content">
 <h4>Toad in the Hole</h4>
 <p>A British classic that everybody loves - this toad in the hole consists of meaty pork sausages nestled in a giant crispy Yorkshire pudding. All served up with a rich red onion gravy.</p>
 </div>
 </div>
 <div class="single-menu">

 <div class="menu-content">
 <h4>Yorkshire Pudding</h4>
 <p>Succulent pieces of chicken nestled in a golden Yorkshire pudding with crispy diced potatoes, British pork, onion and sage stuffing, chipolata sausages, carrots and peas in a rich chicken gravy.</p>
 </div>
 </div>
 <div class="single-menu">

 <div class="menu-content">
 <h4>Lancashire Hot Pot</h4>
 <p>Succulent lamb in a meaty gravy, topped with potatoes that are tender underneath and crisp on top.</p>
 </div>
 </div>
 </div>
 </div>
 <div class="title">
 <h4>Chinese Place</h4>
 </div>
 <div class="menu">
 <div class="single-menu">

 <div class="menu-content">
 <h4>Chow Mein</h4>

<p>Stir-fried dish consists of noodles, meat (usually chicken, beef, shrimp, or pork), onions and celery.</p>

</div>

</div>

<div class="single-menu">

<div class="menu-content">

<h4>Peking Roasted Duck</h4>

<p>Peking duck is savored for its thin and crispy skin. The Sliced Peking duck is often eaten with pancakes, sweet bean sauce, or soy with mashed garlic.</p>

</div>

</div>

<div class="single-menu">

<div class="menu-content">

<h4>Steamed Vermicelli Rolls</h4>

<p>White sheets of rice starch are rolled with various fillings. Some popular choices are beef/pork, shrimp, even oyster, with mushroom, egg, lettuce or watercress.</p>

</div>

</div>

<div class="single-menu">

<div class="menu-content">

<h4>Fried Shrimp with Cashew Nuts</h4>

<p>You get the tenderness of peeled shrimps and the crispiness of cashew nuts. The shrimp is always tender and juicy and easy to deal with. If you are traveling with kids, this is both a nutritional and smart choice!</p>

</div>

</div>

<div class="single-menu">

<div class="menu-content">

<h4>Sweet and Sour Pork</h4>

<p>Sweet and sour pork has a bright orange-red color, and a delicious sweet and sour taste.</p>

</div>

</div>

<div class="single-menu">

<div class="menu-content">

<h4>Kung Pao Chicken</h4>

<p>Kung Pao Chicken is a famous Sichuan-style specialty, popular with both Chinese and foreigners. The major ingredients are diced chicken, dried chili, and fried peanuts.</p>

</div>

</div>

<div class="single-menu">

<div class="menu-content">

<h4>Spring Rolls</h4>

<p>Spring rolls are a Cantonese dim sum of cylindrical shape. The filling of spring rolls could be vegetables or meat, and the taste could be either sweet or savory.</p>

</div>

</div>

<div class="single-menu">

<div class="menu-content">

<h4>Yangchow Fried Rice</h4>

<p>The standard flavorsome ingredients of Yangchow fried rice are peeled shrimp, diced ham, carrot, mushroom, baby bamboo shoots, crumbled egg, and corn.</p>

</div>

</div>

<div class="single-menu">

<div class="menu-content">

<h4>Sichuan Pork</h4>

<p>The meaty broth is typical Sichuan cuisine, featuring a peppery and spicy taste. When eating, you'll find each piece of meat contains abundant juices with a fresh and fragrant spicy aroma.</p>

</div>

</div>

<div class="single-menu">

<div class="menu-content">

<h4>Dumplings</h4>

<p>Popular fillings are mince pork, diced shrimp, ground chicken, beef, and vegetables. They can be cooked by boiling, steaming, or frying. Dumplings are a traditional dish eaten on Chinese New Year's Eve.</p>

</div>

</div>

</div>

```

<div class="title">
    <h4>Indian Place</h4>
</div>
<div class="menu">
    <div class="single-menu">
        
        <div class="menu-content">
            <h4>Naan</h4>
            <p>Naan, a puffy flatbread, is a staple in the Indian kitchen and can go with everything you make, the ingredient list includes yeast, flour, sugar, and water, as well as yogurt and ghee.</p>
        </div>
    </div>
    <div class="single-menu">
        
        <div class="menu-content">
            <h4>Palak Paneer</h4>
            <p>One of the most popular paneer recipe at Indian restaurants is palak paneer, a mildly flavored dish made with spinach and cottage cheese (the paneer), along with the typical Indian spices.</p>
        </div>
    </div>
    <div class="single-menu">
        
        <div class="menu-content">
            <h4>Chole</h4>
            <p>A classic and easy chole chickpea curry, is a favorite in Northern India and has become a worldwide sensation.</p>
        </div>
    </div>
    <div class="single-menu">
        
        <div class="menu-content">
            <h4>Malai Kofta</h4>
            <p>Malai kofta (vegetable "meatballs" in a thick sauce) is the vegetarian alternative to meatballs. The koftas are made with a mix of potatoes, carrots, beans, peas, and sweet corn, which are cooked and mashed before mixing with spices and paneer.</p>
        </div>
    </div>
    <div class="single-menu">
        
        <div class="menu-content">
    
```

<h4>Rogan Josh</h4>

<p>Rogan Josh, the name of this dish from Kashmir, translates roughly to "red lamb." The color comes from Kashmiri dry red chilies. While the name may sound fiery, the heat of the dish is toned down by the cream that is added at the end.</p>

</div>

</div>

<div class="single-menu">

<div class="menu-content">

<h4>Chicken Vindaloo Curry</h4>

<p>"Vindaloo" is a popular Indian curry dish that calls for meat to be marinated in a highly flavorful spicy mixture with vinegar, then quickly cooked up when you're ready to eat.</p>

</div>

</div>

<div class="single-menu">

<div class="menu-content">

<h4>Chicken Tikka Masala</h4>

<p>Chicken tikka masala is a delicious grilled chicken dish with a thick, creamy gravy that is unforgettable after the first bite. A tomato-yogurt sauce is spiced with chili, garlic, ginger, and garam masala, the ubiquitous Indian spice blend.</p>

</div>

</div>

<div class="single-menu">

<div class="menu-content">

<h4>Tandoori Chicken</h4>

<p>Tandoori chicken, a dish of roasted chicken marinated in yogurt and generously spiced, giving the meat its trademark red colour.</p>

</div>

</div>

<div class="single-menu">

<div class="menu-content">

<h4>Murgh Makhani</h4>

<p>Butter Chicken or murgh makhani is a curry of chicken in a spiced tomato, butter and cream sauce.</p>

</div>

</div>

<div class="single-menu">

<div class="menu-content">

Industrial Informatics – Project

```
<div class="menu-content">
    <h4>Papdi Chaat</h4>
    <p>These wafers are then topped with
potatoes and chickpeas and drizzled with a tangy,
spicy, and sweet sauce.</p>
</div>
</div>

</asp:Content>
```

MenuChef.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
```

```
namespace Project_client_template
{
    public partial class MenuChef : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {
            System.Web.UI.HtmlControls.HtmlLink css
            = new System.Web.UI.HtmlControls.HtmlLink();
            css.Href = "~/Content/style_menu.css";
            css.Attributes["rel"] = "stylesheet";
            css.Attributes["type"] = "text/css";
            // css.Attributes["media"] = "all"; //add any
            attributes as needed
            Master.Page.Header.Controls.Add(css);
        }
    }
}
```



MenuClient.aspx

```
<%@ Page Title="" Language="C#"
MasterPageFile="~/LoginMasterPage.Master"
AutoEventWireup="true"
CodeBehind="MenuClient.aspx.cs"
Inherits="Project_client_template.MenuClient" %>
<asp:Content ID="Content1"
ContentPlaceHolderID="MainContent"
runat="server">

    <div class="wrapper">
        <div class="title">
            <h2>Menu</h2>
        </div>
        <div class="title">
            <h4>English Place</h4>
        </div>
        <div class="menu">
            <div class="single-menu">
                
                <div class="menu-content">
                    <h4>Shepherd's Pie </h4>
                    <p>A hearty mixture of ground beef, prime rib and vegetables with a thick gravy. Topped with mashed potatoes, mixed cheeses and served with garlic toast. Enjoy it with a Guinness Stout!</p>
                </div>
            </div>
            <div class="single-menu">
                
                <div class="menu-content">
                    <h4>Beef Wellington</h4>
                    <p>Beef tenderloin wrapped in layers of pâté, duxelles, parma ham, and puff pastry, then baked, served with pumpkin puree and steamed broccolini.</p>
                </div>
            </div>
            <div class="single-menu">
                
                <div class="menu-content">
                    <h4>Fish and Chips</h4>
                    <p>Filets of Basa lightly breaded in panko and cooked to a crisp. Served with steak fries and mushy peas. Goes great with Blue Moon, a Belgian Style Wheat Ale!</p>
                </div>
            </div>
            <div class="single-menu">
                
                <div class="menu-content">

```

```
                <div class="menu-content">
                    <h4>Steak and Kidney Pie</h4>
                    <p>You can't get more traditional than a Steak & Kidney pie, and ours has been handmade using grass-fed British beef for optimum flavour. A flaky and buttery crust that covers a decadent savory filling of beef chuck and beef kidneys flavored by vegetables and beef stock.</p>
                </div>
            </div>
            <div class="single-menu">
                
                <div class="menu-content">
                    <h4>Cornish Pasty</h4>
                    <p>Traditional English Cornish Pasties with Chicken, Onion, Potatoes, Celery and Carrots.</p>
                </div>
            </div>
            <div class="single-menu">
                
                <div class="menu-content">
                    <h4>English Breakfast</h4>
                    <p>A greasy fry-up with all the fixings - salty, greasy sausage and bacon, the perfect egg, saucy beans, grilled mushrooms and blistered tomatoes all served up with crusty bread.</p>
                </div>
            </div>
            <div class="single-menu">
                
                <div class="menu-content">
                    <h4>Roast Dinner</h4>
                    <p>Enhance the flavour of roast lamb with herbs and garlic, or you could try slices of anchovy, slivers of chilli or nuggets of feta pushed into the slits</p>
                </div>
            </div>
            <div class="single-menu">
                
                <div class="menu-content">
                    <h4>Toad in the Hole</h4>
                    <p>A British classic that everybody loves - this toad in the hole consists of meaty pork sausages nestled in a giant crispy Yorkshire pudding. All served up with a rich red onion gravy.</p>
                </div>
            </div>

```

Industrial Informatics – Project

```
<div class="single-menu">
  
    <div class="menu-content">
      <h4>Yorkshire Pudding</h4>
      <p>Succulent pieces of chicken nestled in a golden Yorkshire pudding with crispy diced potatoes, British pork, onion and sage stuffing, chipolata sausages, carrots and peas in a rich chicken gravy.</p>
    </div>
  </div>
  <div class="single-menu">
    
      <div class="menu-content">
        <h4>Lancashire Hot Pot</h4>
        <p>Succulent lamb in a meaty gravy, topped with potatoes that are tender underneath and crisp on top.</p>
      </div>
    </div>
  </div>

  <div class="title">
    <h4>Chinese Place</h4>
  </div>
  <div class="menu">
    <div class="single-menu">
      
        <div class="menu-content">
          <h4>Chow Mein</h4>
          <p>Stir-fried dish consists of noodles, meat (usually chicken, beef, shrimp, or pork), onions and celery.</p>
        </div>
      </div>
      <div class="single-menu">
        
          <div class="menu-content">
            <h4>Peking Roasted Duck</h4>
            <p>Peking duck is savored for its thin and crispy skin. The Sliced Peking duck is often eaten with pancakes, sweet bean sauce, or soy with mashed garlic.</p>
          </div>
        </div>
        <div class="single-menu">
          
            <div class="menu-content">

```

```
              <h4>Steamed Vermicelli Rolls</h4>
              <p>White sheets of rice starch are rolled with various fillings. Some popular choices are beef/pork, shrimp, even oyster, with mushroom, egg, lettuce or watercress.</p>
            </div>
          </div>
          <div class="single-menu">
            
              <div class="menu-content">
                <h4>Fried Shrimp with Cashew Nuts</h4>
                <p>You get the tenderness of peeled shrimps and the crispiness of cashew nuts. The shrimp is always tender and juicy and easy to deal with. If you are traveling with kids, this is both a nutritional and smart choice!</p>
              </div>
            </div>
            <div class="single-menu">
              
                <div class="menu-content">
                  <h4>Sweet and Sour Pork</h4>
                  <p>Sweet and sour pork has a bright orange-red color, and a delicious sweet and sour taste.</p>
                </div>
              </div>
              <div class="single-menu">
                
                  <div class="menu-content">
                    <h4>Kung Pao Chicken</h4>
                    <p>Kung Pao Chicken is a famous Sichuan-style specialty, popular with both Chinese and foreigners. The major ingredients are diced chicken, dried chili, and fried peanuts.</p>
                  </div>
                </div>
                <div class="single-menu">
                  
                    <div class="menu-content">
                      <h4>Spring Rolls</h4>
                      <p>Spring rolls are a Cantonese dim sum of cylindrical shape. The filling of spring rolls could be vegetables or meat, and the taste could be either sweet or savory.</p>
                    </div>
                  </div>
                  <div class="single-menu">
                    

```

```

<div class="menu-content">
    <h4>Yangchow Fried Rice</h4>
    <p>The standard flavorsome ingredients of Yangchow fried rice are peeled shrimp, diced ham, carrot, mushroom, baby bamboo shoots, crumbled egg, and corn.</p>
</div>
</div>
<div class="single-menu">
    
    <div class="menu-content">
        <h4>Sichuan Pork</h4>
        <p>The meaty broth is typical Sichuan cuisine, featuring a peppery and spicy taste. When eating, you'll find each piece of meat contains abundant juices with a fresh and fragrant spicy aroma.</p>
    </div>
</div>
<div class="single-menu">
    
    <div class="menu-content">
        <h4>Dumplings</h4>
        <p>Popular fillings are mince pork, diced shrimp, ground chicken, beef, and vegetables. They can be cooked by boiling, steaming, or frying. Dumplings are a traditional dish eaten on Chinese New Year's Eve.</p>
    </div>
</div>

</div>

<div class="title">
    <h4>Indian Place</h4>
</div>
<div class="menu">
    <div class="single-menu">
        
        <div class="menu-content">
            <h4>Naan</h4>
            <p>Naan, a puffy flatbread, is a staple in the Indian kitchen and can go with everything you make, the ingredient list includes yeast, flour, sugar, and water, as well as yogurt and ghee.</p>
        </div>
    </div>
    <div class="single-menu">
        
        <div class="menu-content">

```

```

            <h4>Palak Paneer</h4>
            <p>One of the most popular paneer recipe at Indian restaurants is palak paneer, a mildly flavored dish made with spinach and cottage cheese (the paneer), along with the typical Indian spices.</p>
        </div>
    </div>
    <div class="single-menu">
        
        <div class="menu-content">
            <h4>Chole</h4>
            <p>A classic and easy chole chickpea curry, is a favorite in Northern India and has become a worldwide sensation.</p>
        </div>
    </div>
    <div class="single-menu">
        
        <div class="menu-content">
            <h4>Malai Kofta</h4>
            <p>Malai kofta (vegetable "meatballs" in a thick sauce) is the vegetarian alternative to meatballs. The koftas are made with a mix of potatoes, carrots, beans, peas, and sweet corn, which are cooked and mashed before mixing with spices and paneer.</p>
        </div>
    </div>
    <div class="single-menu">
        
        <div class="menu-content">
            <h4>Rogan Josh</h4>
            <p>Rogan Josh, the name of this dish from Kashmir, translates roughly to "red lamb." The color comes from Kashmiri dry red chilies. While the name may sound fiery, the heat of the dish is toned down by the cream that is added at the end.</p>
        </div>
    </div>
    <div class="single-menu">
        
        <div class="menu-content">
            <h4>Chicken Vindaloo Curry</h4>
            <p>"Vindaloo" is a popular Indian curry dish that calls for meat to be marinated in a highly flavorful spicy mixture with vinegar, then quickly cooked up when you're ready to eat.</p>
        </div>
    </div>
    <div class="single-menu">
```

Industrial Informatics – Project

```

<div class="menu-content">
    <h4>Chicken Tikka Masala</h4>
    <p>Chicken tikka masala is a delicious
grilled chicken dish with a thick, creamy gravy that is
unforgettable after the first bite. A tomato-yogurt
sauce is spiced with chili, garlic, ginger, and garam
masala, the ubiquitous Indian spice blend.</p>
</div>
</div>
<div class="single-menu">
    
    <div class="menu-content">
        <h4>Tandoori Chicken</h4>
        <p>Tandoori chicken, a dish of roasted
chicken marinated in yogurt and generously spiced,
giving the meat its trademark red colour.</p>
    </div>
    </div>
    <div class="single-menu">
        
        <div class="menu-content">
            <h4>Murgh Makhani</h4>
            <p>Butter Chicken or murgh makhani is a
curry of chicken in a spiced tomato, butter and cream
sauce.</p>
        </div>
        </div>
        <div class="single-menu">
            
            <div class="menu-content">
                <h4>Papdi Chaat</h4>
                <p>These wafers are then topped with
potatoes and chickpeas and drizzled with a tangy,
spicy, and sweet sauce.</p>
            </div>
        </div>
    </div>

```

```
</div>
</div>

</div>
</div>

</asp:Content>



## MenuClient.aspx.cs


using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace Project_client_template
{
    public partial class MenuClient : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {
            System.Web.UI.HtmlControls.HtmlLink css
= new System.Web.UI.HtmlControls.HtmlLink();
            css.Href = "~/Content/style_menu.css";
            css.Attributes["rel"] = "stylesheet";
            css.Attributes["type"] = "text/css";
            //css.Attributes["media"] = "all"; //add any
            attributes as needed
            Master.Page.Header.Controls.Add(css);
        }
    }
}


```

```
<%@ Page Title="" Language="C#"
MasterPageFile="~/LoginMasterPage.Master"
AutoEventWireup="true"
CodeBehind="MyReservationsClient.aspx.cs"
Inherits="Project_client_template.MyReservationsCli
ent" %>
<asp:Content ID="Content1"
ContentPlaceHolderID="MainContent"
runat="server">
    <section class="reservations">
        <h2 class="title">My reservations</h2>
        <div class="container">
```

```
<div class="row">
    <%if(locations.Count!=0)
    { %>
        <%for(int i=0; i<locations.Count; i++) 
        { %>
            <div class="col-sm-6 col-md-3 space">
                <div class="card z-depth-0">
                    <div class="card-content center">
                        <div>
                            <tr>
                                <td><%=i+1 %></td>
                            </tr>
```

Industrial Informatics – Project

```

<!--<asp:Button ID="btns"
runat="server" CssClass="btn" Text="Delete"
href='..../MyReservationsClient.aspx?<% i%>'
OnClick="Button1_Click"/-->
</div>
<h3><%= locations[i] %></h3>
<h4><%= chefName[i]+"
"+chefSurname[i] %></h4>
<div><%= date[i]%></div>
<div><%= hour[i] %></div>
</div>
</div>
<div>
<% } %>
<% } %>
<%else
{ %>
<h5 class="res">No reservations yet.</h5>

```

```

<% } %>
</div>
</div>
<div class="row el">
<div class="col span-1-of-10">
<input class="textbox" id="textbox2"
name="textbox2" runat="server"></div>
</div>
<div class="col span-2-of-10">
<asp:Button ID="del" text="Delete"
CssClass="btn full-blue" OnClick="Button1_Click"
runat="server"/>
</div>
</div>
</section>
</asp:Content>

```

MyReservationsClient.aspx.cs

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Net;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace Project_client_template
{
    public partial class MyReservationsClient : System.Web.UI.Page
    {
        static
Project_client_template.ServiceReference1.WebService1SoapClient service =
        new
Project_client_template.ServiceReference1.WebService1SoapClient();
        protected static string user =
service.getUsername();
        protected static List<int> ids =
service.getAppointmentsClient(user);
        protected List<string>[] reservations = new
List<string>[ids.Count];
        protected List<string> locations = new
List<string>();
        protected List<string> chefName = new
List<string>();
        protected List<string> chefSurname = new
List<string>();
        protected List<string> date = new
List<string>();

```

```

protected List<string> hour = new
List<string>();
protected List<string> simpleHour = new
List<string>();

protected void Page_Load(object sender,
EventArgs e)
{
    System.Web.UI.HtmlControls.HtmlLink css
= new System.Web.UI.HtmlControls.HtmlLink();
    css.Href =
"~/Content/style_myAppointments.css";
    css.Attributes["rel"] = "stylesheet";
    css.Attributes["type"] = "text/css";
    // css.Attributes["media"] = "all"; //add any
attributes as needed
    Master.Page.Header.Controls.Add(css);

    ids = service.getAppointmentsClient(user);
    int no = ids.Count;

    for (int i = 0; i < no; i++)
    {
        reservations[i] =
service.getDetailsOfAppointment(ids[i]);
    }

    for (int i = 0; i < no; i++)
    {
        locations.Add(reservations[i][0]);
        chefName.Add(reservations[i][1]);
        chefSurname.Add(reservations[i][2]);
        date.Add(reservations[i][3]);
    }
}

```

Industrial Informatics – Project

```

        hour.Add(reservations[i][4] + ":00 pm");
        simpleHour.Add(reservations[i][4]);
    }

//ClientScript.RegisterStartupScript(this.GetType(),
"myalert", "alert(" + "Please wait 10 seconds for the
database to be updated." + ");", true);

//ClientScript.RegisterStartupScript(this.GetType(),
"myalert", "alert(" + reservations[0] + "*" +
reservations[1] + "*" + reservations[2][0] + ");",
true);
}

```

```

protected void Button1_Click(object sender,
EventArgs e)
{
    string username = service.getUsername();
    int index = int.Parse(textBox2.Value)-1;
    service.deleteAppointment(username,
locations[index], date[index],
int.Parse(simpleHour[index]), chefName[index],
chefSurname[index]);
    Response.Redirect(Request.RawUrl);
}
}

```

ReservationChef.aspx

```

<%@ Page Title="" Language="C#"
MasterPageFile="~/LoginChefs.Master"
AutoEventWireup="true"
CodeBehind="ReservationChef.aspx.cs"
Inherits="Project_client_template.ReservationChef"
%>
<asp:Content ID="Content1"
ContentPlaceHolderID="MainContent"
runat="server">

<section class="reservations">
<h2 class="title">My reservations</h2>
<div class="container">
<div class="row">

<%for(int i=0; i<locations.Count; i++) {
%>
<div class="col-sm-6 col-md-3 space">

```

```

<div class="card z-depth-0">
<div class="card-content center">
<h3><%= locations[i] %></h3>
<h4><%= clientName[i]+
"+clientSurname[i] %></h4>
<div><%= date[i]%></div>
<div><%= hour[i] %></div>
</div>
</div>
<% } %>

</div>
</div>
</section>

</asp:Content>

```

ReservationChef.aspx.cs

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace Project_client_template
{
    public partial class ReservationChef :
System.Web.UI.Page
    {
        static
Project_client_template.ServiceReference1.WebServi
ce1SoapClient service =

```

```

new
Project_client_template.ServiceReference1.WebServi
ce1SoapClient();
protected static string username =
service.getUsername();
protected static List<int> ids =
service.getIDsOfAppointmentsChef(username);
protected List<string>[] reservations = new
List<string>[ids.Count];
protected List<string> locations = new
List<string>();
protected List<string> clientName = new
List<string>();
protected List<string> clientSurname = new
List<string>();

```



```

protected List<string> date = new
List<string>();
protected List<string> hour = new
List<string>();

protected void Page_Load(object sender,
EventArgs e)
{
    //IN WORKING
    System.Web.UI.HtmlControls.HtmlLink css
= new System.Web.UI.HtmlControls.HtmlLink();
    css.Href =
"~/Content/style_myAppointments.css";
    css.Attributes["rel"] = "stylesheet";
    css.Attributes["type"] = "text/css";
    // css.Attributes["media"] = "all"; //add any
attributes as needed
    Master.Page.Header.Controls.Add(css);

    ids =
service.getIDsOfAppointmentsChef(username);
    if (ids[0] != -1)
    {

        int no = ids.Count;

        for (int i = 0; i < no; i++)
        {
            reservations[i] =
service.getAppDetailsChef(ids[i]);
        }
    }
}

```

```
for (int i = 0; i < no; i++)
{
    locations.Add(reservations[i][0]);
    clientName.Add(reservations[i][1]);
    clientSurname.Add(reservations[i][2]);
    date.Add(reservations[i][3]);
    hour.Add(reservations[i][4] + ":00 pm");
}
else
{
```

```
ClientScript.RegisterStartupScript(this.GetType(),  
    "myalert", "alert('" + No appointments. + "');",  
    true);  
}
```

```
//ClientScript.RegisterStartupScript(this.GetType(),
"myalert", "alert(\"Please wait 10 seconds for the
database to be updated.\" + \");", true);

//ClientScript.RegisterStartupScript(this.GetType(),
"myalert", "alert(\" + reservations[0] + \"*\" +
reservations[1] + \"*\" + reservations[2][0] + \");",
true);
}

}

}
```

ReservationClient.aspx

```
<%@ Page Title="" Language="C#"
MasterPageFile="~/LoginMasterPage.Master"
AutoEventWireup="true"
CodeBehind="ReservationClient.aspx.cs"
Inherits="Project_client_template.ReservationClient"
%>
<asp:Content ID="Content1"
ContentPlaceHolderID="MainContent"
runat="server">
    <section class="section-story">
        <div class="row">
            <div class="col span-1-of-3 story-box">
                <asp:Image ID="before" alt="before"
class="cooking" runat="server"
ImageUrl="~/fonts/table1.jpg"/>
            </div>
            <div class="col span-1-of-3 story-box
form-box">
                <h2 class="title2">Reservation</h2>
```

```
<h3>BOOK YOUR TABLE</h3>
<form method="post" action="#">
    <div class="contact-form">
        <div class="row">
            <select class="selectpicker" name="address" ID="address" runat="server">
                <option runat="server">English: Str.Bucuresti</option>
                <option runat="server">Indian: Str.Eroilor</option>
                <option runat="server">Chinese: Str.Horea</option>
            </select>
        </div>
        <div class="row">
            <asp:TextBox class="date" type="text" ID="date" name="date" placeholder="12/02/2021" runat="server" required="1"/>
        </div>
    </div>
</form>
```

```

        </div>
        <div class="row">
            <select class="selectpicker"
name="hours" id="hours" runat="server">
                <option runat="server">2:00
pm</option>
                <option runat="server">3:00
pm</option>
                <option runat="server">4:00
pm</option>
                <option runat="server">5:00
pm</option>
                <option runat="server">6:00
pm</option>
                <option runat="server">7:00
pm</option>
                <option runat="server">8:00
pm</option>
                <option runat="server">9:00
pm</option>
                <option runat="server">10:00
pm</option>
            </select>
        </div>
        <div class="row">
            <asp:button Text="Check
availability" class="btn new-btn"
OnClick="Button1_Click" ID="available"
runat="server" />
        </div>
    <div class="row">

```

```

        <select class="selectpicker"
name="chefs" id="chefs" runat="server">
            <option value="" disabled
selected hidden>Chefs</option>
        </select>
    </div>
    <div class="row">
        <Label>&nbsp;</Label>
    <div class="row">
        <asp:button Text="Find a table"
class="btn full-btn" OnClick="Button2_Click"
ID="table" runat="server" />
    </div>
    </div>
    <div class="row">
        <a class="myres"
href="..//MyReservationsClient.aspx"
runat="server">My reservations</a>
    </div>
</form>
</div>
<div class="col span-1-of-3 story-box">
    <asp:Image ID="Image2" alt="after"
class="cooking" runat="server"
ImageUrl="~/fonts/table2.jpg"/>
</div>
</div>
</section>
</asp:Content>

```

ReservationClient.aspx.cs

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace Project_client_template
{
    public partial class ReservationClient : 
System.Web.UI.Page
    {

Project_client_template.ServiceReference1.WebServi
ce1SoapClient service =
        new
Project_client_template.ServiceReference1.WebServi
ce1SoapClient();
        string global = "";

```

```

    protected void Page_Load(object sender,
EventArgs e)
    {
        System.Web.UI.HtmlControls.HtmlLink css
= new System.Web.UI.HtmlControls.HtmlLink();
        css.Href =
"~/Content/style_reservationClient.css";
        css.Attributes["rel"] = "stylesheet";
        css.Attributes["type"] = "text/css";
        // css.Attributes["media"] = "all"; //add any
attributes as needed
        Master.Page.Header.Controls.Add(css);
        global = service.getUsername();
    }

    protected void Button1_Click(object sender,
EventArgs e)
    {
        List<string> response = new List<string>();
        string user = service.getUsername();

```

Industrial Informatics – Project

```

        string loc =
address.Items[address.SelectedIndex].Text;
        string location = loc.Substring(loc.IndexOf(':')
+ 2);
        string day = date.Text;
        string h =
hours.Items[hours.SelectedIndex].Text;
        int hour = int.Parse(h.Substring(0, 1));

        address.EnableViewState = true;
        hours.EnableViewState = true;

//ClientScript.RegisterStartupScript(this.GetType(),
"myalert", "alert(" + "*" + location + "*" + h + "*" +
");", true);

        chefs.Items.Clear();
        response =
service.verifyAppointment(location, day, hour);
        if (response != null)
        {
            foreach (string chef in response)
            {
                chefs.Items.Add(chef);
            }
        }
        else
        {

ClientScript.RegisterStartupScript(this.GetType(),
"myalert", "alert(" + "No chef available! Please
choose another hour." + ");", true);
        }
    }

}
    
```

```

        }
        protected void Button2_Click(object sender,
EventArgs e)
    {
        List<string> response = new List<string>();
        string user = service.getUsername();
        string loc =
address.Items[address.SelectedIndex].Text;
        string location = loc.Substring(loc.IndexOf(':')
+ 2);
        string day = date.Text;
        string h =
hours.Items[hours.SelectedIndex].Text;
        int hour = int.Parse(h.Substring(0, 1));
        response =
service.verifyAppointment(location, day, hour);

        int index = chefs.SelectedIndex;
        string nameChef = response[index];
        string[] nameall = nameChef.Split(' ');
        string name = nameall[0];
        string surname = nameall[1];

//ClientScript.RegisterStartupScript(this.GetType(),
"myalert", "alert(" + global + ")", true);

ClientScript.RegisterStartupScript(this.GetType(),
"myalert", "alert(" + "We are processing your
request, please wait 10 seconds! " + ")", true);
        service.createAppointment(user, location,
day, hour, name, surname);
        Response.Redirect(Request.RawUrl);
    }
}
    
```

SignUp.aspx

```

<%@ Page Title="" Language="C#"
MasterPageFile="~/Site.Master"
AutoEventWireup="true"
CodeBehind="SignUp.aspx.cs"
Inherits="Project_client_template.SignUp" %>
<asp:Content ID="Content1"
ContentPlaceHolderID="MainContent"
runat="server">
    <header>
        <section class="form">
            <div class="row">
                <h3>Visit us</h3>
                <h2>We're happy to hear from you!</h2>
            </div>
            <div class="row contact-form" ID="contact-
form">
                <form method="post" action="#">
    
```

```

<div class="row">
    <asp:Label Text="Name*" runat="server"/>
<div class="row">
    <div class="col span-1-of-3">
        <asp:TextBox CssClass="name" type="text" ID="name" name="name"
placeholder="First Name" runat="server" required="1"/>
    </div>
    <div class="col span-2-of-3">
        <asp:TextBox CssClass="surname" type="text" ID="surname"
name="surname" placeholder="Last Name" runat="server" required="1"/>
    </div>
</div>
    
```



Industrial Informatics – Project

```

</div>
<div class="row">
    <asp:Label Text="Birthday*" runat="server"/>
<div class="row">
    <div class="col span-1-of-10">
        <asp:TextBox type="text" class="birthday" ID="day" name="day" placeholder="DD" runat="server" required="1"/>
    </div>
    <div class="col span-1-of-10">
        <asp:TextBox type="text" class="birthday" ID="month" name="month" placeholder="MM" runat="server" required="1"/>
    </div>
    <div class="col span-1-of-10">
        <asp:TextBox type="text" class="birthday" ID="year" name="year" placeholder="YYYY" runat="server" required="1"/>
    </div>
    </div>
</div>
<div class="row">
    <asp:Label Text="Email*" runat="server"/>
<div class="row">
    <asp:TextBox class="email" type="email" ID="address" name="email" placeholder="ex: sen@gmail.com" runat="server" required="1"/>
</div>
</div>
<div class="row">
    <asp:Label Text="Username*" runat="server"/>
<div class="row">
    <asp:TextBox class="username" type="text" ID="username" name="username" runat="server" required="1"/>

```

```

</div>
<div class="row">
    <asp:Label Text="Password*" runat="server"/>
<div class="row">
    <asp:TextBox class="password" type="password" ID="password" name="password" runat="server" required="1"/>
</div>
</div>
<div class="row">
    <asp:Label Text="Comments" runat="server"/>
<div class="row">
    <textarea name="other_details" ID="other_details" runat="server" />
</div>
</div>
<div class="row">
    <Label>&nbsp;</Label>
<div class="row">
    <asp:button Text="Submit" class="btn full-btn btn-hide" ID="hide" runat="server" OnClick="Button1_Click"/>
</div>
<div class="row">
    <a class="login-ref" href="../Login.aspx" runat="server">Already have an account?</a>
</div>
</div>
</form>
</div>
</section>
</header>
</asp:Content>

```

SignUp.aspx.cs

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace Project_client_template
{
    public partial class SignUp : System.Web.UI.Page
    {

```

```

        Project_client_template.ServiceReference1.WebService1SoapClient service =
            new Project_client_template.ServiceReference1.WebService1SoapClient();

        protected void Page_Load(object sender, EventArgs e)
        {
            System.Web.UI.HtmlControls.HtmlLink css =
                new System.Web.UI.HtmlControls.HtmlLink();

```



```

        css.Href = "~/Content/style_form.css";
        css.Attributes["rel"] = "stylesheet";
        css.Attributes["type"] = "text/css";
        // css.Attributes["media"] = "all"; //add any
attributes as needed
        Master.Page.Header.Controls.Add(css);
    }

protected void Button1_Click(object sender,
EventArgs e)
{
    string user = username.Text;
    string pass = password.Text;
}

        string birthday = day.Text + "/" + month.Text
+ "/" + year.Text;
        string firstName = name.Text;
        string lastName = surname.Text;
        string email = address.Text;
        string details = other_details.Value;

        string message = service.insertClient(user,
pass, firstName, lastName, email, birthday, details);
        Response.Redirect("~/Login.aspx");
    }
}

```

Site.Master

```

<%@ Master Language="C#"
AutoEventWireup="true"
CodeBehind="Site.master.cs"
Inherits="Project_client_template.SiteMaster" %>

<!DOCTYPE html>

<html lang="en">
<head runat="server">
    <meta charset="utf-8" />
    <meta name="viewport" content="width=device-
width, initial-scale=1.0" />
    <title>Noissete</title>

    <asp:PlaceHolder runat="server">
        <%: Scripts.Render("~/bundles/modernizr") %>
    </asp:PlaceHolder>

    <webopt:bundlereference runat="server"
path("~/Content/css" />
    <link href("~/favicon.ico" rel="shortcut icon"
type="image/x-icon" />
    <link rel="stylesheet" type="text/css"
href("~/Content/normalize.css">
    <link rel="stylesheet" type="text/css"
href "~/Content/grid.css">
    <link rel="stylesheet" type="text/css"
href "~/Content/style_master.css">
    <link rel="preconnect"
href="https://fonts.gstatic.com">
    <link
href="https://fonts.googleapis.com/css2?family=Lato
:ital,wght@0,300;0,400;0,700;1,100&display=swap"
rel="stylesheet">
    <link
href="https://fonts.googleapis.com/css2?family=Dan
cing+Script:wght@700&display=swap"
rel="stylesheet">

```

```

</head>
<body>
<form id="form1" runat="server">
    <asp:ScriptManager runat="server">
        <Scripts>
            <%--To learn more about bundling scripts
in ScriptManager see
https://go.microsoft.com/fwlink/?LinkID=301884 --%>
            <%--Framework Scripts--%>
            <asp:ScriptReference
Name="MsAjaxBundle" />
                <asp:ScriptReference Name="jquery" />
                <asp:ScriptReference Name="bootstrap" />
                <asp:ScriptReference
Name="WebForms.js" Assembly="System.Web"
Path="~/Scripts/WebForms/WebForms.js" />
                <asp:ScriptReference
Name="WebUIValidation.js"
Assembly="System.Web"
Path="~/Scripts/WebForms/WebUIValidation.js" />
                <asp:ScriptReference
Name="MenuStandards.js"
Assembly="System.Web"
Path="~/Scripts/WebForms/MenuStandards.js" />
                <asp:ScriptReference Name="GridView.js"
Assembly="System.Web"
Path="~/Scripts/WebForms/Gridview.js" />
                <asp:ScriptReference
Name="DetailsView.js" Assembly="System.Web"
Path="~/Scripts/WebForms/DetailsView.js" />
                <asp:ScriptReference Name="TreeView.js"
Assembly="System.Web"
Path="~/Scripts/WebForms/TreeView.js" />
                <asp:ScriptReference Name="WebParts.js"
Assembly="System.Web"
Path="~/Scripts/WebForms/WebParts.js" />

```

Industrial Informatics – Project

```

<asp:ScriptReference Name="Focus.js"
Assembly="System.Web"
Path("~/Scripts/WebForms/Focus.js" />
<asp:ScriptReference
Name="WebFormsBundle" />
<%--Site Scripts--%>
</Scripts>
</asp:ScriptManager>

<nav class="navigation">
<div class="row">
<h1 class="logo">Noissete</h1>
<ul class="navi">
<li><a runat="server"
href "~/Home.aspx">Home</a></li> <!--list
element-->
<li><a runat="server"
href "~/FindUs.aspx">Find us</a></li>
<li><a runat="server"
href "~/Menu.aspx">Menu</a></li>
<li><a runat="server"
href "~/Chefs.aspx">Chefs</a></li>
<li><a runat="server"
href "../Login.aspx">Reservation</a></li>
</ul> <!--unordered list-->
</div>
</nav>

<asp:ContentPlaceHolder ID="MainContent"
runat="server"/>

<footer>
<div class="row">
<h1 class="footer-logo">Noissete</h1>
</div>
<div class="row">
<p class="working-hours">WORKING
HOURS:</p>
<p>MON - FRI: 08:00 AM - 11:00
PM</p>
<p>SAT - SUN: 10:00 AM - 11:00
PM</p>
</div>

```

```

<div class="row">
<div class="col span-1-of-2">
<ul class="footer-nav">
<li><a runat="server"
href "~/Home.aspx">HOME</a></li>
<li><a runat="server"
href "~/FindUs.aspx">FIND US</a></li>
<li><a runat="server"
href "~/Menu.aspx">MENU</a></li>
<li><a runat="server"
href "~/Chefs.aspx">CHEFS</a></li>
<li><a runat="server"
href "../Login.aspx">RESERVATION</a></li>
</ul>
</div>
<div class="col span-1-of-2">
<ul class="social-icons">
<li><a href="#" class="icon-
contact4"><asp:Image ID="Image11"
alt="instagram" runat="server"
ImageUrl "~/fonts/logo-instagram.svg" /></a></li>
<li><a href="#" class="icon-
contact3"><asp:Image ID="Image12" alt="google"
runat="server" ImageUrl "~/fonts/logo-
google.svg" /></a></li>
<li><a href="#" class="icon-
contact2"><asp:Image ID="Image13" alt="twitter"
runat="server" ImageUrl "~/fonts/logo-
twitter.svg" /></a></li>
<li><a href="#" class="icon-
contact1"><asp:Image ID="Image14" alt="facebook"
runat="server" ImageUrl "~/fonts/logo-
facebook.svg" /></a></li>
</ul>
</div>
</div>
</footer>

</form>
</body>
</html>

```

Site.Master.cs

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

```

```

namespace Project_client_template
{
    public partial class SiteMaster : MasterPage
    {
        protected void Page_Load(object sender,
EventArgs e)
        {

```



```

        }
    }

}



## CSS files:



- style_reservationClient.css



```

/*GOLD COLOR #eccc68*/
/*DARK BLUE COLOR #0a0e13*/

* {
 margin: 0;
 padding: 0;
 -webkit-box-sizing: border-box;
 box-sizing: border-box;
}

html, body {
 overflow-x: hidden;
 background-color: #fff;
 color: #555;
 font-family: 'Lato', sans-serif;
 font-size: 20px;
 font-weight: 200;
 text-rendering: optimizeLegibility;
 overflow-x: hidden;
 scroll-behavior: smooth;
}

html, body, div, span, applet, object, iframe, h1, h2, h3, h4, h5, h6, p, blockquote, pre, a, abbr, acronym, address, big, cite, code, del, dfn, em, font, img, ins, kbd, q, s, samp, small, strike, strong, sub, sup, tt, var, b, u, i, center, dl, dt, dd, ol, ul, li, fieldset, form, label, legend, caption {
 margin: 0;
 padding: 0;
 border: 0;
 outline: 0;
 font-size: 100%;
 vertical-align: baseline;
 background: transparent;
}

/*CLEARING THE FLOATS*/

.clearfix {
 zoom: 1
}
.clearfix:after {
 content: " ";
 clear: both;
 display: block;
 height: 0;
 visibility: hidden;
}

}

.row {
 max-width: 1140px;
 margin: 0 auto; /*set right margin to auto and left margin to auto - center top,bottom=0 and left,right=auto*/
}

.text-box {
 position: absolute; /*we can vertically and horizontally center it*/
 width: 1140px;
 top: 40%;
 left: 19%;
}

/*HEADINGS*/

h2 {
 color: #eccc68;
 font-family: 'Dancing Script', sans-serif;
 font-size: 35px;
 margin-bottom: 10px;
 text-align: center;
}

h3 {
 margin-bottom: 40px;
 color: #000;
 font-weight: 400;
 font-size: 160%;
 font-family: 'Lato';
}

.title2:after {
 display: block;
 height: 2px;
 background-color: #eccc68;
 content: " ";
 width: 200px;
 margin-left: auto;
 margin-right: auto;
 margin-top: 10px;
 margin-bottom: 25px;
}

/*HEADER*/

header {
 background-image: linear-gradient(rgba(0, 0, 0, 0.65), rgba(0, 0, 0, 0.65)), url("../fonts/food.jpeg");
 /*two background images on top of eachother and adding transparency for the first one*/
}

```


```

Industrial Informatics – Project

```
background-size: cover; /*in order to see the
whole image*/
background-position: center; /*centers the image*/
height: 100vh; /*100% of the viewport*/
}

/*OUR STORY*/

.story-box {
margin-top: 40px;
margin-bottom: 20px;
}

.story-box:first-child {
text-align: left;
}

.story-box:last-child {
text-align: right;
}

.story-box:nth-child(2) {
text-align: center;
}

.cooking {
width: 100%;
}
.story-box h2 {
margin-left:-30px;
}

.story-box h2:after {
}

.form-box {
padding-top:40px;
}

/*FORM - CLIENTS*/

.contact-form{
width:60%;
margin-left:auto;
margin-right: 70px;
}

input,
.selectpicker {
padding:5px;
border-radius:5px;
border: 1px solid #9b9b9b;
margin-bottom:10px;
}

width:270px;
}

::placeholder{
color:rgba(78, 78, 78, 0.54);
font-weight: 100;
}

.place {
font-weight: 100;
}

/*Buttons*/

.btn {
display: inline-block;
padding: 10px 25px;
margin-right: 0px;
margin-left: 0px;
font-weight: 400;
border-radius: 3px;
border: 1px solid #d4b85e;
color: #fff;
transition: background-color 0.4s;
text-decoration: none;
}

.full-btn {
background-color: #ecc668;
margin-bottom:7px;
}

.full-btn:hover,
.full-btn:active {
background-color: #d4b85e;
}

.new-btn {
margin-bottom: 10px;
color: #fff;
background-color: #161d27;
border: 1px solid #161d27;
padding: 7px 20px;
}

.new-btn:hover,
.new-btn:active {
background-color: #2d343d;
color: #fff;
}

.myres{
color: #000;
```



Industrial Informatics – Project

```
        font-family: 'Lato'  
        font-size: 15px;  
        margin-left: -160px;  
    }  
  
/*NAVIGATION*/  
  
h1 {  
    margin: 0;  
    margin-bottom: 15px;  
    color: #fff;  
    font-size: 40px; /*autumatically adjusting its size  
from the html size*/  
}  
  
.navigation {  
    background-color: #000;  
    box-shadow: 0 2px 2px #101010;  
    height: 14%;  
}  
  
.logo {  
    font-family: 'Dancing Script', sans-serif;  
    text-transform: none;  
    float: left;  
    margin-top: 20px;;  
}  
  
.navi{  
    float:right;  
    list-style: none; /*get rid of the bullet points*/  
    margin-top: 40px;  
}  
  
.navi li{ /*select all li elements inside the nav*/  
    display: inline;  
    margin-left: 30px;  
}  
  
.navi li a:link,  
.navi li a:visited {  
    color: #fff;  
    text-decoration: none; /*get rid of the underline*/  
    text-transform: uppercase;  
    font-size: 14px;  
    transition: color 0.2s;  
}  
  
.navi li a:hover,  
.navi li a:active {  
    color: #eccc68;  
}  
  
.navigation-hidden {  
    background-color: #000;  
    box-shadow: 0 2px 2px #101010;  
    height: 14%;  
    display: none;  
}  
  
/*FOOTER*/  
  
footer {  
    background-color: #0a0e13;  
}  
  
.working-hours {  
    color: #eccc68  
}  
  
footer p {  
    margin: 7px;  
    text-align: center;  
    font-size: 14px;  
    color: #fff;  
}  
  
footer h1 {  
    padding-top: 5%;  
    margin-top: 40px;  
    margin-bottom: 40px;  
}  
  
.footer-logo {  
    font-family: 'Dancing Script', sans-serif;  
    text-transform: none;  
    text-align: center;  
}  
  
.footer-nav {  
    padding-top: 10px;  
    list-style: none;  
    float: left;  
    font-size: 16px;  
}  
  
.icon-contact1,  
.icon-contact2,  
.icon-contact3,  
.icon-contact4 {  
    padding-top: 10px;  
    list-style: none;  
    float: right;  
    width: 20px;  
    display: inline-block;  
    margin-right: 20px;  
}
```



Industrial Informatics – Project

```
filter: invert(54%) sepia(4%) saturate(3%) hue-rotate(340deg) brightness(98%) contrast(92%);  
transition: filter 0.5s;  
}  
  
.icon-contact4 {  
margin-right: 0;  
}  
  
.icon-contact1:hover,  
.icon-contact2:hover,  
.icon-contact3:hover,  
.icon-contact4:hover {  
filter: invert(100%) sepia(43%) saturate(3271%)  
hue-rotate(321deg) brightness(103%) contrast(85%);  
}  
  
.footer-nav li {  
display: inline-block;  
margin-right: 20px;  
}  
  
.social-icons li{  
display: inline;  
margin-right: 20px;  
}  
  
.footer-nav li a:link,  
.footer-nav li a:visited,  
.icon-contact1:link,  
.icon-contact1:visited,  
.icon-contact2:link,  
.icon-contact2:visited,  
.icon-contact3:link,  
.icon-contact3:visited,  
.icon-contact4:link,  
.icon-contact4:visited  
{  
text-decoration: none;  
border: 0;  
color: #888;  
-webkit-transition: color 0.2s;  
transition: color 0.2s;  
}  
  
.footer-nav li a:hover,  
.footer-nav li a:active {  
color: #ddd;  
}  
  
.icon-contact:link,  
.icon-contact:visited {  
font-size: 170%;  
}  
o style_myAppointments.css  
/*GOLD COLOR #eccc68*/  
/*DARK BLUE COLOR #0a0e13*/  
* {  
margin:0;  
padding:0;  
box-sizing: border-box;  
}  
  
html {  
background-color: #fff;  
color: #555;  
font-family: 'Lato';  
font-size: 20px;  
font-weight: 200;  
text-rendering: optimizeLegibility;  
}  
  
html, body, div, span, applet, object, iframe, h1, h2, h3, h4, h5, h6, p, blockquote, pre, a, abbr, acronym, address, big, cite, code, del, dfn, em, font, img, ins, kbd, q, s, samp, small, strike, strong, sub, sup, tt, var, b, u, i, center, dl, dt, dd, ol, ul, li, fieldset, form, label, legend, caption {  
margin: 0;  
padding: 0;  
border: 0;  
outline: 0;  
font-size: 100%;  
vertical-align: baseline;  
background: transparent;  
}  
  
.clearfix {  
zoom:1  
}  
.clearfix:after {  
content:" ";  
clear: both;  
display: block;  
height: 0;  
visibility: hidden;  
}  
  
.row {  
max-width: 1140px;  
margin: 0 auto; /*set right margin to auto and left margin to auto - center top,bottom=0 and left,right=auto*/  
}
```



Industrial Informatics – Project

```
.text-box{  
    position: absolute; /*we can vertically and  
horizontally center it*/  
    width: 1140px;  
    top: 45%;  
    left: 19%;  
}  
  
/*HEADINGS*/  
  
h2 {  
    color: #eccc68;  
    font-family: 'Dancing Script', sans-serif;  
    font-size: 35px;  
    margin-bottom: 10px;  
    text-align: center;  
    margin-top: 80px;  
    margin-bottom: 80px;  
}  
  
h3 {  
    margin: 0;  
    margin-bottom: 5px;  
    color: #000;  
    font-size: 100% /*autumatically adjusting its size  
from the html size*/  
    letter-spacing: 1px;  
    word-spacing: 4px;  
    text-transform: uppercase;  
}  
  
h4 {  
    margin: 0;  
    margin-bottom: 5px;  
    color: #000;  
    font-family: 'Dancing Script', sans-serif;  
    font-size: 120%;  
}  
  
.res {  
    text-align: center;  
    color: #000;  
    text-transform: uppercase;  
    font-size: 30px;  
    font-weight: 300;  
}  
  
h2:after {  
    display: block;  
    height: 2px;  
    background-color: #eccc68;  
    content: " ";  
    width: 240px;  
    margin-left: auto;  
}  
  
    margin-right: auto;  
    margin-top: 10px;  
    margin-bottom: 10px;  
}  
  
input {  
    padding: 5px;  
    border-radius: 5px;  
    border: 1px solid #9b9b9b;  
    width: 100px;  
    margin-left: 18px;  
}  
  
.full-blue {  
    width: 100px;  
    color: #fff;  
    background-color: #161d27;  
    border: 1px solid #161d27;  
    padding: 4px 20px;  
    margin-bottom: 60px;  
}  
  
.full-blue:hover,  
.full-blue:active {  
    background-color: #2d343d;  
    color: #fff;  
}  
  
.el {  
    margin-top: 50px;  
    margin-bottom: 50px;  
}  
  
.space {  
    margin-bottom: 20px;  
}  
  
/*HEADER*/  
  
header {  
    background-image: linear-gradient(#fff, #fff);  
    background-size: cover; /*in orderd to see the  
whole image*/  
    background-position: center; /*centers the image*/  
    min-height: 100vh; /*100% of the viewport*/  
}  
  
/*Buttons*/  
  
.delete:link,  
.delete:visited {  
    font-weight: 300;  
}
```



Industrial Informatics – Project

```
color: #000;
text-decoration: none;
transition: color 0.3s;
}

.delete:hover,
.delete:active {
color: #eccc68;
text-decoration: none;
}

.card {
/* Add shadows to create the "card" effect */
background-color: #f8f8f8;
width: 80%;
box-shadow: 0 3px 3px 0 rgba(0,0,0,0.2);
transition: 0.3s;
padding-top: 30px;
padding-bottom: 20px;
text-align: center;
border-radius: 10px;
}

/* On mouse-over, add a deeper shadow */
.card:hover {
box-shadow: 0 6px 6px 0 rgba(0,0,0,0.2);
}

/* Add some padding inside the card container */
.container {
padding: 2px 16px;
}

.close {
width: 10%;
margin-top: -30px;
}

li {
list-style-type: none;
}

/*NAVIGATION*/

h1 {
margin: 0;
margin-bottom: 15px;
color: #fff;
font-size: 40px; /*autumatically adjusting its size from the html size*/
}

.navigation {
background-color: #000;
box-shadow: 0 2px 2px #101010;
height: 14%;
}

.logo {
font-family: 'Dancing Script', sans-serif;
text-transform: none;
float: left;
margin-top: 20px;;
}

.navi {
float: right;
list-style: none; /*get rid of the bullet points*/
margin-top: 40px;
}

.navi li { /*select all li elements inside the nav*/
display: inline;
margin-left: 30px;
}

.navi li a:link,
.navi li a:visited {
color: #fff;
text-decoration: none; /*get rid of the underline*/
text-transform: uppercase;
font-size: 14px;
transition: color 0.2s;
}

.navi li a:hover,
.navi li a:active {
color: #eccc68;
}

.navigation-hidden {
background-color: #000;
box-shadow: 0 2px 2px #101010;
height: 14%;
display: none;
}

/*FOOTER*/

footer {
background-color: #0a0e13;
}

.working-hours {
color: #eccc68
}
```



Industrial Informatics – Project

```
footer p {  
    margin: 7px;  
    text-align: center;  
    font-size: 14px;  
    color: #fff;  
}  
  
footer h1 {  
    padding-top: 5%;  
    margin-top: 40px;  
    margin-bottom: 40px;  
}  
  
.footer-logo {  
    font-family: 'Dancing Script', sans-serif;  
    text-transform: none;  
    text-align: center;  
}  
  
.footer-nav {  
    padding-top: 10px;  
    list-style: none;  
    float: left;  
    font-size: 16px;  
}  
  
.icon-contact1,  
.icon-contact2,  
.icon-contact3,  
.icon-contact4 {  
    padding-top: 10px;  
    list-style: none;  
    float: right;  
    width: 20px;  
    display: inline-block;  
    margin-right: 20px;  
    filter: invert(54%) sepia(4%) saturate(3%) hue-rotate(340deg) brightness(98%) contrast(92%);  
    transition: filter 0.5s;  
}  
  
.icon-contact4 {  
    margin-right: 0;  
}  
  
.icon-contact1:hover,  
.icon-contact2:hover,  
.icon-contact3:hover,  
.icon-contact4:hover {  
    filter: invert(100%) sepia(43%) saturate(3271%) hue-rotate(321deg) brightness(103%) contrast(85%);  
}  
  
.footer-nav li {  
    display: inline-block;  
    margin-right: 20px;  
}  
  
.social-icons li {  
    display: inline;  
    margin-right: 20px;  
}  
  
.footer-nav li a:link,  
.footer-nav li a:visited,  
.icon-contact1:link,  
.icon-contact1:visited,  
.icon-contact2:link,  
.icon-contact2:visited,  
.icon-contact3:link,  
.icon-contact3:visited,  
.icon-contact4:link,  
.icon-contact4:visited {  
    text-decoration: none;  
    border: 0;  
    color: #888;  
    -webkit-transition: color 0.2s;  
    transition: color 0.2s;  
}  
  
.footer-nav li a:hover,  
.footer-nav li a:active {  
    color: #ddd;  
}  
  
.icon-contact:link,  
.icon-contact:visited {  
    font-size: 170%;  
}  
  
○ style_menu.css  
*{  
    margin: 0;  
    padding: 0;  
    box-sizing: border-box;  
}  
@import  
url('https://fonts.googleapis.com/css2?family=Poppins  
s&display=swap');
```



Industrial Informatics – Project

```
address, big, cite, code, del, dfn, em, font, img, ins,
kbd, q, s, samp, small, strike, strong, sub, sup, tt, var,
b, u, i, center, dl, dt, dd, ol, ul, li, fieldset, form, label,
legend, caption {
    margin: 0;
    padding: 0;
    border: 0;
    outline: 0;
    vertical-align: baseline;
    background: transparent;
}

h2 {
    font-size: 150%;
    color: #000;
}

.im {
    width: 100px;
    height: 100px
}

.wrapper{
    width: 1200px;
    margin: 100px auto;
}

.title{
    text-align: center;
    margin-bottom: 60px;
    margin-top: 20px;
}

.title h2{
    color: #eccc68;
    font-family: 'Dancing Script', sans-serif;
    font-size: 200%;
}

.title h4{
    text-transform: capitalize;
    font-size: 30px;
    position: relative;
    display: inline-block;
    margin-top: 50px;
}

.title h4 span{
    display: block;
    font-size: 18px;
    font-style: italic;
    margin-bottom: -10px;
}

.title h4:before{
    position: absolute;
    content: "";
    width: 220px;
    height: 2px;
    background-color: #0a0e13;
    bottom: -10px;
    left: 50%;
    transform: translateX(-50%);
}

.menu{
    display: flex;
    flex-wrap: wrap;
    justify-content: space-between;
}

.single-menu{
    flex-basis: 580px;
    margin-bottom: 20px;
    padding-bottom: 20px;
    border-bottom: 1px solid #dddddd ;
}

.single-menu:nth-child(5), .single-menu:nth-child(6){
    border-bottom: 0;
}

.single-menu{
    display: flex;
    flex-direction: row;
    align-items: center;
}

.single-menu img{
    max-width: 180px;
    margin-right: 30px;
    border-radius: 100px;
    border: 1px solid #dddddd;
    padding: 3px;
}

.single-menu h4{
    font-size: 22px;
    border-bottom: 1px dashed #333333;
    margin-bottom: 5px;
    padding-bottom: 5px;
}

/*NAVIGATION*/

h1 {
    margin: 0;
    margin-bottom: 15px;
    color: #fff;
    font-size: 40px; /*autumatically adjusting its size from the html size*/
}

.navigation {
    background-color: #000;
    box-shadow: 0 2px 2px #101010;
    height: 14%;
}
```



```

.logo {
    font-family: 'Dancing Script', sans-serif;
    text-transform: none;
    float: left;
    margin-top: 20px;;
}

.navi{
    float:right;
    list-style: none; /*get rid of the bullet points*/
    margin-top: 40px;
}

.navi li{ /*select all li elements inside the nav*/
    display: inline;
    margin-left: 30px;
}

.navi li a:link,
.navi li a:visited {
    color: #fff;
    text-decoration: none; /*get rid of the underline*/
    text-transform: uppercase;
    font-size: 14px;
    transition: color 0.2s;
}

.navi li a:hover,
.navi li a:active {
    color: #eccc68;
}

.navigation-hidden {
    background-color: #000;
    box-shadow: 0 2px 2px #101010;
    height: 14%;
    display: none;
}

/*FOOTER*/

footer {
    background-color: #0a0e13;
}

.working-hours {
    color: #eccc68
}

footer p {
    margin: 7px;
    text-align: center;
    font-size: 14px;
}

color: #fff;
}

footer h1 {
    padding-top: 5%;
    margin-top: 40px;
    margin-bottom: 40px;
}

.footer-logo {
    font-family: 'Dancing Script', sans-serif;
    text-transform: none;
    text-align: center;
}

.footer-nav {
    padding-top:10px;
    list-style: none;
    float:left;
    font-size:16px;
}

.icon-contact1,
.icon-contact2,
.icon-contact3,
.icon-contact4 {
    padding-top: 10px;
    list-style: none;
    float: right;
    width: 20px;
    display: inline-block;
    margin-right: 20px;
    filter: invert(54%) sepia(4%) saturate(3%) hue-rotate(340deg) brightness(98%) contrast(92%);
    transition: filter 0.5s;
}

.icon-contact4 {
    margin-right: 0;
}

.icon-contact1:hover,
.icon-contact2:hover,
.icon-contact3:hover,
.icon-contact4:hover {
    filter: invert(100%) sepia(43%) saturate(3271%) hue-rotate(321deg) brightness(103%) contrast(85%);
}

.footer-nav li {
    display: inline-block;
    margin-right: 20px;
}

```



Industrial Informatics – Project

```
}

.social-icons li{
    display: inline;
    margin-right: 20px;
}

.footer-nav li a:link,
.footer-nav li a:visited,
.icon-contact1:link,
.icon-contact1:visited,
.icon-contact2:link,
.icon-contact2:visited,
.icon-contact3:link,
.icon-contact3:visited,
.icon-contact4:link,
.icon-contact4:visited
{
    text-decoration: none;
    border: 0;
    color: #888;
    -webkit-transition: color 0.2s;
    transition: color 0.2s;
}

.footer-nav li a:hover,
.footer-nav li a:active {
    color: #ddd;
}

.icon-contact:link,
.icon-contact:visited {
    font-size: 170%;
}

○ style_master.css
/*GOLD COLOR #eccc68*/
/*DARK BLUE COLOR #0a0e13*/

* {
    margin:0;
    padding:0;
    box-sizing: border-box;
}

html, body, div, span, applet, object, iframe, h1, h2, h3, h4, h5, h6, p, blockquote, pre, a, abbr, acronym, address, big, cite, code, del, dfn, em, font, img, ins, kbd, q, s, samp, small, strike, strong, sub, sup, tt, var, b, u, i, center, dl, dt, dd, ol, ul, li, fieldset, form, label, legend, caption {
    margin: 0;
    padding: 0;
    border: 0;
}

outline: 0;
font-size: 100%;
vertical-align: baseline;
background: transparent;
}

html {
    background-color: #fff;
    color: #555;
    font-family: 'Lato', sans-serif;
    font-size: 20px;
    font-weight: 200;
    text-rendering: optimizeLegibility;
}

.clearfix {
    zoom:1
}
.clearfix:after {
    content:" ";
    clear: both;
    display: block;
    height: 0;
    visibility: hidden;
}

.row {
    max-width: 1140px;
    margin: 0 auto; /*set right margin to auto and left margin to auto - center top,bottom=0 and left,right=auto*/
}

/*HEADINGS*/

h1 {
    margin: 0;
    margin-bottom:15px;
    color:#fff;
    font-size: 40px; /*autumatically adjusting its size from the html size*/
}

/*HEADER*/

header {
    background-image: linear-gradient(#fff, #fff);
    background-size: cover; /*in orderd to see the whole image*/
    background-position: center; /*centers the image*/
    min-height: 100vh; /*100% of the viewport*/
}

/*NAVIGATION*/
```



```

.navigation {
    background-color: #000;
    box-shadow: 0 2px 2px #101010;
    height: 14%;
}

.logo {
    font-family: 'Dancing Script', sans-serif;
    text-transform: none;
    float: left;
    margin-top: 20px;;
}

.navi{
    float:right;
    list-style: none; /*get rid of the bullet points*/
    margin-top: 40px;
}

.navi li{ /*select all li elements inside the nav*/
    display: inline;
    margin-left: 30px;
}

.navi li a:link,
.navi li a:visited {
    color: #fff;
    text-decoration: none; /*get rid of the underline*/
    text-transform: uppercase;
    font-size: 14px;
    transition: color 0.2s;
}

.navi li a:hover,
.navi li a:active {
    color: #eccc68;
}

.navigation-hidden {
    background-color: #000;
    box-shadow: 0 2px 2px #101010;
    height: 14%;
    display: none;
}

/*FOOTER*/

footer {
    background-color: #0a0e13;
}

.working-hours {
    color: #eccc68
}

}

footer p {
    margin: 7px;
    text-align: center;
    font-size: 14px;
    color: #fff;
}

footer h1 {
    padding-top: 5%;
    margin-top: 40px;
    margin-bottom: 40px;
}

.footer-logo {
    font-family: 'Dancing Script', sans-serif;
    text-transform: none;
    text-align: center;
}

.footer-nav {
    padding-top:10px;
    list-style: none;
    float:left;
    font-size:16px;
}

.icon-contact1,
.icon-contact2,
.icon-contact3,
.icon-contact4 {
    padding-top: 10px;
    list-style: none;
    float: right;
    width: 20px;
    display: inline-block;
    margin-right: 20px;
    filter: invert(54%) sepia(4%) saturate(3%) hue-rotate(340deg) brightness(98%) contrast(92%);
    transition: filter 0.5s;
}

.icon-contact4 {
    margin-right: 0;
}

.icon-contact1:hover,
.icon-contact2:hover,
.icon-contact3:hover,
.icon-contact4:hover {
    filter: invert(100%) sepia(43%) saturate(3271%)
    hue-rotate(321deg) brightness(103%) contrast(85%);
}

```



```

}

.footer-nav li {
    display: inline-block;
    margin-right: 20px;
}

.social-icons li{
    display: inline;
    margin-right: 20px;
}

.footer-nav li a:link,
.footer-nav li a:visited,
.icon-contact1:link,
.icon-contact1:visited,
.icon-contact2:link,
.icon-contact2:visited,
.icon-contact3:link,
.icon-contact3:visited,
.icon-contact4:link,
.icon-contact4:visited
{
    text-decoration: none;
    border: 0;
    color: #888;
    -webkit-transition: color 0.2s;
    transition: color 0.2s;
}

.footer-nav li a:hover,
.footer-nav li a:active {
    color: #ddd;
}

.icon-contact:link,
.icon-contact:visited {
    font-size: 170%;
}

    ○ style_login.css
/*GOLD COLOR #ecc68*/
/*DARK BLUE COLOR #0a0e13*/

* {
    margin:0;
    padding:0;
    box-sizing: border-box;
}

html {
    background-color: #fff;
    color: #555;
}

```

```

font-family: 'Lato';
font-size: 20px;
font-weight: 200;
text-rendering: optimizeLegibility;
}

html, body, div, span, applet, object, iframe, h1, h2,
h3, h4, h5, h6, p, blockquote, pre, a, abbr, acronym,
address, big, cite, code, del, dfn, em, font, img, ins,
kbd, q, s, samp, small, strike, strong, sub, sup, tt, var,
b, u, i, center, dl, dt, dd, ol, ul, li, fieldset, form, label,
legend, caption {
    margin: 0;
    padding: 0;
    border: 0;
    outline: 0;
    font-size: 100%;
    vertical-align: baseline;
    background: transparent;
}

.clearfix {
    zoom:1
}
.clearfix:after {
    content: " ";
    clear: both;
    display: block;
    height: 0;
    visibility: hidden;
}

.row {
    max-width: 1140px;
    margin: 0 auto; /*set right margin to auto and left
margin to auto - center top,bottom=0 and
left,right=auto*/
}

.text-box{
    position:absolute; /*we can vertically and
horizontally center it*/
    width:1140px;
    top:45%;
    left:19%;
}

/*HEADINGS*/

h2 {
    margin-bottom: 40px;
    color: #000;
    font-weight: 400;
    font-size: 25px;
}

```



Industrial Informatics – Project

```
font-family: 'Lato';
text-align: center;
}

h3 {
color: #eccc68;
font-family: 'Dancing Script', sans-serif;
font-size: 35px;
margin-left: 520px;
margin-top: 100px
}

h3:after {
display: block;
height: 2px;
background-color: #eccc68;
content: " ";
width: 170px;
margin-left: -38px;
margin-top: 10px;
margin-bottom: 10px;
}

/*HEADER*/

header {
background-image: linear-gradient(#fff, #fff);
background-size: cover; /*in order to see the
whole image*/
background-position: center; /*centers the image*/
min-height: 100vh; /*100% of the viewport*/
}

/*Buttons*/

.btn {
display: inline-block;
padding: 10px 20px;
font-weight: 300;
border-radius: 10px;
border: 1px solid #eccc68;
color: #fff;
transition: background-color 0.4s;
}

.full-btn {
background-color: #eccc68;
}

.full-btn:hover,
.full-btn:active {

background-color: #d4b85e;
}

/*FORM - CLIENTS*/

input {
padding: 5px;
border-radius: 5px;
border: 1px solid #9b9b9b;
margin-bottom: 10px;
}

.birthday {
width: 110%;
}

::placeholder {
color: rgba(78, 78, 78, 0.54);
font-weight: 100;
}

.login-ref {
color: #000;
font-size: 15px;
text-decoration: underline;
margin-left: -40px;
}

.login-ref:hover,
.login-ref:active {
color: #40629a;
}

.login {
text-align: center;
}

.labels,
.btn {
margin-left: -146px;
}

.username,
.password {
width: 220px;
}

.radio-label {
font-weight: 400;
font-family: 'Lato';
}

/*NAVIGATION*/
```



Industrial Informatics – Project

```
h1 {  
    margin: 0;  
    margin-bottom: 15px;  
    color: #fff;  
    font-size: 40px; /*autumatically adjusting its size  
from the html size*/  
}  
  
.navigation {  
    background-color: #000;  
    box-shadow: 0 2px 2px #101010;  
    height: 14%;  
}  
  
.logo {  
    font-family: 'Dancing Script', sans-serif;  
    text-transform: none;  
    float: left;  
    margin-top: 20px;;  
}  
  
.navi {  
    float: right;  
    list-style: none; /*get rid of the bullet points*/  
    margin-top: 40px;  
}  
  
.navi li{ /*select all li elements inside the nav*/  
    display: inline;  
    margin-left: 30px;  
}  
  
.navi li a:link,  
.navi li a:visited {  
    color: #fff;  
    text-decoration: none; /*get rid of the underline*/  
    text-transform: uppercase;  
    font-size: 14px;  
    transition: color 0.2s;  
}  
  
.navi li a:hover,  
.navi li a:active {  
    color: #eccc68;  
}  
  
.navigation-hidden {  
    background-color: #000;  
    box-shadow: 0 2px 2px #101010;  
    height: 14%;  
    display: none;  
}  
  
/*FOOTER*/  
  
footer {  
    background-color: #0a0e13;  
}  
  
.working-hours {  
    color: #eccc68  
}  
  
footer p {  
    margin: 7px;  
    text-align: center;  
    font-size: 14px;  
    color: #fff;  
}  
  
footer h1 {  
    padding-top: 5%;  
    margin-top: 40px;  
    margin-bottom: 40px;  
}  
  
.footer-logo {  
    font-family: 'Dancing Script', sans-serif;  
    text-transform: none;  
    text-align: center;  
}  
  
.footer-nav {  
    padding-top: 10px;  
    list-style: none;  
    float: left;  
    font-size: 16px;  
}  
  
.icon-contact1,  
.icon-contact2,  
.icon-contact3,  
.icon-contact4 {  
    padding-top: 10px;  
    list-style: none;  
    float: right;  
    width: 20px;  
    display: inline-block;  
    margin-right: 20px;  
    filter: invert(54%) sepia(4%) saturate(3%) hue-  
rotate(340deg) brightness(98%) contrast(92%);  
    transition: filter 0.5s;  
}  
  
.icon-contact4 {  
    margin-right: 0;  
}
```



Industrial Informatics – Project

```
}

.icon-contact1:hover,
.icon-contact2:hover,
.icon-contact3:hover,
.icon-contact4:hover {
    filter: invert(100%) sepia(43%) saturate(3271%)
    hue-rotate(321deg) brightness(103%) contrast(85%);
}

.footer-nav li {
    display: inline-block;
    margin-right: 20px;
}

}

.social-icons li{
    display: inline;
    margin-right: 20px;
}

.footer-nav li a:link,
.footer-nav li a:visited,
.icon-contact1:link,
.icon-contact1:visited,
.icon-contact2:link,
.icon-contact2:visited,
.icon-contact3:link,
.icon-contact3:visited,
.icon-contact4:link,
.icon-contact4:visited
{
    text-decoration: none;
    border: 0;
    color: #888;
    -webkit-transition: color 0.2s;
    transition: color 0.2s;
}

.footer-nav li a:hover,
.footer-nav li a:active {
    color: #ddd;
}

.icon-contact:link,
.icon-contact:visited {
    font-size: 170%;
}

    ○ style_form.css
/*GOLD COLOR #eccc68*/
/*DARK BLUE COLOR #0a0e13*/
* {

    margin:0;
    padding:0;
    box-sizing: border-box;
}

html {
    background-color: #fff;
    color: #555;
    font-family: 'Lato', sans-serif;
    font-size: 20px;
    font-weight: 200;
    text-rendering: optimizeLegibility;
}

html, body, div, span, applet, object, iframe, h1, h2, h3, h4, h5, h6, p, blockquote, pre, a, abbr, acronym, address, big, cite, code, del, dfn, em, font, img, ins, kbd, q, s, samp, small, strike, strong, sub, sup, tt, var, b, u, i, center, dl, dt, dd, ol, ul, li, fieldset, form, label, legend, caption {
    margin: 0;
    padding: 0;
    border: 0;
    outline: 0;
    font-size: 100%;
    vertical-align: baseline;
    background: transparent;
}

.clearfix {
    zoom:1
}
.clearfix:after {
    content:" ";
    clear: both;
    display: block;
    height: 0;
    visibility: hidden;
}

.row {
    max-width: 1140px;
    margin: 0 auto; /*set right margin to auto and left margin to auto - center top,bottom=0 and left,right=auto*/
}

.text-box{
    position:absolute; /*we can vertically and horizontally center it*/
    width:1140px;
    top:45%;
    left:19%;
}
```



Industrial Informatics – Project

```
/*HEADINGS*/  
  
h1 {  
    margin: 0;  
    margin-bottom: 15px;  
    color: #fff;  
    font-size: 240%; /*autumatically adjusting its size  
from the html size*/  
    letter-spacing: 1px;  
    word-spacing: 4px;  
    text-transform: uppercase;  
}  
  
h2 {  
    margin-bottom: 40px;  
    color: #000;  
    font-weight: 400;  
    font-size: 25px;  
    font-family: 'Lato';  
    text-align: center;  
}  
  
h3 {  
    color: #eccc68;  
    font-family: 'Dancing Script', sans-serif;  
    font-size: 35px;  
    margin-left: 520px;  
    margin-top: 100px  
}  
  
h3:after {  
    display: block;  
    height: 2px;  
    background-color: #eccc68;  
    content: " ";  
    width: 170px;  
    margin-left: -38px;  
    margin-top: 10px;  
    margin-bottom: 10px;  
}  
  
.title {  
    margin-left: 450px;  
}  
  
/*HEADER*/  
  
header {  
    background-image: linear-gradient(#fff, #fff);  
    background-size: cover; /*in orderd to see the  
whole image*/  
    background-position: center; /*centers the image*/  
}  
  
min-height: 100vh; /*100% of the viewport*/  
}  
  
/*Buttons*/  
  
.btn {  
    display: inline-block;  
    padding: 10px 20px;  
    font-weight: 300;  
    border-radius: 10px;  
    border: 1px solid #eccc68;  
    color: #fff;  
    transition: background-color 0.4s;  
}  
  
.full-btn {  
    background-color: #eccc68;  
}  
  
.full-btn:hover,  
.full-btn:active {  
    background-color: #d4b85e;  
}  
  
/*FORM - CLIENTS*/  
.contact-form{  
    width:60%;  
    margin-left:auto;  
    margin-right: 70px;  
    margin-bottom: 100px;  
}  
  
input {  
    padding: 5px;  
    border-radius: 5px;  
    border: 1px solid #9b9b9b;  
    margin-bottom: 10px;  
}  
  
.birthday{  
    width: 110%;  
}  
  
::placeholder {  
    color: rgba(78, 78, 78, 0.54);  
    font-weight: 100;  
}  
  

```



Industrial Informatics – Project

```
.login-ref{  
    color: #000;  
    font-size: 15px;  
    text-decoration: underline;  
}  
  
.login-ref:hover,  
.login-ref:active{  
    color: #40629a;  
}  
  
.login {  
    margin-left:140px;  
    margin-top: 25px;  
}  
  
.name,  
.surname,  
.email,  
.username,  
.password {  
    width:220px;  
}  
  
.surname {  
    margin-left: -20px;  
}  
  
/*NAVIGATION*/  
  
h1 {  
    margin: 0;  
    margin-bottom:15px;  
    color:#fff;  
    font-size: 40px; /*autumatically adjusting its size  
from the html size*/  
}  
  
.navigation {  
    background-color: #000;  
    box-shadow: 0 2px 2px #101010;  
    height: 14%;  
}  
  
.logo {  
    font-family: 'Dancing Script', sans-serif;  
    text-transform: none;  
    float: left;  
    margin-top: 20px;;  
}  
  
.navi{  
    float:right;  
    list-style: none; /*get rid of the bullet points*/  
    margin-top: 40px;  
}  
  
.navi li{ /*select all li elements inside the nav*/  
    display: inline;  
    margin-left: 30px;  
}  
  
.navi li a:link,  
.navi li a:visited {  
    color: #fff;  
    text-decoration: none; /*get rid of the underline*/  
    text-transform: uppercase;  
    font-size: 14px;  
    transition: color 0.2s;  
}  
  
.navi li a:hover,  
.navi li a:active {  
    color: #eccc68;  
}  
  
.navigation-hidden {  
    background-color: #000;  
    box-shadow: 0 2px 2px #101010;  
    height: 14%;  
    display: none;  
}  
  
/*FOOTER*/  
  
footer {  
    background-color: #0a0e13;  
}  
  
.working-hours {  
    color: #eccc68  
}  
  
footer p {  
    margin: 7px;  
    text-align: center;  
    font-size: 14px;  
    color: #fff;  
}  
  
footer h1 {  
    padding-top: 5%;  
    margin-top: 40px;  
    margin-bottom: 40px;  
}
```



Industrial Informatics – Project

```
.footer-logo {  
    font-family: 'Dancing Script', sans-serif;  
    text-transform: none;  
    text-align: center;  
}  
  
.footer-nav {  
    padding-top: 10px;  
    list-style: none;  
    float: left;  
    font-size: 16px;  
}  
  
.icon-contact1,  
.icon-contact2,  
.icon-contact3,  
.icon-contact4 {  
    padding-top: 10px;  
    list-style: none;  
    float: right;  
    width: 20px;  
    display: inline-block;  
    margin-right: 20px;  
    filter: invert(54%) sepia(4%) saturate(3%) hue-rotate(340deg) brightness(98%) contrast(92%);  
    transition: filter 0.5s;  
}  
  
.icon-contact4 {  
    margin-right: 0;  
}  
  
.icon-contact1:hover,  
.icon-contact2:hover,  
.icon-contact3:hover,  
.icon-contact4:hover {  
    filter: invert(100%) sepia(43%) saturate(3271%) hue-rotate(321deg) brightness(103%) contrast(85%);  
}  
  
.footer-nav li {  
    display: inline-block;  
    margin-right: 20px;  
}  
  
.social-icons li {  
    display: inline;  
    margin-right: 20px;  
}  
  
.footer-nav li a:link,  
.footer-nav li a:visited,  
.icon-contact1:link,  
.icon-contact1:visited,  
.icon-contact2:link,  
.icon-contact2:visited,  
.icon-contact3:link,  
.icon-contact3:visited,  
.icon-contact4:link,  
.icon-contact4:visited {  
    text-decoration: none;  
    border: 0;  
    color: #888;  
    -webkit-transition: color 0.2s;  
    transition: color 0.2s;  
}  
  
.footer-nav li a:hover,  
.footer-nav li a:active {  
    color: #ddd;  
}  
  
.icon-contact:link,  
.icon-contact:visited {  
    font-size: 170%;  
}  
    ○ style_findus.css  
/*GOLD COLOR #eccc68*/  
/*DARK BLUE COLOR #0a0e13*/  
  
* {  
    margin: 0;  
    padding: 0;  
    -webkit-box-sizing: border-box;  
    box-sizing: border-box;  
}  
  
html, body {  
    overflow-x: hidden;  
    background-color: #fff;  
    color: #555;  
    font-family: 'Lato', sans-serif;  
    font-size: 20px;  
    font-weight: 200;  
    text-rendering: optimizeLegibility;  
    overflow-x: hidden;  
    scroll-behavior: smooth;  
}  
  
html, body, div, span, applet, object, iframe, h1, h2, h3, h4, h5, h6, p, blockquote, pre, a, abbr, acronym, address, big, cite, code, del, dfn, em, font, img, ins, kbd, q, s, samp, small, strike, strong, sub, sup, tt, var,
```



Industrial Informatics – Project

```
b, u, i, center, dl, dt, dd, ol, ul, li, fieldset, form, label,  
legend, caption {  
    margin: 0;  
    padding: 0;  
    border: 0;  
    outline: 0;  
    font-size: 100%;  
    vertical-align: baseline;  
    background: transparent;  
}  
  
/*CLEARING THE FLOATS*/  
  
.clearfix {  
    zoom:1  
}  
.clearfix:after {  
    content:" ";  
    clear: both;  
    display: block;  
    height: 0;  
    visibility: hidden;  
}  
  
.row {  
    max-width: 1140px;  
    margin: 0 auto; /*set right margin to auto and left  
margin to auto - center top,bottom=0 and  
left,right=auto*/  
}  
  
.text-box{  
    position:absolute; /*we can vertically and  
horizontally center it*/  
    width:1140px;  
    top:40%;  
    left:19%;  
}  
  
/*HEADINGS*/  
  
h3 {  
    margin-bottom:15px;  
    color: #000;  
    font-size: 20px; /*autumatically adjusting its size  
from the html size*/  
    letter-spacing: 1px;  
    word-spacing: 4px;  
    text-transform: uppercase;  
    font-weight: 400;  
}  
  
h2 {  
    color: #eccc68;  
}  
  
font-family: 'Dancing Script', sans-serif;  
font-size: 35px;  
text-align: center;  
margin-bottom: 10px;  
margin-top:80px;  
}  
  
h2:after {  
    display: block;  
    height: 2px;  
    background-color: #eccc68;  
    content: " ";  
    width: 450px;  
    margin-right: auto;  
    margin-left: auto;  
    margin-top: 10px;  
}  
  
.icon-small {  
    height: 20px;  
    display: inline;  
    width: 30px;  
    -webkit-filter: invert(44%) sepia(94%)  
    saturate(636%) hue-rotate(354deg) brightness(89%)  
    contrast(87%);  
    filter: invert(44%) sepia(94%) saturate(636%) hue-  
    rotate(354deg) brightness(89%) contrast(87%);  
  
/*Secrets to align text and icons*/  
margin-top: -4px;  
}  
  
}  
  
.img-row {  
    width: 300px;  
    height: auto;  
    margin-bottom: 20px;  
}  
  
.city-feature {  
    margin-bottom: 5px;  
}  
  
.box {  
    text-align:center;  
    margin-top:60px;  
    margin-bottom:100px;  
}  
  
.third {  
    margin-left:-75px;  
}  
  
.last {
```



Industrial Informatics – Project

```
        margin-left:-17px;
    }

/*NAVIGATION*/

h1 {
    margin: 0;
    margin-bottom:15px;
    color:#fff;
    font-size: 40px; /*autumatically adjusting its size
from the html size*/
}

.navigation {
    background-color: #000;
    box-shadow: 0 2px 2px #101010;
    height: 14%;
}

.logo {
    font-family: 'Dancing Script', sans-serif;
    text-transform: none;
    float: left;
    margin-top: 20px;;
}

.navi{
    float:right;
    list-style: none; /*get rid of the bullet points*/
    margin-top: 40px;
}

.navi li{ /*select all li elements inside the nav*/
    display: inline;
    margin-left: 30px;
}

.navi li a:link,
.navi li a:visited {
    color: #fff;
    text-decoration: none; /*get rid of the underline*/
    text-transform: uppercase;
    font-size: 14px;
    transition: color 0.2s;
}

.navi li a:hover,
.navi li a:active {
    color: #eccc68;
}

.navigation-hidden {
    background-color: #000;
    box-shadow: 0 2px 2px #101010;
    height: 14%;
    display: none;
}

/*FOOTER*/

footer {
    background-color: #0a0e13;
}

.working-hours {
    color: #eccc68
}

footer p {
    margin: 7px;
    text-align: center;
    font-size: 14px;
    color: #fff;
}

footer h1 {
    padding-top: 5%;
    margin-top: 40px;
    margin-bottom: 40px;
}

.footer-logo {
    font-family: 'Dancing Script', sans-serif;
    text-transform: none;
    text-align: center;
}

.footer-nav {
    padding-top:10px;
    list-style: none;
    float:left;
    font-size:16px;
}

.icon-contact1,
.icon-contact2,
.icon-contact3,
.icon-contact4 {
    padding-top: 10px;
    list-style: none;
    float: right;
    width: 20px;
    display: inline-block;
    margin-right: 20px;
    filter: invert(54%) sepia(4%) saturate(3%) hue-
rotate(340deg) brightness(98%) contrast(92%);
    transition: filter 0.5s;
}
```



```

}

.icon-contact4 {
    margin-right: 0;
}

.icon-contact1:hover,
.icon-contact2:hover,
.icon-contact3:hover,
.icon-contact4:hover {
    filter: invert(100%) sepia(43%) saturate(3271%)
    hue-rotate(321deg) brightness(103%) contrast(85%);
}

.footer-nav li {
    display: inline-block;
    margin-right: 20px;
}

.social-icons li{
    display: inline;
    margin-right: 20px;
}

.footer-nav li a:link,
.footer-nav li a:visited,
.icon-contact1:link,
.icon-contact1:visited,
.icon-contact2:link,
.icon-contact2:visited,
.icon-contact3:link,
.icon-contact3:visited,
.icon-contact4:link,
.icon-contact4:visited
{
    text-decoration: none;
    border: 0;
    color: #888;
    -webkit-transition: color 0.2s;
    transition: color 0.2s;
}

.footer-nav li a:hover,
.footer-nav li a:active {
    color: #ddd;
}

.icon-contact:link,
.icon-contact:visited {
    font-size: 170%;
}

```

```

○ style_chefs.css
/*GOLD COLOR #eccc68*/
/*DARK BLUE COLOR #0a0e13*/

* {
    margin: 0;
    padding: 0;
    -webkit-box-sizing: border-box;
    box-sizing: border-box;
}

html, body {
    overflow-x: hidden;
    background-color: #fff;
    color: #555;
    font-family: 'Lato', sans-serif;
    font-size: 20px;
    font-weight: 200;
    text-rendering: optimizeLegibility;
    overflow-x: hidden;
    scroll-behavior: smooth;
}

html, body, div, span, applet, object, iframe, h1, h2, h3, h4, h5, h6, p, blockquote, pre, a, abbr, acronym, address, big, cite, code, del, dfn, em, font, img, ins, kbd, q, s, samp, small, strike, strong, sub, sup, tt, var, b, u, i, center, dl, dt, dd, ol, ul, li, fieldset, form, label, legend, caption {
    margin: 0;
    padding: 0;
    border: 0;
    outline: 0;
    font-size: 100%;
    vertical-align: baseline;
    background: transparent;
}

/*CLEARING THE FLOATS*/

.clearfix {
    zoom:1
}
.clearfix:after {
    content:" ";
    clear: both;
    display: block;
    height: 0;
    visibility: hidden;
}

.row {
    max-width: 1140px;
}

```

Industrial Informatics – Project

```
margin: 0 auto; /*set right margin to auto and left  
margin to auto - center top,bottom=0 and  
left,right=auto*/  
}  
  
.text-box{  
    position:absolute; /*we can vertically and  
horizontally center it*/  
    width:1140px;  
    top:40%;  
    left:19%;  
}  
  
/*HEADINGS*/  
  
h3 {  
    font-family: 'Dancing Script', sans-serif;  
    margin-bottom:18px;  
    margin-top:60px;  
    color: #000;  
    font-size: 28px; /*autumatically adjusting its size  
from the html size*/  
    letter-spacing: 1px;  
    word-spacing: 3px;  
    font-weight: 400;  
}  
  
p {  
    font-family: 'Lato', sans-serif;  
    margin-bottom:18px;  
    font-weight: 200;  
    font-size:18px;  
    color: #000;  
}  
  
h4 {  
    text-transform: uppercase;  
    color: #000;  
    margin-top:7px;  
}  
  
h3:before {  
    display: block;  
    height: 1px;  
    background-color: #eccc68;  
    content: " ";  
    width: 1150px;  
    text-align: center;  
    margin-top: -30px;  
    margin-bottom: 30px;  
}  
  
h3:first-child:before{  
    display: block;  
    height: 1px;  
    background-color: #eccc68;  
    content: " ";  
    width: 1150px;  
    text-align: center;  
    margin-top: -30px;  
    margin-bottom: 30px;  
}  
  
h2 {  
    color: #eccc68;  
    font-family: 'Dancing Script', sans-serif;  
    font-size: 35px;  
    text-align:center;  
    margin-bottom: 10px;  
    margin-top:60px;  
}  
  
h2:after {  
    display: block;  
    height: 2px;  
    background-color: #eccc68;  
    content: " ";  
    width: 200px;  
    margin-left:auto;  
    margin-right:auto;  
    margin-top: 10px;  
    margin-bottom: 60px;  
}  
  
.boxes{  
    margin-bottom: 50px;  
}  
  
/*HEADER*/  
  
header {  
    background-image: linear-gradient(rgba(0, 0, 0,  
0.65), rgba(0, 0, 0, 0.65)),url("../fonts/food.jpeg");  
    /*two background images on top of eachother and  
adding transparency for the first one*/  
    background-size: cover; /*in orderd to see the  
whole image*/  
    background-position: center; /*centers the image*/  
    height: 100vh; /*100% of the viewport*/  
}  
  
/*NAVIGATION*/  
  
h1 {
```



Industrial Informatics – Project

```
margin: 0;
margin-bottom:15px;
color:#ffff;
font-size: 40px; /*autumatically adjusting its size
from the html size*/
}

.navigation {
background-color: #000;
box-shadow: 0 2px 2px #101010;
height: 14%;
}

.logo {
font-family: 'Dancing Script', sans-serif;
text-transform: none;
float: left;
margin-top: 20px;;
}

.navi{
float:right;
list-style: none; /*get rid of the bullet points*/
margin-top: 40px;
}

.navi li{ /*select all li elements inside the nav*/
display: inline;
margin-left: 30px;
}

.navi li a:link,
.navi li a:visited {
color: #ffff;
text-decoration: none; /*get rid of the underline*/
text-transform: uppercase;
font-size: 14px;
transition: color 0.2s;
}

.navi li a:hover,
.navi li a:active {
color: #eccc68;
}

.navigation-hidden {
background-color: #000;
box-shadow: 0 2px 2px #101010;
height: 14%;
display: none;
}

/*FOOTER*/
```

```
footer {
background-color: #0a0e13;
}

.working-hours {
color: #eccc68
}

footer p {
margin: 7px;
text-align: center;
font-size: 14px;
color: #ffff;
}

footer h1 {
padding-top: 5%;
margin-top: 40px;
margin-bottom: 40px;
}

.footer-logo {
font-family: 'Dancing Script', sans-serif;
text-transform: none;
text-align: center;
}

.footer-nav {
padding-top:10px;
list-style: none;
float:left;
font-size:16px;
}

.icon-contact1,
.icon-contact2,
.icon-contact3,
.icon-contact4 {
padding-top: 10px;
list-style: none;
float: right;
width: 20px;
display: inline-block;
margin-right: 20px;
filter: invert(54%) sepia(4%) saturate(3%) hue-rotate(340deg) brightness(98%) contrast(92%);
transition: filter 0.5s;
}

.icon-contact4 {
margin-right: 0;
}
```



Industrial Informatics – Project

```
.icon-contact1:hover,  
.icon-contact2:hover,  
.icon-contact3:hover,  
.icon-contact4:hover {  
    filter: invert(100%) sepia(43%) saturate(3271%)  
    hue-rotate(321deg) brightness(103%) contrast(85%);  
}  
  
.footer-nav li {  
    display: inline-block;  
    margin-right: 20px;  
}  
  
.social-icons li{  
    display: inline;  
    margin-right: 20px;  
}  
  
.footer-nav li a:link,  
.footer-nav li a:visited,  
.icon-contact1:link,  
.icon-contact1:visited,  
.icon-contact2:link,  
.icon-contact2:visited,  
.icon-contact3:link,  
.icon-contact3:visited,  
.icon-contact4:link,  
.icon-contact4:visited  
{  
    text-decoration: none;  
    border: 0;  
    color: #888;  
    -webkit-transition: color 0.2s;  
    transition: color 0.2s;  
}  
  
.footer-nav li a:hover,  
.footer-nav li a:active {  
    color: #ddd;  
}  
  
.icon-contact:link,  
.icon-contact:visited {  
    font-size: 170%;  
}  
  
    ○ style_Account.css  
/*GOLD COLOR #eccc68*/  
  
/*DARK BLUE COLOR #0a0e13*/  
* {  
    margin:0;  
    padding:0;  
    box-sizing: border-box;  
}  
  
html {  
    background-color: #fff;  
    color: #555;  
    font-family: 'Lato', sans-serif;  
    font-size: 20px;  
    font-weight: 200;  
    text-rendering: optimizeLegibility;  
}  
  
html, body, div, span, applet, object, iframe, h1, h2,  
h3, h4, h5, h6, p, blockquote, pre, a, abbr, acronym,  
address, big, cite, code, del, dfn, em, font, img, ins,  
kbd, q, s, samp, small, strike, strong, sub, sup, tt, var,  
b, u, i, center, dl, dt, dd, ol, ul, li, fieldset, form, label,  
legend, caption {  
    margin: 0;  
    padding: 0;  
    border: 0;  
    outline: 0;  
    font-size: 100%;  
    vertical-align: baseline;  
    background: transparent;  
}  
  
.clearfix {  
    zoom:1  
}  
.clearfix:after {  
    content:" ";  
    clear: both;  
    display: block;  
    height: 0;  
    visibility: hidden;  
}  
  
.row {  
    max-width: 1140px;  
    margin: 0 auto; /*set right margin to auto and left  
margin to auto - center top,bottom=0 and  
left,right=auto*/  
}  
  
.text-box{  
    position:absolute; /*we can vertically and  
horizontally center it*/  
    width:1140px;
```



Industrial Informatics – Project

```
top:45%;  
left:19%;  
}  
  
/*HEADINGS*/  
  
h1 {  
margin: 0;  
margin-bottom:15px;  
color:#fff;  
font-size: 240% /*autumatically adjusting its size  
from the html size*/  
letter-spacing: 1px;  
word-spacing: 4px;  
text-transform: uppercase;  
}  
  
h3 {  
margin: 0;  
margin-bottom:10px;  
margin-left:320px;  
margin-top:30px;  
color:#000;  
font-size: 120% /*autumatically adjusting its size  
from the html size*/  
}  
  
h2 {  
color: #eccc68;  
font-family: 'Dancing Script', sans-serif;  
font-size: 35px;  
text-align: center;  
margin-top: 50px  
}  
  
h2:after {  
display: block;  
height: 2px;  
background-color: #eccc68;  
content: " ";  
width: 240px;  
margin-left: auto;  
margin-right: auto;  
margin-top: 10px;  
margin-bottom: 10px;  
}  
  
.title {  
margin-left: 450px;  
}  
  
/*HEADER*/  
  
header {  
background-image: linear-gradient(#fff, #fff);  
background-size: cover; /*in orderd to see the  
whole image*/  
background-position: center; /*centers the image*/  
min-height: 100vh; /*100% of the viewport*/  
}  
  
/*Buttons*/  
  
.btn {  
display: inline-block;  
padding: 10px 20px;  
font-weight: 300;  
border-radius: 10px;  
border: 1px solid #eccc68;  
color: #fff;  
transition: background-color 0.4s;  
width: 120px;  
margin-left:318px;  
margin-top:7px;  
margin-bottom:20px;  
}  
  
.full-btn {  
background-color: #eccc68;  
}  
  
.bf:before {  
display: block;  
height: 1px;  
background-color: #ecf0f1;  
content: " ";  
width: 550px;  
text-align: center;  
margin-top: -30px;  
margin-bottom: 30px;  
}  
  
.full-btn:hover,  
.full-btn:active {  
background-color: #d4b85e;  
}  
  
.full-blue {  
margin-bottom: 10px;  
color: #fff;  
background-color: #161d27;  
border: 1px solid #161d27;  
padding: 7px 20px;  
margin-top:7px;
```



Industrial Informatics – Project

```
margin-bottom: 60px;
}

.full-blue:hover,
.full-blue:active {
    background-color: #2d343d;
    color: #fff;
}

/*Account settings*/

.account {
}

input {
    padding: 5px;
    border-radius: 5px;
    border: 1px solid #9b9b9b;
    width: 180px;
}

.margins {
    margin-left: 320px;
}

textarea {
    border-radius: 5px;
    padding: 5px;
    border: 1px solid #9b9b9b;
    margin-top: 7px;
}

.birthday {
    display: inline;
    width: 47.5px;
}
.surname {
    margin-left: 30px;
}

.btn1 {
    margin-left: 320px;
}
.btn2 {
    margin-left: 400px;
}

    o style.css
/*GOLD COLOR #eccc68*/
/*DARK BLUE COLOR #0a0e13*/

* {
    margin: 0;
    padding: 0;
    -webkit-box-sizing: border-box;
    box-sizing: border-box;
}

html, body {
    overflow-x: hidden;
    background-color: #fff;
    color: #555;
    font-family: 'Lato', sans-serif;
    font-size: 20px;
    font-weight: 200;
    text-rendering: optimizeLegibility;
    overflow-x: hidden;
    scroll-behavior: smooth;
}

html, body, div, span, applet, object, iframe, h1, h2, h3, h4, h5, h6, p, blockquote, pre, a, abbr, acronym, address, big, cite, code, del, dfn, em, font, img, ins, kbd, q, s, samp, small, strike, strong, sub, sup, tt, var, b, u, i, center, dl, dt, dd, ol, ul, li, fieldset, form, label, legend, caption {
    margin: 0;
    padding: 0;
    border: 0;
    outline: 0;
    font-size: 100%;
    vertical-align: baseline;
    background: transparent;
}

/*CLEARING THE FLOATS*/

.clearfix {
    zoom: 1;
}
.clearfix:after {
    content: " ";
    clear: both;
    display: block;
    height: 0;
    visibility: hidden;
}

.row {
    max-width: 1140px;
    margin: 0 auto; /*set right margin to auto and left margin to auto - center top,bottom=0 and left,right=auto*/
}

.text-box{
```



Industrial Informatics – Project

```
position: absolute; /*we can vertically and
horizontally center it*/
width: 1140px;
top: 40%;
left: 19%;
}

/*HEADINGS*/

h3 {
margin-bottom: 15px;
color: #fff;
font-size: 200%; /*automatically adjusting its size
from the html size*/
letter-spacing: 1px;
word-spacing: 4px;
text-transform: uppercase;
font-weight: 400;
margin-left: 150px;
}

h2 {
color: #eccc68;
font-family: 'Dancing Script', sans-serif;
font-size: 35px;
margin-left: 340px;
margin-bottom: 10px;
}

.title1:after {
display: block;
height: 2px;
background-color: #eccc68;
content: " ";
width: 200px;
margin-left: -45px;
margin-top: 10px;
margin-bottom: 25px;
}

.title2:after {
display: block;
height: 2px;
background-color: #eccc68;
content: " ";
width: 200px;
margin-left: auto;
margin-right: auto;
margin-top: 10px;
margin-bottom: 25px;
}

.title3 {
margin-top: 30px;
}

.text-align: center;
margin-left: 0;
}

.title3:after {
display: block;
height: 2px;
background-color: #eccc68;
content: " ";
width: 200px;
margin-left: auto;
margin-right: auto;
margin-top: 10px;
margin-bottom: 25px;
}

/*HEADER*/

header {
background-image: linear-gradient(rgba(0, 0, 0,
0.65), rgba(0, 0, 0, 0.65)), url("../fonts/food.jpeg");
/*two background images on top of eachother and
adding transparency for the first one*/
background-size: cover; /*in orderd to see the
whole image*/
background-position: center; /*centers the image*/
height: 100vh; /*100% of the viewport*/
}

/*Buttons*/

.btn {
display: inline-block;
padding: 10px 25px;
margin-right: 0px;
margin-left: 0px;
font-weight: 400;
border-radius: 3px;
border: 1px solid #393939;
color: #fff;
transition: background-color 0.4s;
text-decoration: none;
}

.ghost-btn {
border: 1px solid #b1b1b1;
background-color: rgba(255, 255, 255, 0);
position: absolute;
right: 39%;
}

.full-btn {
```



Industrial Informatics – Project

```
background-color: #eccc68;
position: absolute;
right: 48%;
}

.full-btn:hover,
.full-btn:active {
    background-color: #d4b85e;
}

.ghost-btn:hover,
.ghost-btn:active {
    background-color: #eccc68;
}

/*SECTIONS*/

/*OUR STORY*/

.story-box {
    margin-top: 40px;
    margin-bottom: 20px;
}

.story-box:first-child {
    text-align: left;
}

.story-box:last-child {
    text-align: right;
}

.story-box:nth-child(2) {
    text-align: center;
}

.cooking {
    width: 100%;
}
.story-box h2 {
    margin-left: -30px;
}

.story-box h2:after {
}

/*MEALS*/

.section-food {
    padding: 0;
}

.meals-showcase {
```

```
list-style: none;
width: 100%;
}

.meals-showcase li {
    display: block;
    float: left;
    width: 25%;
}

.meal-photo {
    width: 100%;
    margin: 0;
    overflow: hidden;
    background-color: #000;
}

.meal-photo img {
    opacity: 0.7;
    width: 100%;
    height: auto;
    -webkit-transform: scale(1.15);
    transform: scale(1.15);
    -webkit-transition: opacity 0.5s, -webkit-transform 0.5s;
    transition: opacity 0.5s, -webkit-transform 0.5s;
    transition: transform 0.5s, opacity 0.5s;
    transition: transform 0.5s, opacity 0.5s, -webkit-transform 0.5s;
}

.meal-photo img:hover {
    -webkit-transform: scale(1.03);
    transform: scale(1.03);
    opacity: 1;
}

.text-food {
    text-align: center;
    margin-bottom: 15px;
}

.section-food {
    background-color: #f8f8f8;
}

/*NAVIGATION*/

h1 {
    margin: 0;
    margin-bottom: 15px;
    color: #fff;
    font-size: 40px; /*autumatically adjusting its size from the html size*/
}
```



Industrial Informatics – Project

```
}

.navigation {
    background-color: #000;
    box-shadow: 0 2px 2px #101010;
    height: 14%;
}

.logo {
    font-family: 'Dancing Script', sans-serif;
    text-transform: none;
    float: left;
    margin-top: 20px;;
}

.navi{
    float:right;
    list-style: none; /*get rid of the bullet points*/
    margin-top: 40px;
}

.navi li{ /*select all li elements inside the nav*/
    display: inline;
    margin-left: 30px;
}

.navi li a:link,
.navi li a:visited {
    color: #fff;
    text-decoration: none; /*get rid of the underline*/
    text-transform: uppercase;
    font-size: 14px;
    transition: color 0.2s;
}

.navi li a:hover,
.navi li a:active {
    color: #eccc68;
}

.navigation-hidden {
    background-color: #000;
    box-shadow: 0 2px 2px #101010;
    height: 14%;
    display: none;
}

/*FOOTER*/

footer {
    background-color: #0a0e13;
}

.working-hours {
    color: #eccc68
}

footer p {
    margin: 7px;
    text-align: center;
    font-size: 14px;
    color: #fff;
}

footer h1 {
    padding-top: 5%;
    margin-top: 40px;
    margin-bottom: 40px;
}

.footer-logo {
    font-family: 'Dancing Script', sans-serif;
    text-transform: none;
    text-align: center;
}

.footer-nav {
    padding-top:10px;
    list-style: none;
    float:left;
    font-size:16px;
}

.icon-contact1,
.icon-contact2,
.icon-contact3,
.icon-contact4 {
    padding-top: 10px;
    list-style: none;
    float: right;
    width: 20px;
    display: inline-block;
    margin-right: 20px;
    filter: invert(54%) sepia(4%) saturate(3%) hue-rotate(340deg) brightness(98%) contrast(92%);
    transition: filter 0.5s;
}

.icon-contact4 {
    margin-right: 0;
}

.icon-contact1:hover,
.icon-contact2:hover,
.icon-contact3:hover,
.icon-contact4:hover {
```



Industrial Informatics – Project

```
filter: invert(100%) sepia(43%) saturate(3271%)
hue-rotate(321deg) brightness(103%) contrast(85%);
}

.footer-nav li {
    display: inline-block;
    margin-right: 20px;
}

.social-icons li{
    display: inline;
    margin-right: 20px;
}

.footer-nav li a:link,
.footer-nav li a:visited,
.icon-contact1:link,
.icon-contact1:visited,
.icon-contact2:link,
.icon-contact2:visited,
.icon-contact3:link,
```

```
.icon-contact3:visited,
.icon-contact4:link,
.icon-contact4:visited
{
    text-decoration: none;
    border: 0;
    color: #888;
    -webkit-transition: color 0.2s;
    transition: color 0.2s;
}

.footer-nav li a:hover,
.footer-nav li a:active {
    color: #ddd;
}

.icon-contact:link,
.icon-contact:visited {
    font-size: 170%;
}
```



Sfârșit

