


RTM View Shell — Data Reference

RTSData interaction / agent-status tables

Source of truth: db/schema.sql (DDL) + db/functions/02_rtsdata_functions.sql (write/read routines) + RTM engine value literals. Tables: RTSData_Interaction, RTSData_UserStatus, RTSData_UserStatusLog. ("User" = agent throughout.)

1. ERD

Relationships are **logical** — these real-time tables are denormalized and joined by **string keys**, with no enforced foreign keys (RTM writes fast, keys are external CC ids).

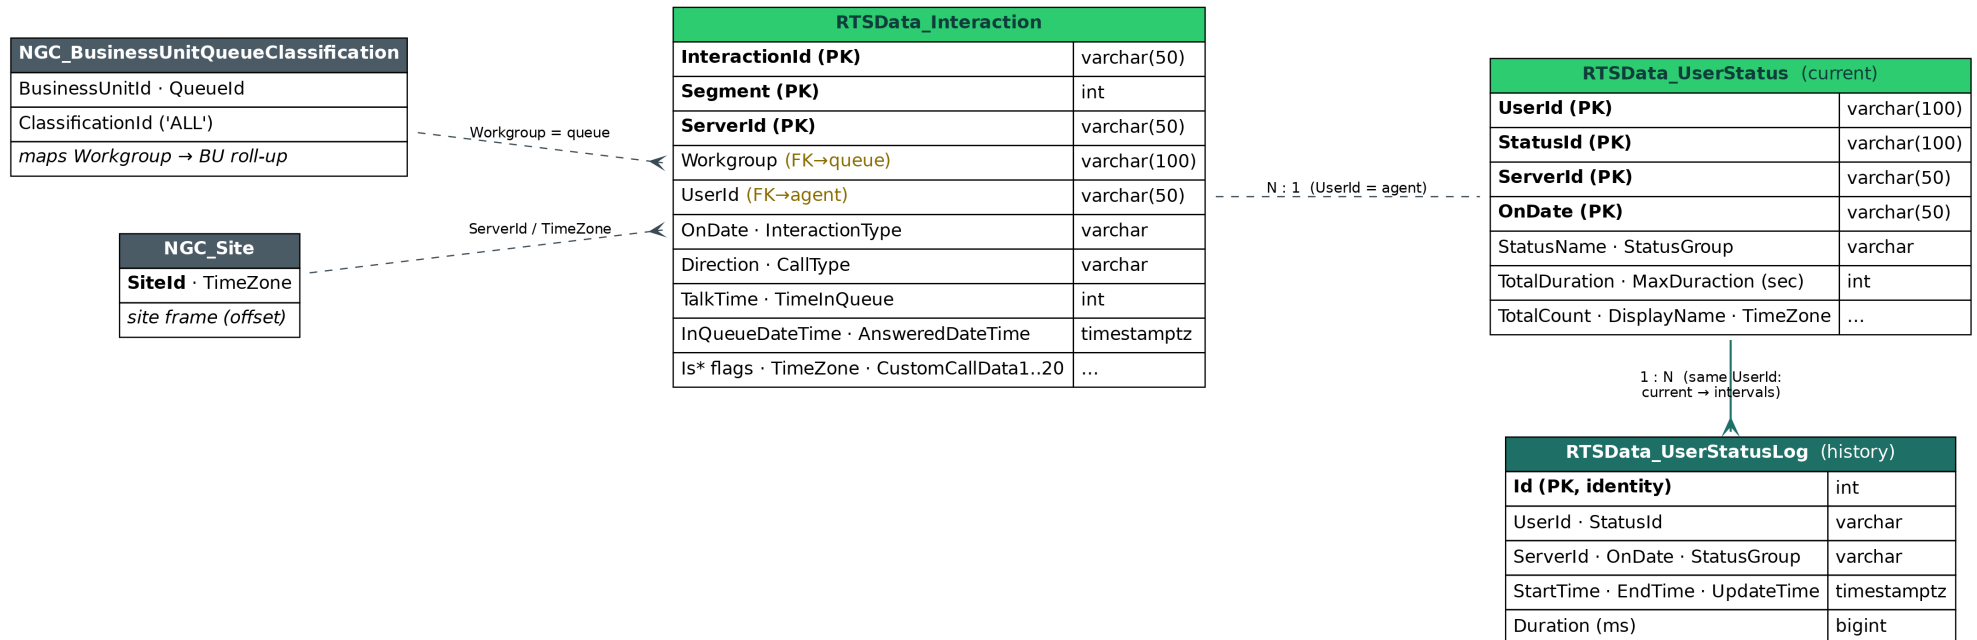

Composite natural keys (upsert targets):
- RTSData_Interaction → (InteractionId, Segment, ServerId) — unique index IX_RTSData_Interaction_Upsert
- RTSData_UserStatus → (UserId, StatusId, ServerId, OnDate).
- RTSData_UserStatusLog → surrogate Id (append-only; no natural upsert).

2. Write / lifecycle semantics

Table	Written by	Mode	Lifecycle
RTSDData_Interaction	RTSDData_SetInteraction	UPSERT on (InteractionId, Segment, ServerId)	Live + today's rows; wiped daily by the midnight-clear routine
RTSDData_UserStatus	RTSDData_SetUserStatus (snapshot part)	UPSERT on (UserId, StatusId, ServerId, OnDate)	Current state only; wiped daily by the midnight-clear routine
RTSDData_UserStatusLog	RTSDData_SetUserStatus (interval part)	APPEND-ONLY ; a row is inserted only when StartTime+EndTime present and EndTime > StartTime	Durable history ; NOT cleared at midnight

RTSDData_UserStatus = “where each agent is **right now**” (one row, overwritten). RTSDData_UserStatusLog = “**how long** each agent spent in each status” (one row per completed interval, kept) — the durable source for historical staffing.

3. RTSDData_Interaction — one row per interaction segment

Column	Type	Possible values / description
InteractionId	varchar(50) NN	External CC-platform interaction/call id (opaque string). PK part.
Segment	int NN	Segment index within the interaction: 0 = original leg; 1, 2, ... added by each transfer / conference leg. PK part.
OnDate	varchar(50) NN	Server-local business-day string (e.g. 2026-07-22). Scope key — not a timestamp; never time-filter on it. PK part.
ServerId	varchar(50) NN	RTM/CC server-node / site code (e.g. IL). PK part.
Workgroup	varchar(100) NN	Queue name (== QueueId in the model). Examples: DE - Support, US - Onboarding, Callbacks, Everyone.
UserId	varchar(50) NN, dflt ''	Agent login/id handling the segment; '' (empty) while unassigned / still in queue.
ClassificationCode	text	Classification / disposition code (adapter-defined; nullable).
InteractionType	varchar(50)	Call · Callback · Chat · Email. (Chat/Email also flagged by IsMessaging=true.)
CallType	varchar(50)	External · Internal.
Direction	varchar(50)	Incoming · Outgoing. (Realized callbacks are Outgoing.)

Column	Type	Possible values / description
CustomCallData	text	Primary attached-data slot (adapter/customer payload; nullable).
IsTransferred	bool	true if this segment was transferred; else false/null.
IsAnswered	bool	true once answered by an agent.
IsInQueue	bool	true while waiting in queue (not yet answered).
IsTalk	bool	true while in active talk.
IsAbandoned	bool	true if the caller hung up before answer.
TimeInQueue	int	Seconds spent waiting in queue (≥ 0).
TalkTime	int	Talk duration, seconds (≥ 0). WFM AHT source — talk only , no separate hold/wrap column → AHT is wrapIncluded=false.
InQueueDateTime	timestampz	When it entered the queue. Δ Stamped as UtcNow + site-offset, stored SpecifyKind(Utc) (local wall-time labelled UTC — see §6.2).
AnsweredDateTime	timestampz	When answered (same stamping convention); null if never answered.
UpdateTime	timestampz	Last write time for the row.
LastUserId	varchar(50)	Previous agent (after a transfer); nullable.
LastWorkgroup	varchar(100)	Previous queue (after a transfer); nullable.
IsMessaging	bool	true for chat/email channels (vs voice).
RemoteAddress	varchar(50)	ANI / remote-party address (e.g. phone number); nullable.
IsCallbackRequest	bool	true on the original inbound Call when it is deflected to a callback (the realized callback is a separate Outgoing row). λ dedup marker: 1 arrival, not 2.
TimeZone	varchar(10)	Per-row site TZ offset used to stamp the datetimes. Examples: +02:00, -04:00, +00:00, +12:00; occasionally an IANA name; can be misconfigured (e.g. DE -01:00) but stays self-consistent with the stamp.
CustomCallData1 ... CustomCallData20	text × 20	20 additional attached-data slots (customCallData1..20 from the adapter); each nullable.

4. RTSDData_UserStatus — CURRENT agent-status snapshot

Column	Type	Possible values / description
UserId	varchar(100) NN	Agent login/id. PK part.
StatusId	varchar(100) NN	Raw status code from the CC platform. PK part.
ServerId	varchar(50) NN	RTM/CC server-node / site code. PK part.
OnDate	varchar(50) NN	Server-local business-day string. PK part.
StatusName	varchar(100)	Granular per-state name. Examples seen live: Available, Incoming Ext Call, Ringing, Back Office, Meeting, Callback Outgoing, Callback Incoming, Special Projects, Unavailable, Lunch, Training.
StatusGroup	varchar(100)	Canonical status group the state rolls up to — the WFM “serving-groups” (N) source. Canonical groups: AVAILABLE · ONPHONE · PAPERWORK · BREAK · TRAINING · UNAVAILABLE . (May also appear title-cased in some configs: Available, On Phone, Paperwork, Break, Training, Unavailable.)
TotalDuration	int	Cumulative seconds in this status today (≥ 0).
MaxDuration	int	Max single-occurrence duration, seconds . ⚠ Column name is misspelled MaxDuraction in the schema — keep as-is.
TotalCount	int	Number of times the agent entered this status today (≥ 0).
UpdateTime	timestampz	Last update.
DisplayName	varchar(100)	Agent display name (e.g. Mirna Barakat).
TimeZone	varchar(10)	Per-row site TZ offset (as in §3).

5. RTSDData_UserStatusLog — agent-status INTERVAL history (append-only)

One row per **completed** status interval. NOT cleared at midnight → durable source for historical staffing (e.g. the planned WFM Graph).

Column	Type	Possible values / description
Id	int IDENTITY, PK	Surrogate auto-increment key (1, 2, ...).
UserId	varchar(100)	Agent login/id.

Column	Type	Possible values / description
StatusId	varchar(100)	Raw status code for the interval.
ServerId	varchar(50)	RTM/CC server-node / site code.
OnDate	varchar(50)	Server-local business-day string.
StartTime	timestampz	Interval start.
EndTime	timestampz	Interval end (> StartTime; a row is only written once the interval is closed).
Duration	bigint	Interval length in milliseconds = (EndTime – StartTime) × 1000. ⚠ Milliseconds here vs seconds in RTSDData_UserStatus.TotalDuration.
UpdateTime	timestampz	Write time.
TimeZone	varchar(10)	Per-row site TZ offset.
StatusGroup	varchar(50)	Canonical group of the interval (AVAILABLE/ONPHONE/PAPERWORK/BREAK/TRAINING/UNAVAILABLE). Note: varchar(50) here vs varchar(100) on UserStatus.StatusGroup.

6. Notes / gotchas

1. **OnDate is varchar, not a date** — a business-day scope key. Never filter time ranges on it; use the timestampz columns (InQueueDateTime / AnsweredDateTime / UpdateTime / StartTime / EndTime).
2. **Timezone stamping** — InQueueDateTime / AnsweredDateTime hold **site-local wall time labelled as UTC** (UtcNow + TimeZone-offset, SpecifyKind(Utc)). Any windowing must frame with the row's own TimeZone to stay self-consistent. A wrong site offset (e.g. DE -01:00) is self-consistent for windowing but skews cross-TZ display.
3. **Current vs history** — RTSDData_UserStatus cannot answer “how many agents were serving at time T” (current only). Use RTSDData_UserStatusLog interval overlap. This is the key dependency for historical staffing views.
4. **Duration units differ** — RTSDData_UserStatusLog.Duration = **ms**; RTSDData_UserStatus.TotalDuration / MaxDuration = **seconds**.
5. **Midnight clear** wipes RTSDData_Interaction + RTSDData_UserStatus daily; the **Log survives**. Live views reset at the business-day boundary; interval history persists.
6. **Callback dedup** — a deflected call keeps ONE Incoming row with IsCallbackRequest=true; the executed callback is a separate Outgoing row → arrivals (λ) filter Direction='Incoming' to avoid double-counting.
7. **Serving-group ↔ state mapping** — StatusName (granular, e.g. Incoming Ext Call, Back Office) rolls up to StatusGroup (canonical, e.g. ONPHONE, PAPERWORK). Which StatusGroups count as “serving” is per-deployment WFM config.
8. **Schema quirks to preserve** — MaxDuration (typo); StatusGroup width mismatch (varchar(50) in Log vs varchar(100) in UserStatus).