



03

Git & GitHub & Markdown

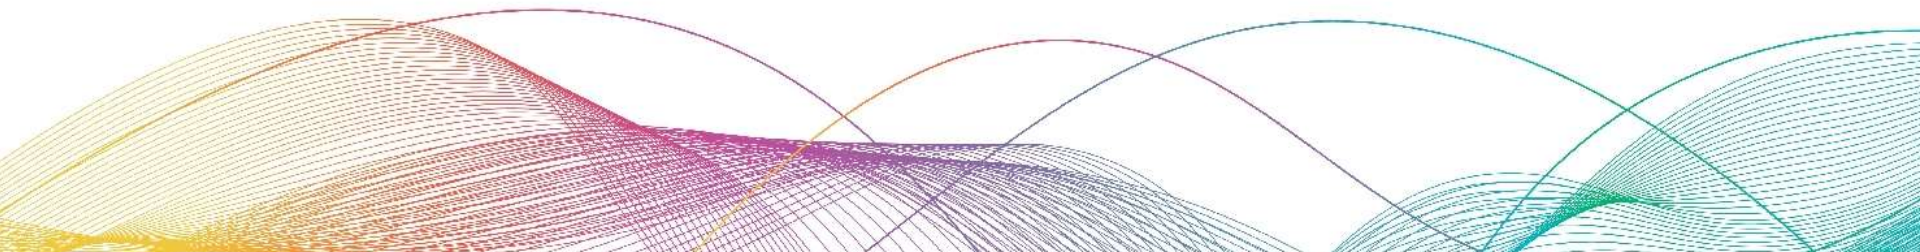

Git Code Version Management

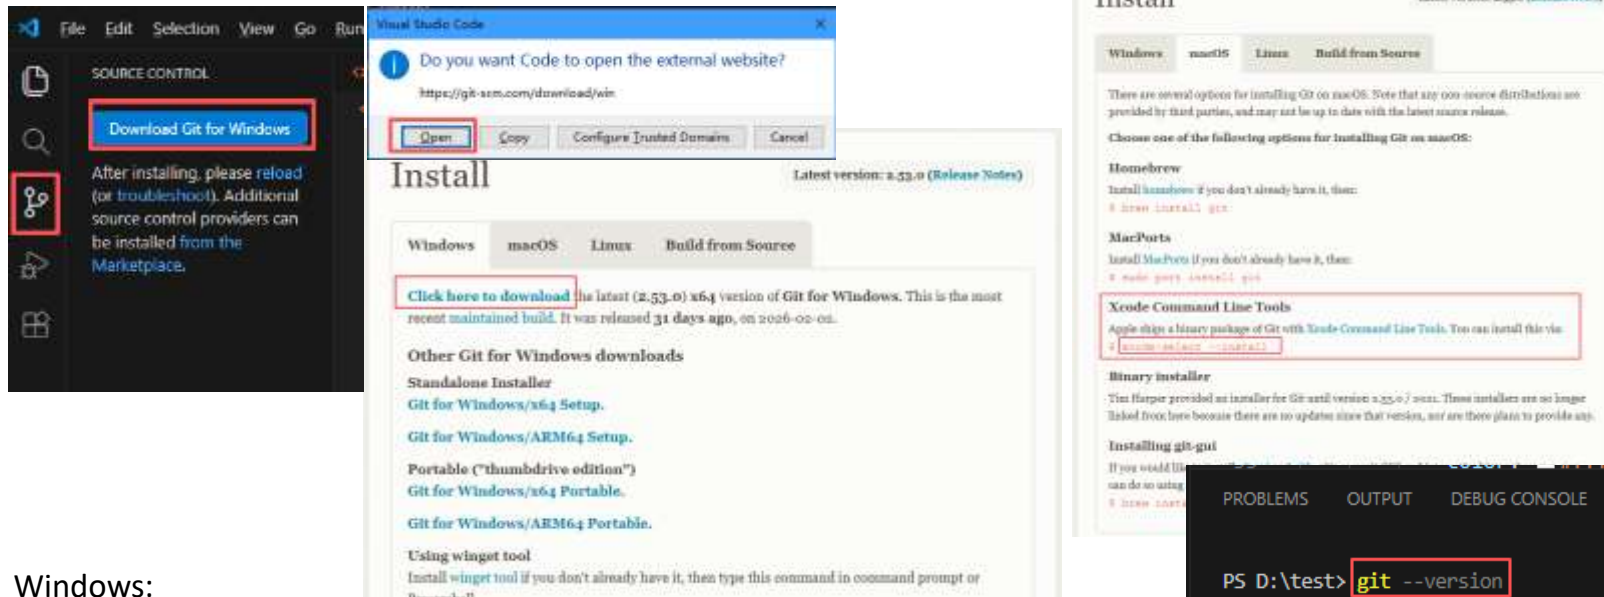


Windows:


1. During Windows installation, simply click "Next" repeatedly and use the default configuration.
2. After the installation is complete, close VSCODE and then open it again. On Windows, use `Ctrl+~` to open the terminal, enter `"git --version"`, and press Enter

macOS:

1. Open VSCODE, use the shortcut key `control+~` to open the terminal, and enter the command `"xcode-select --install"`.
2. After the installation is complete, enter the command `"git --version"` in the terminal and press Enter.

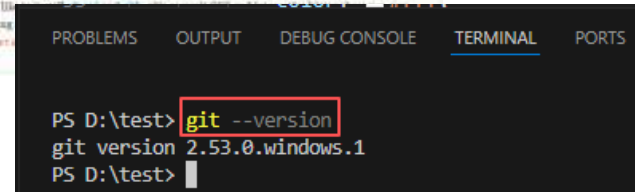

Git Code Version Management

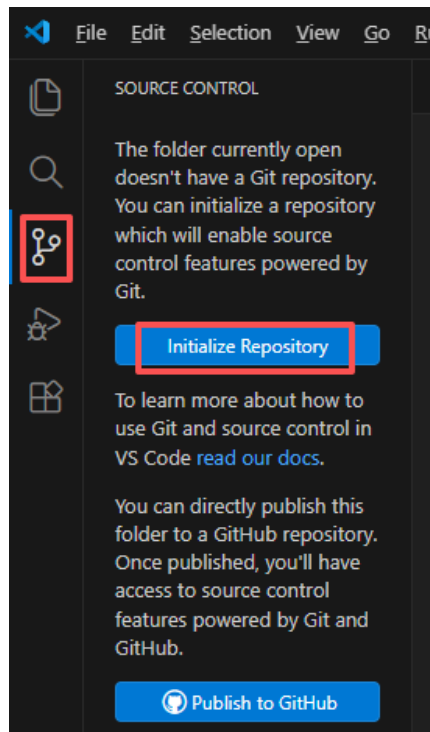

Configure user information:

Open the terminal and enter

```
"git config --global user.name "a""
```

```
"git config --global user.email "a@bcom""
```

Enter the command "git config user.name" to check if the return is a.

```
PS C:\Users\FQM\vscode> git config user.name
a
PS C:\Users\FQM\vscode>
```

Initialize the local Git repository:

Enter in terminal

```
"git init"
```

```
PS C:\Users\FQM\vscode> git init
Reinitialized existing Git repository in C:/Users/FQM/vscode/.git/
```

Git Code Version Management

"**git add .**":Add all files to temporary storage

"**git commit -m "remarks"**":Submit backup (remarks must be written)

```
PS C:\Users\FQM\vscode> git add .
warning: in the working copy of '3dpong.html', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'Pong Game/index.html', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'Pong Game/script.js', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'Pong Game/style.css', LF will be replaced by CRLF the next time Git touches it
PS C:\Users\FQM\vscode> git commit -m "0.1"
[main (root-commit) 0c9737d] 0.1
 5 files changed, 1383 insertions(+)
 create mode 100644 3dpong.html
 create mode 100644 Pong Game/index.html
 create mode 100644 Pong Game/script.js
 create mode 100644 Pong Game/style.css
 create mode 100644 test.py
```

"**git checkout .**":Abandon modifications

```
PS C:\Users\FQM\vscode> git checkout .
Updated 1 path from the index
```

Submit code to GitHub

Register a GitHub account:

1. Open the browser and enter "https://github.com/"
2. Click on "Sign up" in the upper right corner to register
3. Record the username and email provided during registration, which will be used in the future
4. After completing the verification, a verification code will be sent to the email. Login to the email to obtain the verification and enter it

or

Email*

3641906531@qq.com

Password*

Password should be at least 15 characters OR at least 8 characters including a number and a lowercase letter.

Username*

FQM36

Username may only contain alphanumeric characters or single hyphens, and cannot begin or end with a hyphen.

Your Country/Region*

China

For compliance reasons, we're required to collect country information to send you occasional updates and announcements.

Create account >


Submit code to GitHub

GitHub creates an empty repository:

Go back to the top right corner of the GitHub homepage and click+→ New repository

Fill in warehouse information:

- 1.Repository name: Warehouse name (in English, without spaces)
- 2.Description: Optional, warehouse description
- 3.Public/Private: Public/Private repositories
- 4.Key: Do not check "Add a README file", "Add. gitignore", "Choose a license" (checking "will cause conflicts in the first push)
- 5.Click on 'Create repository' to complete the creation process

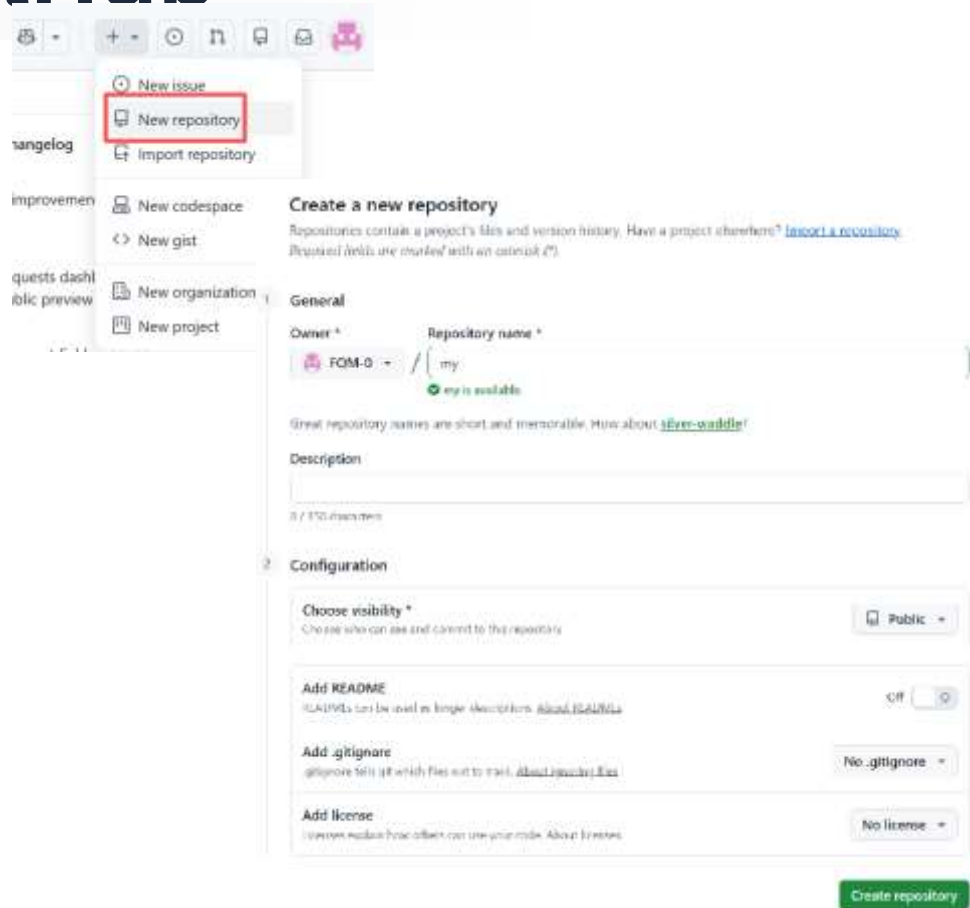

Submit code to GitHub

Select HTTPS and copy the link:

<https://github.com/FQM-0/VibeCoding.git>

Quick setup — if you've done this kind of thing before

 Set up in Desktop

or

HTTPS

SSH

<https://github.com/FQM-0/VibeCoding.git>

Get started by [creating a new file](#) or [uploading an existing file](#). We recommend every repository include a [README](#), [LICENSE](#), and [.gitignore](#)

...or create a new repository on the command line

```
echo "# VibeCoding" >> README.md
git init
git add README.md
git commit -m "first commit"
git branch -M main
git remote add origin https://github.com/FQM-0/VibeCoding.git
git push -u origin main
```


...or push an existing repository from the command line

```
git remote add origin https://github.com/FQM-0/VibeCoding.git
git branch -M main
git push -u origin main
```


Submit code to GitHub



VSCODE login:

1. Open VSCODE, click the account button in the lower left corner, and select Sign in to use AI features

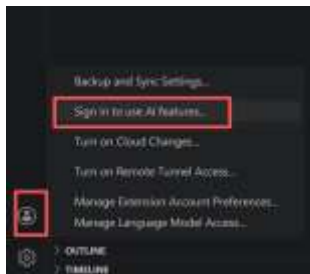

2. Select the first option in the pop-up window, 'Continue with GitHub'

3. At this point, the browser will open and access GitHub. If GitHub is not logged in, please log in first. After logging in, click the Continue button.

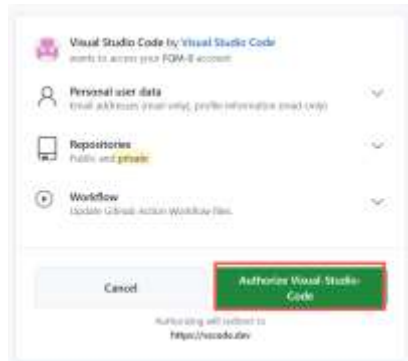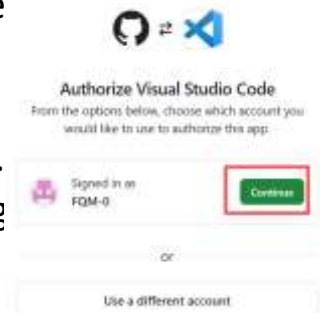

4. Continue clicking the Authorize Visual-Studio-Code button after page jump



5. Check it and click the VSCODE button to open it

Submit code to GitHub

Configure user information:

Open the terminal and enter

"git config --global user.name "your username""

"git config --global user.email "your email""

Enter the command "git config user.name" to check
if the return is your username.

```
PS C:\Users\FQM\vscode> git config --global user.name "FQM36"
PS C:\Users\FQM\vscode> git config --global user.email "3641906531@qq.com"
PS C:\Users\FQM\vscode> git config user.name
FQM36
```

Submit code to GitHub

1.VSCode initializes Git repository:

Open the terminal (Ctrl+~), enter "**git init**", and press enter

2.Temporarily store and submit code to local repository:

Enter "**git add .**", "**git commit -m 'V0.1'**" respectively in the terminal

3.Associate local repositories with GitHub remote repositories:

Enter "**git remote add origin Your warehouse address**" in the terminal

4.Push local code to GitHub remote repository:

First push:**git push -u origin main**


When the first push is made, there will be a prompt. Click the webpage, and then click "Authorize git system"

5.Follow up push: **git push**

```
PS C:\Users\FQM\vscode> git remote add origin https://github.com/FQM-0/VibeCoding.git
error: remote origin already exists.
PS C:\Users\FQM\vscode> git push -u origin main
info: please complete authentication in your browser...
Enumerating objects: 13, done.
Counting objects: 100% (13/13), done.
Delta compression using up to 8 threads
Compressing objects: 100% (12/12), done.
Writing objects: 100% (13/13), 14.20 KiB | 2.84 MiB/s, done.
Total 13 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (1/1), done.
To https://github.com/FQM-0/VibeCoding.git
 * [new branch]      main -> main
branch 'main' set up to track 'origin/main'.
```



1 your br

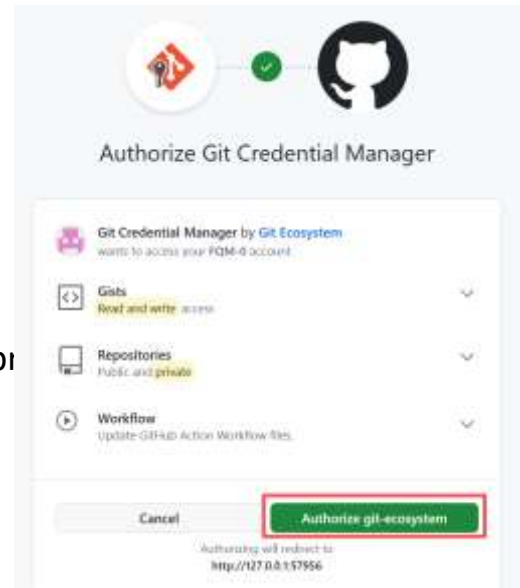

Copy repository code to local

Download the entire project for the first time:

Enter in the terminal "**git clone** Your warehouse address"

```
PS C:\Users\FQM\vscode> git clone git@github.com:FQM-0/my.git
Cloning into 'my'...
remote: Enumerating objects: 11, done.
remote: Counting objects: 100% (11/11), done.
remote: Compressing objects: 100% (9/9), done.
remote: Total 11 (delta 1), reused 11 (delta 1), pack-reused 0 (from 0)
Receiving objects: 100% (11/11), 13.99 KiB | 103.00 KiB/s, done.
Resolving deltas: 100% (1/1), done.
```

Update the code locally after the project is completed:

Enter in the terminal "**git pull**"

Split The Codes

1. In the directory containing index.html, create a new file named style.css and a new file named script.js
2. Move the style codes from index.html to style.css, and link it to the index.html
3. Move the script codes from index.html to script.js, and include it to the index.html

```
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Pong Game with Power-ups</title>
<link rel="stylesheet" href="style.css">
</head>

<script src="script.js"></script>
</body>
</html>
```





```
Users > nil > Documents > LLM > VibeCoding > crazy_pong > classic > index.html > html > body
2  <html lang="en">
3  <head>
7    <style>
74      #start-button {
75        width: 100px;
76        border: none;
77        border-radius: 5px;
78        cursor: pointer;
79      }
80
81      #start-button:hover {
82        background-color: #45a049;
83      }
84    </style>
85  </head>
```

```
<body>
<script>
  document.addEventListener('keyup', function(e) {
    // ...
  });

  // Initialize game positions
  initGame();
</script>
</body>
```

Can AI Help?

Move the style codes to style.css and the script codes to script.js, and modify the index.html.

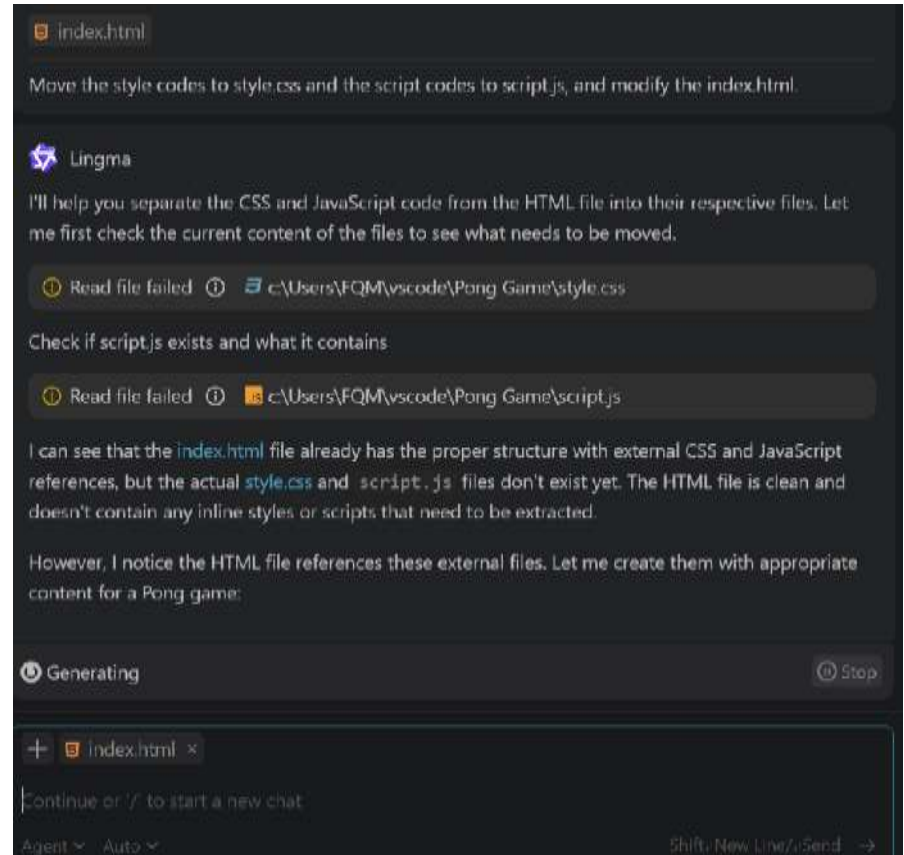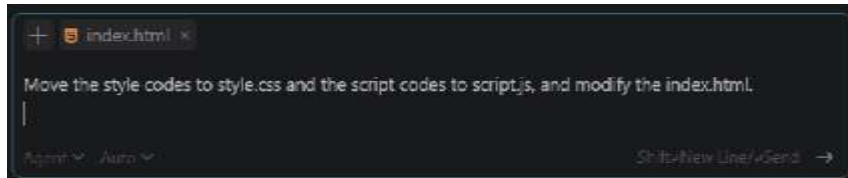


Markdown

What is Markdown?

A lightweight markup language that lets you format text using plain text symbols
Created by John Gruber in 2004

Why Use Markdown?

Advantage	Description	↓
✓ Easy to Read	Plain text format – readable even without rendering	
✓ Easy to Write	No complex tags – just simple symbols	
✓ Portable	Works everywhere: GitHub, Notion, Obsidian, blogs	
✓ Future-Proof	Plain text never goes out of style	

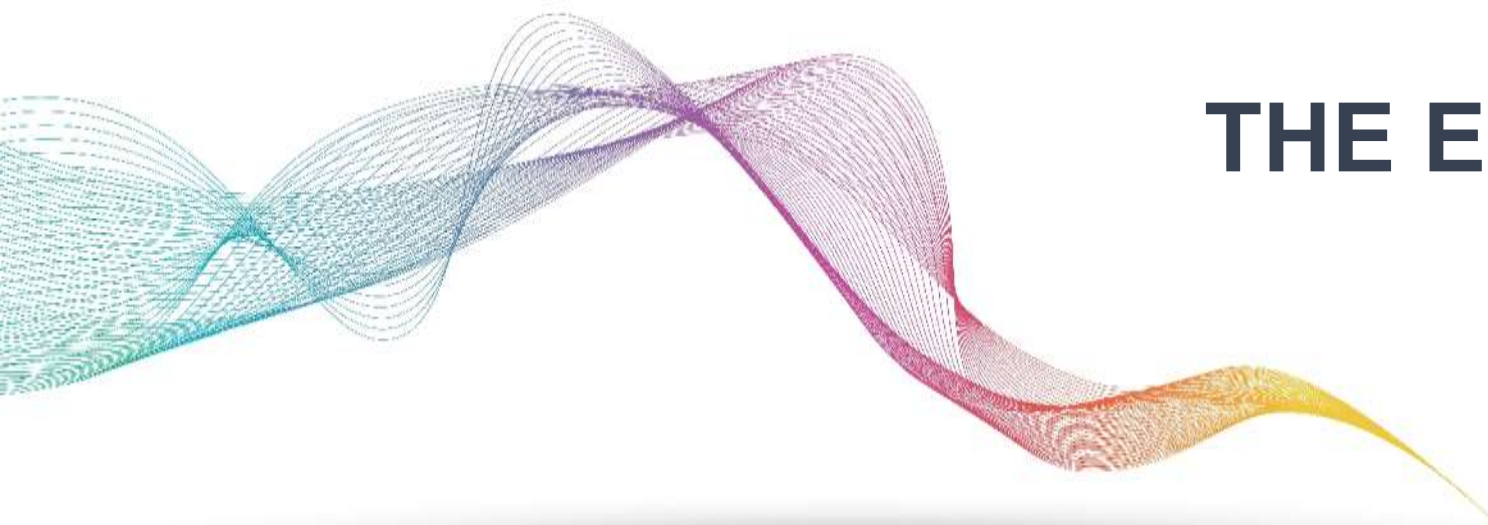

THE END