

Documentation for RandomTilings

Max van Horssen & Lennart Hübner

Department of Mathematics, KU Leuven,
Celestijnenlaan 200 B bus 2400, 3001 Leuven, Belgium
max.vanhorssen@kuleuven.be, lennart.huebner@kuleuven.be

September 29, 2025

Abstract

This document provides the documentation for the Python package `RandomTilings`, which is a translation into Python of the Matlab program `MatlabTilings` by Christophe Charlier. The underlying algorithm is the shuffling algorithm as described in [arXiv:0111034](#). This document is a reduced adaptation of the *Help file* for `MatlabTilings`. We are grateful to Christophe Charlier for allowing us to make this package publicly available.

Contents

0	Specifics of the Python package	1
1	Random tilings of the hexagon	1
1.1	<code>draw_hexagon</code>	1
1.1.1	About <code>a</code> , <code>b</code> , and <code>c</code>	2
1.1.2	The uniform weighting	2
1.1.3	A 3×3 periodic weighting	3
1.2	<code>draw_hexagon_gap</code>	3
1.2.1	A hexagon tiling with a gap	3
2	Random tilings of the Aztec diamond	4
2.1	<code>draw_aztec</code>	4
2.1.1	About <code>rotated</code>	4
2.1.2	The uniform weighting	5
2.1.3	A 2×2 periodic weighting	5
2.2	<code>draw_aztec_gap</code>	6
2.2.1	An Aztec diamond tiling with a gap	6

0 Specifics of the Python package

Let us begin with an important note. The Python package uses the `Numba` package to compile certain routines, resulting in a drastic performance improvement. This package needs to be installed to be able to run the package. The disadvantage of this package is that the type-handling is more delicate than is usually the case in Python; please be aware of this fact. In addition, the packages `NumPy` and `Matplotlib` are also required.

In the current version, not all options from `MatlabTilings` have been implemented in the Python package. Most notably, the package only produces images of tilings, and not of the corresponding non-intersecting path systems. This document mainly discusses the necessary changes important for the Python package. Some parts of the *Help file* for `MatlabTilings` are copied for context. For a more complete description, the reader should consult the *Help file*; please keep in mind that only some features are available in the Python package.

1 Random tilings of the hexagon

1.1 `draw_hexagon`

The routine `draw_hexagon` generates a random tiling of a hexagon for a given *periodic weighting*. The syntax is given by: `draw_hexagon(n,w,a,b,c,edge,dpi,show_figure)`. By default, `a=1,b=1,c=1,edge=0,dpi=200,show_figure=True`.

1. `draw_hexagon(n,w)` is the same as `draw_hexagon(n,w,1,1,1,0,200,True)`.
2. The sides of the hexagon are of length $a*n$, $b*n$, and $c*n$.
3. w is the weighting on the edges. For a $p \times q$ periodic weightings, w must be a matrix of size $2p \times q$. We adopt the convention that the weightings is assigned on the bottom left corner of the hexagon as shown in Figure 1, and is then extended by periodicity over the full hexagon.


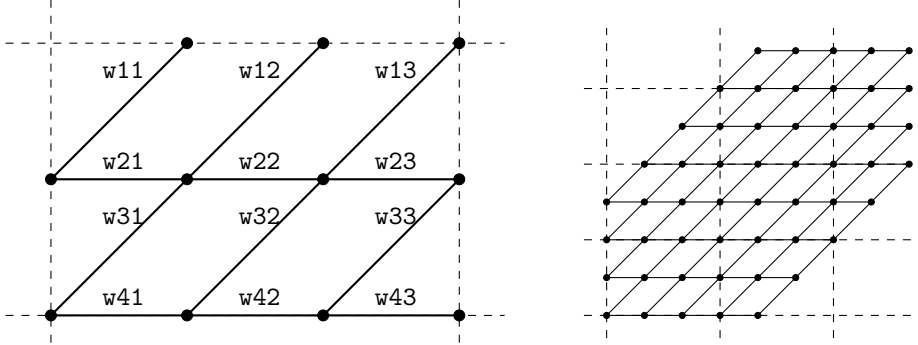


Figure 1: A 2×3 periodic weighting on a $4 \times 4 \times 4$ hexagon. The dashed lines emphasize the periodicity. Here `w=np.array([[w11,w12,w13],[w21,w22,w23],[w31,w32,w33],[w41,w42,w43]])`.

4. `edge` is the thickness of the lines around the lozenges. Use `edge=0` for no edges.
5. `dpi` is the resolution of the image.
6. `show_figure` tells the package to show the figure when `show_figure = True`.
7. The routine returns the figure `fig`, which allows the user to save it using, for example, `fig.savefig('figure_name.png')`.


1.1.1 About a , b , and c

With `w=np.array([[1,1]]).T`, `draw_hexagon(1,w,1,2,3,edge=1)` produces:

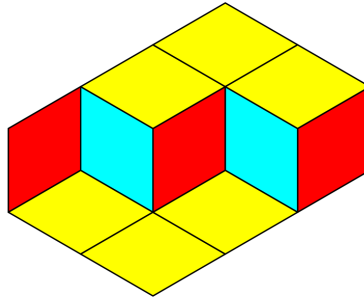


1.1.2 The uniform weighting

With `w=np.array([[1,1]]).T`, `draw_hexagon(100,w,dpi=500)` takes around 10-12 seconds on our computer to produce:

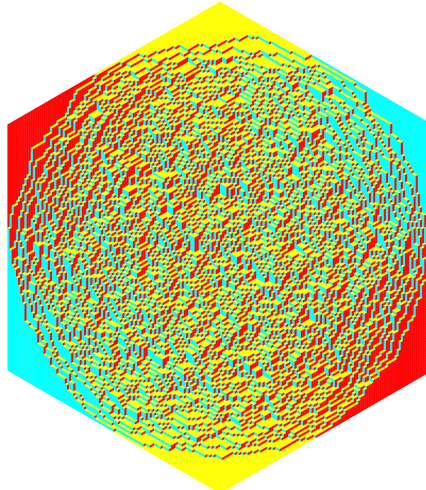

1.1.3 A 3×3 periodic weighting

With `alpha1=0.3, alpha2=0.3, w=np.array([[1,1,1],[1,1,1],[1,1,1],[1/alpha1,alpha2,alpha1/alpha2],[1,1,1],[alpha1,1/alpha2,alpha2/alpha1]])`, `draw_hexagon(200,w,dpi=500)` takes around 2 minutes on our computer to produce the example from [arXiv:2412.03115](#):

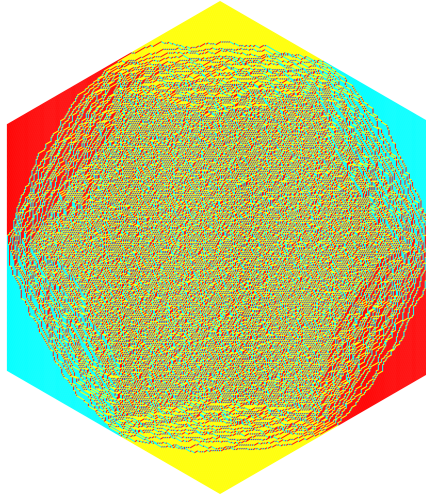


1.2 draw_hexagon_gap

The routine `draw_hexagon_gap` generates a random tiling of a hexagon for a given *periodic weighting* with some specified *gaps*. The syntax is given by: `draw_hexagon_gap(n,w,gap,a,b,c,edge,dpi,show_figure)`. By default, `a=1,b=1,c=1,edge=0,dpi=200,show_figure=True`.

1. `gap` must be of the form `np.array([[t1,x1,y1],[t2,x2,y2],...,[tm,xm,ym]])`, which means that at each time `tj`, there is a vertical gap from `xj` to `yj`. The points must satisfy `tj ∈ {0,1,...,2n}` and `xj,yj ∈ ℤ`. The package also allows for `xj=yj`, which represents a single point `xj`.
2. The routine return a vector `vec=[logPn,logZnNum,logZnDen]` and a figure `fig`, i.e., `vec, fig = draw_hexagon_gap(n,w,gap)`. To compute only the log partition functions, call the routine `log_partition_function_hexagon_gap(n,w,gap,a,b,c)` instead.
3. `logZnNum` is the log of the partition function of the hexagon with the specified gaps.
4. `logZnDen` is the log of the partition function of the hexagon without any gaps.
5. `logPn=logZnNum-logZnDen` is the log of the probability to observe a tiling with the specified gaps.

1.2.1 A hexagon tiling with a gap

With `w=np.array([[1,1]]).T,gap=np.array([[130,100.5,140.5]])`, `draw_hexagon_gap(1,w,gap,120,120,80,dpi=500)` produces:

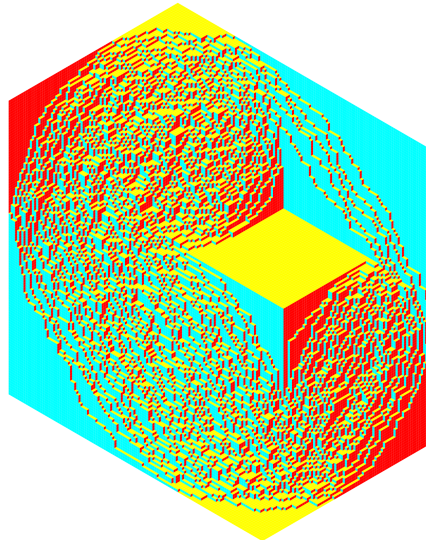

2 Random tilings of the Aztec diamond

2.1 draw_aztec

The routine `draw_aztec` generates a random tiling of an Aztec diamond for a given *periodic weighting*. The syntax is given by: `draw_aztec(n,w,edge,dpi,rotated,show_figure)`. By default, `edge=0`, `dpi=200`, `rotated=True`, `show_figure=True`.

1. `draw_aztec(n,w)` is the same as `draw_aztec(n,w,0,200,True,True)`.
2. `w` is the weighting on the edges, which can be a matrix of any size. We adopt the convention that the weightings is assigned on the bottom left corner of the Aztec diamond as shown in Figure 1, and is then extended by periodicity over the full Aztec diamond.


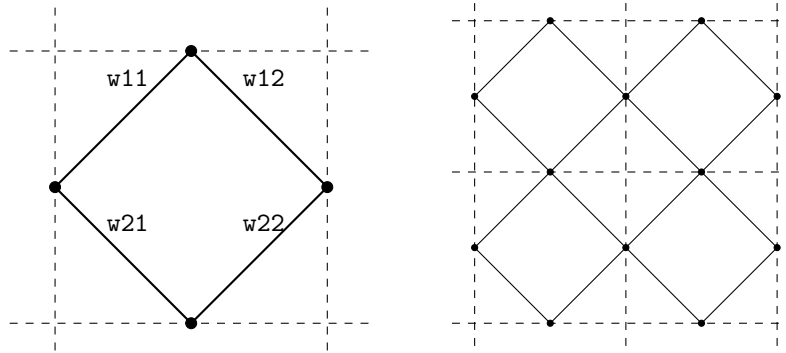


Figure 2: Right: an Aztec diamond of size 2. The dashed lines emphasize the periodicity. Here `w=np.array([[w11,w12],[w21,w22]])`.

3. `edge` is the thickness of the lines around the lozenges. Use `edge=0` for no edges.
4. `dpi` is the resolution of the image.
5. `rotated` tells the package to rotate the figure by 45 degrees when `rotated = True`.
6. `show_figure` tells the package to show the figure when `show_figure = True`.
7. The routine returns the figure `fig`, which allows the user to save it using, for example, `fig.savefig('figure_name.png')`.


2.1.1 About rotated

With `w=np.array([[1]]).T`, `draw_aztec(5,w,edge=1,rotated=True)` (right) and `draw_aztec(5,w,edge=1,rotated=False)` (left) produce:

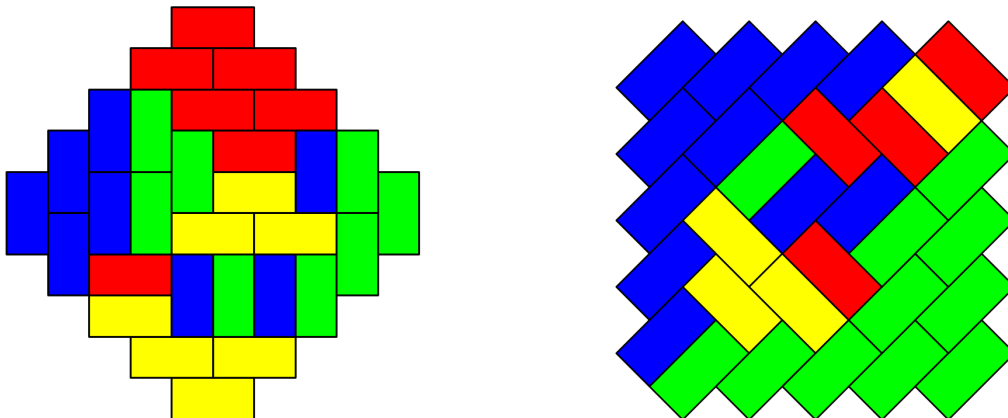


2.1.2 The uniform weighting

With `w=np.array([[1]]).T`, `draw_aztec(300,w,dpi=500)` takes around 15–20 seconds on our computer to produce:

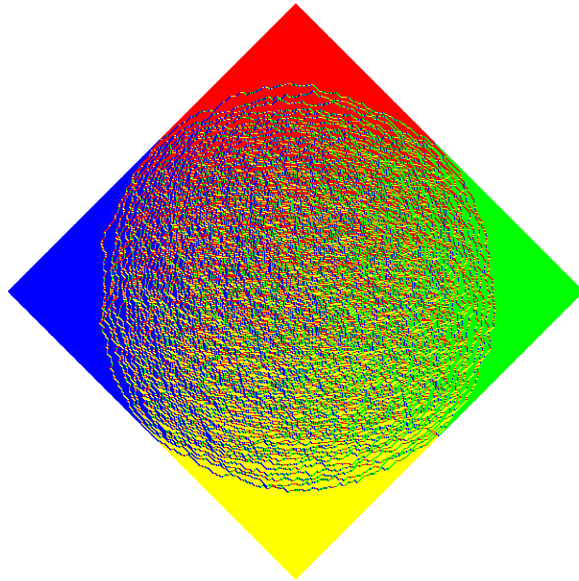


2.1.3 A 2×2 periodic weighting

The 2×2 periodic weightings from [arXiv:1410.2385](#) is given by



With `a=0.5`, `b=1`, `w=np.array([[b,b,a,a],[b,b,a,a],[a,a,b,b],[a,a,b,b]])`, `draw_aztec(300,w,dpi=500)`:

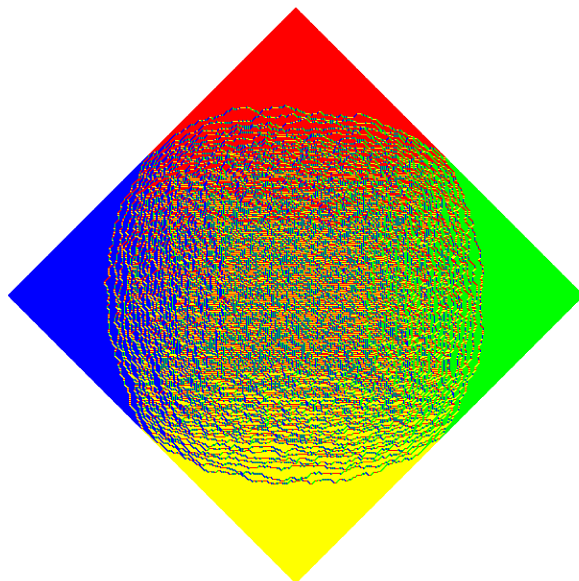

2.2 draw_aztec_gap

The routine `draw_aztec_gap` generates a random tiling of an Aztec diamond for a given *periodic weighting* with some specified *gaps*. The syntax is given by: `draw_aztec_gap(n,w,gap,edge,dpi,rotated,show_figure)`. By default, `edge=0,dpi=200,rotated=True,show_figure=True`.

1. `gap` must be of the form `np.array([[t1,x1,y1],[t2,x2,y2],...,[tm,xm,ym]])`, which means that at each time t_j , there is a vertical gap from x_j to y_j . The points must satisfy $t_j \in \{0, 1, \dots, 2n\}$ and $x_j, y_j \in \mathbb{Z}$. The package also allows for $x_j=y_j$, which represents a single point x_j .
2. The routine return a vector `vec=[logPn,logZnNum,logZnDen]` and a figure `fig`, i.e., `vec, fig = draw_aztec_gap(n,w,gap)`. To compute only the log partition functions, call the routine `log_partition_function_aztec_gap(n,w,gap)` instead.
3. `logZnNum` is the log of the partition function of the Aztec diamond with the specified gaps.
4. `logZnDen` is the log of the partition function of the Aztec diamond without any gaps.
5. `logPn=logZnNum-logZnDen` is the log of the probability to observe a tiling with the specified gaps.

2.2.1 An Aztec diamond tiling with a gap

With `w=np.array([[1]]).T,gap=np.array([[2*150-1,80,150]])`, `draw_aztec_gap(300,w,gap,dpi=500)` produces:

