

School of Computer Science, UPES, Dehradun.

A

LABORATORY FILE

On

DATABASE MANAGEMENT SYSTEM (DBMS) LAB

B.TECH. -III Semester

Submitted by:

Name: Mayank Negi SAP ID: 500120279 Roll No: R2142230039

Batch: 2

DBMS Lab

B.Tech. III Sem.

Experiment 10

To understand the concepts of Views.

Aim:

To create and manage an employee database, including functionality for inserting, updating, and deleting employee records, as well as creating views for simplified data access.

Problem Statement:

The task involves setting up a database to track employee information, such as names, dates of birth, salaries, and department affiliations. The goal is to facilitate efficient data retrieval and manipulation, while also creating views that allow for more straightforward access to specific employee data.

Theory:

Relational databases organize data in structured tables, enabling relationships and efficient querying. SQL (Structured Query Language) is used for defining and manipulating this data. Key concepts include:

- Tables: Used to store data in rows and columns.
- Primary Keys: Unique identifiers for records in a table.
- Views: Virtual tables created from SQL queries that simplify access to data.
- Data Manipulation: Using `INSERT`, `UPDATE`, and `DELETE` commands to modify data in the database.

Commands Used:

- 1. Database and Table Creation:
- 2. Data Insertion:
- 3. Creating Views:
- 4. Modifying Table Structure:

DBMS Lab B.Tech. III Sem.

- 5. Updating Records via a View:
- 6. Deleting Records via a View:
- 7. Creating Another View:
- 8. Viewing the Data:
- 9. Dropping a View:

Results:

```
-- Ayush Vashishth
       -- 500119331
 2
 4 • CREATE DATABASE exp10;
5 • USE exp10;
        -- Creating the EMPLOYEES Table
 8 • G CREATE TABLE EMPLOYEES (
         Employee id CHAR(10) PRIMARY KEY,
9
10
         First_Name CHAR(30) NOT NULL,
         Last_Name CHAR(30) NOT NULL,
        DOB DATE,
12
         Salary DECIMAL(10, 2) NOT NULL, -- Using DECIMAL to handle salaries with two decimal places
13
         Department_id CHAR(10)
14
      - );
15
16
        -- Inserting values into the EMPLOYEES table
17
       INSERT INTO EMPLOYEES (Employee_id, First_Name, Last_Name, DOB, Salary, Department_id) VALUES
18 •
       ('E001', 'John', 'Doe', '1990-01-15', 50000.00, 'D01'),
19
        ('E002', 'Jane', 'Smith', '1985-03-22', 60000.00, 'D02'),
20
       ('E003', 'Emily', 'Jones', '1992-06-30', 55000.00, 'D01'),
21
       ('E004', 'Michael', 'Brown', '1988-12-05', 70000.00, 'D03'),
22
       ('E005', 'Linda', 'Davis', '1995-05-15', 65000.00, 'D02'),
23
        ('E006', 'James', 'Wilson', '1980-09-25', 75000.00, 'D01');
24
25
        -- Creating a View named emp_view
26
       CREATE VIEW emp_view AS
27 •
        SELECT Employee_id, Last_Name, Salary, Department_id
28
```

DBMS Lab

B.Tech. III Sem.

```
29
       FROM EMPLOYEES;
30
       -- You cannot directly insert into a view like this unless you are inserting into an updatable view that maps directly to a base table.
31
32
        -- Remove the insert into view since it will cause errors.
33
       -- If you need to modify the Salary column to allow NULL values, you'd do the following:
34
35 • ALTER TABLE EMPLOYEES MODIFY Salary DECIMAL(10, 2) NULL;
36
       -- Now, you can insert a row with a NULL salary
37
38 •
      INSERT INTO EMPLOYEES (Employee_id, First_Name, Last_Name, DOB, Salary, Department_id) VALUES
39
       ('E007', 'Chris', 'Anderson', NULL, NULL, 'D01');
40
       -- Update operations on the View (affects the base table EMPLOYEES)
41
42 • UPDATE emp_view
43
       SET Salary = 80000.00
44
       WHERE Employee_id = 'E001';
45
        -- Delete an employee from the view (and consequently from the EMPLOYEES table)
47 • DELETE FROM emp_view
48
       WHERE Employee_id = 'E003';
49
50 • SELECT * FROM emp_view;
51
       -- Dropping the emp_view
52 0
      DROP VIEW emp_view;
53
54
       -- Create a View named salary_view to show annual salary for employees in Department D02
55 • CREATE VIEW salary_view AS
       SELECT Employee_id, Last_Name, Salary * 12 AS Annual_Salary
                 SELECT Employee_id, Last_Name, Salary * 12 AS Annual_Salary
  56
  57
                 FROM EMPLOYEES
                 WHERE Department_id = 'D02';
  58
```

-- View the salary_view

SELECT * FROM salary_view;


59

60


61 •

DBMS Lab B.Tech. III Sem.

SELECT * FROM expl0.employees;

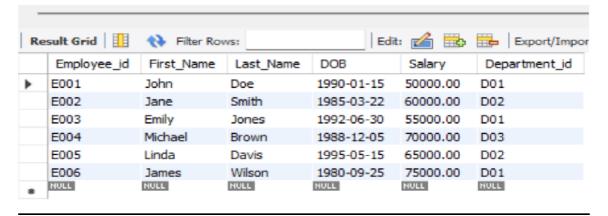

1 • SELECT * FROM exp10.employees;

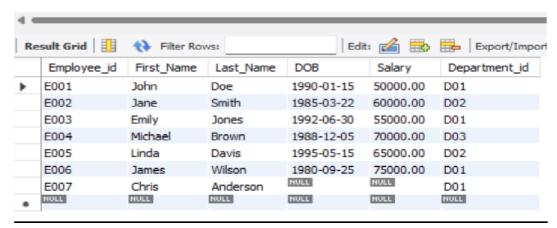

5ELECT * FROM exp10.emp_view;



DBMS Lab

B.Tech. III Sem.



Re	sult Grid	♦ Filter Roy	vs:	Exp
			Annual_Salary	
•	E002	Smith	720000.00	
	E005	Davis	780000.00	

Conclusion:

The SQL code effectively sets up a relational database to manage employee information, including functionalities for inserting, updating, and deleting records. The creation of views enhances data accessibility by allowing users to easily retrieve specific employee data without dealing with the underlying table directly.

The use of a view for annual salaries provides a clear example of how to present calculated data, facilitating reporting and analysis. Overall, this database design supports efficient employee management and can be expanded further with additional features such as more complex views or stored procedures for automated reporting.

Future enhancements could include adding indexes for faster querying, more detailed employee attributes, or implementing stored procedures for common operations to streamline data management tasks.