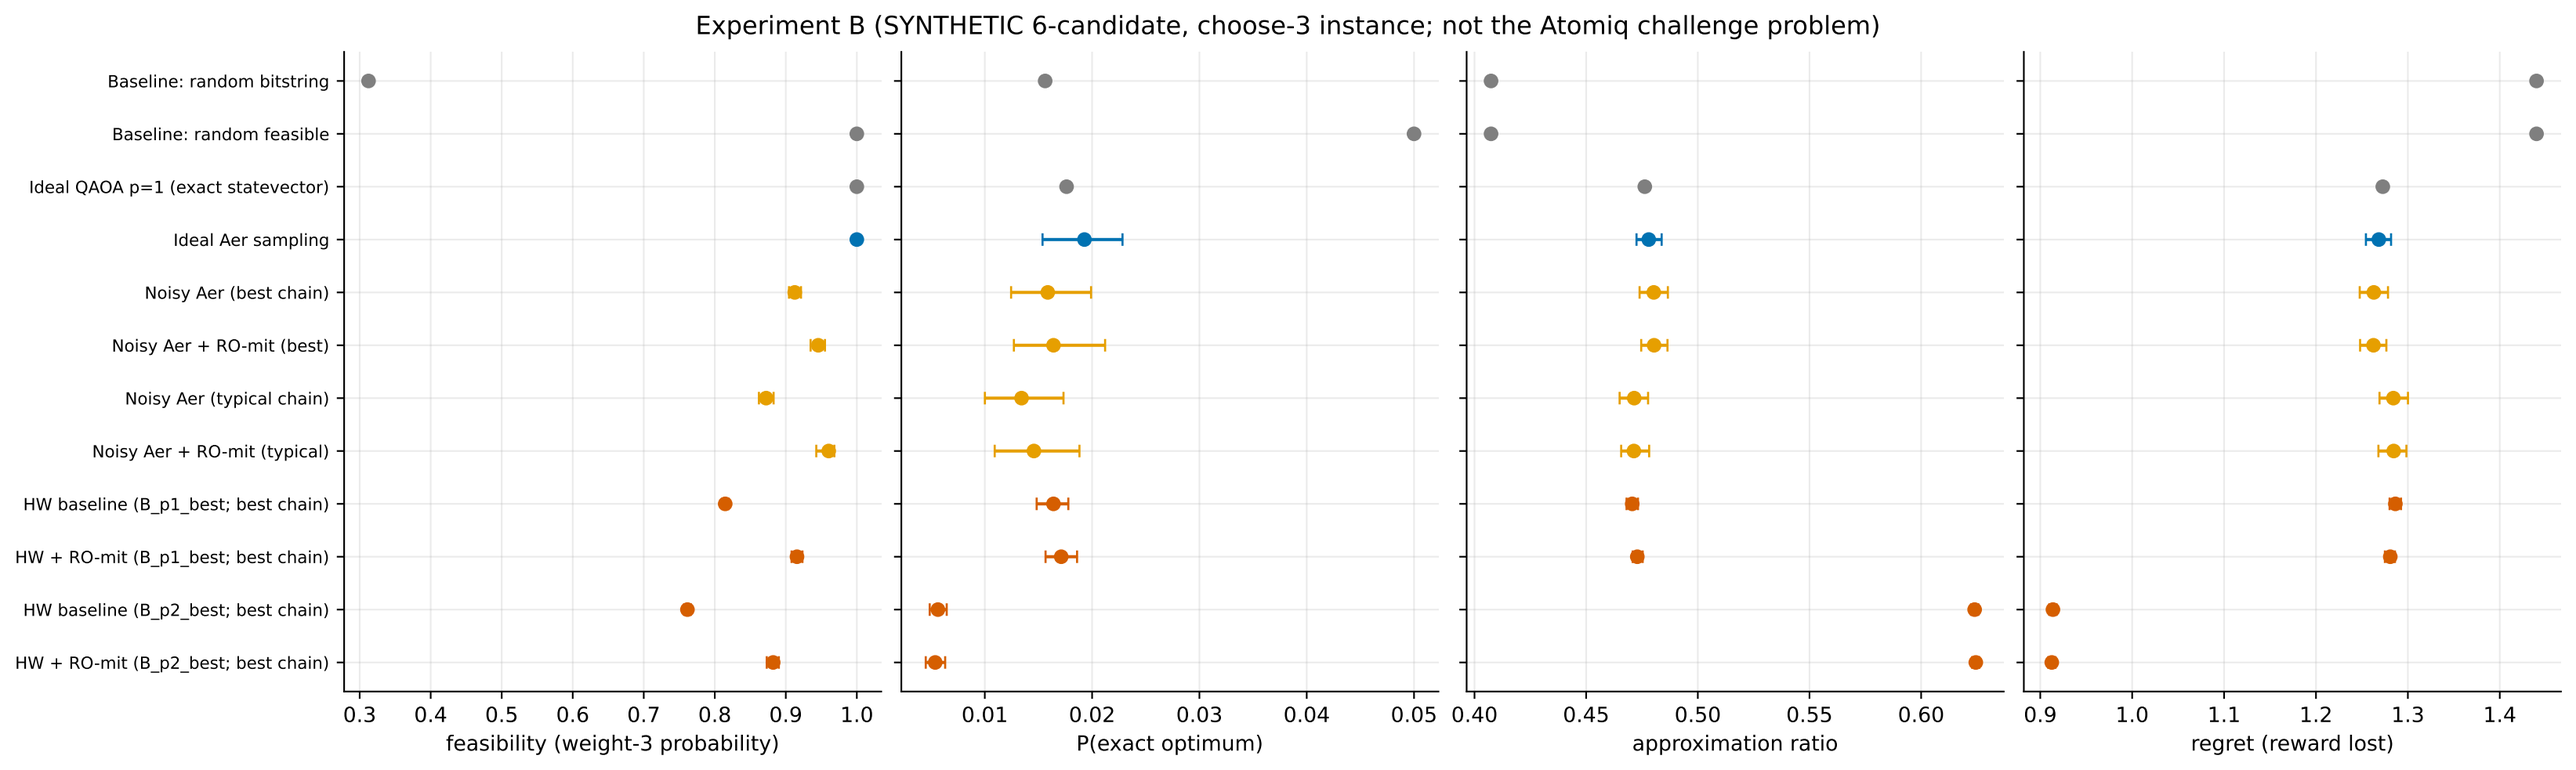
Experiment B (SYNTHETIC 6-candidate, choose-3 instance; not the Atomiq challenge problem)
Baseline: random bitstring
Baseline: random feasible
Ideal QAOA p=1 (exact statevector)
Ideal Aer sampling
Noisy Aer (best chain)
Noisy Aer + RO-mit (best)
Noisy Aer (typical chain)
Noisy Aer + RO-mit (typical)
HW baseline (B_p1_best; best chain)
HW + RO-mit (B_p1_best; best chain)
HW baseline (B_p2_best; best chain)
HW + RO-mit (B_p2_best; best chain)
0.3
0.4
0.5
0.6
0.7
0.8
0.9
1.0
feasibility (weight-3 probability)
0.01
0.02
0.03
0.04
0.05
P(exact optimum)
0.40
0.45
0.50
0.55
0.60
approximation ratio
0.9
1.0
1.1
1.2
1.3
1.4
regret (reward lost)