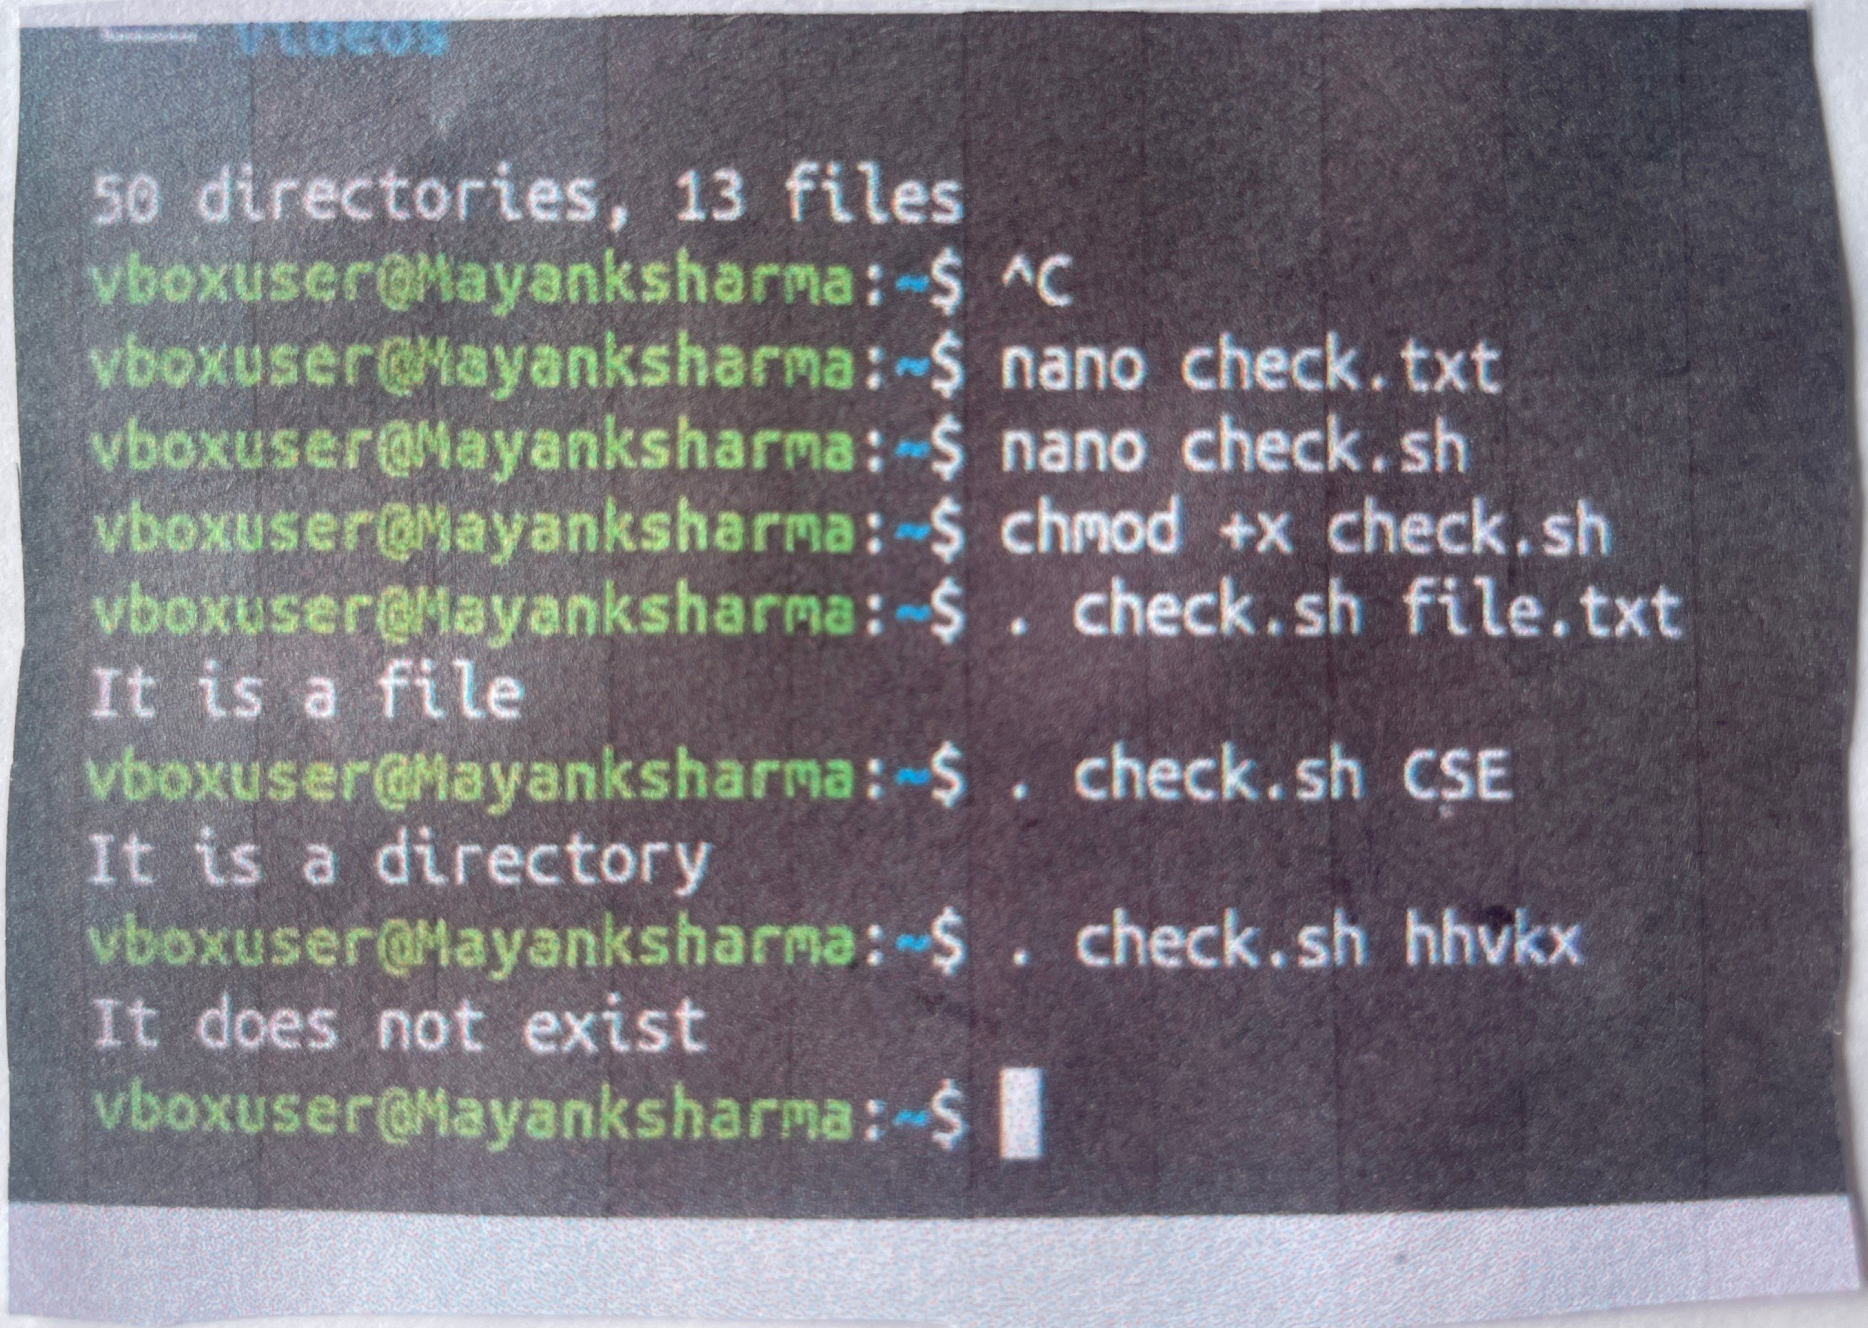
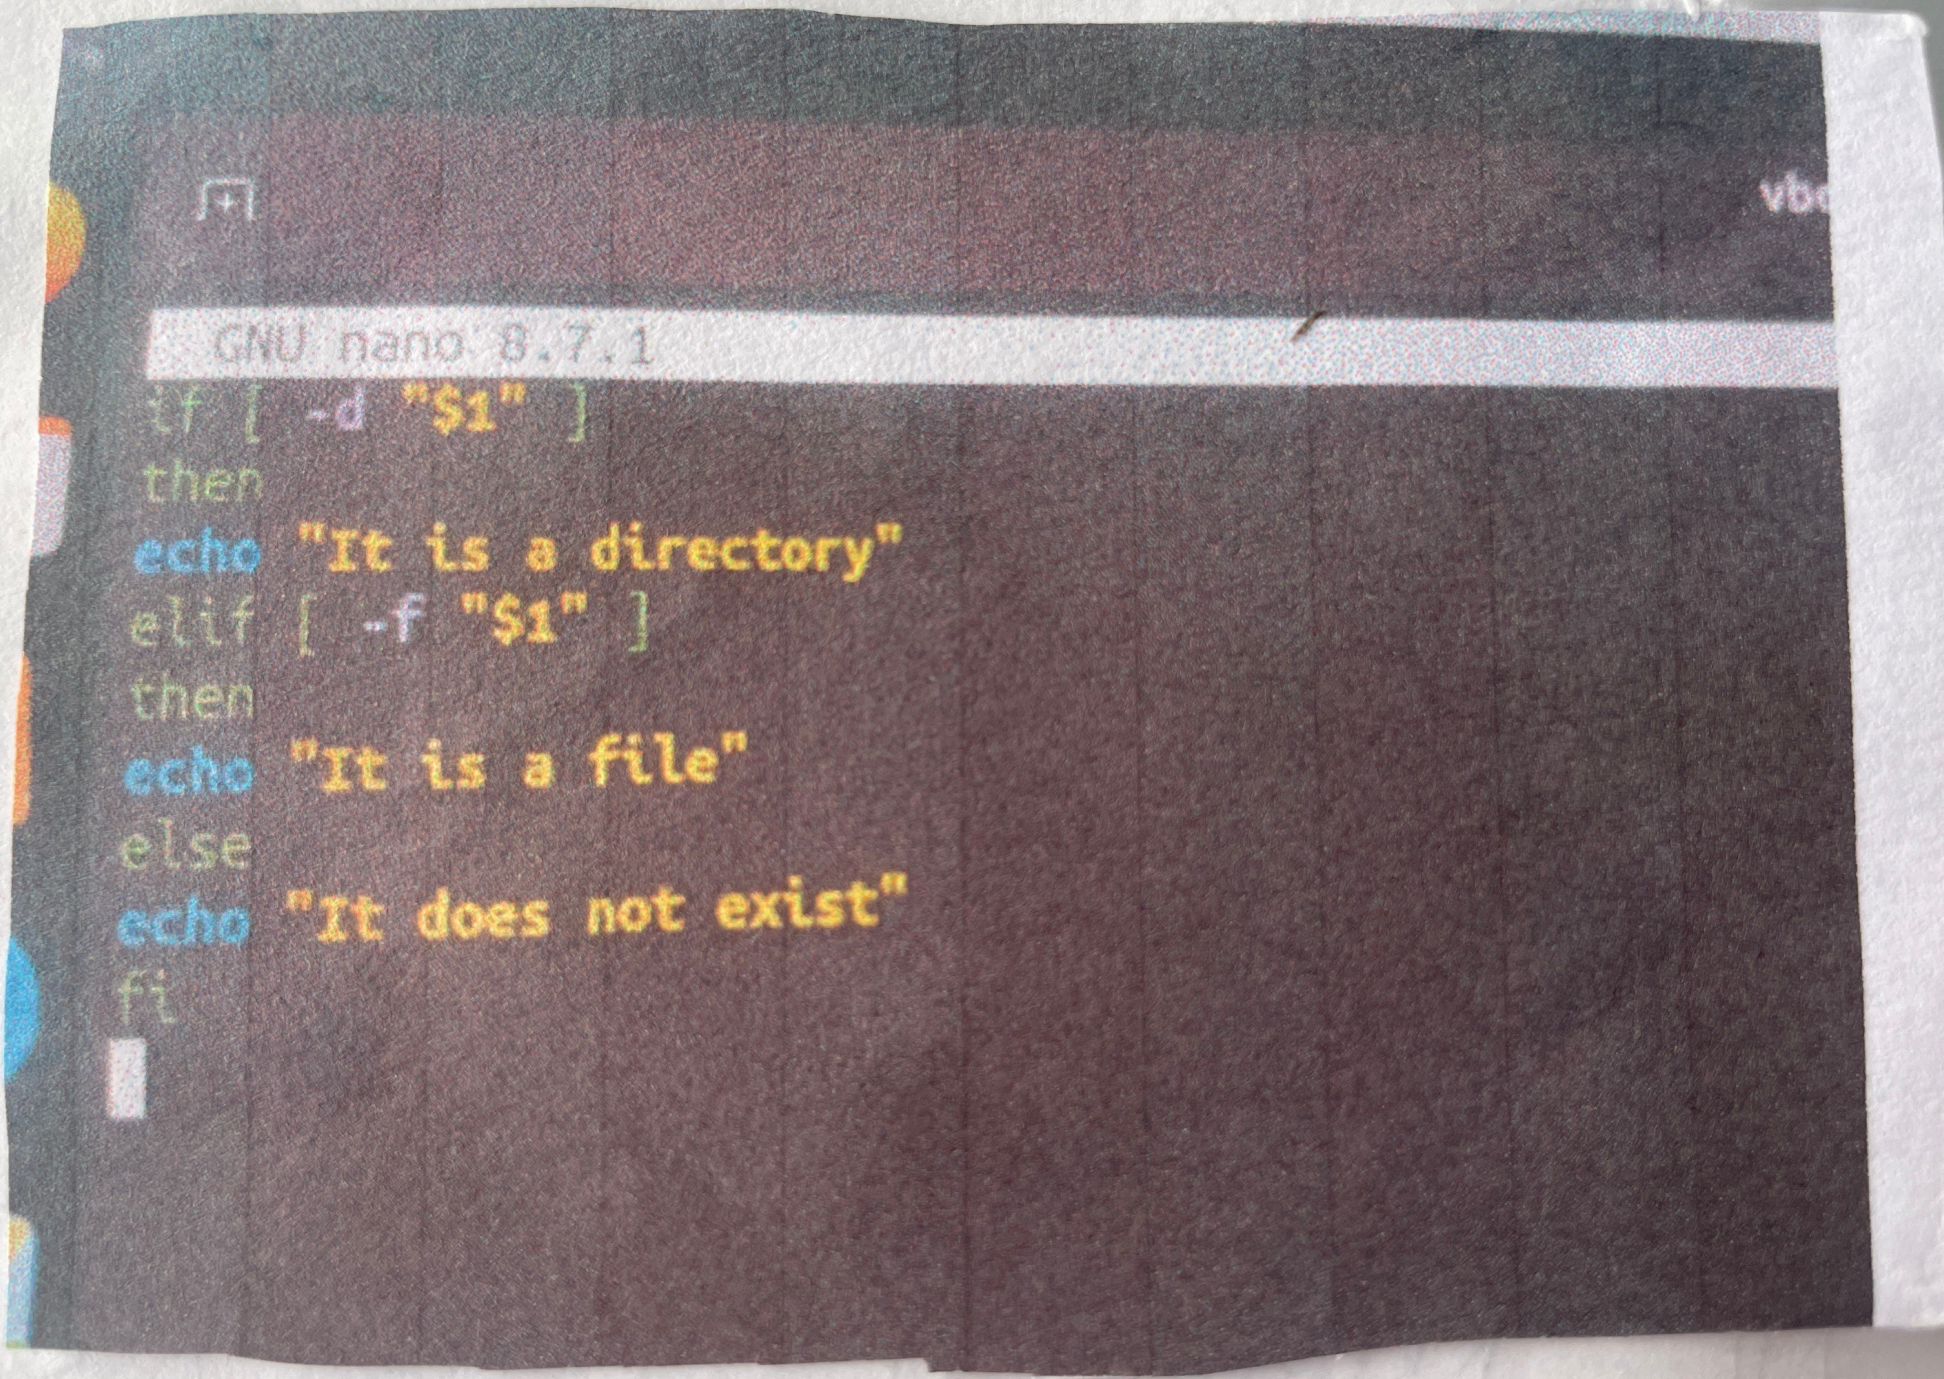

50 directories, 13 files
vboxuser@Mayanksharma:~$ ^C
vboxuser@Mayanksharma:~$ nano check.txt
vboxuser@Mayanksharma:~$ nano check.sh
vboxuser@Mayanksharma:~$ chmod +x check.sh
vboxuser@Mayanksharma:~$. check.sh file.txt
It is a file
vboxuser@Mayanksharma:~$. check.sh CSE
It is a directory
vboxuser@Mayanksharma:~$. check.sh hhvkx
It does not exist
vboxuser@Mayanksharma:~$


GNU nano 8.7.1
if [-d "$1"]
then
echo "It is a directory"
elif [-f "$1"]
then
echo "It is a file"
else
echo "It does not exist"
fi

f makes the end of for loop in

```
vboxuser@Mayankshar...:~$ echo "hello world" | tr '[:lower:]' '[:upper:]'
HELLO WORLD
vboxuser@Mayankshar...:~$ nano upper.sh
vboxuser@Mayankshar...:~$ ./upper.sh file3.txt file4.txt new.txt
file name  changed to upper case
file name  changed to upper case
file name  changed to upper case
vboxuser@Mayankshar...:~$ ls
1.sh     Desktop        FILE1.TXT    FILE4.TXT   NEW.TXT     Templates   check.sh          names_text.bak   snap
2.sh     Documents      FILE2.TXT    MIET        Pictures    Videos      Comp.sh           new.sh           upper.sh
3.sh     Downloads      FILE3.TXT    Music       Public      cat         Continents.txt    num.sh           user.txt
vboxuser@Mayankshar...:~$
```

```
 GNU nano 8.7.1                                                upper.sh *
#!/bin/bash
for file in "$@"
do
if [ -f "$file" ]
then
        mv "$file" "$(echo "$file" | tr '[:lower:]' '[:upper:]')"
        echo "file name changed to upper case"
else
        echo "$file does not exist"

fi
done
```