



The Information Company

Azure AD OTDS Integration

Provisioning users and groups from Azure AD to OTDS using SCIM 2.0

May 2022

1 OTDS Configuration

- Create a dedicated **confidential** OAuth client for the integration to use

The screenshot shows the OTDS Admin console interface. At the top, there is a breadcrumb trail: [OTDS Admin](#) > [OAuth Clients](#) > [azure-otds](#). Below this, there are two buttons: **Save** and **Cancel**. The main content area is divided into two columns. On the left, there is a sidebar with four tabs: **General** (selected), **User Partition**, **Advanced**, **Redirect URLs**, and **Custom Attributes**. On the right, there are two input fields: **Client ID** with the value 'azure-otds' and **Description** which is empty. Below these fields, there is a **Confidential** checkbox which is checked, and a red underline is visible below the label.

- The access token lifetime can be any value that meets your security policies, but no shorter than 15 minutes (900 seconds).
- Do not specify any redirect URLs. They are not required.

- Save the OAuth client. OTDS will generate and display the client secret. Save it in a secure location, such as a password manager application.

Secret Key - azure-otds ✕

Generated client secret:

uWqr4F80vRoOVXDfYx8gN073cPh545vo

OK

- Create a non-synchronized user partition into which you wish AzureAD to synchronize users. The term 'non-synchronized' simply refers to the fact that OTDS itself is not doing the synchronization. Azure AD synchronizes into OTDS.

SETUP

Partitions

☒ Auth Handlers

☐ Resources

OTDS Admin ▸ Partitions



Add **Delete** **Refresh** **Restart Enterprise Sync** **Global Settings** **Toggle Columns** **Help**

☒ New Synchronized User Partition

☐ **New Non-synchronized User Partition**

☐ Name ☒ Users **Save** **Cancel**


- Make the OAuth client an administrator of the partition into which you want to sync users.
Partition -> Actions -> Edit Administrators

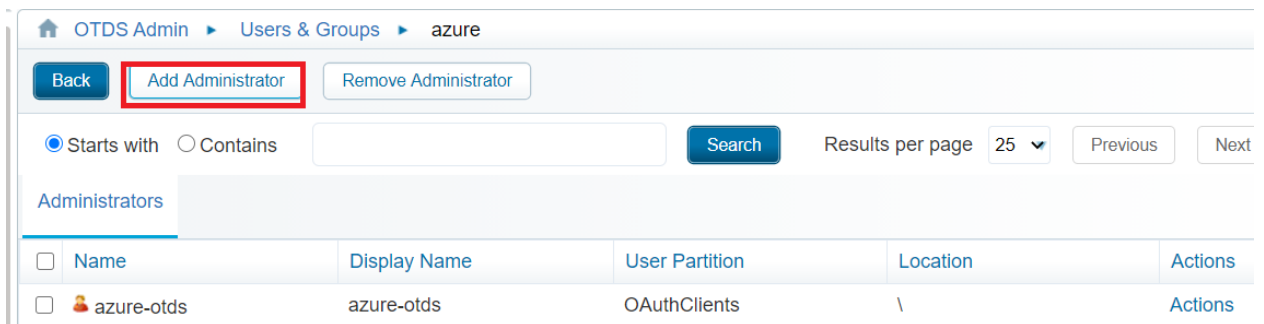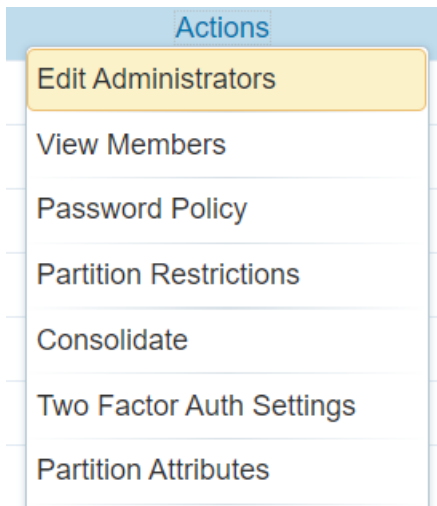


2 Azure AD Configuration

- Add or open the OpenText Directory Services application to your Azure AD tenant from the application gallery

Browse Azure AD Gallery (Preview)

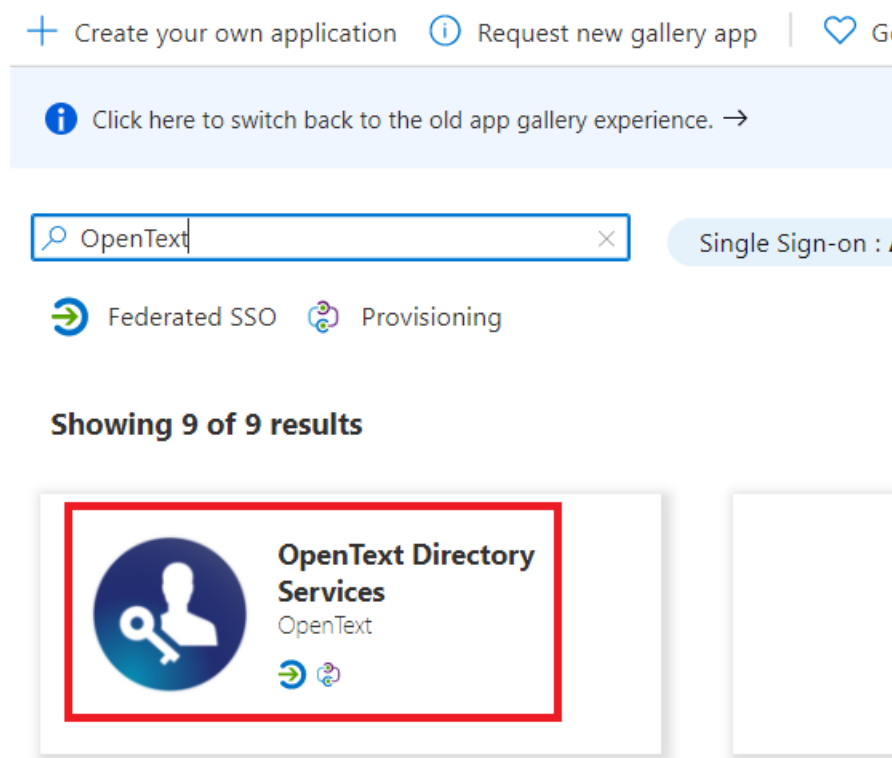

- Configure the 'Provisioning' tab on the OTDS application added in Azure AD

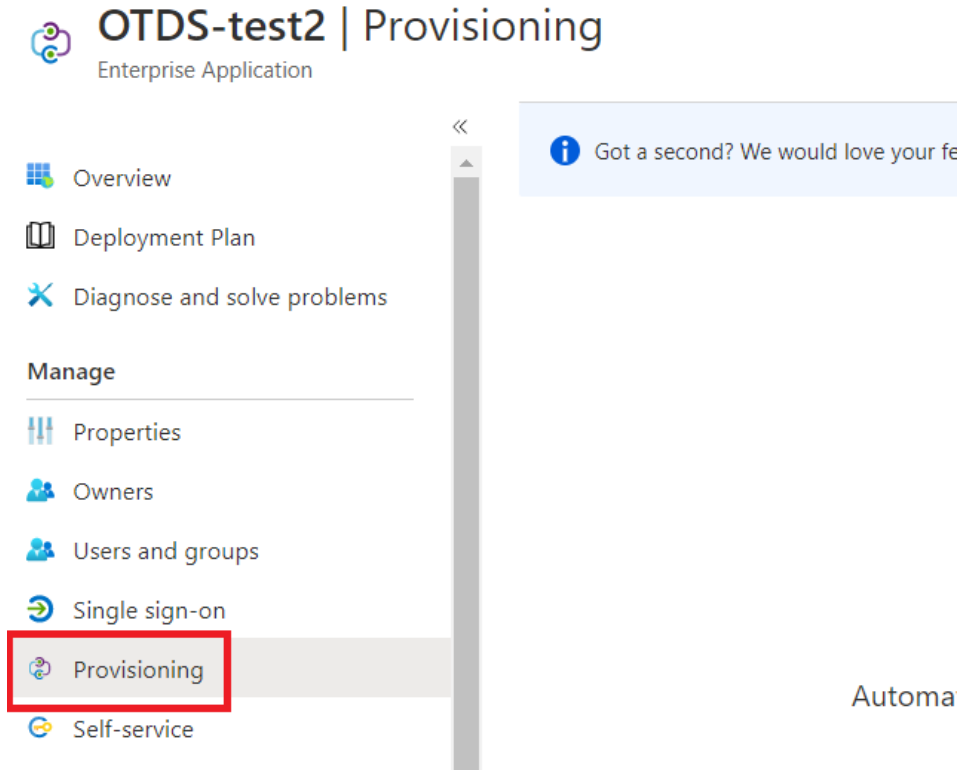

Provisioning ...

 Save  Discard

^ Admin Credentials

Admin Credentials

Azure AD needs the following information to connect to otds-484982-44's API and synchronize user data.

Authentication Method ⓘ

OAuth2 Client Credentials Grant



Tenant URL * ⓘ

https://<OTDS URL>/otdsws/scim/<PartitionName>



Client Identifier * ⓘ

azure-otds



Client Secret

.....

Token Endpoint * ⓘ

https://<OTDS URL>/otdsws/oauth2/token



Test Connection

Authentication Method:

OAuth2 Client Credentials Grant

Tenant URL:

<OTDS URL>/otds/ws/scim/<PartitionName>

Ensure you are using an **https** scheme for the OTDS URL. It is insecure to use plain http over the Internet. Any 'man in the middle' would be able to intercept the traffic, steal the secret or the token, and create/delete users and groups.

Client Identifier:

The OAuth client ID / name used when creating the OAuth client in step 1

Client Secret:

The secret generated by OTDS when creating the OAuth client in step 1

Token Endpoint:

<OTDS URL>/otds/ws/oauth2/token

- Configure the user and group mappings if required. However, the defaults are suitable for most use cases.
- Configure the users/groups to synchronize, or synchronize all

Settings

Start and stop provisioning to OpenText Directory Services, and view provisioning status.

Provisioning Status ⓘ

On

Off

Scope ⓘ

Sync only assigned users and groups

Sync all users and groups

Sync only assigned users and groups

☐ Clear current state

Current Status

Initial cycle off/paused ⓘ

Click refresh to get the latest status

Refresh

0% complete

View Audit Logs ⓘ

Statistics to date

^ View provisioning details

Last completed cycle: Not Available

Duration: Not Available

Steady state achieved: Not Available

Provisioning interval: 40 minutes

v View technical information

NOTE: Azure AD synchronizes periodically on in the background using the interval shown on 'Statistics'. You may have to wait this interval for users/groups to sync to OTDS. Check the sync status in Azure AD. The synchronization frequency is within Microsoft's control.

More details about SCIM 2.0 based provisioning by Azure AD can be found here <https://docs.microsoft.com/en-us/azure/active-directory/app-provisioning/user-provisioning>

Next Step

This guide has covered configuring user and group synchronization with Azure AD. See the accompanying document [Azure AD to OTDS Authentication](#) to configure user authentication with Azure AD.

About OpenText

OpenText enables the digital world, creating a better way for organizations to work with information, on-premises or in the cloud. For more information about OpenText (NASDAQ/TSX: OTEX), visit opentext.com.

Connect with us:

[OpenText CEO Mark Barrenechea's blog](#)

[Twitter](#) | [LinkedIn](#)

opentext.com/contact

Copyright © 2020 Open Text. All rights reserved. Trademarks owned by Open Text.