
## Практическая работа 5\_2

## 1. Оформляем макет

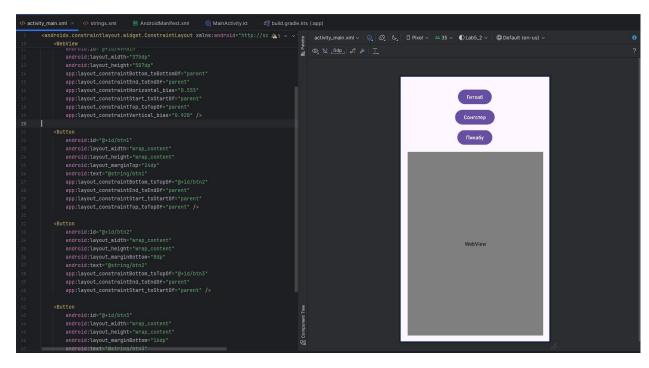

## 2. Оформляем код:

```
class MainActivity : AppCompatActivity() {
private lateinit var binding: ActivityMainBinding
override fun onCreate(savedInstanceState: Bundle?) {
    super.onCreate(savedInstanceState)
   enableEdgeToEdge()
    binding = ActivityMainBinding.inflate(layoutInflater)
    setContentView(binding.root)
    val systemBars = insets.getInsets(WindowInsetsCompat.Type.systemBars())
       v.setPadding(systemBars.left, systemBars.top, systemBars.right, systemBars.bottom)
       insets
    }
    binding.btn1.setOnClickListener {
       binding.wvMain.loadUrl( url: "https://github.com/")
    binding.btn2.setOnClickListener {
       binding.wvMain.loadUrl( url: "https://www.songsterr.com/?inst=guitar/")
   binding.btn3.setOnClickListener {
       binding.wvMain.loadUrl( url: "https://pikabu.ru/")
```

## 3. Результат

