

See discussions, stats, and author profiles for this publication at: <https://www.researchgate.net/publication/376044670>

# IoT solutions for smart farming: A comprehensive review on the current trends, challenges and future prospects for sustainable agriculture

Article in Journal of Forestry Science and Technology · November 2023

DOI: 10.55250/jo.vnuf.8.2.2023.028-035

CITATIONS

8

READS

1,267

7 authors, including:



Ha Chu

Vietnam National University, Hanoi

281 PUBLICATIONS 761 CITATIONS

[SEE PROFILE](#)



Trinh Truong Phung

Vietnam National University, Hanoi

13 PUBLICATIONS 8 CITATIONS

[SEE PROFILE](#)



Le Duc Chien

Vietnam National University, Hanoi

4 PUBLICATIONS 8 CITATIONS

[SEE PROFILE](#)



Dung Tien Le

Bayer CropScience

86 PUBLICATIONS 3,316 CITATIONS

[SEE PROFILE](#)



# JOURNAL OF FORESTRY SCIENCE AND TECHNOLOGY

ISSN 2615 - 9368



Vol. 8, No. 2  
(2023)

VIET NAM NATIONAL UNIVERSITY OF FORESTRY

**JOURNAL OF FORESTRY  
SCIENCE AND TECHNOLOGY**

**ISSN: 2615 - 9368**

**Vol. 8, No. 2 (2023)**

**Editor-in-Chief**

**Bui The Doi**

**Deputy Editor-in-Chief:**

**Nguyen Van Hung**

**Head – office**

Journal of Forestry Science and  
Technology Department  
Vietnam National University of Forestry  
Chuong My – Ha Noi – Viet Nam  
Tel: 024.8588.3318  
Email: Tapchikhcnln@vnuf.edu.vn

**License number:**

119/GP-BTTTT  
Ministry of Information and  
Communications issued  
on 12 April 2023

Printing in Hoang Quoc Viet  
Technology and Science  
Joint Stock Company

**CONTENTS**

	<b>Page</b>
▪ <b>Mai Hai Chau, Vu Van Hung.</b> Effect of inoculation methods of <i>Azospirillum brasiliense</i> on growth and yield of lettuce in the hydroponic system	3-9
▪ <b>Vu Dinh Giap, Do Thi Cam Van, Vu Dinh Duy, Vu Kim Dung, Nguyen Thi Hai Ha.</b> Optimal conditions for extracting bioactive compounds from leaves of <i>Cleistocalyx operculatus roxb</i> using an enzyme cocktail	10-18
▪ <b>Dong Huy Gioi, Chu Duc Ha, Nguyen Quoc Trung, Bui Van Thang, Tran Van Tien, Bui Thi Thu Huong.</b> Screening and characterization of highly responsive genes related to the blast disease caused by <i>Pyricularia oryzae</i> in rice ( <i>Oryza sativa</i> )	19-27
▪ <b>Chu Duc Ha, Le Duc Chien, Phung Truong Trinh, Tran Van Tien, Pham Phuong Thu, Le Tien Dung, Pham Minh Trien.</b> IoT solutions for smart farming: A comprehensive review on the current trends, challenges and future prospects for sustainable agriculture	28-35
▪ <b>Bui Thi Mai Huong, Ha Van Huan, Le Tho Son.</b> Identification of DNA barcode sequence of Hybrid eucalyptus UP99 ( <i>Eucalyptus urophylla</i> x <i>Eucalyptus pellita</i> ) and UP95 ( <i>Eucalyptus urophylla</i> x <i>Eucalyptus pellita</i> ) to identify plant varieties	36-46
▪ <b>Hoang Vu Tho.</b> Plus tree selection of gao vang ( <i>Nauclea orientalis</i> ) for big timber developing of indigenous plantations	47-54
▪ <b>Do Thi Cam Van, Vu Dinh Giap, Nguyen Quang Tung, Tran Viet Ha.</b> Utilization of compost derived from waste sludge of shrimp raising-ponds for crop cultivation	55-66
▪ <b>Quoc Minh Dung, Nguyen Thi Huong Ly, Le Anh Thanh, Nguyen Van Hop, Nguyen Van Quy.</b> Effects of forest structure on woody plant diversity in an evergreen broadleaved forest in Cao Bang province	67-76
▪ <b>Nguyen Hong Hai, Nguyen Van Hop, Nguyen Van Quy, Le Van Cuong.</b> Structuring mechanism of tree species diversity pattern in an evergreen broadleaved forest in Con Dao National Park, Vietnam	77-86
▪ <b>Nguyen Van Quy, Le Van Cuong, Nguyen Van Hop, Pham Thanh Ha, Nguyen Hong Hai.</b> Interspecific association of dominant tree species in an evergreen broadleaved forest in Phu Quoc National Park, Vietnam	87-96
▪ <b>Pham Duc Binh.</b> Mapping small burned areas using high spatial resolution planetscope imagery: a case study of the wildfire in Da Lat city	97-106
▪ <b>Nguyen Hai Hoa, Bui The Doi, Vu Van Truong, Phan Duc Le.</b> Estimation of above-ground carbon of mangrove forest using Sentinel-1 (SAR) and field inventory data: a case study in Quang Yen, Quang Ninh province	107-117
▪ <b>Kieu Manh Huong, Nguyen Thi Hanh, Nguyen Thi Luong, Nguyen Van Hop.</b> Characteristics of wetland flora in Dong Thap Muoi nature reserve, Tien Giang province	118-127
▪ <b>Nguyen Thi Luong, Nguyen Van Quy, Nguyen Van Hop.</b> Woody plants diversity and its relationship with carbon stock in the tropical moist evergreen closed forest, Dong Nai Cultural Nature Reserve	128-137
▪ <b>Tran Thi Ngoan, Nguyen Tan Chung, Nguyen Thi Ha, Dao Thi Thuy Duong, Nguyen Tuan Vu.</b> Models for biomass expansion factor of acacia hybrid ( <i>A. auriculiformis</i> * <i>A. mangium</i> ) plantations in the Southern region, Vietnam	138-146
▪ <b>Vu Van Truong, Ha Tri Son, Nguyen Thi Bich Hao, Nguyen Hai Hoa, Phan Van Dung, Nguyen Thi Thuy Anh.</b> Applying geospatial technology to identify soil erosion risks in the context of climate change in Yen Chau district, Son La province	147-158
▪ <b>Trinh Hien Mai, Nguyen Thi Tham, Nguyen Tat Thang, Nguyen Thi Yen, Nguyen Van Huyen, Tang Thi Kim Hong.</b> Review paper: properties of low molecular weight phenol formaldehyde – treated bamboo composite	159-164
▪ <b>Nguyen Thi Bich Hao, Nguyen Thi Thanh An, Phi Dang Son, Dang Van Phuong.</b> Knowledge, attitude and habits on solid waste management of students at Nho Quan C High School	165-176

**Tạp chí:**

**KHOA HỌC & CÔNG NGHỆ  
LÂM NGHIỆP**

**ISSN: 2615 - 9368**

**TẬP 8, SỐ 2 (2023)**

**TỔNG BIÊN TẬP  
BÙI THẾ ĐỒI**

**PHÓ TỔNG BIÊN TẬP  
NGUYỄN VĂN HÙNG**

**TÒA SOẠN**

Ban Tạp chí KH&CN Lâm nghiệp  
Trường Đại học Lâm nghiệp  
Xuân Mai – Chưong Mỹ – Hà Nội  
ĐT: 024. 8588. 3318  
Email: Tapchikhcnln@vnu.edu.vn

**Giấy phép số:**

119/GP-BTTTT  
Bộ Thông tin - Truyền thông  
cấp ngày 12 tháng 4  
năm 2023

In tại Công ty Cổ phần Khoa học và  
Công nghệ Hoàng Quốc Việt

**MỤC LỤC**

	<b>Trang</b>
▪ <b>Mai Hải Châu, Vũ Văn Hùng.</b> Ảnh hưởng của phương pháp xử lý <i>Azospirillum brasiliense</i> tới sinh trưởng và năng suất giống xà lách trồng trong hệ thống thủy canh	3-9
▪ <b>Vũ Đình Giáp, Đỗ Thị Cẩm Vân, Vũ Đình Duy, Vũ Kim Dung, Nguyễn Thị Hải Hà.</b> Tối ưu điều kiện chiết xuất hoạt chất sinh học từ lá vôi ( <i>Cleistocalyx operculatus roxb</i> ) sử dụng enzyme cocktail	10-18
▪ <b>Đồng Huy Giới, Chu Đức Hà, Nguyễn Quốc Trung, Bùi Văn Thắng, Trần Văn Tiến, Bùi Thị Thu Hương.</b> Sàng lọc và phân tích đặc tính của các gene có biểu hiện khác biệt với bệnh đạo ôn gây ra bởi nấm <i>Pyricularia oryzae</i> ở cây lúa ( <i>Oryza sativa</i> ) bằng công cụ tin sinh học dữ liệu lớn	19-27
▪ <b>Chu Đức Hà, Lê Đức Chiến, Phùng Trường Trinh, Trần Văn Tiến, Phạm Phương Thu, Lê Tiến Dũng, Phạm Minh Triển.</b> Giải pháp IoT trong canh tác thông minh: Bài tông quan về xu hướng, thách thức và định hướng tương lai cho nông nghiệp bền vững	28-35
▪ <b>Bùi Thị Mai Hương, Hà Văn Huân, Lê Thọ Sơn.</b> Xác định DNA mã vạch giống Bạch đàn lai UP99 ( <i>Eucalyptus urophylla</i> x <i>Eucalyptus pellita</i> ) và UP95 ( <i>Eucalyptus urophylla</i> x <i>Eucalyptus pellita</i> ) phục vụ giám định giống cây	36-46
▪ <b>Hoàng Vũ Thơ.</b> Chọn lọc cây trội Gáo Vàng ( <i>Naucleo Orientalis</i> ) cho mục tiêu phát triển rừng trồng bản địa gỗ lớn	47-54
▪ <b>Đỗ Thị Cẩm Vân, Vũ Đình Giáp, Nguyễn Quang Tùng, Trần Việt Hà.</b> Nghiên cứu ứng dụng phân compost từ bùn thải hồ nuôi tôm phục vụ trồng cây rau màu vụ	55-66
▪ <b>Quốc Minh Dũng, Nguyễn Thị Hương Ly, Lê Anh Thanh, Nguyễn Văn Hợp, Nguyễn Văn Quý.</b> Ảnh hưởng của cấu trúc rừng đèn đa dạng loài cây gỗ trong rừng lá rộng thường xanh ở tỉnh Cao Bằng	67-76
▪ <b>Nguyễn Hồng Hải, Nguyễn Văn Hợp, Nguyễn Văn Quý, Lê Văn Cường.</b> Cơ chế hình thành mô hình đa dạng của các loài cây trong rừng lá rộng thường xanh ở Vườn quốc gia Côn Đảo, Việt Nam	77-86
▪ <b>Nguyễn Văn Quý, Lê Văn Cường, Nguyễn Văn Hợp, Phạm Thanh Hà, Nguyễn Hồng Hải.</b> Mối quan hệ của các loài cây ưu thế trong rừng lá rộng thường xanh ở Vườn quốc gia Phú Quốc, Việt Nam	87-96
▪ <b>Phạm Đức Bình.</b> Giám sát cháy rừng quy mô nhỏ sử dụng ảnh vệ tinh độ phân giải cao planetscope tại thành phố Đà Lạt	97-106
▪ <b>Nguyễn Hải Hòa, Bùi Thế Đồi, Vũ Văn Trường, Phan Đức Lê.</b> Uớc tính trữ lượng các bon trên mặt đất rừng ngập mặn từ ảnh Sentinel-1 (SAR) và điều tra thực địa: nghiên cứu điểm tại Quảng Yên, tỉnh Quảng Ninh	107-117
▪ <b>Kiều Mạnh Hướng, Nguyễn Thị Hạnh, Nguyễn Thị Lương, Nguyễn Văn Hợp.</b> Đặc điểm hệ thực vật đất ngập nước tại Khu bảo tồn sinh thái Đồng Tháp Mười, tỉnh Tiền Giang	118-127
▪ <b>Nguyễn Thị Lương, Nguyễn Văn Quý, Nguyễn Văn Hợp.</b> Đa dạng thực vật thân gỗ và mối liên hệ của nó với trữ lượng carbon trên mặt đất trong rừng kín thường xanh ẩm nhiệt đới, Khu Bảo tồn thiên nhiên - Văn hóa Đồng Nai	128-137
▪ <b>Trần Thị Ngoan, Nguyễn Tấn Chung, Nguyễn Thị Hà, Đào Thị Thùy Dương, Nguyễn Tuấn Vũ.</b> Mô hình hệ số chuyển đổi sinh khối đối với rừng trồng Keo lai ( <i>A. auriculiformis</i> * <i>A. mangium</i> ) tại khu vực Nam Bộ, Việt Nam	138-146
▪ <b>Vũ Văn Trường, Hà Trí Sơn, Nguyễn Thị Bích Hảo, Nguyễn Hải Hòa, Phan Văn Dũng, Nguyễn Thị Thùy Anh.</b> Ứng dụng công nghệ địa không gian xác định nguy cơ xói mòn đất trong bối cảnh biến đổi khí hậu tại huyện Yên Châu, tỉnh Sơn La	147-158
▪ <b>Trịnh Hiền Mai, Nguyễn Thị Thắm, Nguyễn Tất Thắng, Nguyễn Thị Yên, Nguyễn Văn Huyền, Tăng Thị Kim Hồng.</b> Tính chất của vật liệu composit tre xử lý với nhựa phenol formaldehyde phân tử lượng thấp	159-164
▪ <b>Nguyễn Thị Bích Hảo, Nguyễn Thị Thanh An, Phí Đăng Sơn, Đặng Văn Phương.</b> Kiến thức, thái độ và thói quen về quản lý chất thải rắn của học sinh Trường THPT Nho Quan C, Ninh Bình	165-176

## **IoT solutions for smart farming: A comprehensive review on the current trends, challenges and future prospects for sustainable agriculture**

**Chu Duc Ha<sup>1</sup>, Le Duc Chien<sup>1</sup>, Phung Truong Trinh<sup>1</sup>, Tran Van Tien<sup>2</sup>,**

**Pham Phuong Thu<sup>3</sup>, Le Tien Dung<sup>4</sup>, Pham Minh Trien<sup>1\*</sup>**

<sup>1</sup>*University of Engineering and Technology*

<sup>2</sup>*National Academy of Public Administration*

<sup>3</sup>*Hanoi Pedagogical University 2*

<sup>4</sup>*Nguyen Tat Thanh University*

### **Giải pháp IoT trong canh tác thông minh: Bài tổng quan về xu hướng, thách thức và định hướng tương lai cho nông nghiệp bền vững**

**Chu Đức Hà<sup>1</sup>, Lê Đức Chiến<sup>1</sup>, Phùng Trường Trinh<sup>1</sup>, Trần Văn Tiên<sup>2</sup>,**

**Phạm Phương Thu<sup>3</sup>, Lê Tiến Dũng<sup>4</sup>, Phạm Minh Triển<sup>1\*</sup>**

<sup>1</sup>*Trường Đại học Công nghệ*

<sup>2</sup>*Học viện Hành chính Quốc gia*

<sup>3</sup>*Trường Đại học Sư phạm Hà Nội 2*

<sup>4</sup>*Trường Đại học Nguyễn Tất Thành*

\*Corresponding author: trienpm@vnu.edu.vn

<https://doi.org/10.55250/jo.vnuf.8.2.2023.028-035>

---

#### **ABSTRACT**

*Agriculture is the most resource-intensive human activity. The goal to reduce agricultural input while producing more has been a primary driver of agricultural technology advancement since its inception. With recent advancements in supporting technologies, the usage of Internet-of-things (IoT) has become a trend in farming practice for agriculture management that use information technology to ensure that soil and plants receive their requirements for optimum health and productivity. It could be significant to summarize the trends and challenges of the application of IoT-based solutions in precision agriculture, more specifically smart crop production. Thus, the current review sought to give a complete overview of the use of IoT technology in smart farming. By surveying recent high-quality publications, IoT-based solutions applied to smart farming, with four basic layers, including data collection (perception), data transmission (transport), data processing, and application layers were summarized. The use of IoT solutions allows for resolving several issues in smart farming, such as the optimization of input resources, saving irrigation water, reducing the amount of fertilizer and pesticides, and optimizing energy resources. Accordingly, we discussed some notes about sensors, microcontroller systems, communication methods, and cloud platforms. In particular, a list of low-cost sensors and several typical single-board computers was provided. The IoT communication was discussed to get insight into the essential considerations. Since then, several key points have been noted for further directions of the application of IoT-based solutions for smart farming. Taken together, our mini-review could provide solid information for further construction and development of smart models of farming.*

#### **TÓM TẮT**

**Từ khóa:** Nông nghiệp là lĩnh vực đòi hỏi sử dụng nhiều tài nguyên. Ứng dụng công nghệ cảm biến, canh tác thông minh, dẫn truyền dữ liệu, Internet vạn vật, thu thập dữ liệu, ứng dụng, xử lý dữ liệu.

Nông nghiệp là lĩnh vực đòi hỏi sử dụng nhiều tài nguyên. Ứng dụng công nghệ vào nông nghiệp nhằm đảm bảo mục tiêu giảm thiểu yếu tố đầu vào trong khi tạo ra nhiều sản phẩm hơn. Với sự phát triển của công nghệ phụ trợ, Internet vạn vật (IoT) trở thành xu hướng trong canh tác thông qua sử dụng công nghệ thông tin nhằm tối ưu hóa sản lượng cũng như sức khỏe cây trồng. Do vậy, tóm lược xu hướng và thách thức trong ứng dụng giải pháp IoT vào nông nghiệp chính xác, đặc biệt trong canh tác là cần thiết. Bài tổng quan được thực hiện nhằm cung cấp cái nhìn toàn diện về công nghệ IoT trong mô hình canh tác thông minh hiện nay. Thông qua việc tóm lược các công trình nghiên cứu, giải pháp IoT trong canh tác thông minh thường chia làm bốn lớp, bao gồm thu thập, truyền tải, xử lý dữ liệu và giải quyết bài toán. Sử dụng công cụ IoT cho phép xử lý nhiều bài toán trong canh tác, như tối ưu tài nguyên, tiết kiệm nước tưới, giảm lượng phân bón và thuốc trừ sâu, hợp lý hóa năng lượng. Cụ thể, bài tổng quan đã chỉ ra các điểm lưu ý trong sử dụng cảm biến, bộ vi điều khiển, phương thức truyền thông và nền tảng

đám mây. Danh sách các cảm biến giá thành rẻ và hệ thống vi điều khiển phổ biến đã được đề xuất, trong khi phương thức truyền thông được đưa ra thảo luận nhằm cung cấp thông số kỹ thuật cần thiết khi lắp đặt. Từ đó, một vài điểm chính đã đặt ra để định hướng cho việc ứng dụng công cụ IoT trong canh tác thông minh. Bài tổng quan này có thể cung cấp những kiến thức căn bản cho xây dựng và phát triển mô hình canh tác nông nghiệp thông minh.

## 1. INTRODUCTION

The resource-intensive nature of food production in the twenty-first century is becoming an increasingly relevant theme as population growth continues to rise year after year. It is anticipated that by 2050, the world will have 9.4 to 10.1 billion people who rely on biodiversity to survive, increasing the necessity for specialized food production regions [1]. Human-caused environmental changes may result in conditions that make the cultivation of new crops impossible. Similarly, expanding urbanization diminishes manpower in areas normally involved in food production [2], raising costs and reducing the sector's productive potential [3]. To deal with this issue, precision agriculture, particularly smart farming has been regarded as a new farm management concept that employs techniques and technologies at various levels and scales of agricultural production [4, 5], allowing to overcome obstacles in food production demands and workforce reduction [6, 7]. Smart farming, for example, may employ many types of sensors to gather environmental data, like temperature, humidity, light, soil features and plant characteristics [5, 8-10], communication networks to send and receive data, which is then managed and analyzed by data analysis solutions [5, 11, 12]. Consequently, by using these advanced approaches, the main purpose of smart farming is to enhance the efficiency, productivity and sustainability of crop production, and to optimize field-level management [5]. In this case, Internet-of-Things (IoT) refers to a network of physical items integrated with sensors, software, and other technologies for connecting and exchanging data with other devices and systems via the Internet. The utilization of data produced by smart farming aids in increasing output and reducing waste by allowing critical actions to be carried out at the proper time, quantity, and location. Furthermore, current technological advancements in IoT-related sectors enhance the adoption and usage of smart farming with


IoT. Network connectivity, hardware size reduction, power consumption optimization, and device cost reduction are examples of such technological advancements.

The aim of this current review was to provide a comprehensive survey of the application of IoT solutions in smart farming. We first reported the trends of using IoT solutions in precision agriculture, particularly smart farming. Next, all issues related to three basic layers in IoT architectures, including perception, transport, processing and application were comprehensively summarized. Finally, we provided several prospects for the application of IoT solutions in smart farming.

## 2. TREND OF APPLICATION OF IoT SOLUTIONS IN SMART FARMING

The use of IoT solutions in smart farming has increased in recent years, particularly since roughly five years ago [5]. IoT tools, in particular, are used to solve problems related to farming in the field and farming in greenhouse systems [13], which can be categorized into five major groups, including smart irrigation [14, 15], plant health monitoring [8], pest and disease control [16], supply chain traceability [9], and automated machinery operation dynamic [17].

Crop health monitoring is the most prominent application of IoT in field and greenhouse farming [5, 8]. Particularly, physical data, such as temperature, humidity, and light features are monitored and gathered to aid in the assessment of plant growth, development, and yield prediction (Figure 1) [18, 19]. Several models have been successfully utilized to analyze crop biomass and estimate yields on a variety of essential crops grown in the field or greenhouse [20, 21]. In comparison to conventional farming practices, the use of IoT solutions allows for the optimization of farming resources, such as saving irrigation water [14, 15], reducing the quantity of fertilizer and pesticides used [16], optimizing energy resources [11], and lowering human resource expenditures [5, 17].

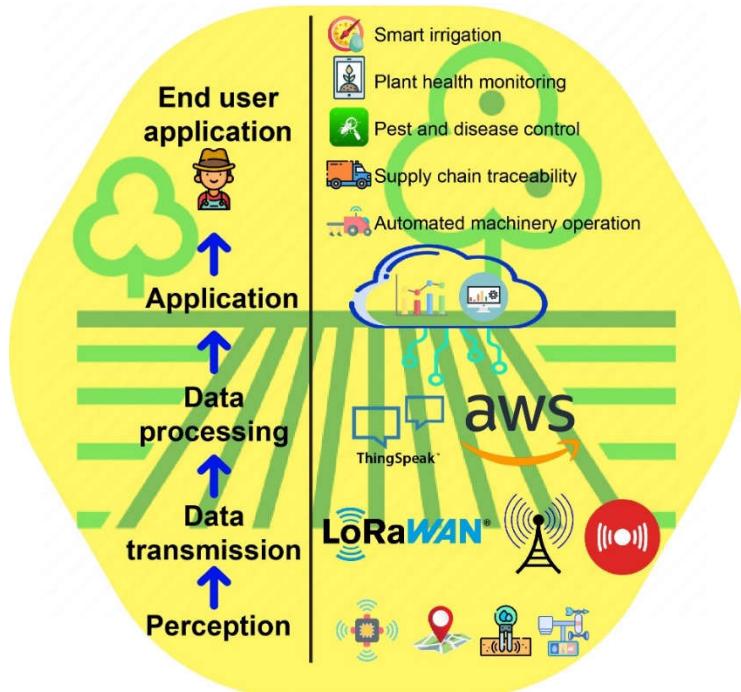

**Figure 1. Potential applications of IoT in smart farming**

In a typical IoT model, data gathering (perception), data transfer (transport), information processing (processing), and application of processed information to issues (application) are four common layers in IoT architectures. Data collection, in particular, is the process of collecting data from the surrounding environment (such as temperature, humidity, light, and localization) utilizing sensors and recognition devices (Figure 1) [22]. Devices can transform many types of data into digital signals, allowing electronic data to be transmitted to a server or database via communication protocols. Finally, the processed data can be used to aid decision-making, take action, or display outcomes through a user interface, with the goal of resolving four challenges for farmers [8, 9, 14, 16, 17]. Many issues remain in the problem of data gathering, data transfer, and information processing in smart farming.

### 3. PERCEPTION ISSUES IN SMART FARMING

In conventional farming practices, data collecting is frequently relied on farmers' direct experience and observation, which leads to inconsistency and inaccuracy in problem-solving [23, 24]. One of the major issues of conventional farming practices is the lack of ability to detect environmental factors concurrently. To deal with this gap, IoT systems

can be utilized in smart farming to collect extensive environmental data in real-time, giving a modern, accurate, and automated approach for better at observing and reacting to environmental elements and crop conditions, allowing for early detection and decision-making [14, 22, 25].

Sensors are currently being developed to estimate indicators of crop growth, soil and atmospheric parameters, and monitor a variety of other indicators (Table 1). The most frequent types of sensors, in particular, are incorporated directly in the field, on greenhouse farming systems (hydroponics, aeroponics), or integrated into smart weather stations. Cameras and multispectral sensors can be installed on unmanned aerial vehicles (UAV) and unmanned ground vehicles (UGV) to obtain aerial photographs of fields [26, 27] and leaf and fruit images [28], respectively (Figure 1). Most farming models in greenhouses and fields only collected data on 3 - 4 indicators related to soil and atmosphere features and vegetation indices [10, 22]. Among them, vegetation indices are thought to be mainly associated with yield and yield-related characteristics and to evaluate the canopy normalized difference vegetation index (NDVI) [29-31]. For example, NDVI measured by a multispectral sensor mounted in a UAV was used to compare the growth and development of wheat (*Triticum*

*aestivum*) cultivars under limited irrigation and full irrigation treatments [31]. It has been demonstrated that the NDVI is significantly correlated with biomass and several yield-compounding traits of wheat plants [31]. Recently, a concept of the monitoring system for a greenhouse system has been constructed by using three simple IoT-based sensors [13].

More specifically, DHT11 (Adafruit Industries, USA) and DHT22 sensors (Adafruit Industries, USA) were selected to measure temperature (ranging from 0 - 50 ± 2°C) and humidity (ranging from 20 - 90 ± 4% RH), while BH1750 sensor (ROHM Apollo Co., Ltd., Japan) was used to estimate the light density (ranging from 0 - 27306 lx) [13].

**Table 1. Introduction of sensors used in smart farming**

Issues in smart farming	Parameters	Plots	Common models	Origin
Plant health monitoring	Plant growth	1	Cyber-shot DSC-QX100	Sony Electronics Inc., Japan
		2	Parrot Sequoia	MicaSense Inc., USA
	Pest and disease detection	3	FLIR Blackfly 23S6C	FLIR Systems, USA
	Active canopy	4	ACS-430, ACS-470	Holland Scientific Inc., USA
Soil monitoring	Soil temperature, soil moisture	5	DS18B20	Maxim Integrated, USA
	Soil pH	8	E-201	Shanghai REX Sensor Technology Co, China
	Chemical components (nitrate, nitrogen)	9	SEN0244	DFROBOTS, China
	Air temperature, air humidity	10	DHT11, DHT22	AM2302, Aosong Electronics Co. Ltd., China
Atmosphere monitoring	Solar radiation	11	SQ-110	Apogee Instruments, Inc., USA
		12	YF-S402	Graylogix, India
	Rain content	13	YL-83	Vaisala Corp., Finland
		14	SE-WS700D	Lufft Inc., Germnay
	Light density	15	BH1750	Rohm Semiconductor, Japan
		16	TSL2561	Adafruit Industries, USA
	Atmosphere pressure	17	MPL3115A2	NXP Semiconductors, Netherlands
		18	WS-3000	Ambient Weather, USA
	Wind direction and speed	19	SEN08942	SparkFun Electronics, USA
		20	MG-811	Zhengzhou Winsen Electronics Technology Co., Ltd., China
	CO <sub>2</sub> concentration	21	MQ135	Waveshare Electronics, China
		22	Mifare Ultralight NFC tag	NXP Semiconductors, Netherlands
Others	Tracking	23	Blueberry RFID reader	Tertium Technology, India
	Localization	24	UM220-III	Unicore Communication Inc., China

Hardware selection is thought as a significant component in deciding the success of IoT projects used in agriculture [9, 32]. These single-board computers (SBCs) are regarded as nodes or devices capable of gathering data from sensors and/or operating devices. Up till now, Arduino, Raspberry Pi, BeagleBone, and

NVIDIA Jetson Nano are among popular SBCs in agricultural IoT projects [5, 10, 22, 32]. Specifically, Arduino, including variations of Arduino UNO, Arduino Nano, and Arduino Mega, is an open-source hardware platform that runs C/C++ programming language written by users and is based on the use of a

microprocessor board. For example, a low-cost platform for monitoring and controlling CO<sub>2</sub> has been designed by using Arduino-based microcontrollers to access the data logging of CO<sub>2</sub> concentrations [33]. Meanwhile, Raspberry Pi and BeagleBone are mini SBCs that have more robust performance and processing capabilities than Arduino and run versions of the Linux operating system that allow for linguistic customization of their source code (Python, C/C++, JavaScript, Node.js, Java, and Shell scripting). Finally, the NVIDIA Jetson Nano is a form of SBC optimized for graphics processing that can be trained for image recognition, making it frequently used in detecting difficulties, such as weeds, pests, and detecting ripe fruit. Recently, the ESP microcontroller system (created by Espressif Systems) was developed and widely used in small-scale agricultural IoT projects, with two models including ESP8266 (compact, integrated WiFi) and ESP32 (upgraded version of ESP8266 with extra Bluetooth). In smart farming, a total of five most popular hardware modules for irrigation control was Arduino UNO, Node MCU-ESP8266, Arduino Mega, Raspberry Pi 2 Model B, and Raspberry Pi 3 Model B+ [5, 10, 15].

#### **4. DATA TRANSMISSION ISSUES IN SMART FARMING**

IoT communication is critical for linking agricultural equipment and machines. Data collected by sensor nodes is often transmitted to a data processor over a wired or wireless network. Distance, bandwidth, performance, dependability and security, compatibility and cost are all essential considerations when choosing a communication channel for agricultural IoT applications. The most often used protocols for wired networks in smart farming are controller area networks and Ethernet. Additionally, Long Range Wireless Area Network (LoRaWAN), cellular network protocols (like general packet radio service and 3G/4G/5G) and Sigfox are the most commonly used protocols for long-range wireless networks, whereas ZigBee, Wi-Fi and Bluetooth are the most commonly used protocols for short- and medium-range wireless networks.

Wi-Fi has a high bandwidth (54 Mbps or more with Wi-Fi 4, and up to 3.5 Gbps with Wi-

Fi 6), allowing for fast data transfer; nevertheless, Wi-Fi consumes a large amount of power and has a restricted operating range (a few hundred meters). Bluetooth, an open standard technology developed by the Bluetooth Special Interest Group, exhibits a low bandwidth (with Bluetooth 5.0, the highest data transfer rate is 3 Mbps), requires little power and has a limited range (100 meters). LoRa is a wireless technology for mesh networks with low bandwidth, low power consumption, and long range (up to 15 km in rural regions). It is also a reliable communication technique in peripheral locations and distributed IoT applications. NB-IoT (Narrowband IoT) offers a very narrow frequency band, typically 200 kHz, low power consumption, and a wide range, much like LoRa. Because NB-IoT is built on top of the current mobile network infrastructure, it has very high dependability and coverage. Meanwhile, Zigbee provides low bandwidth, low power consumption, and works well in household contexts by employing a mesh network concept that allows devices to send data across other devices to extend range and reliability [5]. Recently, (i) mobile networks, such as 3G (data upload speed reaches 7.2 Mbps, download speed reaches 2 Mbps), 4G/LTE (data upload speed reaches 150 Mbps, download speed reaches 50 Mbps) and 5G, (ii) Bluetooth radio, including IEEE 802.15.1-Bluetooth (frequency range 2,400 - 2,483.5 MHz, maximum data transfer rate up to 3 Mbps) and BLE (frequency range 2,400 - 2,483.5 GHz, maximum data transfer rate up to 2 Mbps), (iii) Zigbee (maximum data transfer rate up to 250 kbps), (iv) Wi-Fi radio, including IEEE 802.11a (frequency range 5,725 - 5,875 MHz, maximum data transfer rate up to 54 Mbps), IEEE 802.11b (frequency range 2,400 - 2,500 MHz, maximum data transfer rate up to 11 Mbps), IEEE 802.11g (frequency range 2,400 - 2,500 MHz, maximum data transfer rate up to 54 Mbps), IEEE 802.11n (maximum data transfer rate up to 600 Mbps), IEEE 802.1ac (maximum data transfer rate maximum data rate up to 3.46 Gbps) and IEEE 802.11ah (maximum data transfer rate up to 40 Mbps), (v) NB-IoT radio (maximum data transfer rate up to 200 kbps), (vi) Sigfox (maximum data transmission rate up to 600 bps) and (vii) LoRaWAN wave (maximum data

transmission rate from 0.3 - 50 kbps) were used to send data collected from sensors into a cloud-based platform to control irrigation systems [10, 15]. For example, a simple LoRa-based platform for remote monitoring of agriculture farms in Chile has been constructed to enable continuous data collection from many IoT-based devices [34]. Particularly, two types of calculations, like ambient parameters (temperature, humidity, ultraviolet and vibration) and soil parameters (soil temperature and moisture) were explored for the design [34]. The data transmission was built based on a low power wide area network (LPWAN) using LoRaWAN to adapt to the large scale [34].

## 5. DATA PROCESSING ISSUES IN SMART FARMING

Previously, the usage of IoT solutions in agriculture was frequently focused on gathering and storing data from sensor nodes. However, in recent years, an increasing number of IoT solutions for agriculture have shifted to cloud-based data processing, machine learning, artificial intelligence, and big data [5]. The capacity of data obtained from IoT-based sensors in smart farming models is enormous and grows seasonally. Data capacity in agricultural models has been determined by the amounts of sensors, the frequency with which data is collected, and the type of data collected [25]. Thus, an issue has been raised on how platforms process and store data collected from IoT sensors in smart cultivation. To deal with this problem, cloud-based platforms can help IoT systems scale by storing, processing, and visualizing data acquired from sensor nodes, allowing end users to control operations. Up till now, ThinkgSpeak, FIWARE, Ubidots, SmartFarmNet, AWS IoT, and Thinger.io were among the most prominent cloud systems used in smart cultivation [5, 25]. Particularly, ThingSpeak is the most common cloud-based platform in smart farming since it is open source and has modest infrastructure requirements, making it suited for simple data from environmental sensors. Meanwhile, Thinger.io is wholly based on infrastructure services supplied by cloud providers, such as Amazon AWS and Microsoft Azure, and thus always has application programming interfaces for real-time monitoring and analyzing data [5].

However, the cost of adopting cloud platform services are frequently prohibitively expensive when compared to the requirements of smart farming models. Self-development of simple data analysis and processing tools is frequently used to handle huge amounts of information in a short period of time. The majority of smart farming application processing technologies is related to six core keywords, including artificial intelligence [22], big data, computer vision [17], machine learning [25], blockchain, and fuzzy logic [15]. The majority of these technologies is aimed at monitoring plant health and irrigation system control issues [10].

The automation of management in smart farming models using IoT solutions is dependent on the manipulation of numerous variables. For example, soil moisture and temperature monitoring were commonly utilized to activate irrigation systems in a simple closed-loop control method [13-15]. Water management and crop monitoring in greenhouse farming, on the other hand, can be more complicated, needing more climate parameters and crop characteristics. Because it allows calculations based on imprecise and uncertain information, which is frequently encountered in cultivation practice, the data processing approaches based on fuzzy logic have been successfully employed in irrigation system control [15]. An irrigation system based on fuzzy logic, for example, can use data, such as air temperature, soil moisture, time since last watering, and crop type to calculate when and how much water should be applied. These parameters can be represented as fuzzy variables, like "high temperature", "average humidity", "recently watered", and so on, and fuzzy rules can be used to make irrigation management decisions [5, 10, 14].

For example, an automated irrigation system has been constructed based on RTC-DS1302 water pump and Arduino Mega-2560. A timing sensor was explored to manage the water volume for farming in coastal Java Island, Indonesia [35]. Particularly, the microcontroller is set up for automatic drip irrigation and sprinkler irrigation systems for the cultivation of onions (*Allium cepa*) and cabbage (*Brassica oleracea*) [35]. The timer system is created with a real-time clock and an Arduino SBC to irrigate at three periods within 15 minutes, including 07:00, 11:00, and 17:00

[35]. Controlled watering systems with timers and humidity sensors have previously been designed for lettuce (*Lactuca sativa*) cultivation [36]. The results show that using a timed irrigation system with two formulas,  $\Theta=0.3$  (volumetric water content reaches  $0.3 \text{ m}^3 \text{ water/m}^3 \text{ soil}$ ) and  $0.4$  (volumetric water content reaches  $0.4 \text{ m}^3 \text{ water/m}^3 \text{ soil}$ ), saved 17 and 42% of irrigation solution, respectively [35].

## **6. FUTURE DIRECTION FOR THE APPLICATION OF IoT SOLUTIONS IN SMART FARMING**

IoT solutions for smart farming take advantage of the cloud-based computing platform and scalability to store a huge amount of environmental data obtained by sensors. These big data sets could be utilized by using machine-learning to enhance the management capacity of smart farming. For example, the processing of big data may be used to get insight into the growth and development of crops, optimize resources (energy, fertilizer, water and pesticide) and increase crop quality and productivity. Thus, using SBCs and UAVs or UGVs together with IoT-based sensors to collect data in indoor (greenhouse) or outdoor environments (field) were highly recommended for crop monitoring solutions [31, 37-39].

Next, computer vision is indeed a significant application of IoT in precision agriculture. Computer vision combined with IoT technologies helps in monitoring and managing crops, assessing plant health, and making data-driven decisions for enhancing agricultural productivity. The most significant advantage of using computer imaging IoT-based devices is that they eliminate human labor. This can assist farmers in properly managing acres of land. These sensors can also tell them what type of finite natural resources to use and when to use them. They also offer crop monitoring and soil quality tracking to farmers. Farmers can alter their production based on information such as soil quality and weather conditions. Furthermore, these IoT-based smart sensors and other gadgets can reduce crop losses and optimize yields on the same area of land.

Various kinds of network connections, like wired and wireless connections have been explored to interact between IoT-based devices. It is strongly believed that two typical wired

networks, such as CAN and Ethernet are often applied for indoor agriculture, like greenhouse conditions because the physical components of these wired networks are thought to be less susceptible to climatic agent impacts. Meanwhile, wireless connections, including Wi-Fi, ZigBee and LoRa were used both in greenhouse and field conditions. Wi-Fi exhibited several serious issues, like power consumption and signal range, whereas ZigBee and LoRa were energy-efficient protocols for communication in wireless networks [34, 40]. Thus, improvement in algorithms for the reduction of power consumption in data transferring has been still needed.

## **7. CONCLUSIONS**

In this mini-review, we provided a systematic survey of the state-of-the-art of IoT-based solutions in smart farming. By collecting all high-quality publications related to smart farming, the application of IoT-based solutions could be classified into five main aspects, including smart irrigation, plant health monitoring, pest and disease control, supply chain traceability, and automated machinery operation dynamic. Among them, three issues related to the layers of IoT architectures, including perception, data transport and data processing were intensively discussed. Further studies may extend this current review by including other relevant publications and complementary analysis of other issues of the IoT architecture in smart farming.

## **REFERENCES**

- [1]. J. Shi, G. An, A. P. M. Weber & D. Zhang (2023). Prospects for rice in 2050. *Plant Cell Environ.* 46(4): 1037-1045.
- [2]. D. Satterthwaite, G. McGranahan & C. Tacoli (2010). Urbanization and its implications for food and farming. *Philos Trans R Soc Lond B Biol Sci.* 365(1554): 2809-20.
- [3]. S. H. Mahmoud & T. Y. Gan (2018). Urbanization and climate change implications in flood risk management: Developing an efficient decision support system for flood susceptibility mapping. *Sci Total Environ.* 636: 152-167.
- [4]. C. Agrimonti, M. Lauro & G. Visioli (2021). Smart agriculture for food quality: facing climate change in the 21st century. *Crit Rev Food Sci Nutr.* 61(6): 971-981.
- [5]. E. Navarro, N. Costa & A. Pereira (2020). A Systematic Review of IoT Solutions for Smart Farming. *Sensors (Basel).* 20(15): 4231.
- [6]. L. Christiaensen, Z. Rutledge & J. E. Taylor (2021). Viewpoint: The future of work in agri-food. *Food Policy.* 99: 101963.
- [7]. L. Emmi, R. Fernandez & J. M. Guerrero (2022). Editorial: Robotics for smart farms. *Front Robot AI.* 9: 1113440.
- [8]. K. Kour, D. Gupta, K. Gupta, D. Anand, D. H. Elkamchouchi, C. M. Perez-Oleaga, M. Ibrahim & N. Goyal (2022). Monitoring Ambient Parameters in the IoT Precision

- Agriculture Scenario: An Approach to Sensor Selection and Hydroponic Saffron Cultivation. *Sensors (Basel)*. 22(22).
- [9]. I. Sergi, T. Montanaro, F. L. Benvenuto & L. Patrono (2021). A Smart and Secure Logistics System Based on IoT and Cloud Technologies. *Sensors (Basel)*. 21(6).
- [10]. L. Garcia, L. Parra, J. M. Jimenez, J. Lloret & P. Lorenz (2020). IoT-Based Smart Irrigation Systems: An Overview on the Recent Trends on Sensors and IoT Systems for Irrigation in Precision Agriculture. *Sensors (Basel)*. 20(4).
- [11]. A. Inn, R. Hassan, Z. Daud & S. Usman (2022). Internet of Things for Smart Solar Energy: An IoT Farm Development. 2022 International Conference on Business Analytics for Technology and Security (ICBATS). 1-5.
- [12]. J. A. th Manalo, K. P. Balmeo, J. C. Berto, F. M. Saludez, J. D. Villaflor & A. M. Pagdanganan (2016). Integrating climate-smart rice agriculture into secondary-level curriculum: lessons from three high schools in the Philippines. Springerplus. 5(1): 1592.
- [13]. N. Jaliyagoda, S. Lokuge, Pmpc Gunathilake, K. S. P. Amarasingha, W. A. P. Weerakkody, P. C. G. Bandaranayake & A. U. Bandaranayake (2023). Internet of things (IoT) for smart agriculture: Assembling and assessment of a low-cost IoT system for polytunnels. *PLoS One*. 18(5): e0278440.
- [14]. E. Palomar-Cosin & M. Garcia-Valls (2022). Flexible IoT Agriculture Systems for Irrigation Control Based on Software Services. *Sensors (Basel)*. 22(24).
- [15]. Emmanuel Abiodun Abioye, Mohammad Shukri Zainal Abidin, Mohd Saiful Azimi Mahmud, Salinda Buyamin, Mohamad Hafis Izran Ishak, Muhammad Khairie Idham Abd Rahman, Abdulrahman Okino Otuoze, Patrick Onotu & Muhammad Shahrukl Azwan Ramli (2020). A review on monitoring and advanced control strategies for precision irrigation. *Computers and Electronics in Agriculture*. 173: 105441.
- [16]. D. Jin, H. Yin, R. Zheng, S. J. Yoo & Y. H. Gu (2023). PlantInfoCMS: Scalable Plant Disease Information Collection and Management System for Training AI Models. *Sensors (Basel)*. 23(11).
- [17]. L. Droukas, Z. Doulgeri, N. L. Tsakiridis, D. Triantafyllou, I. Kleitsiotis, I. Mariolis, D. Giakoumis, D. Tzovaras, D. Kateris & D. Bochtis (2023). A Survey of Robotic Harvesting Systems and Enabling Technologies. *J Intell Robot Syst*. 107(2): 21.
- [18]. B. Yang & Y. Xu (2021). Applications of deep-learning approaches in horticultural research: a review. *Hortic Res*. 8(1): 123.
- [19]. M. Shahhosseini, G. Hu, I. Huber & S. V. Archontoulis (2021). Coupling machine learning and crop modeling improves crop yield prediction in the US Corn Belt. *Sci Rep*. 11(1): 1606.
- [20]. L. Gong, M. Yu, S. Jiang, V. Cutsuridis & S. Pearson (2021). Deep Learning Based Prediction on Greenhouse Crop Yield Combined TCN and RNN. *Sensors (Basel)*. 21(13).
- [21]. K. O. Oladosu, T. B. Asafa, A. O. Alade & M. F. Erinosho (2021). Artificial neural network prediction of CO emission and ash yield from co-combustion of empty fruit bunch, palm kernel shell and kaolin. *Environ Sci Pollut Res Int*. 28(31): 42596-42608.
- [22]. A. Z. Bayih, J. Morales, Y. Assabie & R. A. de By (2022). Utilization of Internet of Things and Wireless Sensor Networks for Sustainable Smallholder Agriculture. *Sensors (Basel)*. 22(9).
- [23]. G. N. Yuan, G. P. B. Marquez, H. Deng, A. Iu, M. Fabella, R. B. Salonga, F. Ashardiono & J. A. Cartagena (2022). A review on urban agriculture: technology, socio-economy, and policy. *Heliyon*. 8(11): e11583.
- [24]. D. Jimenez, H. Dorado, J. Cock, S. D. Prager, S. Delerce, A. Grillon, M. Andrade Bejarano, H. Benavides & A. Jarvis (2016). From Observation to Information: Data-Driven Understanding of on Farm Yield Variation. *PLoS One*. 11(3): e0150015.
- [25]. K. Dineva & T. Atanasova (2022). Cloud Data-Driven Intelligent Monitoring System for Interactive Smart Farming. *Sensors (Basel)*. 22(17).
- [26]. Wanxue Zhu, Ehsan Eyshi Rezaei, Hamideh Nouri, Zhigang Sun, Jing Li, Danyang Yu & Stefan Siebert (2022). UAV-based indicators of crop growth are robust for distinct water and nutrient management but vary between crop development phases. *Field Crops Research*. 284: 108582.
- [27]. Uma Shankar Panday, Arun Kumar Pratihast, Jagannath Aryal & Rijan Bhakta Kayastha (2020). A review on drone-based data solutions for cereal crops. *Drones*. 4(3): 41.
- [28]. H. Zhou, J. Xiao, H. Kang, X. Wang, W. Au & C. Chen (2022). Learning-Based Slip Detection for Robotic Fruit Grasping and Manipulation under Leaf Interference. *Sensors (Basel)*. 22(15).
- [29]. Z. Ji, Y. Pan, X. Zhu, J. Wang & Q. Li (2021). Prediction of Crop Yield Using Phenological Information Extracted from Remote Sensing Vegetation Index. *Sensors (Basel)*. 21(4).
- [30]. Yuri Taddia, Corinne Corbau, Joana Buoninsegna, Umberto Simeoni & Alberto Pellegrinelli (2021). UAV Approach for Detecting Plastic Marine Debris on the Beach: A Case Study in the Po River Delta (Italy). *Drones*. 5(4): 140.
- [31]. M. A. Hassan, M. Yang, A. Rasheed, G. Yang, M. Reynolds, X. Xia, Y. Xiao & Z. He (2019). A rapid monitoring of NDVI across the wheat growth cycle for grain yield prediction using a multi-spectral UAV platform. *Plant Sci*. 282: 95-103.
- [32]. H. Yin, Y. Cao, B. Marelli, X. Zeng, A. J. Mason & C. Cao (2021). Soil Sensors and Plant Wearables for Smart and Precision Agriculture. *Adv Mater*. 33(20): e2007764.
- [33]. H. Chen & J. Markham (2020). Using microcontrollers and sensors to build an inexpensive CO<sub>2</sub> control system for growth chambers. *Appl Plant Sci*. 8(10): e11393.
- [34]. M. A. Ahmed, J. L. Gallardo, M. D. Zuniga, M. A. Pedraza, G. Carvajal, N. Jara & R. Carvajal (2022). LoRa Based IoT Platform for Remote Monitoring of Large-Scale Agriculture Farms in Chile. *Sensors (Basel)*. 22(8).
- [35]. A. Sudarmaji, S. Sahirman, Saparso & Y. Ramadhani (2019). Time based automatic system of drip and sprinkler irrigation for horticulture cultivation on coastal area. *IOP Conference Series: Earth and Environmental Science*. 250(1): 012074.
- [36]. F. F. Montesano, M. W. van Iersel & A. Parente (2016). Timer versus moisture sensor-based irrigation control of soilless lettuce: Effects on yield, quality and water use efficiency. *Horticultural Science*. 43(2): 67-75.
- [37]. A. Morales, R. Guerra, P. Horstrand, M. Diaz, A. Jimenez, J. Melian, S. Lopez & J. F. Lopez (2020). A Multispectral Camera Development: From the Prototype Assembly until Its Use in a UAV System. *Sensors (Basel)*. 20(21): 6129.
- [38]. Songyang Li, Fei Yuan, Syed Tahir Ata-Ul-Karim, Hengbiao Zheng, Tao Cheng, Xiaojun Liu, Yongchao Tian, Yan Zhu, Weixing Cao & Qiang Cao (2019). Combining Color Indices and Textures of UAV-Based Digital Imagery for Rice LAI Estimation. *Remote Sensing*. 11(15): 1763.
- [39]. Y. Zhao, J. Ma, X. Li & J. Zhang (2018). Saliency Detection and Deep Learning-Based Wildfire Identification in UAV Imagery. *Sensors (Basel)*. 18(3): 712.
- [40]. S. Kim, M. Lee & C. Shin (2018). IoT-Based Strawberry Disease Prediction System for Smart Farming. *Sensors (Basel)*. 18(11).