

# Machine-Level Programming III: Procedures (*aka Functions*)


Professor Hugh C. Lauer

CS-2011, Machine Organization and Assembly Language

(Slides include copyright materials from *Computer Systems: A Programmer's Perspective*, by Bryant and O'Hallaron, and from *The C Programming Language*, by Kernighan and Ritchie)

# Mechanisms in Functions

- **Passing control**
  - To beginning of function code
  - Back to return point
- **Passing data**
  - function arguments
  - Return value
- **Memory management**
  - Allocate during function execution
  - Deallocate upon return
- **Mechanisms all implemented with machine instructions**
- **x86-64 implementation of a function uses only those mechanisms required**

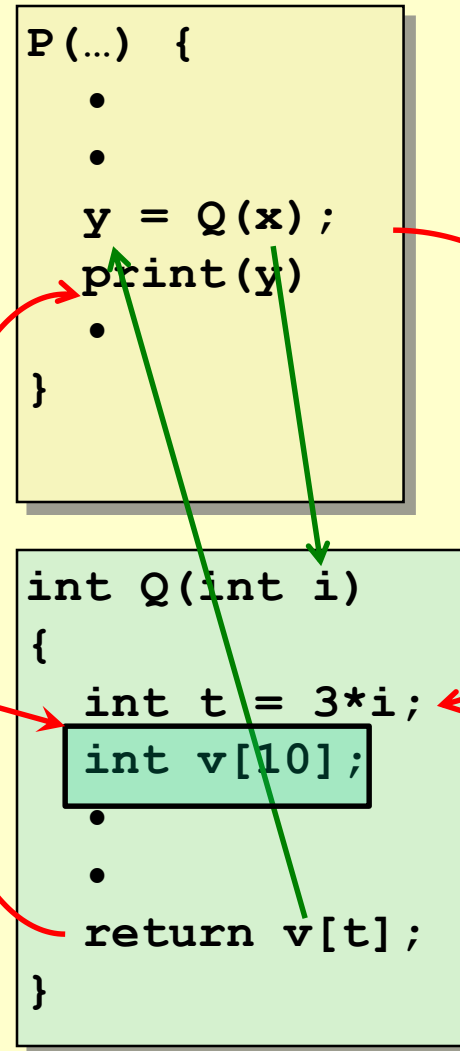

# Today

## ■ ~~Procedures~~ Functions

- Stack Structure
- Calling Conventions
  - Passing control
  - Passing data
  - Managing local data
- Illustration of Recursion

# x86-64 Stack

- Region of memory managed with stack discipline
- Grows toward lower addresses
- Register `%rsp` contains lowest stack address
  - address of “top” element

Stack Pointer: `%rsp` →

Stack “Bottom”



Increasing  
Addresses

Stack  
Grows  
Down


Stack “Top”



# x86-64 Stack: Push

## ■ `pushq Src`


- Fetch operand at *Src*
- Decrement `%rsp` by 8
- Write operand at address given by `%rsp`

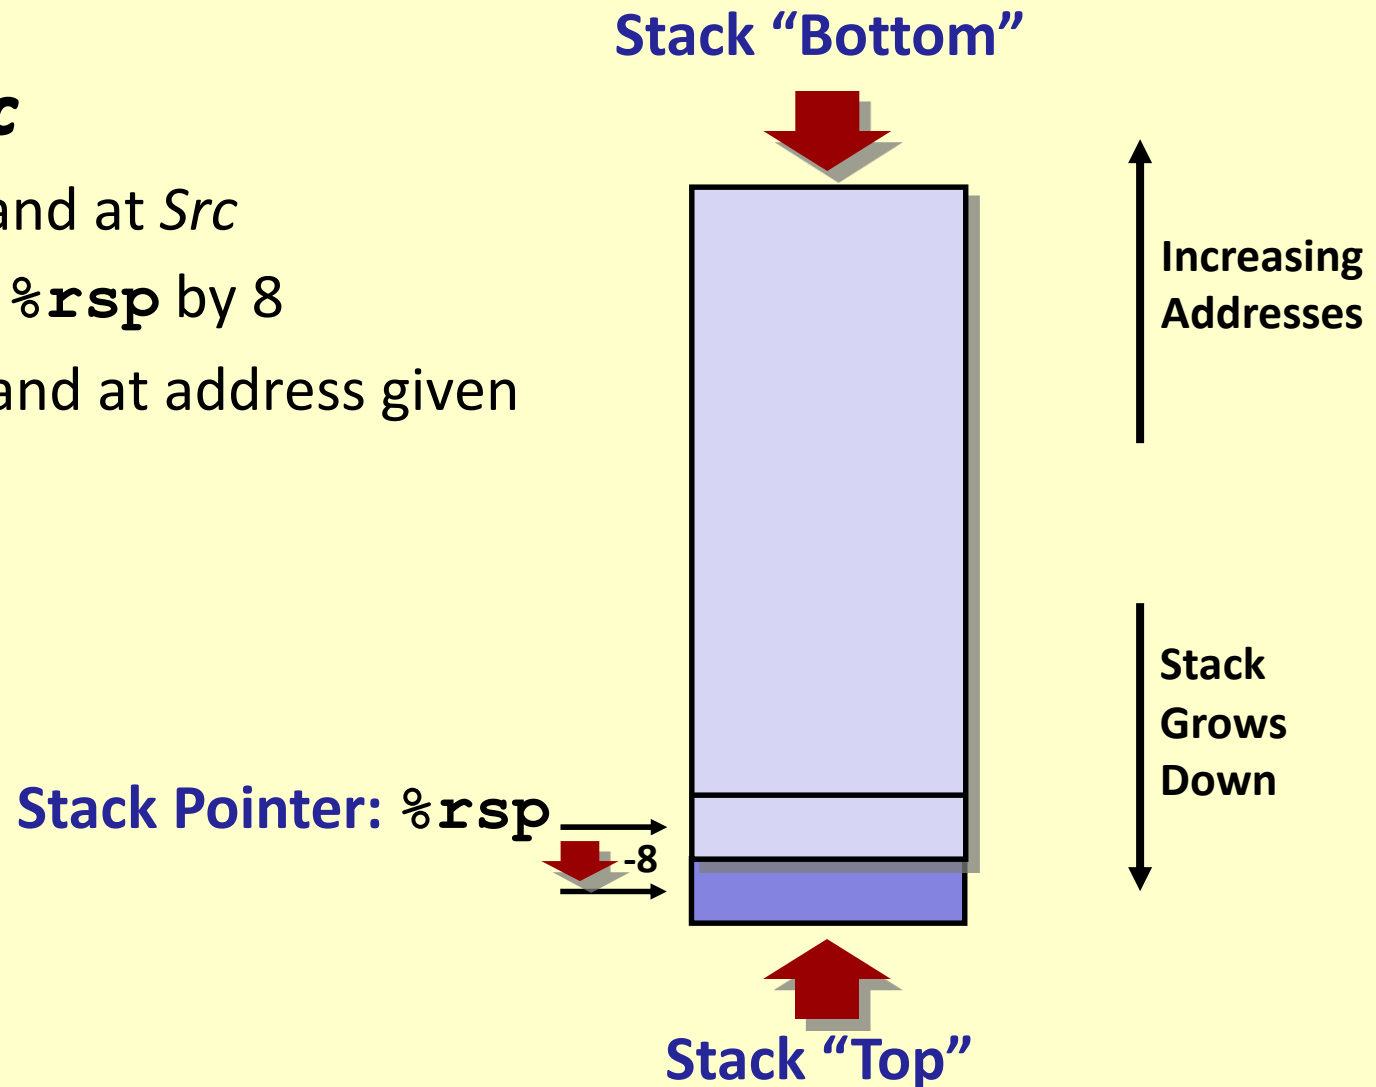

# x86-64 Stack: Pop

## ■ `popq Dest`

- Read value at address given by `%rsp`
- Increment `%rsp` by 8
- Store value at `Dest` (must be register)

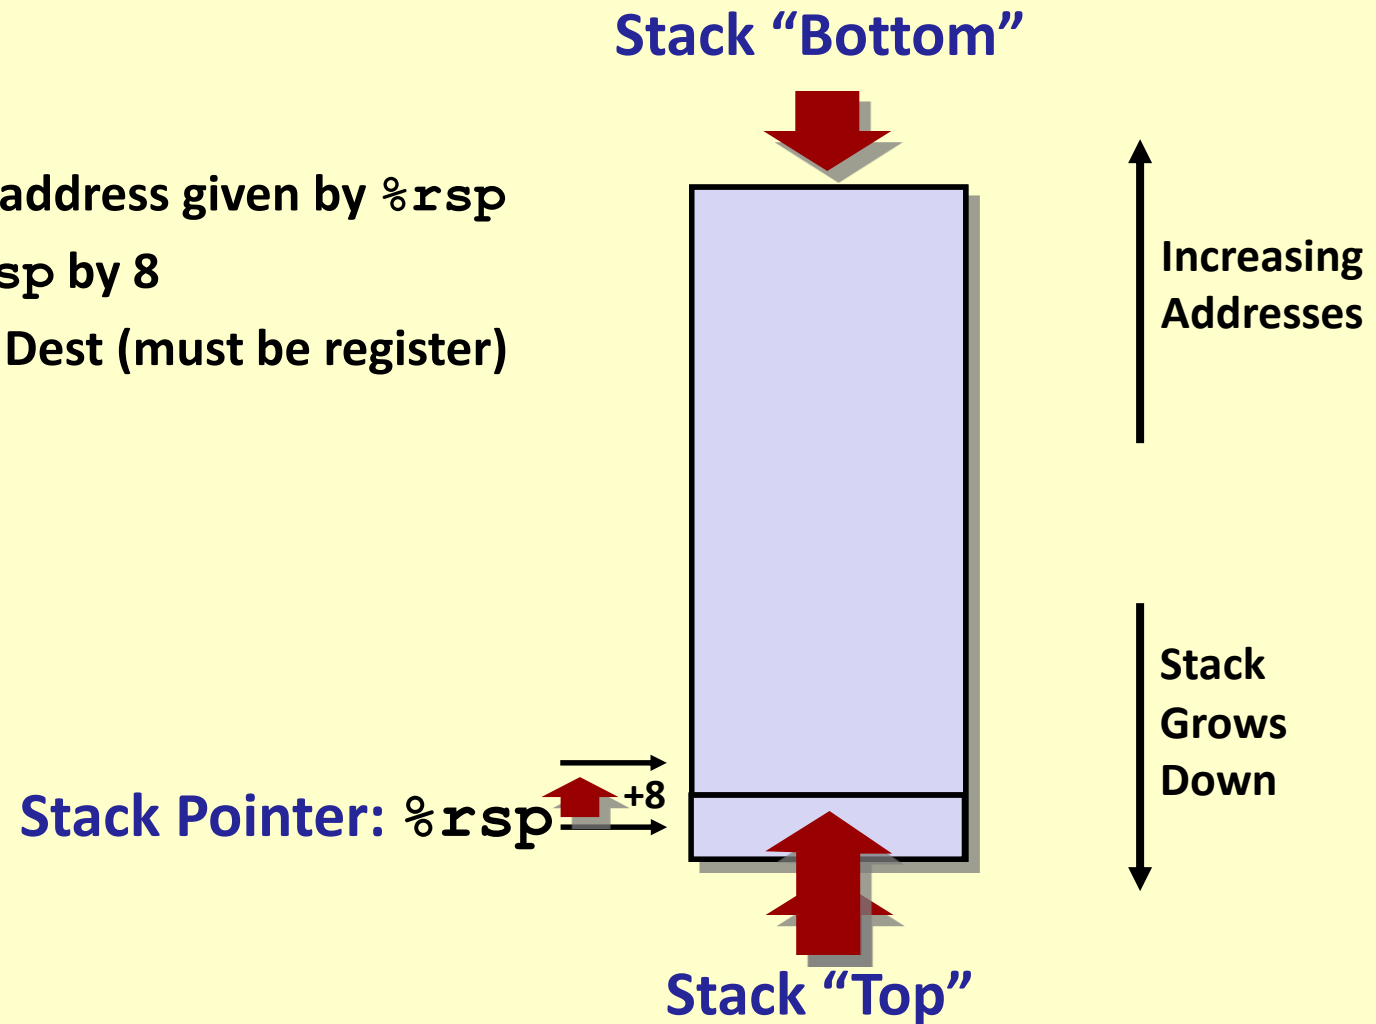

# Today

## ■ ~~Procedures~~ Functions

- Stack Structure
- Calling Conventions
  - Passing control
  - Passing data
  - Managing local data
- Illustration of Recursion

# Code Examples

```
void multstore
(long x, long y, long *dest)
{
    long t = mult2(x, y);
    *dest = t;
}
```

```
0000000000400540 <multstore>:
400540: push    %rbx                # Save %rbx
400541: mov     %rdx,%rbx           # Save dest
400544: callq   400550 <mult2>      # mult2(x,y)
400549: mov     %rax, (%rbx)        # Save at dest
40054c: pop     %rbx                # Restore %rbx
40054d: retq                                # Return
```

Caller save  
register  
(p. 251,  
§3.7.5)

```
long mult2
(long a, long b)
{
    long s = a * b;
    return s;
}
```

```
0000000000400550 <mult2>:
400550: mov     %rdi,%rax           # a
400553: imul    %rsi,%rax           # a * b
400557: retq                                # Return
```



# Function Control Flow

- Use stack to support procedure call and return
- **Function/Procedure call:** `call label`
  - Push *return address* on stack
  - Jump to *label*
- **Return address:—**
  - Address of the next instruction immediately after call
  - Example on next slide
- **Procedure return:** `ret`
  - Pop return address from stack
  - Jump to address

# Control Flow Example #1

```
0000000000400540 <multstore>:  
.  
.  
400544: callq 400550 <mult2>  
400549: mov  %rax, (%rbx)  
.  
.
```

```
0000000000400550 <mult2>:  
400550: mov  %rdi, %rax  
.  
.  
400557: retq
```

0x130

0x128

0x120

%rsp

0x120

%rip

0x400544

# Control Flow Example #2

```
0000000000400540 <multstore>:
.
.
400544: callq 400550 <mult2>
400549: mov    %rax, (%rbx)
.
.
```

```
0000000000400550 <mult2>:
400550: mov    %rdi,%rax
.
.
400557: retq
```

0x130

0x128

0x120

0x118

0x400549

%rsp

0x118

%rip

0x400550

# Control Flow Example #3

```
0000000000400540 <multstore>:
```

•  
•  
•

```
400544: callq 400550 <mult2>
```

```
400549: mov    %rax, (%rbx) ←
```

•  
•

```
0000000000400550 <mult2>:
```

```
400550: mov    %rdi, %rax
```

•  
•

```
400557: retq ←
```

0x130

0x128

0x120

0x118

0x400549

%rsp

0x118

%rip

0x400557

# Control Flow Example #4

```
0000000000400540 <multstore>:  
.  
.  
400544: callq 400550 <mult2>  
400549: mov  %rax, (%rbx)  
.  
.
```

```
0000000000400550 <mult2>:  
400550: mov  %rdi, %rax  
.  
.  
400557: retq
```

0x130

0x128

0x120

%rsp

0x120

%rip

0x400549

**Note:** *Callee* must return stack to condition it found it (subject to side effects)

# Today

## ■ ~~Procedures~~ Functions

- Stack Structure
- Calling Conventions
  - Passing control
  - Passing data
  - Managing local data
- Illustrations of Recursion & Pointers

# Procedure Data Flow

## Registers

### ■ First 6 arguments

<code>%rdi</code>
<code>%rsi</code>
<code>%rdx</code>
<code>%rcx</code>
<code>%r8</code>
<code>%r9</code>

### ■ Return value

<code>%rax</code>
-------------------

## Stack

...
Arg <i>n</i>
...
Arg 8
Arg 7

### ■ Only allocate stack space when needed

# Data Flow Examples

```
void multstore
(long x, long y, long *dest)
{
    long t = mult2(x, y);
    *dest = t;
}
```

```
0000000000400540 <multstore>:
    # x in %rdi, y in %rsi, dest in %rdx
    ...
400541: mov     %rdx,%rbx        # Save dest
400544: callq   400550 <mult2>     # mult2(x,y)
    # t in %rax
400549: mov     %rax,(%rbx)        # Save at dest
    ...
```

```
long mult2
(long a, long b)
{
    long s = a * b;
    return s;
}
```

```
0000000000400550 <mult2>:
    # a in %rdi, b in %rsi
400550: mov     %rdi,%rax        # a
400553: imul    %rsi,%rax        # a * b
    # s in %rax
400557: retq                      # Return
```



# Today

## ~~Procedures~~ Functions

- Stack Structure
- Calling Conventions
  - Passing control
  - Passing data
  - Managing local data
- Illustration of Recursion

# Stack-Based Languages

## ■ Languages that support recursion

- e.g., C, Pascal, Java
- Code must be “*Reentrant*”
  - Multiple simultaneous instantiations of single function
- Need some place to store state of each instantiation
  - Arguments
  - Local variables
  - Return pointer

## ■ Stack discipline

- State for given function needed for limited time
  - From when called to when return
- Callee returns before caller does

## ■ Stack allocated in *Frames*

- state for single function instantiation

# Call Chain Example


```
yoo (...)  
{  
  .  
  .  
  who () ;  
  .  
  .  
}
```

```
who (...)  
{  
  . . .  
  amI () ;  
  . . .  
  amI () ;  
  . . .  
}
```

```
amI (...)  
{  
  .  
  .  
  amI () ;  
  .  
  .  
}
```

function amI () is recursive

## Example Call Chain

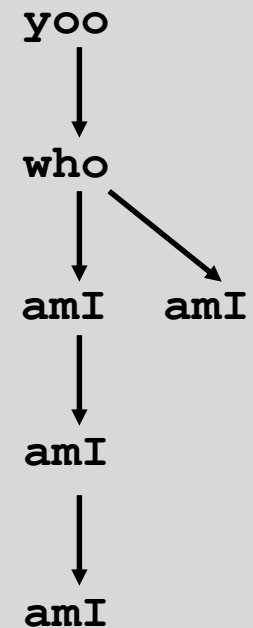


# Stack Frames

## ■ Contents

- Return information
- Local storage (if needed)
- Temporary space (if needed)

Frame Pointer: `%rbp`  
(Optional) x


Stack Pointer: `%rsp`

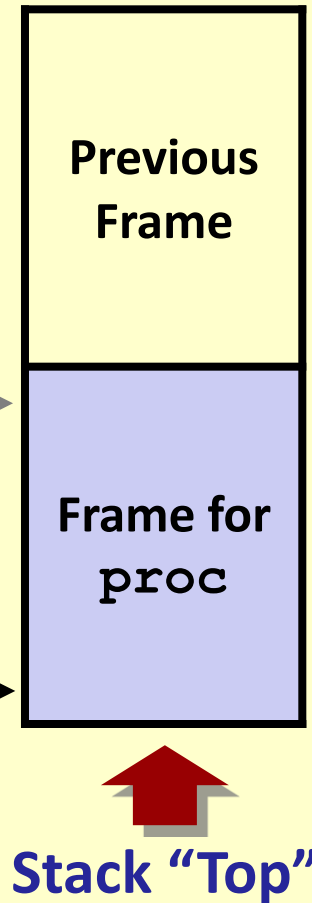

## ■ Management


- Space allocated when enter function
  - “Set-up” code
  - Includes push by **call** instruction
- Deallocated when return
  - “Finish” code
  - Includes pop by **ret** instruction

# Example






```
yoo (...)  
{  
  .  
  .  
  who () ;  
  .  
  .  
}
```




```
yoo  
  ↓  
who  
  ↓  ↘  
amI  amI  
  ↓  
amI  
  ↓  
amI
```

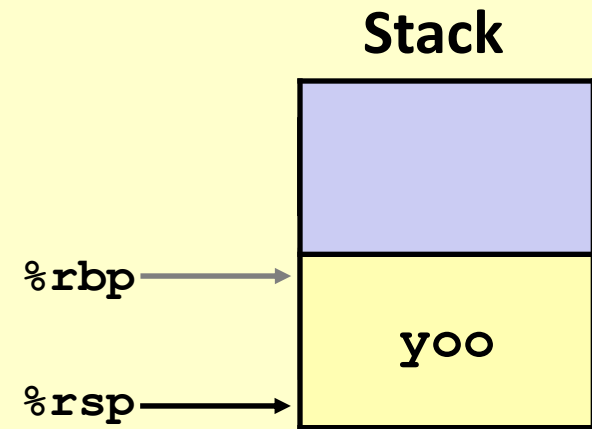




# Example

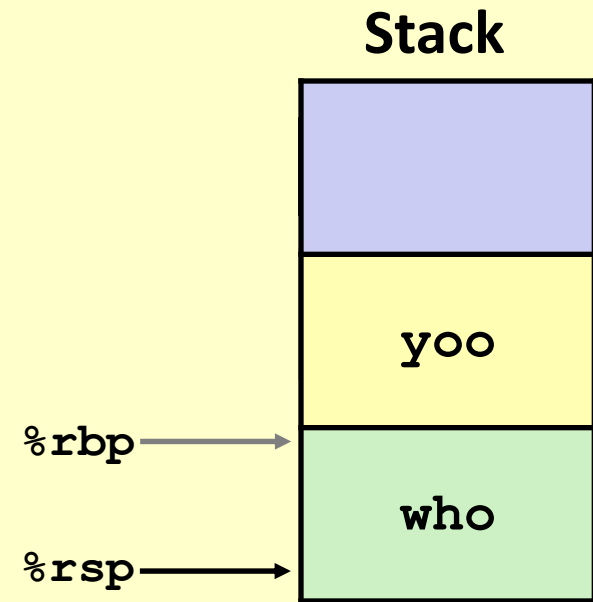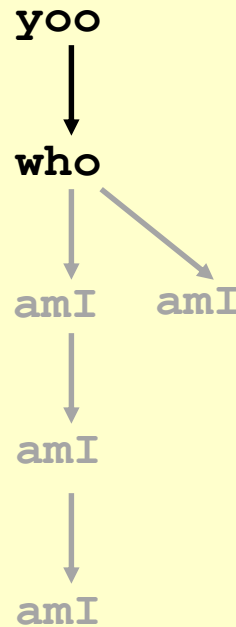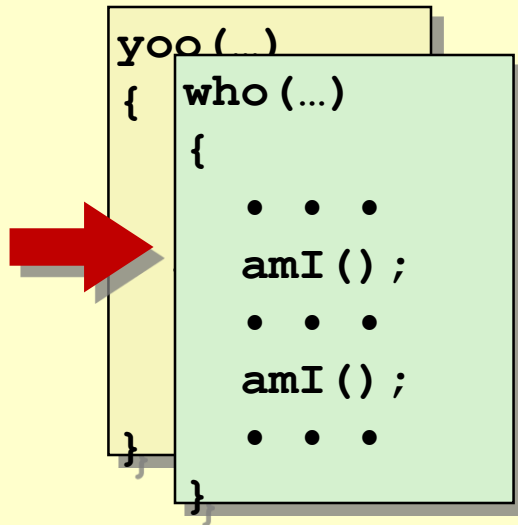

# Example

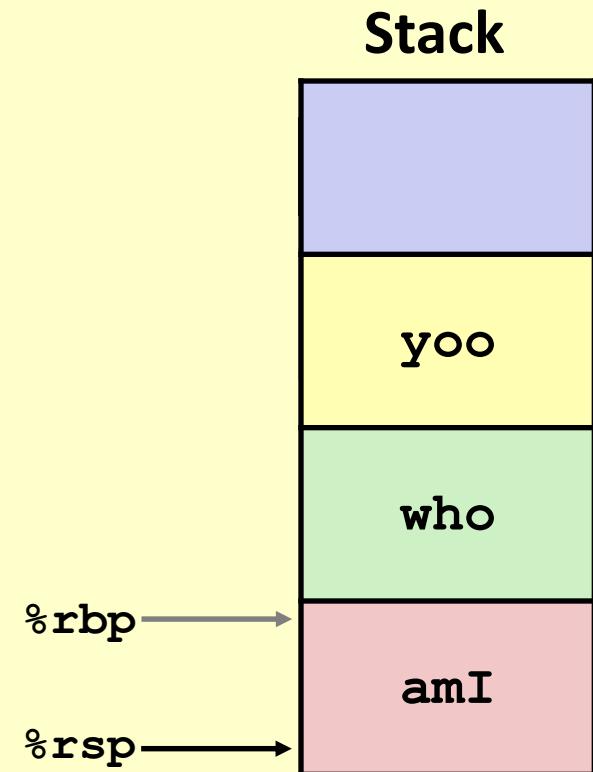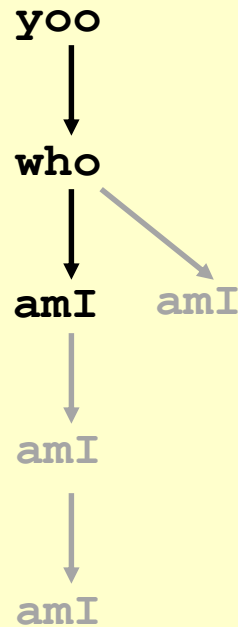
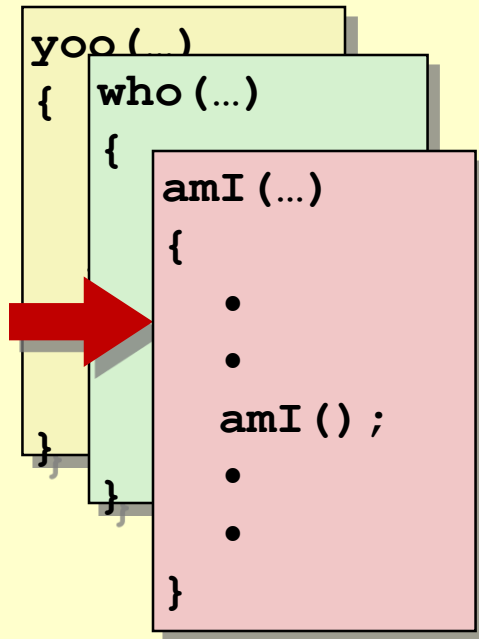


# Example

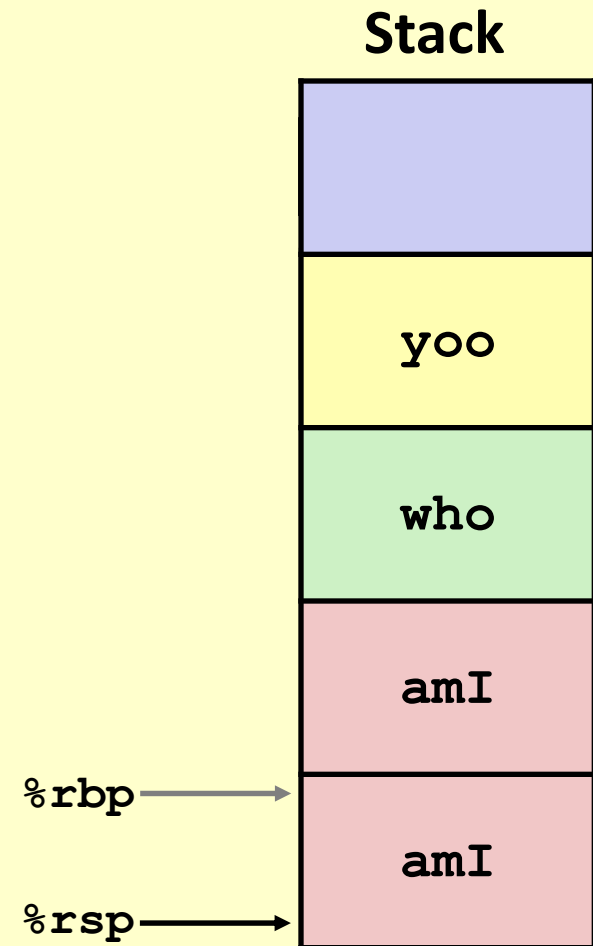
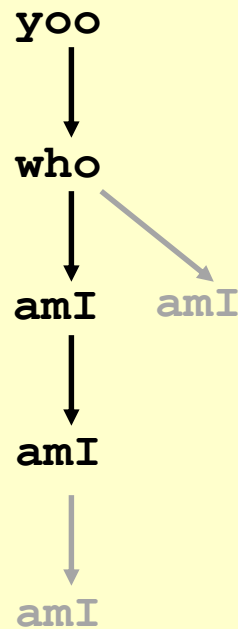
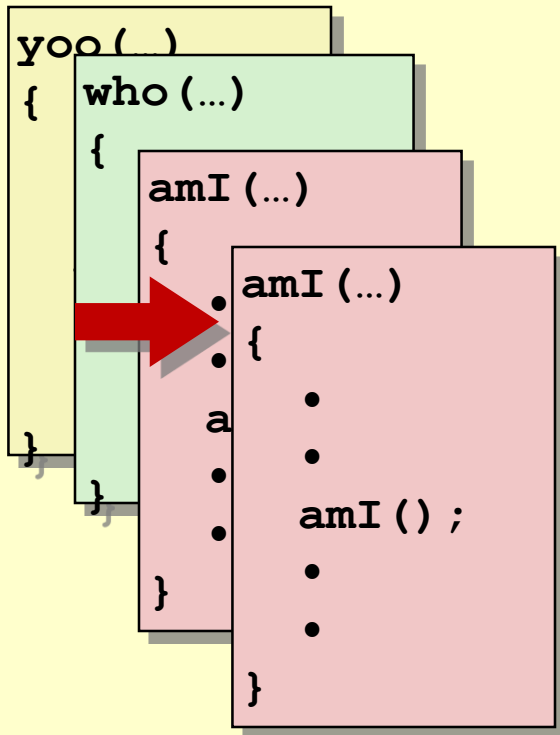







# Example

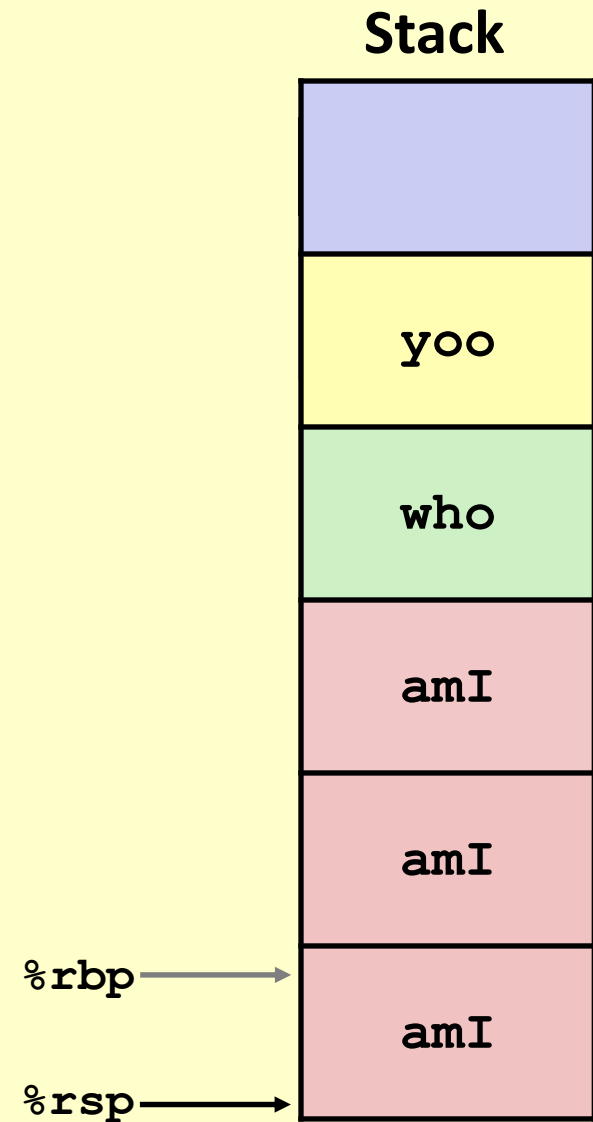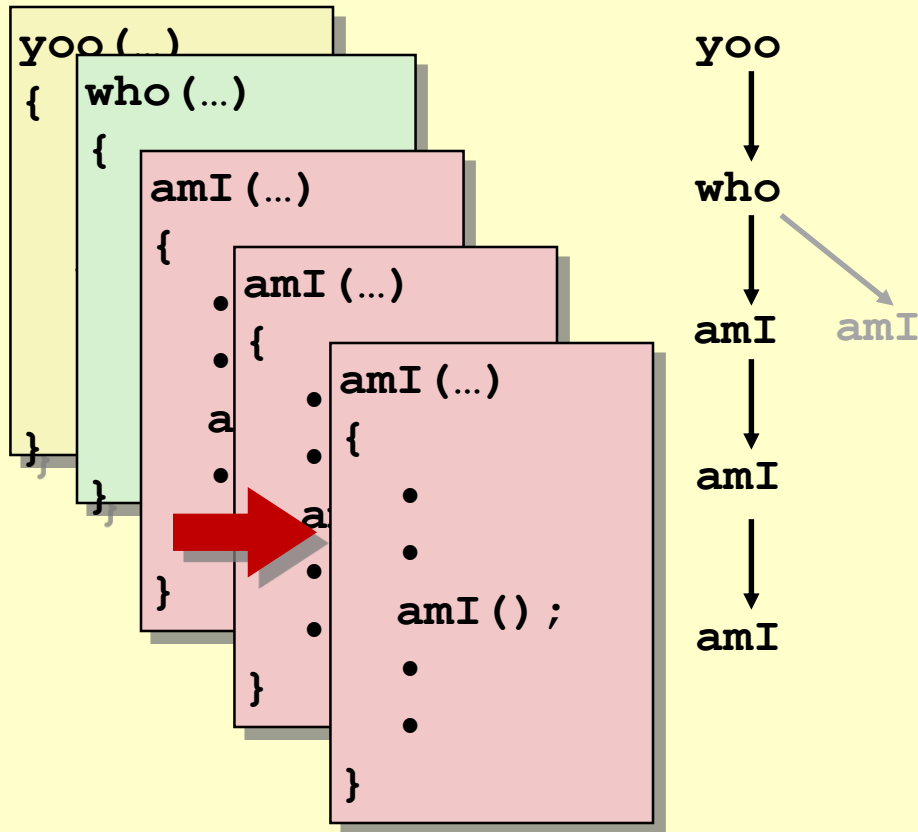




# Example

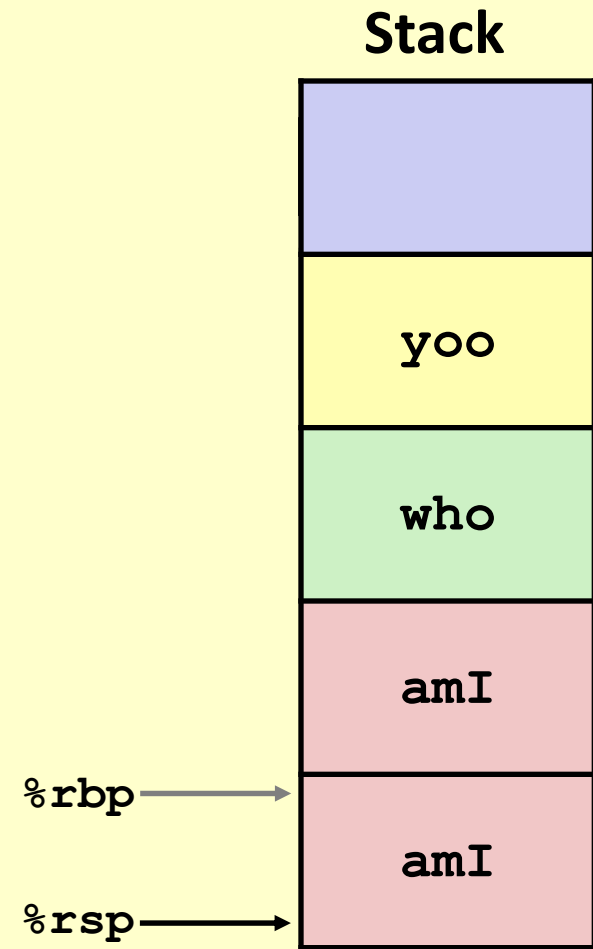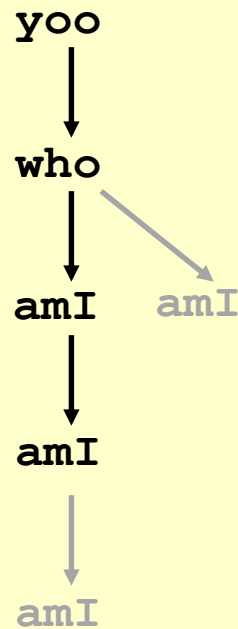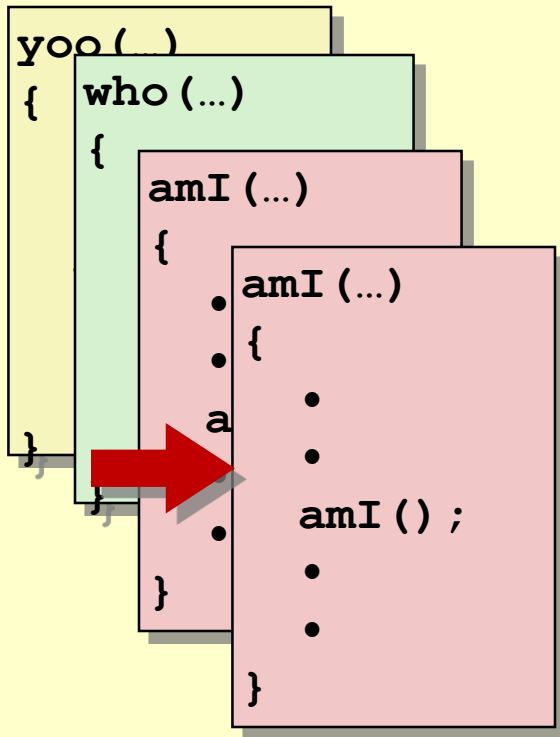




# Example

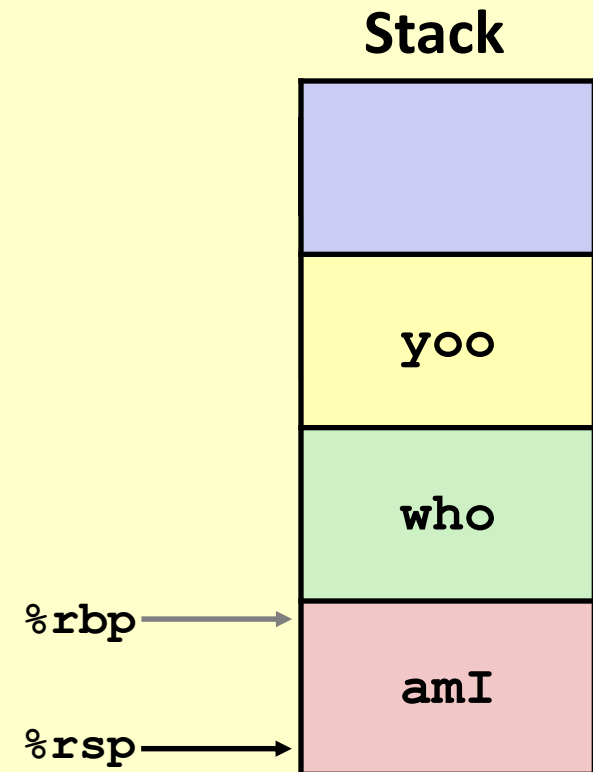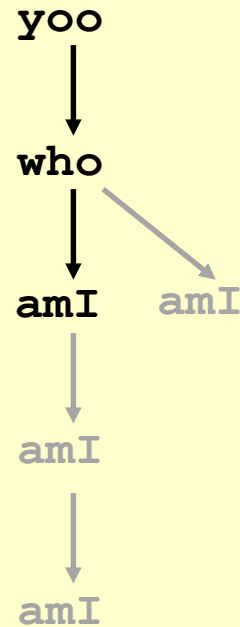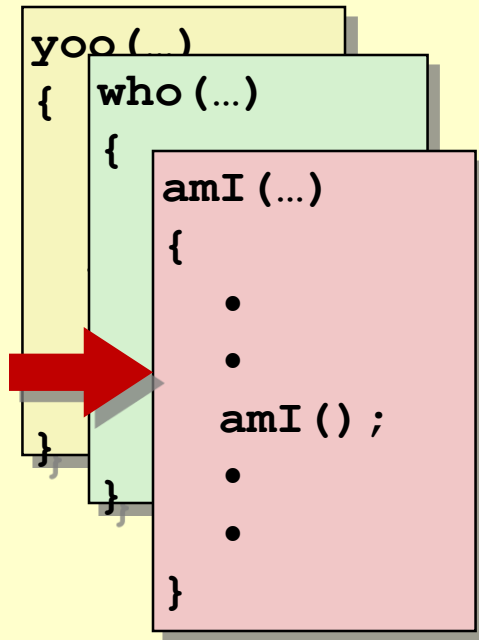




# Example

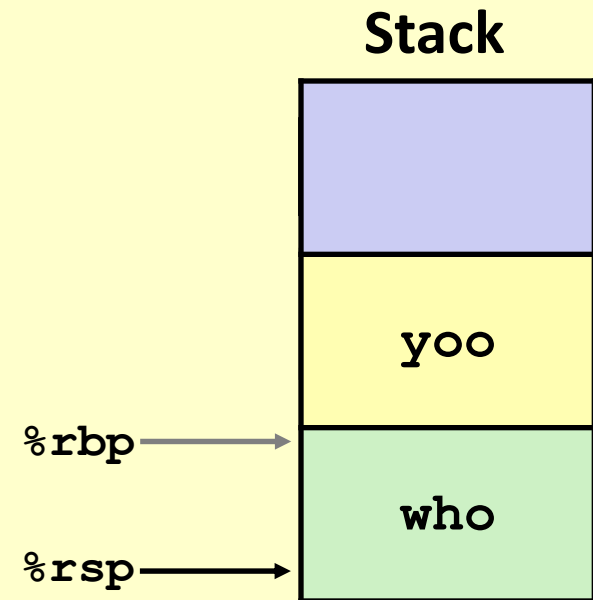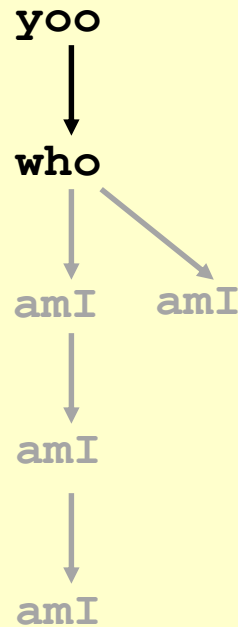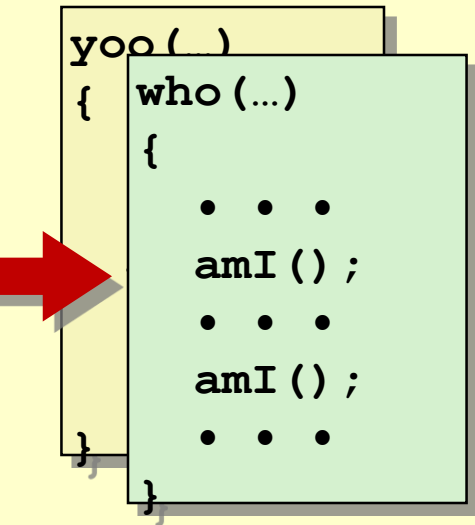




# Example

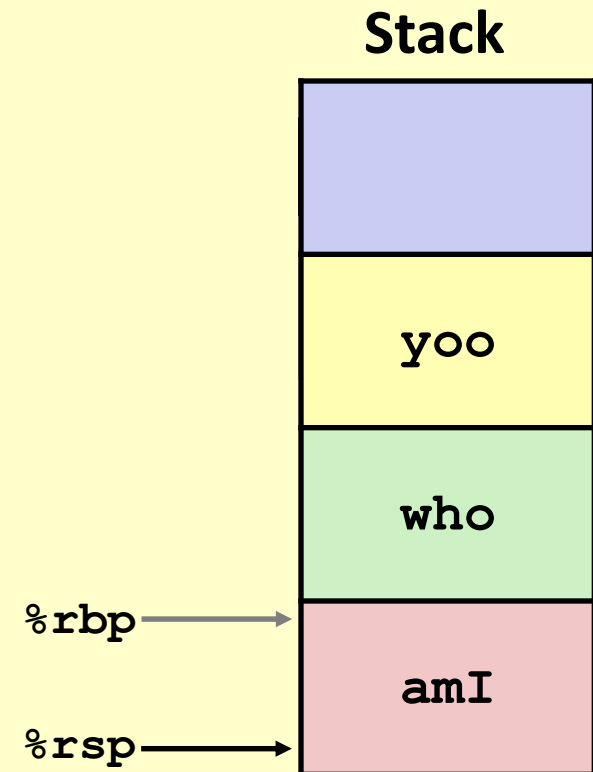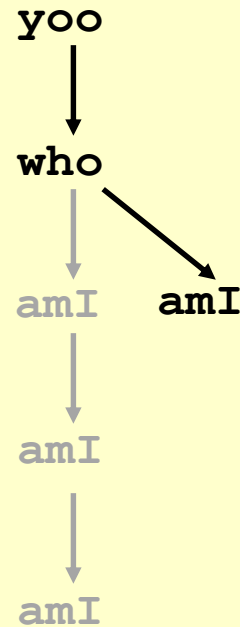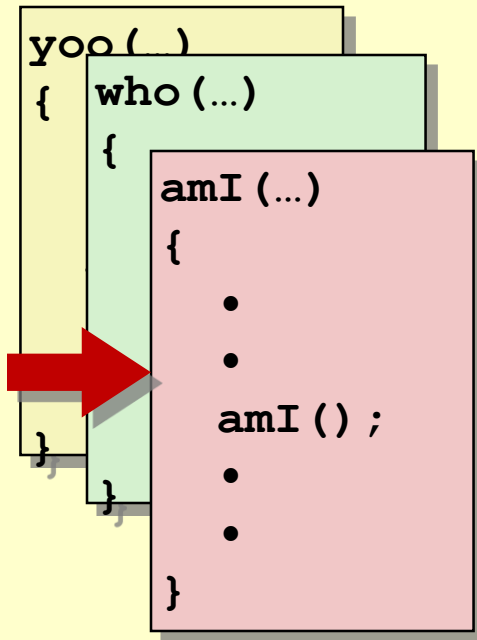

# Example

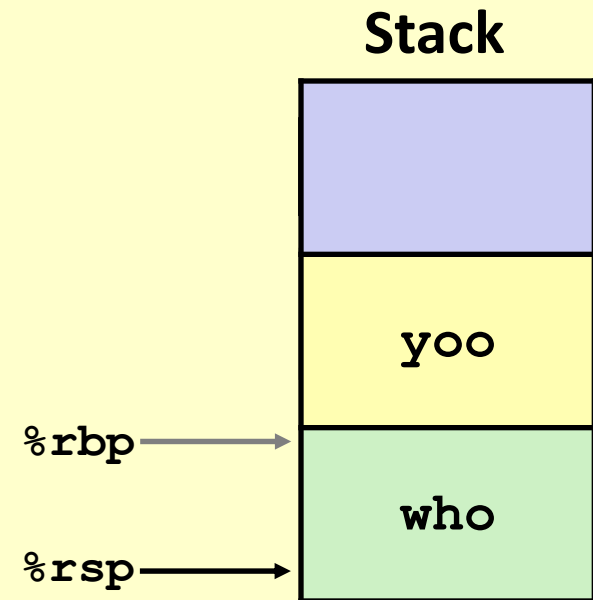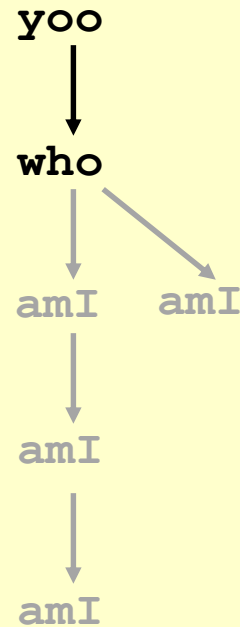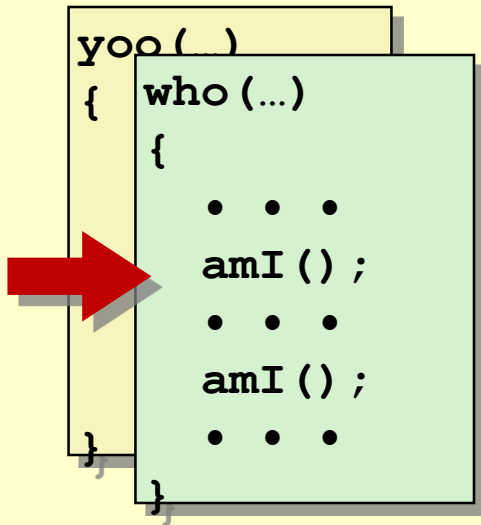

# Example

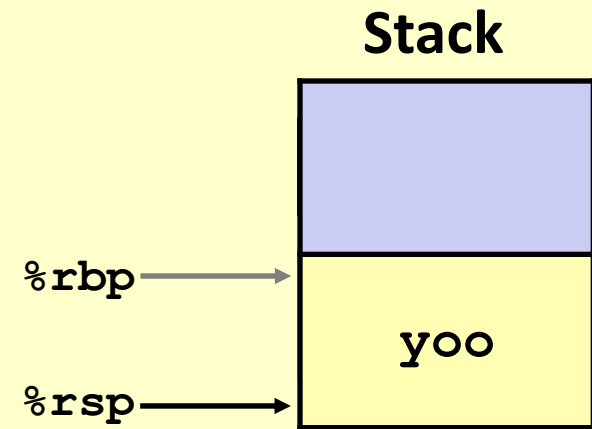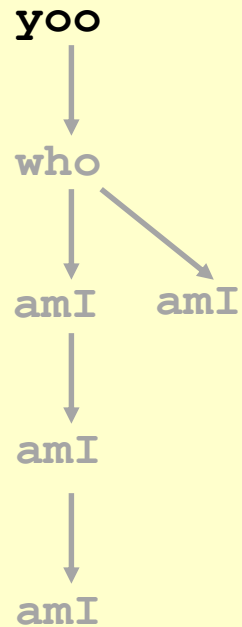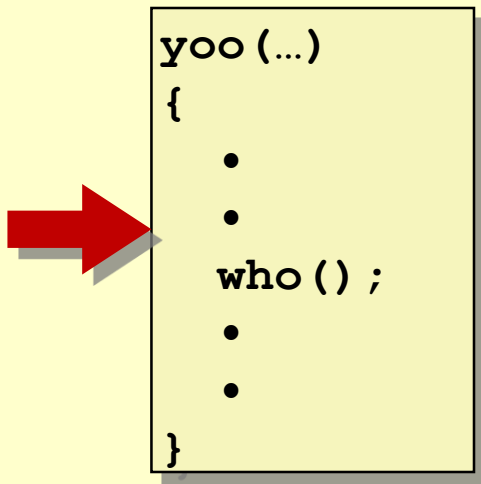

See also: Fig 3.25


# x86-64/Linux Stack Frame

## ■ Current Stack Frame (“Top” to Bottom)

- “Argument build:”  
Parameters for function about to call
- Local variables  
If can’t keep in registers
- Saved register context
- Old frame pointer (optional)

## ■ Caller Stack Frame

- Return address
  - Pushed by **call** instruction
- Arguments for this call

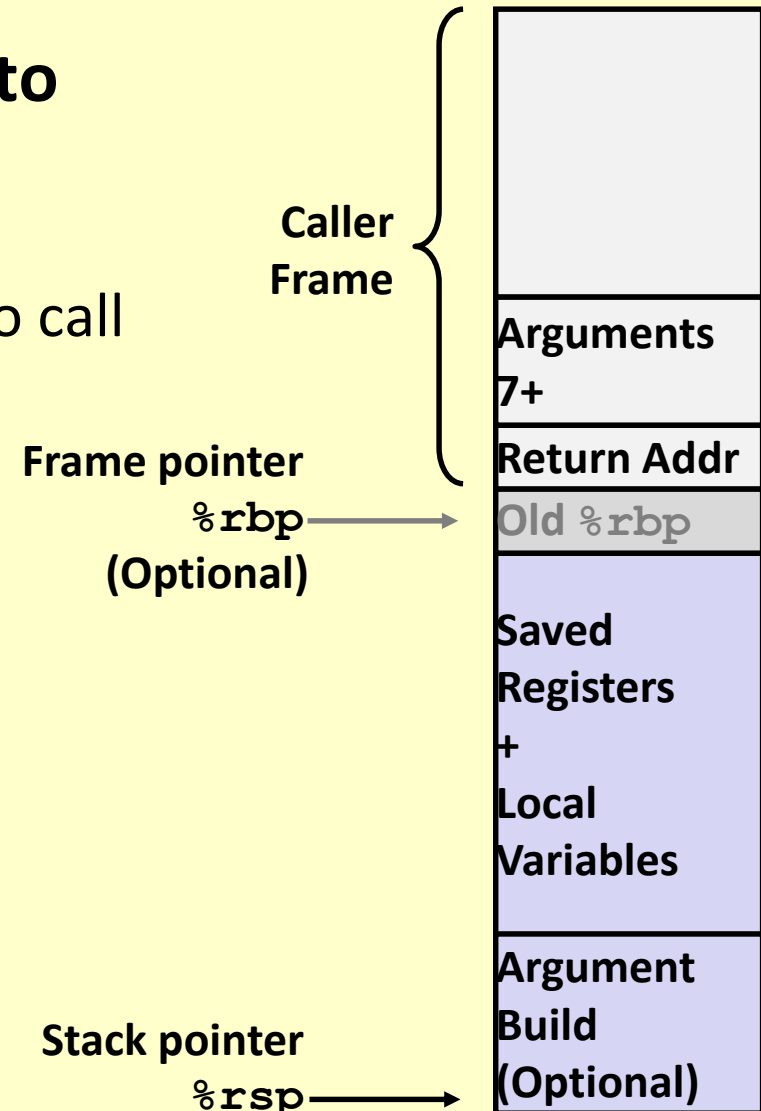



See also: Fig 3.25

# x86-64/Linux Stack Frame


## ■ Current Stack Frame (“Top” to

**Definition:**– Area on the stack bounded by `%rsp` (at top) and caller’s stack frame (below)

- Local variables
  - If can’t keep in registers
- Saved register context
- Old frame pointer (optional)

## ■ Caller Stack Frame

- Return address
  - Pushed by `call` instruction
- Arguments for this call

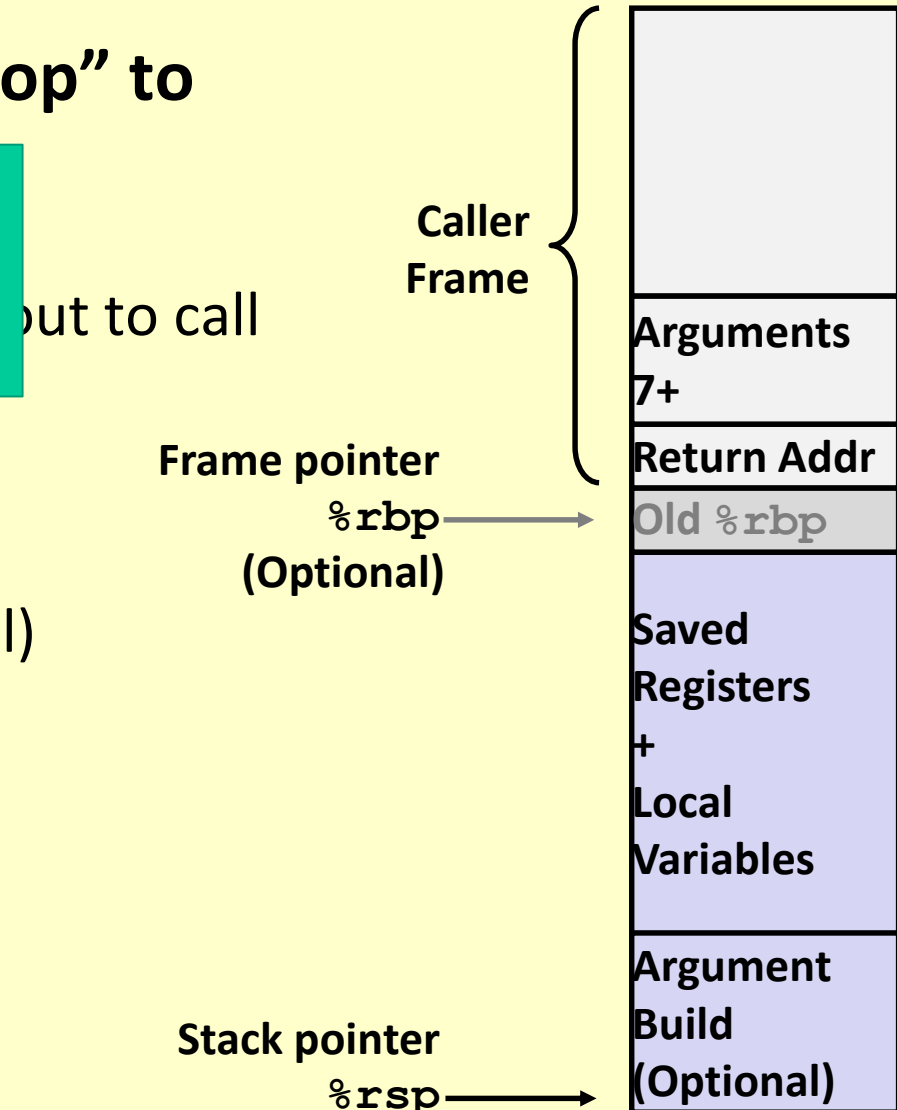

# Example: `incr`

```
long incr(long *p, long val) {  
    long x = *p;  
    long y = x + val;  
    *p = y;  
    return x;  
}
```

```
incr:  
    movq    (%rdi), %rax  
    addq    %rax, %rsi  
    movq    %rsi, (%rdi)  
    ret
```


Register	Use(s)
%rdi	Argument <code>p</code>
%rsi	Argument <code>val</code> , <code>y</code>
%rax	<code>x</code> , Return value

# Example: Calling `incr` #1

Why do we need to save 15213 on the stack?

```
long call_incr() {
    long v1 = 15213;
    long v2 = incr(&v1, 3000);
    return v1+v2;
}
```

## Initial Stack Structure

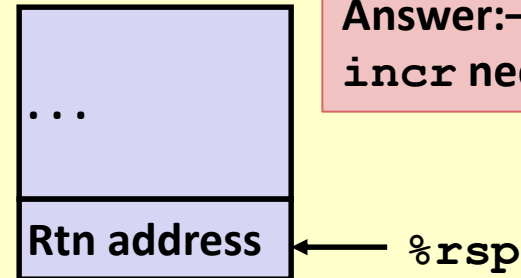


Answer:– because `incr` needs its address

Can only make pointers to things in memory!  
E.g. on The Stack

```
call_incr:
    subq    $16, %rsp
    movq    $15213, 8(%rsp)
    movl    $3000, %esi
    leaq    8(%rsp), %rdi
    call    incr
    addq    8(%rsp), %rax
    addq    $16, %rsp
    ret
```

## Resulting Stack Structure

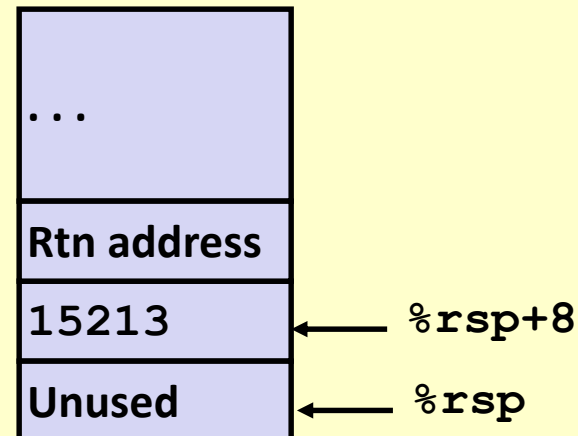


# Example: Calling `incr` #2

```
long call_incr() {
    long v1 = 15213;
    long v2 = incr(&v1, 3000);
    return v1+v2;
}
```

```
call_incr:
    subq    $16, %rsp
    movq    $15213, 8(%rsp)
    movl    $3000, %esi
    leaq    8(%rsp), %rdi
    call    incr
    addq    8(%rsp), %rax
    addq    $16, %rsp
    ret
```

## Stack Structure

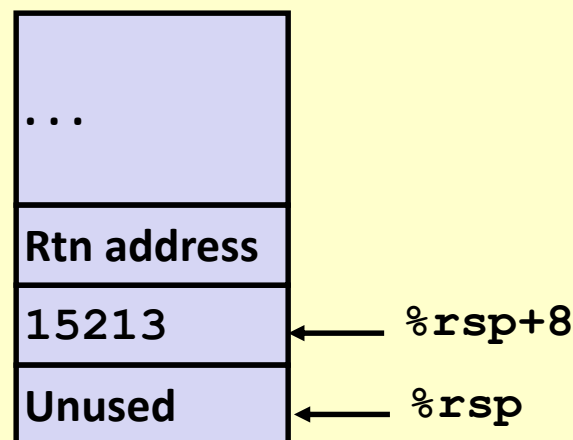


Register	Use(s)
<code>%rdi</code>	<code>&amp;v1</code>
<code>%rsi</code>	3000

# Example: Calling `incr` #3

```
long call_incr() {
    long v1 = 15213;
    long v2 = incr(&v1, 3000);
    return v1+v2;
}
```

```
call_incr:
    subq    $16, %rsp
    movq    $15213, 8(%rsp)
    movl    $3000, %esi
    leaq    8(%rsp), %rdi
    call    incr
    addq    8(%rsp), %rax
    addq    $16, %rsp
    ret
```

## Stack Structure

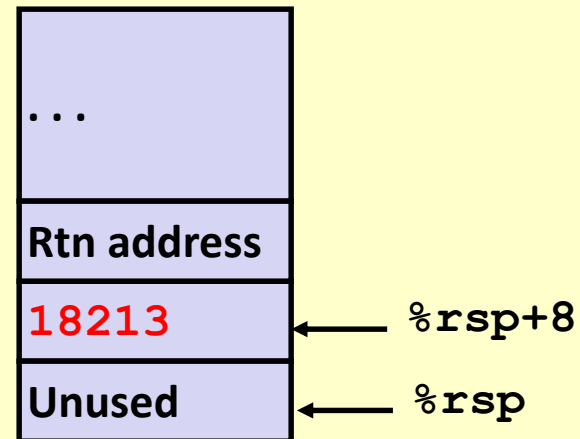


Register	Use(s)
<code>%rdi</code>	<code>&amp;v1</code>
<code>%rsi</code>	3000

# Example: Calling `incr` #4

```
long call_incr() {
    long v1 = 15213;
    long v2 = incr(&v1, 3000);
    return v1+v2;
}
```


```
call_incr:
    subq    $16, %rsp
    movq    $15213, 8(%rsp)
    movl    $3000, %esi
    leaq    8(%rsp), %rdi
    call    incr
    addq    8(%rsp), %rax
    addq    $16, %rsp
    ret
```

## Stack Structure

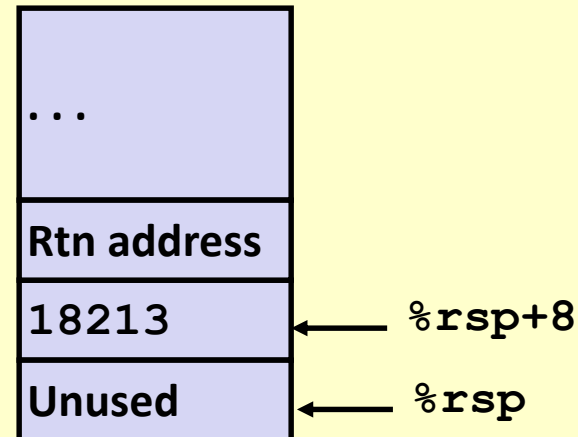

Register	Use(s)
<code>%rax</code>	Return value

## Updated Stack Structure

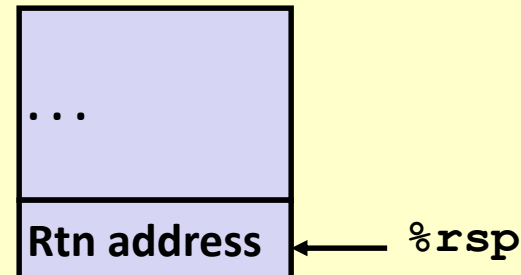


# Example: Calling `incr` #5

```
long call_incr() {
    long v1 = 15213;
    long v2 = incr(&v1, 3000);
    return v1+v2;
}
```


```
call_incr:
    subq    $16, %rsp
    movq    $15213, 8(%rsp)
    movl    $3000, %esi
    leaq    8(%rsp), %rdi
    call    incr
    addq    8(%rsp), %rax
    addq    $16, %rsp
    ret
```

## Updated Stack Structure

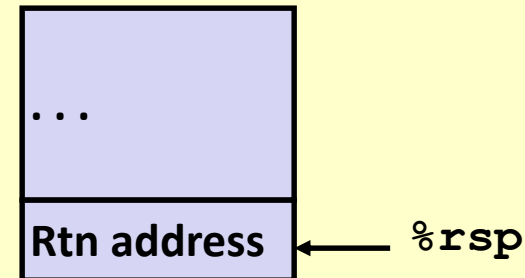

Register	Use(s)
<code>%rax</code>	Return value

## Final Stack Structure

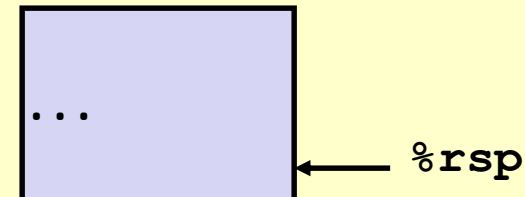

# Register Saving Conventions

- When function `yoo` calls `who`:
  - `yoo` is the *caller*
  - `who` is the *callee*
- Can register be used for temporary storage?

```
yoo:
    . . .
    movq $15213, %rdx
    call who
    addq %rdx, %rax
    . . .
    ret
```

```
who:
    . . .
    subq $18213, %rdx
    . . .
    ret
```

- Contents of register `%rdx` overwritten by `who`
- This could be trouble → something should be done!
  - Need some coordination



# Register Saving Conventions

- When function `yoo` calls `who`:
  - `yoo` is the *caller*
  - `who` is the *callee*
- Can register be used for temporary storage?
- Conventions
  - *“Caller Saved”*
    - Caller saves temporary values in its frame before the call
  - *“Callee Saved”*
    - Callee saves temporary values in its frame before using
    - Callee restores them before returning to caller

# x86-64 Linux Register Usage #1

## ■ **%rax**

- Return value
- Also caller-saved
- Can be modified by function

## ■ **%rdi, ..., %r9**

- Arguments
- Also caller-saved
- Can be modified by procedure

## ■ **%r10, %r11**

- Caller-saved
- Can be modified by function

Return value

**%rax**

Arguments

**%rdi**

**%rsi**

**%rdx**

**%rcx**

**%r8**

**%r9**


Caller-saved  
temporaries

**%r10**

**%r11**

# x86-64 Linux Register Usage #2

- **%rbx, %r12, %r13, %r14**
  - Callee-saved
  - Callee must save & restore
- **%rbp**
  - Callee-saved
  - Callee must save & restore
  - May be used as frame pointer
  - Can mix & match
- **%rsp**
  - Special form of callee save
  - Restored to original value upon exit from function

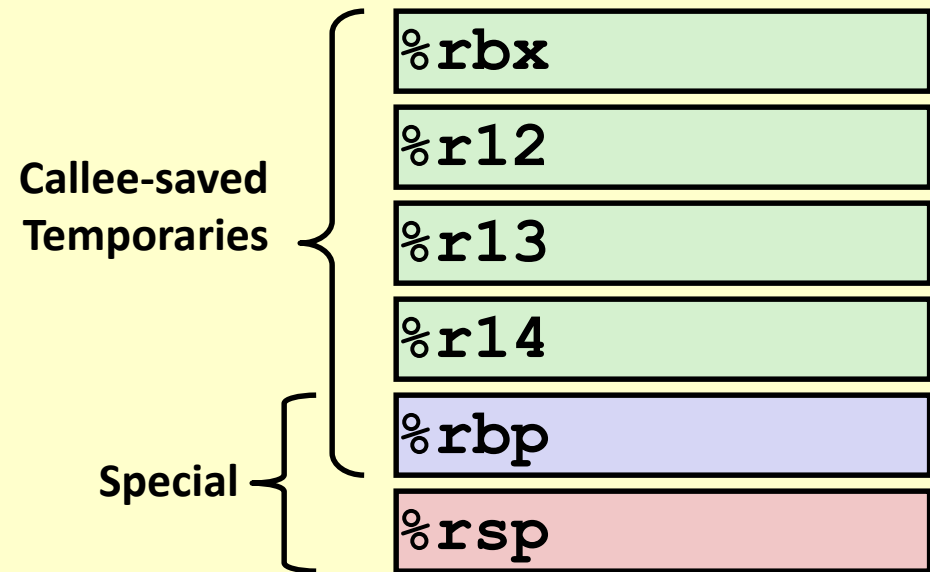


# Callee-Saved Example #1


```
long call_incr2(long x) {
    long v1 = 15213;
    long v2 = incr(&v1, 3000);
    return x+v2;
}
```

```
call_incr2:
    pushq    %rbx
    subq     $16, %rsp
    movq     %rdi, %rbx
    movq     $15213, 8(%rsp)
    movl     $3000, %esi
    leaq     8(%rsp), %rdi
    call     incr
    addq     %rbx, %rax
    addq     $16, %rsp
    popq     %rbx
    ret
```

## Initial Stack Structure

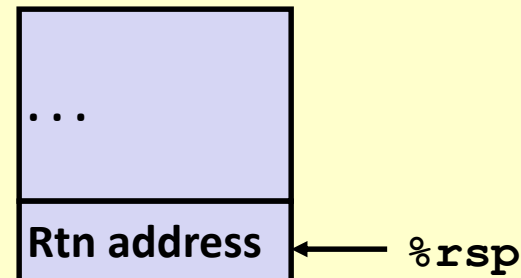

## Resulting Stack Structure

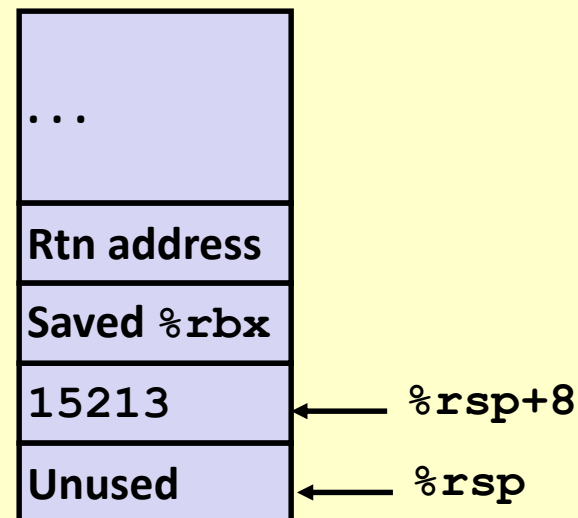


# Callee-Saved Example #2


```
long call_incr2(long x) {
    long v1 = 15213;
    long v2 = incr(&v1, 3000);
    return x+v2;
}
```

```
call_incr2:
    pushq    %rbx
    subq     $16, %rsp
    movq     %rdi, %rbx
    movq     $15213, 8(%rsp)
    movl     $3000, %esi
    leaq     8(%rsp), %rdi
    call     incr
    addq     %rbx, %rax
    addq     $16, %rsp
    popq     %rbx
    ret
```

## Resulting Stack Structure

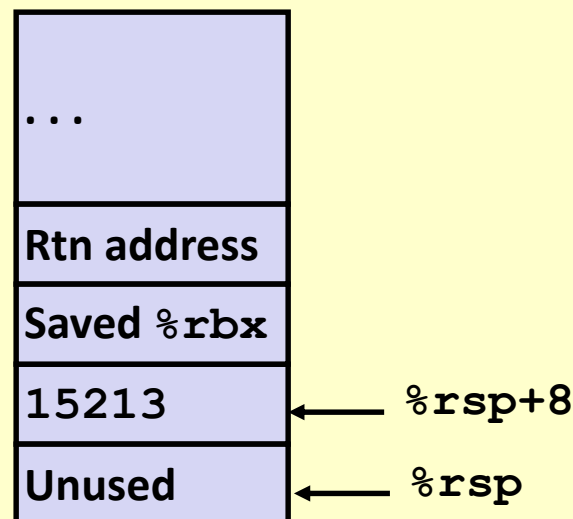

## Pre-return Stack Structure

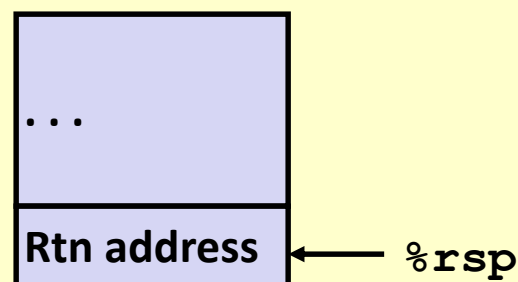

# Today

## ■ ~~Procedures~~ Functions

- Stack Structure
- Calling Conventions
  - Passing control
  - Passing data
  - Managing local data
- Illustration of Recursion
- Multiple Threads

# Recursive Function

```
/* Recursive popcount */  
long pcount_r(unsigned long x) {  
    if (x == 0)  
        return 0;  
    else  
        return (x & 1)  
            + pcount_r(x >> 1);  
}
```

```
pcount_r:  
    movl    $0, %eax  
    testq   %rdi, %rdi  
    je      .L6  
    pushq   %rbx  
    movq    %rdi, %rbx  
    andl    $1, %ebx  
    shrq    %rdi  
    call    pcount_r  
    addq    %rbx, %rax  
    popq    %rbx  
.L6:  
    rep; ret
```

# Recursive Function Terminal Case

```
/* Recursive popcount */
long pcount_r(unsigned long x) {
    if (x == 0)
        return 0;
    else
        return (x & 1)
            + pcount_r(x >> 1);
}
```

```
pcount_r:
    movl    $0, %eax
    testq   %rdi, %rdi
    je      .L6
    pushq   %rbx
    movq    %rdi, %rbx
    andl    $1, %ebx
    shrq    %rdi
    call    pcount_r
    addq    %rbx, %rax
    popq    %rbx
```

```
.L6:
    rep; ret
```

Register	Use(s)	Type
%rdi	x	Argument
%rax	Return value	Return value



# Recursive Function Register Save

```
/* Recursive popcount */
long pcount_r(unsigned long x) {
    if (x == 0)
        return 0;
    else
        return (x & 1)
            + pcount_r(x >> 1);
}
```


pcount\_r:

```
movl    $0, %eax
testq   %rdi, %rdi
je      .L6
pushq   %rbx
movq    %rdi, %rbx
andl    $1, %ebx
shrq    %rdi
call    pcount_r
addq    %rbx, %rax
popq    %rbx
```

.L6:

```
rep; ret
```

Register	Use(s)	Type
%rdi	x	Argument

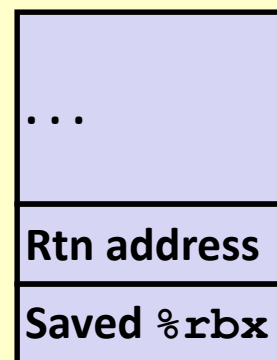

# Recursive Function Call Setup

```
/* Recursive popcount */
long pcount_r(unsigned long x) {
    if (x == 0)
        return 0;
    else
        return (x & 1)
            + pcount_r(x >> 1);
}
```

```
pcount_r:
    movl    $0, %eax
    testq   %rdi, %rdi
    je      .L6
    pushq   %rbx
    movq    %rdi, %rbx
    andl    $1, %ebx
    shrq    %rdi
    call    pcount_r
    addq    %rbx, %rax
    popq    %rbx
.L6:
    rep; ret
```

Register	Use(s)	Type
%rdi	x >> 1	Rec. argument
%rbx	x & 1	Callee-saved

# Recursive Function Call

```

/* Recursive popcount */
long pcount_r(unsigned long x) {
    if (x == 0)
        return 0;
    else
        return (x & 1)
            + pcount_r(x >> 1);
}

```

```

pcount_r:
    movl    $0, %eax
    testq   %rdi, %rdi
    je      .L6
    pushq   %rbx
    movq    %rdi, %rbx
    andl    $1, %ebx
    shrq    %rdi
    call    pcount_r
    addq    %rbx, %rax
    popq    %rbx
.L6:
    rep; ret

```

Register	Use(s)	Type
%rbx	x & 1	Callee-saved
%rax	Recursive call return value	

# Recursive Function Result

```

/* Recursive popcount */
long pcount_r(unsigned long x) {
    if (x == 0)
        return 0;
    else
        return (x & 1)
            + pcount_r(x >> 1);
}

```

```

pcount_r:
    movl    $0, %eax
    testq   %rdi, %rdi
    je      .L6
    pushq   %rbx
    movq    %rdi, %rbx
    andl    $1, %ebx
    shrq    %rdi
    call    pcount_r
    addq    %rbx, %rax
    popq    %rbx
.L6:
    rep; ret

```


Register	Use(s)	Type
%rbx	x & 1	Callee-saved
%rax	Return value	

# Recursive Function Completion

```
/* Recursive popcount */
long pcount_r(unsigned long x) {
    if (x == 0)
        return 0;
    else
        return (x & 1)
            + pcount_r(x >> 1);
}
```

```
pcount_r:
    movl    $0, %eax
    testq   %rdi, %rdi
    je      .L6
    pushq   %rbx
    movq    %rdi, %rbx
    andl    $1, %ebx
    shrq    %rdi
    call    pcount_r
    addq    %rbx, %rax
    popq    %rbx
.L6:
    rep; ret
```

Register	Use(s)	Type
%rax	Return value	Return value

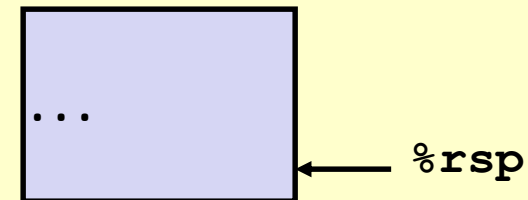

# Observations About Recursion

## ■ Handled Without Special Consideration

- Stack frames mean that each function call has private storage
  - Saved registers & local variables
  - Saved return pointer
- Register saving conventions prevent one function call from corrupting another's data
  - Unless the C code explicitly does so (e.g., buffer overflow in Lecture 9)
- Stack discipline follows call / return pattern
  - If P calls Q, then Q returns before P
  - Last-In, First-Out

## ■ Also works for mutual recursion

- P calls Q; Q calls P

# Multiple Threads

## ■ From OS course:—

- Process — a running program with its own address space, stack, etc.
- Thread — an independently executing function in the same address space as other threads.
  - Requires own stack
  - Shares all other variables
  - Pointers valid across threads

# Threads and Stacks

- **Stack discipline makes it possible for multiple threads to execute same function *independently***
  - Concurrently
- **Each thread has own stack pointer**
  - Separately executing threads use different stack frames on own stacks!



# x86-64 ~~Procedure~~ Function Summary

## ■ Important Points


- Stack is the right data structure for procedure call / return
  - If P calls Q, then Q returns before P

## ■ Recursion (& mutual recursion) handled by normal calling conventions

- Can safely store values in local stack frame and in callee-saved registers
- Put function arguments at top of stack
- Result return in **%rax**

## ■ Pointers are addresses of values

- On stack or global

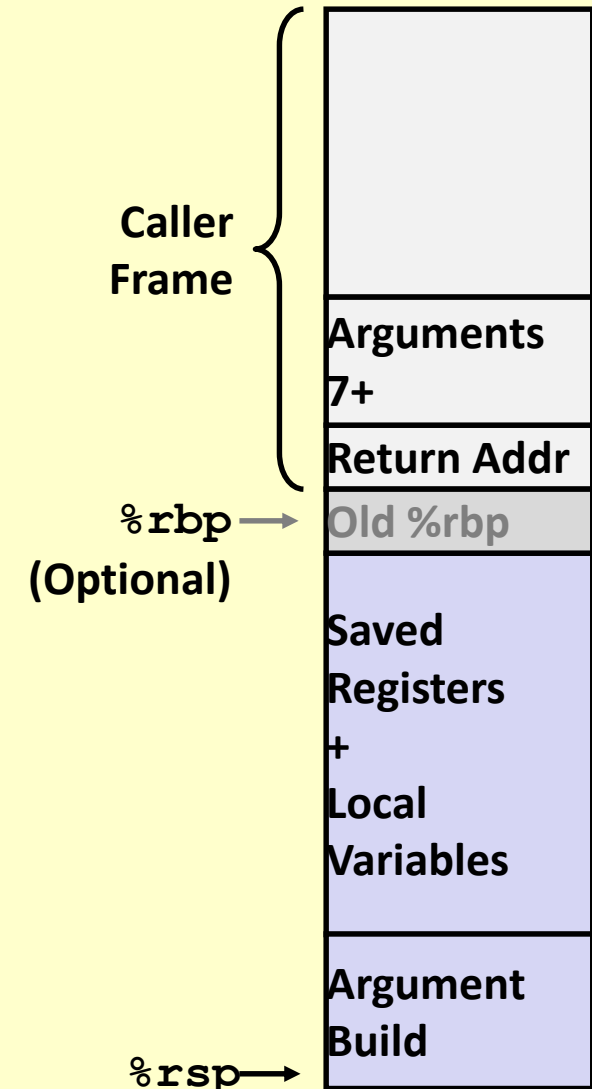

# Questions?