

AWS CLOUDFRONT


CloudFront is a web service that speeds up distribution of your static and dynamic web content, such as .html, .css, .js, and image files, to your users. CloudFront delivers your content through a worldwide network of data centers called edge locations.

When a user requests content that you're serving with CloudFront, the request is routed to the edge location that provides the lowest latency (time delay), so that content is delivered with the best possible performance.

CloudFront to reduce the number of requests that your origin server must respond to directly. With CloudFront caching, more objects are served from CloudFront edge locations, which are closer to your users.


How you set up CloudFront to deliver content

You create a CloudFront distribution to tell CloudFront where you want content to be delivered from, and the details about how to track and manage content delivery. Then CloudFront uses computers—edge servers—that are close to your viewers to deliver that content quickly when someone wants to see it or use it

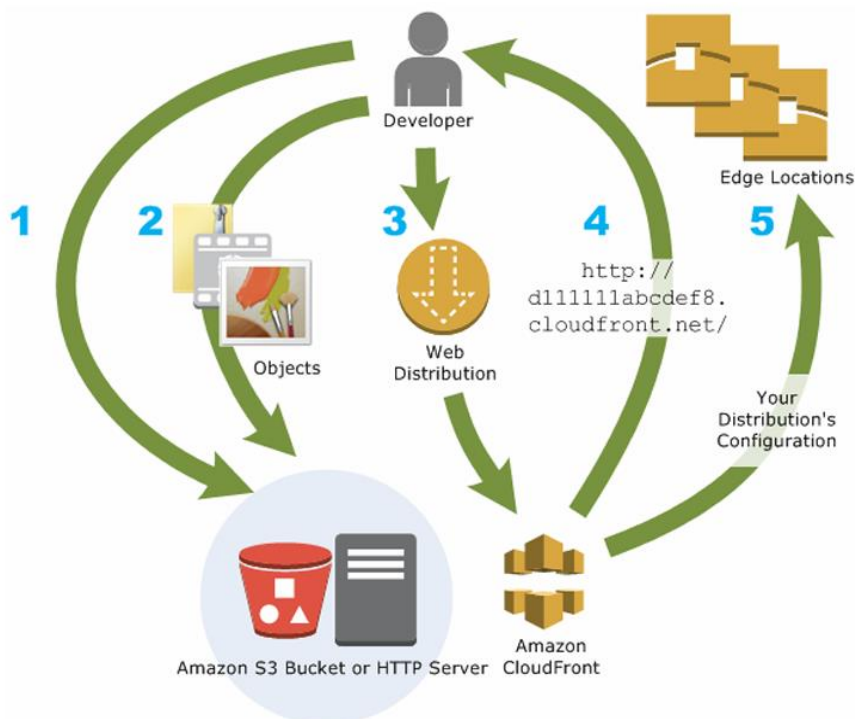


AWS CLOUDFRONT

Go to S3 bucket service

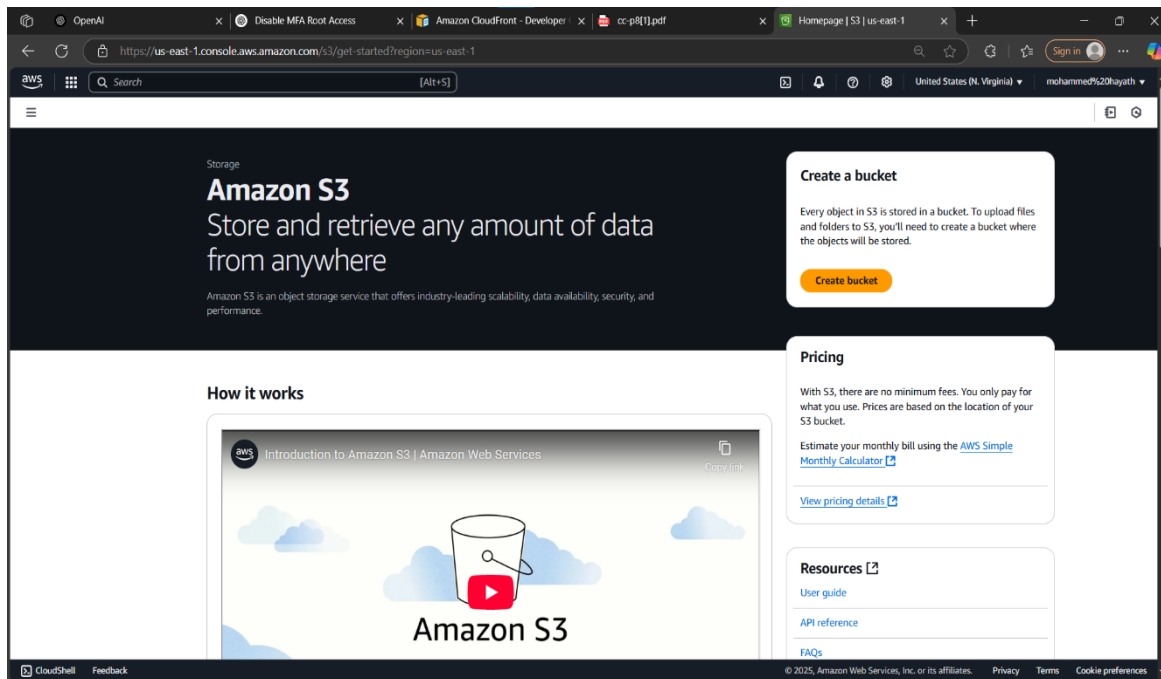

Create s3 bucket and keep all default for static website hosting

i)

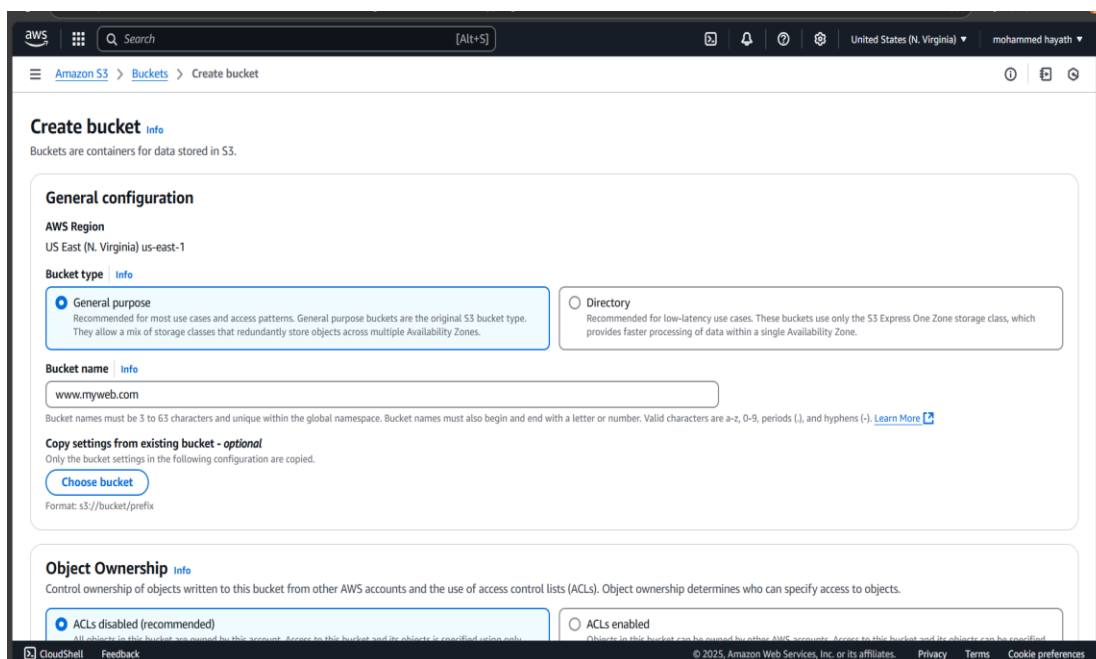

AWS CLOUDFRONT

ii)

aws

Search

[Alt+S]

United States (N. Virginia)

mohammed hayath

Amazon S3

Buckets

Create bucket

Encryption type

Info

☒ Server-side encryption with Amazon S3 managed keys (SSE-S3)
☐ Server-side encryption with AWS Key Management Service keys (SSE-KMS)
☐ Dual-layer server-side encryption with AWS Key Management Service keys (DSSE-KMS)
Secure your objects with two separate layers of encryption. For details on pricing, see DSSE-KMS pricing on the [Storage](#) tab of the [Amazon S3 pricing page](#).

Bucket Key
Using an S3 Bucket Key for SSE-KMS reduces encryption costs by lowering calls to AWS KMS. S3 Bucket Keys aren't supported for DSSE-KMS. [Learn more](#)
☐ Disable
☒ Enable

▼ Advanced settings

Object Lock
Store objects using a write-once-read-many (WORM) model to help you prevent objects from being deleted or overwritten for a fixed amount of time or indefinitely. Object Lock works only in versioned buckets. [Learn more](#)
☒ Disable
☐ Enable
Permanently allows objects in this bucket to be locked. Additional Object Lock configuration is required in bucket details after bucket creation to protect objects in this bucket from being deleted or overwritten.

Object Lock works only in versioned buckets. Enabling Object Lock automatically enables Versioning.

After creating the bucket, you can upload files and folders to the bucket, and configure additional bucket settings.

Create bucket

iii)

aws

Search

[Alt+S]

United States (N. Virginia)

mohammed hayath

Amazon S3

Buckets

✓ Successfully created bucket "www.my-home.com"
To upload files and folders, or to configure additional bucket settings, choose [View details](#).

► Account snapshot - updated every 24 hours [All AWS Regions](#)
Storage lens provides visibility into storage usage and activity trends. Metrics don't include directory buckets. [Learn more](#) [View Storage Lens dashboard](#)

General purpose buckets

Directory buckets

General purpose buckets (1) [Info](#) [All AWS Regions](#)

[Refresh](#) [Copy ARN](#) [Empty](#) [Delete](#) [Create bucket](#)

Buckets are containers for data stored in S3.

Name	AWS Region	IAM Access Analyzer	Creation date
☐ www.my-home.com	US East (N. Virginia) us-east-1	View analyzer for us-east-1	April 23, 2025, 16:12:35 (UTC+05:30)

CloudShell

Feedback

© 2025, Amazon Web Services, Inc. or its affiliates. [Privacy](#) [Terms](#) [Cookie preferences](#)

AWS CLOUDFRONT

Go to the newly created bucket

i)

Object Lock

Store objects using a write-once-read-many (WORM) model to help you prevent objects from being deleted or overwritten for a fixed amount of time or indefinitely. Object Lock works only in versioned buckets. [Learn more](#)

Object Lock
Disabled

Edit

Requester pays

When enabled, the requester pays for requests and data transfer costs, and anonymous access to this bucket is disabled. [Learn more](#)

Requester pays
Disabled

Edit

Static website hosting

Use this bucket to host a website or redirect requests. [Learn more](#)

We recommend using AWS Amplify Hosting for static website hosting

Deploy a fast, secure, and reliable website quickly with AWS Amplify Hosting. Learn more about [Amplify Hosting](#) or [View your existing Amplify apps](#)

Create Amplify app

S3 static website hosting
Disabled

Edit

CloudShellFeedback

© 2025, Amazon Web Services, Inc. or its affiliates. PrivacyTermsCookie preferences

ii) Enable Static website hosting

Amazon S3> Buckets> www.my-home.com> Edit static website hosting

Edit static website hosting info

Static website hosting

Use this bucket to host a website or redirect requests. [Learn more](#)

Static website hosting

☐ Disable

Enable

Hosting type

☒ Host a static website

Use the bucket endpoint as the web address. [Learn more](#)

☐ Redirect requests for an object

Redirect requests to another bucket or domain. [Learn more](#)

For your customers to access content at the website endpoint, you must make all your content publicly readable. To do so, you can edit the S3 Block Public Access settings for the bucket. For more information, see [Using Amazon S3 Block Public Access](#)

Index document

Specify the home or default page of the website.

index.html

Error document - optional

This is returned when an error occurs.

error.html


Redirection rules - optional

CloudShellFeedback


© 2025, Amazon Web Services, Inc. or its affiliates. PrivacyTermsCookie preferences

AWS CLOUDFRONT

Add a simple index.html files into the bucket by clicking Add option

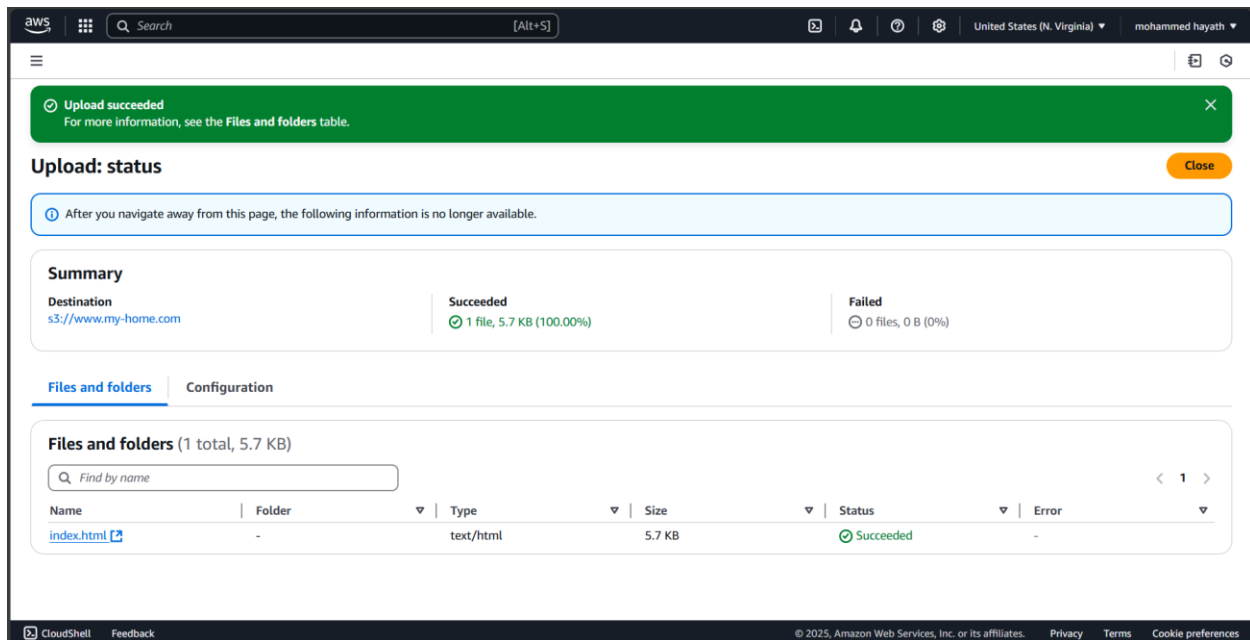


Copy the bucket hyperlink(which will be helpful in future)

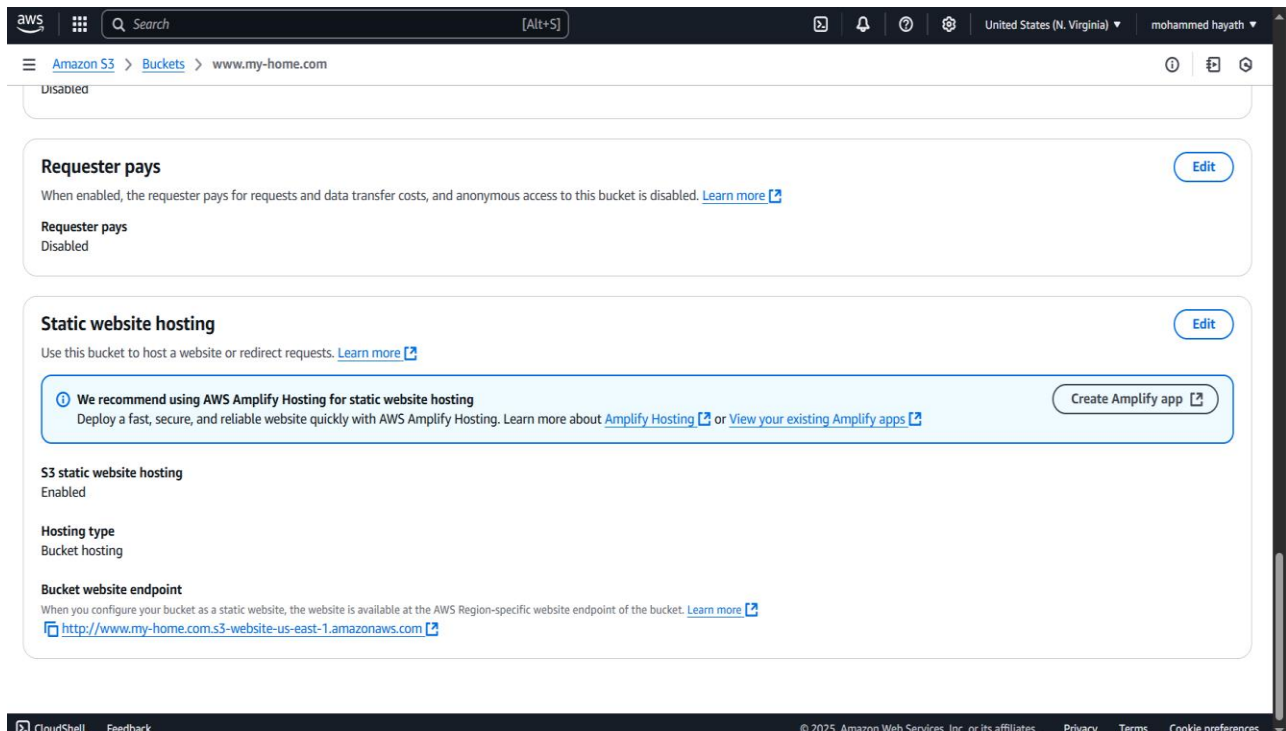


AWS CLOUDFRONT


Next go to CLOUDFRONT Service

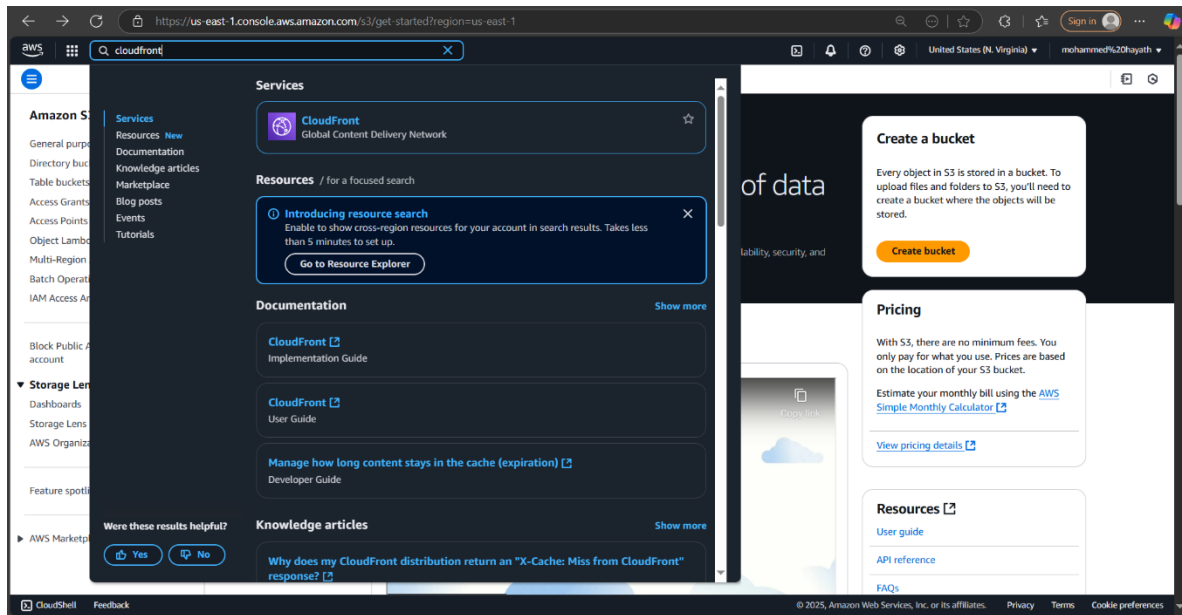

Create a distribution

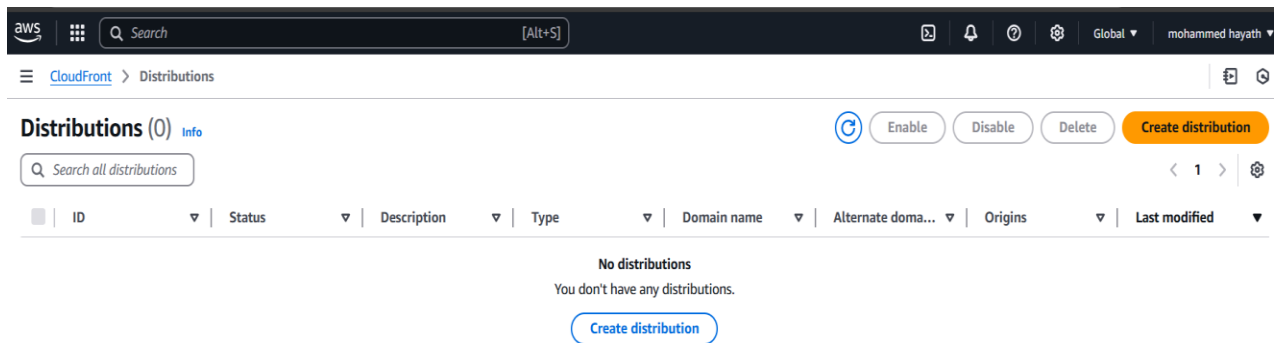


i) Inside the distribution domain will be automatically added

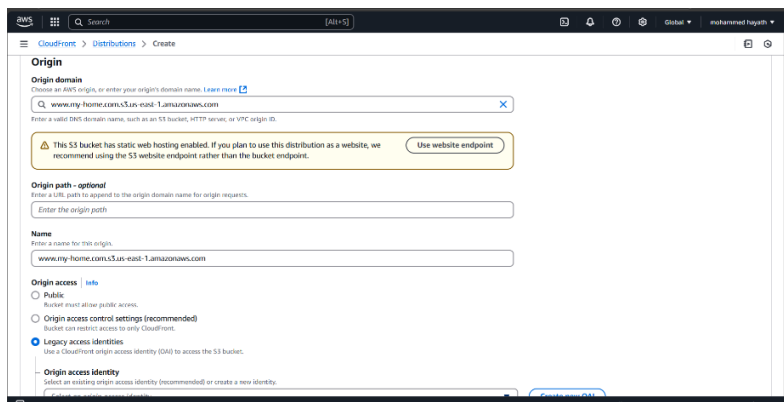


AWS CLOUDFRONT

ii) Add a new OAI inside the the distribution

(Copy paste the s3 bucket hyperlink inside OAI)

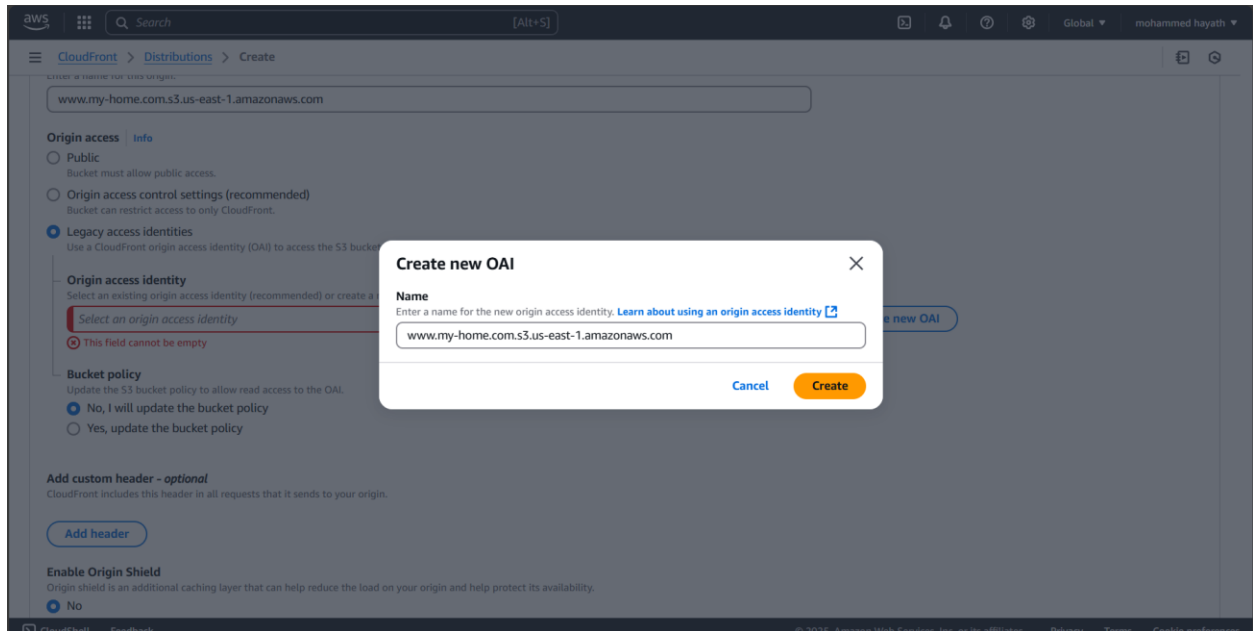

iii) Follow these default settings

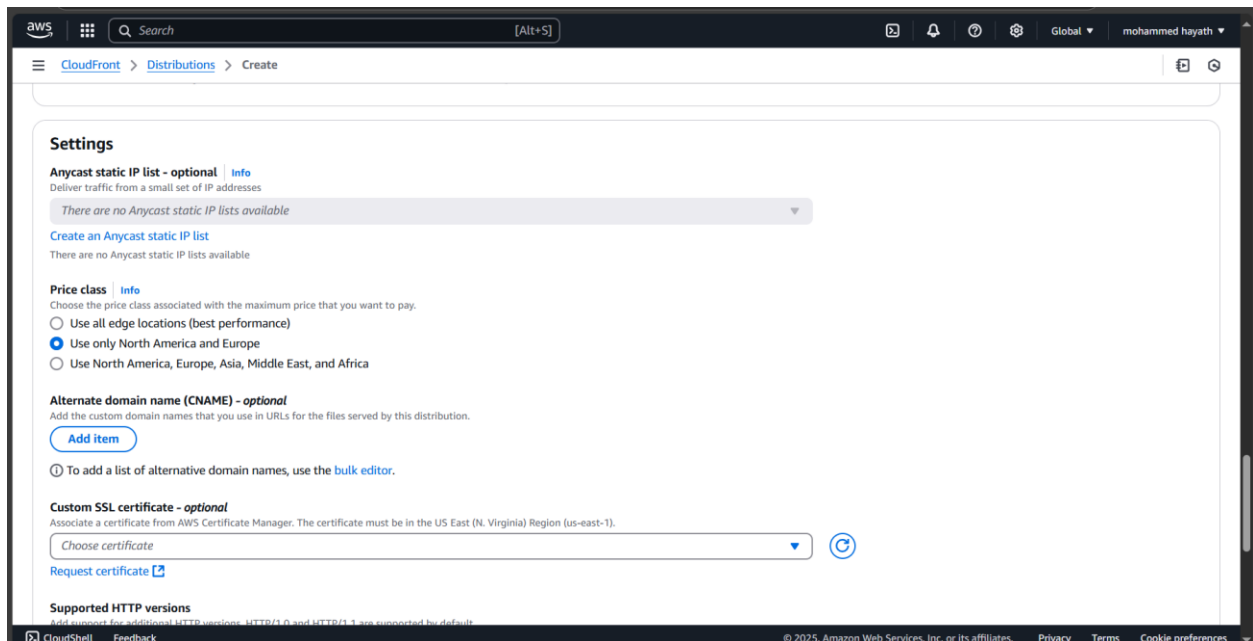

AWS CLOUDFRONT

iv)

The screenshot shows the 'Create' page for a new CloudFront distribution. The breadcrumb navigation is 'CloudFront > Distributions > Create'. The page is divided into several sections:

- Supported HTTP versions:** A section with the text 'Add support for additional HTTP versions. HTTP/1.0 and HTTP/1.1 are supported by default.' Below this are two checkboxes: 'HTTP/2' (checked) and 'HTTP/3' (unchecked).
- Default root object - optional:** A section with the text 'The object (file name) to return when a viewer requests the root URL (/) instead of a specific object.' Below this is a text input field containing 'index.html'.
- IPv6:** A section with two radio buttons: 'Off' and 'On' (selected).
- Description - optional:** A text input field.
- Standard logging:** A section with the text 'Additional charges may apply. See Info for more details.' Below this is a 'Log delivery' section with two radio buttons: 'Off' and 'On' (selected).

At the bottom right, there are two buttons: 'Cancel' and 'Create distribution'.

v)


The screenshot shows the 'E1MT44PJ3TNKQJ' distribution page. The breadcrumb navigation is 'CloudFront > Distributions > E1MT44PJ3TNKQJ'. A green notification banner at the top states 'Successfully created new distribution. To get in-depth monitoring information for your distribution's internet traffic, create an Internet Monitor'. Below the notification is a 'Notifications' bar showing 0 errors, 0 warnings, 1 info, 1 success, and 0 other notifications. The page has a tabbed interface with 'General' selected. The 'General' tab is divided into two sections:

- Details:** A section with three columns of information:
 - Distribution domain name:** d3p1lkgl1xm9sf.cloudfront.net
 - ARN:** arn:aws:cloudfront::339712700987:distribution/E1MT44PJ3TNKQJ
 - Last modified:** Deploying
- Settings:** A section with three columns of information:
 - Description:** -
 - Alternate domain names:** -
 - Standard logging:** Off
 - Price class:** Use only North America and Europe
 - Cookie logging:** Off
 - Supported HTTP versions:** HTTP/2, HTTP/1.1, HTTP/1.0
 - Default root object:** index.html

At the bottom right of the 'Settings' section, there is an 'Edit' button.

AWS CLOUDFRONT

vi) deployment

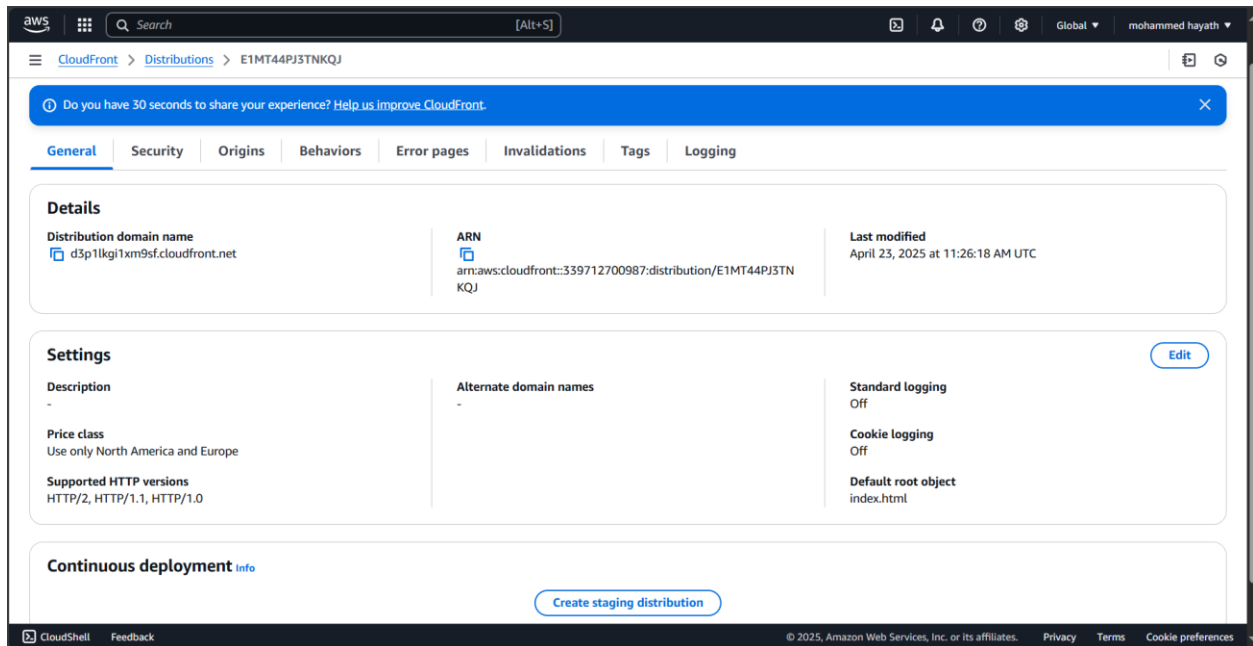

The screenshot shows the AWS CloudFront console for a specific distribution (E1MT44PJ3TNKQJ). The interface includes a top navigation bar with the AWS logo, a search bar, and user information. Below the navigation bar, there's a blue banner with a feedback prompt. The main content area is divided into tabs: General, Security, Origins, Behaviors, Error pages, Invalidations, Tags, and Logging. The 'General' tab is selected, showing the 'Details' section with the distribution domain name, ARN, and last modified date. The 'Settings' section is also visible, showing the description, price class, supported HTTP versions, alternate domain names, standard logging, cookie logging, and default root object. A 'Create staging distribution' button is located at the bottom of the 'Continuous deployment' section.

Details

Property	Value
Distribution domain name	d3p1lkgi1xm9sf.cloudfront.net
ARN	arn:aws:cloudfront::339712700987:distribution/E1MT44PJ3TNKQJ
Last modified	April 23, 2025 at 11:26:18 AM UTC


Settings

Property	Value
Description	-
Price class	Use only North America and Europe
Supported HTTP versions	HTTP/2, HTTP/1.1, HTTP/1.0
Alternate domain names	-
Standard logging	Off
Cookie logging	Off
Default root object	index.html

Continuous deployment [Info](#)

[Create staging distribution](#)

vii) Copy the distribution domain name id and paste it into the browser

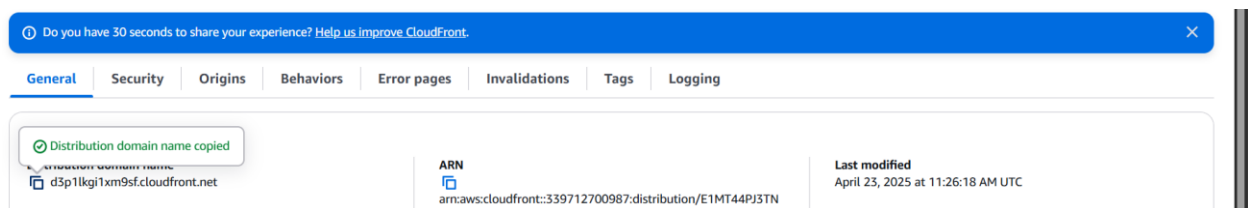

This screenshot shows the same AWS CloudFront console as the previous one, but with a green notification box indicating that the distribution domain name has been copied. The notification box says 'Distribution domain name copied' and shows the domain name 'd3p1lkgi1xm9sf.cloudfront.net'.

Details

Property	Value
Distribution domain name	d3p1lkgi1xm9sf.cloudfront.net
ARN	arn:aws:cloudfront::339712700987:distribution/E1MT44PJ3TNKQJ
Last modified	April 23, 2025 at 11:26:18 AM UTC

AWS CLOUDFRONT

Final result

