A2	PROSOIL	BOREHOLE NO: BH-1	
		LOCATION: Nagbari Bazar, Sadullahpur, Gaibandha.	
PROJECT : Telecommunication Tower.		DEPTH OF BORING: 21.0m	R. L.: 1.34m below from Road Level.
CLIENT : Grameenphone Ltd.		DATE OF BORING: 25-03-2012.	G. W. T : 3.05m below from E. G. L.

THICKNESS	SOIL STRATA	BORELOG	UNDISTURBED SAMPLE	DISTURBED SAMPLE	DEPTH (m) SPT VALUES (BLOWS / 300mm)	Grain Size Distribution, % Clay %, Silt %, Sand %	Max^{m} Penetration
2.0m	Gray 10YR (6/1), medium plasticity, very soft to medium stiff, silty Clay, CL.		UD-1	D-1	1		
2.0m	Very pale Brown 10YR (7/3), medium dense, silty Sand, SM.			D-2, D-3	8, 10		
3.5m	Grayish Brown 10YR (5/2), dense to medium dense, fine Sand, SM.			D-4, D-5, D-6, D-7	10, 25, 16, 15		
1.5m	Brown 10YR (5/3), medium dense to dense, fine Sand (with Mica), SM.			D-8	21		
3.0m	Light Gray 10YR (7/1), dense to very dense, fine Sand, SM.			D-9, D-10	36, 12		
1.5m	Gray 10YR (6/1), medium dense to dense, Silt (with Mica), ML.			D-11	17		
7.95m	Light Gray 10YR (7/1), dense to very dense, fine Sand, SM.			D-12, D-13, D-14, D-15, D-16	28, 32, 36, 37, 38		

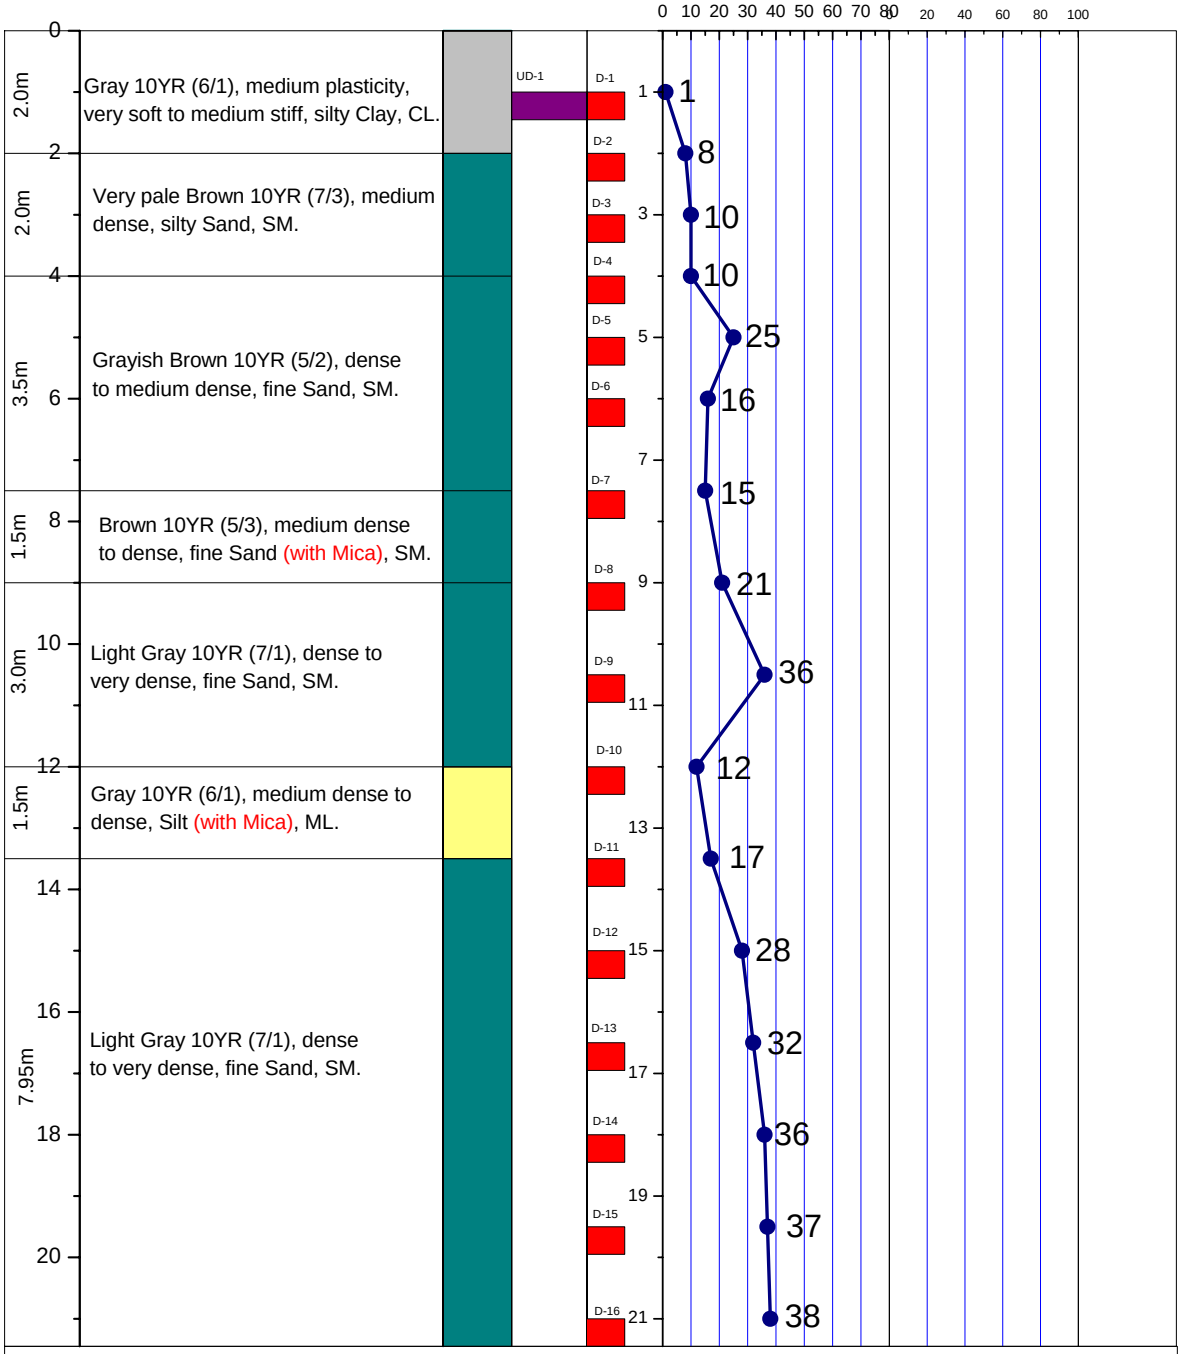

LEGEND FOR BORELOG AND GRAIN SIZE DISTRIBUTION (BASED ON 'ASTM CLASSIFICATION D-2487')

PLASTIC CLAY | SHALE | SILT | SAND

PEAT/HIGHLY ORGANIC SOIL | MICACEOUS FINE SAND/SILT | UNDISTURBED SAMPLE | DISTURBED SAMPLE

N- BLOWS DELIVERED PER FOOT BY A 140 LB HAMMER FALLING 30 INCHES

MAX^{m} PENETRATION= 50 BLOWS

AFTER 50 BLOWS PENETRATION DEPTH WERE MEASURED