



Experiment 2 — heterogeneous validators (CB-BFT vs QBFT)
15 nodes in three CPU tiers (5×2.00, 5×0.75, 5×0.30 cores), 5 tx/s, 150 s per run


(a) Mean block interval

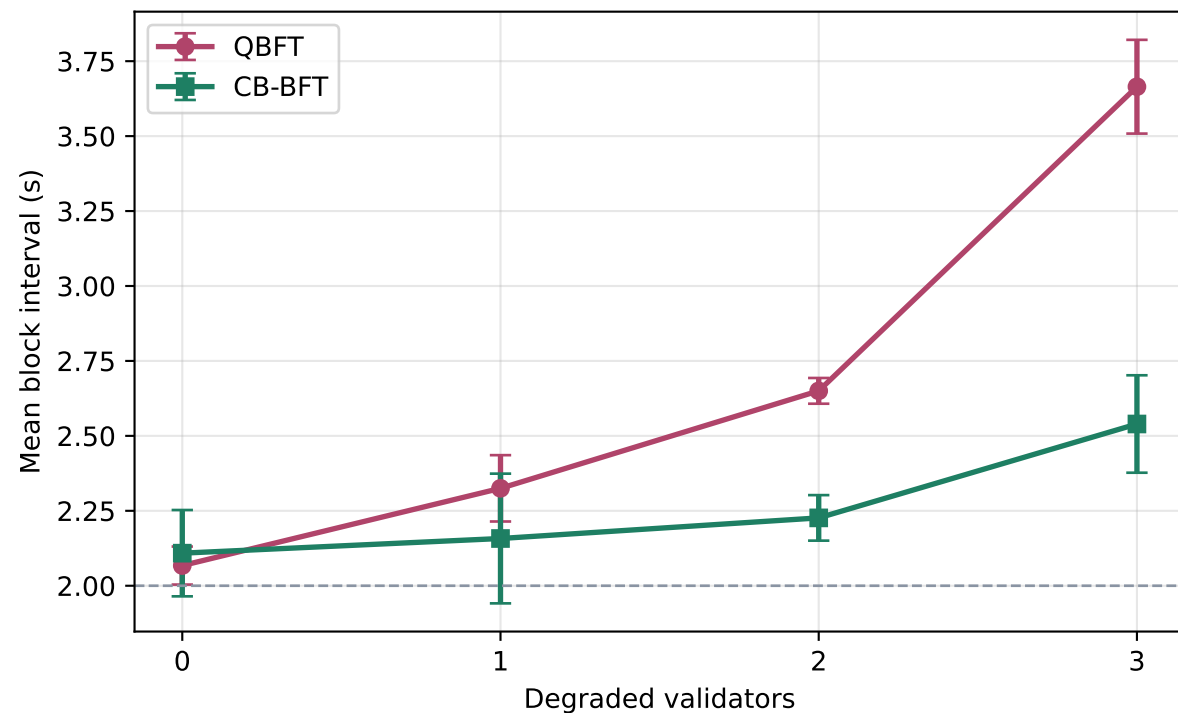

(b) Blocks produced in 150 s

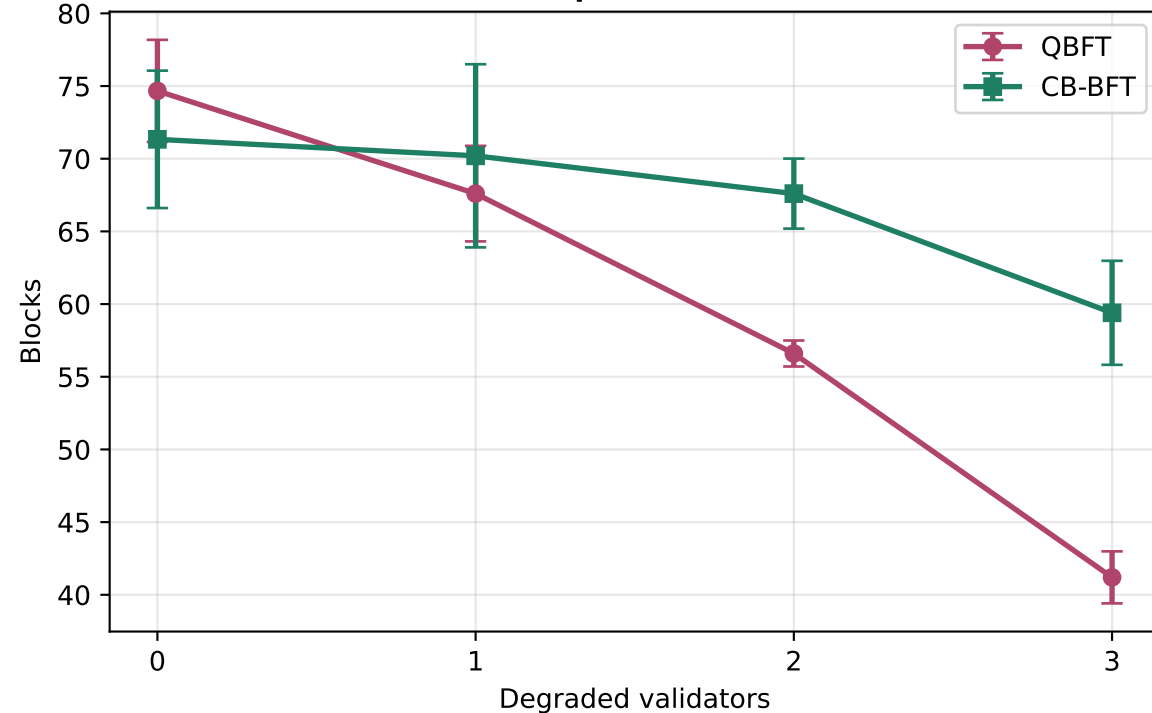

(c) Confirmed throughput

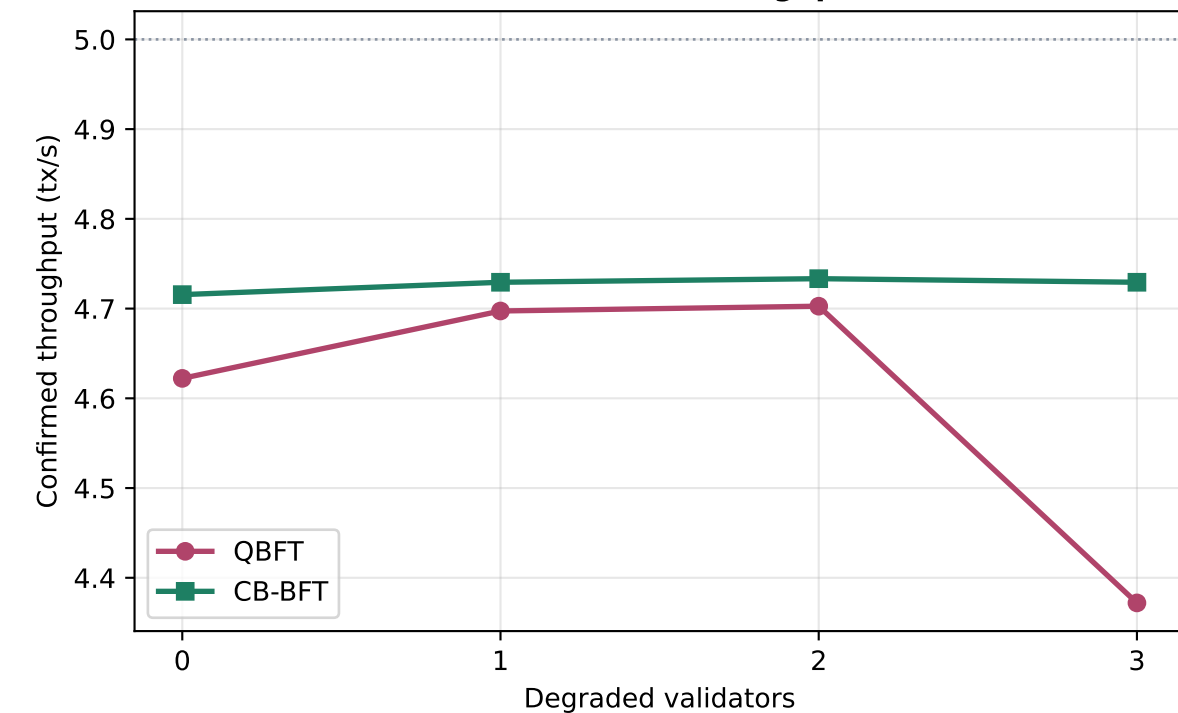

(d) CB-BFT block-interval advantage

