



Heterogeneous experiment — trade-offs of CB-BFT

15 nodes, three CPU tiers (5×2.00, 5×0.75, 5×0.30 cores)


(a) Trade-off 1: no gain in a healthy network

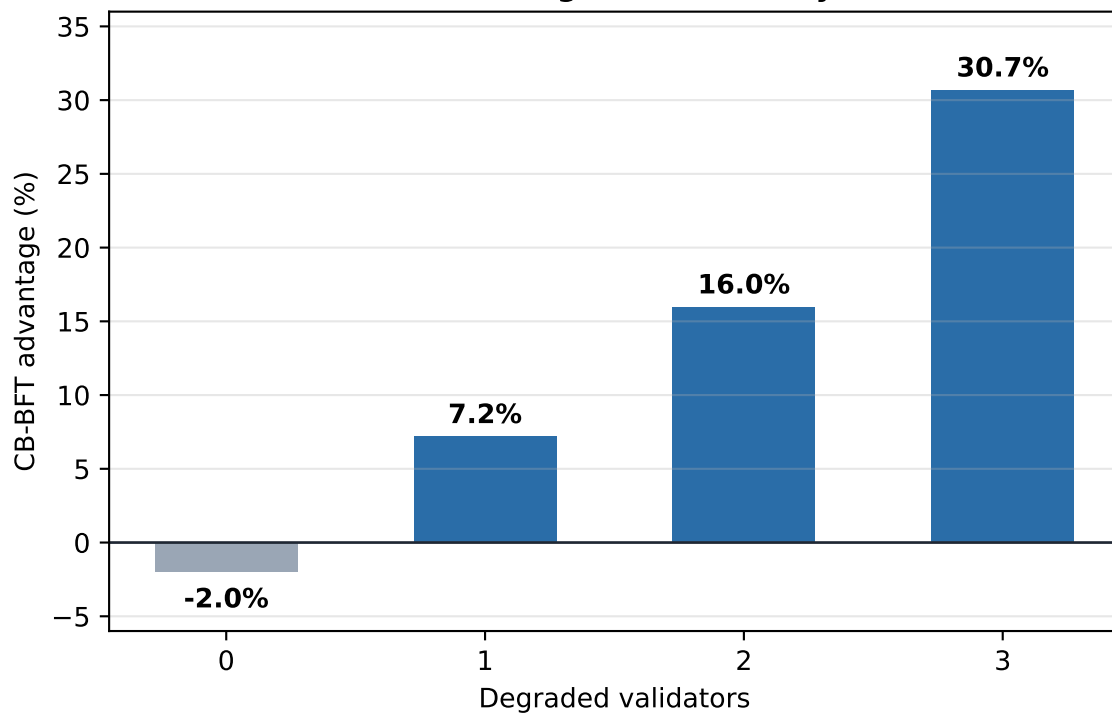

(b) Trade-off 2: proposal concentration

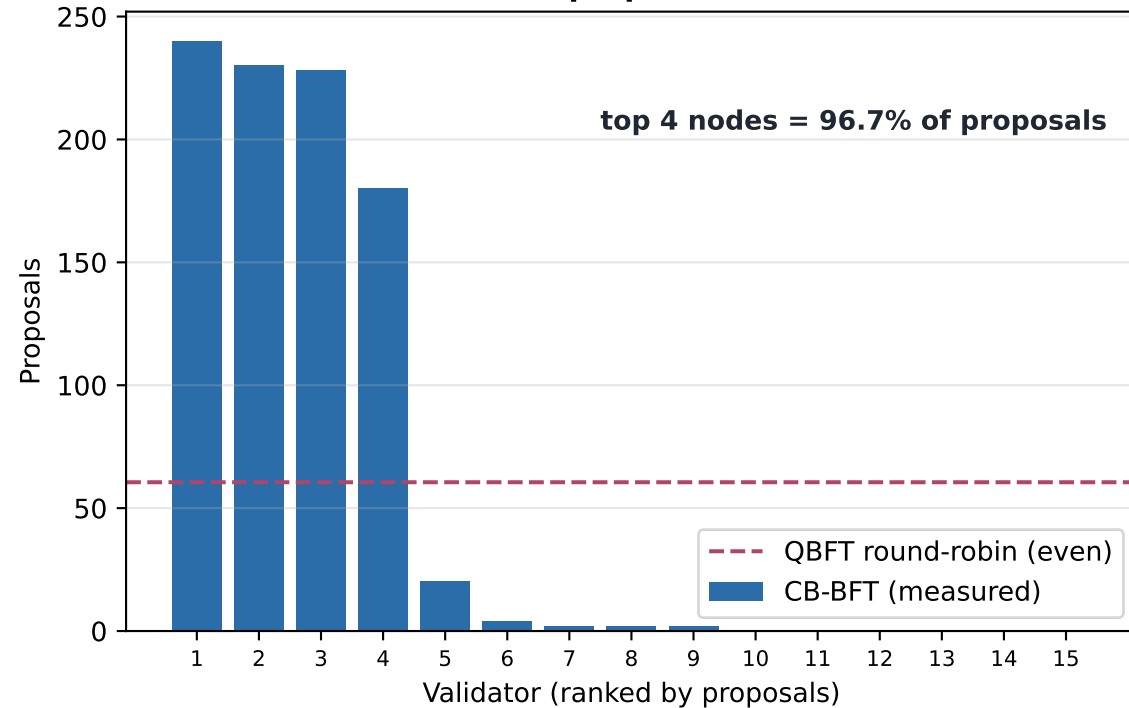

(c) Trade-off 3: selection does not follow capability

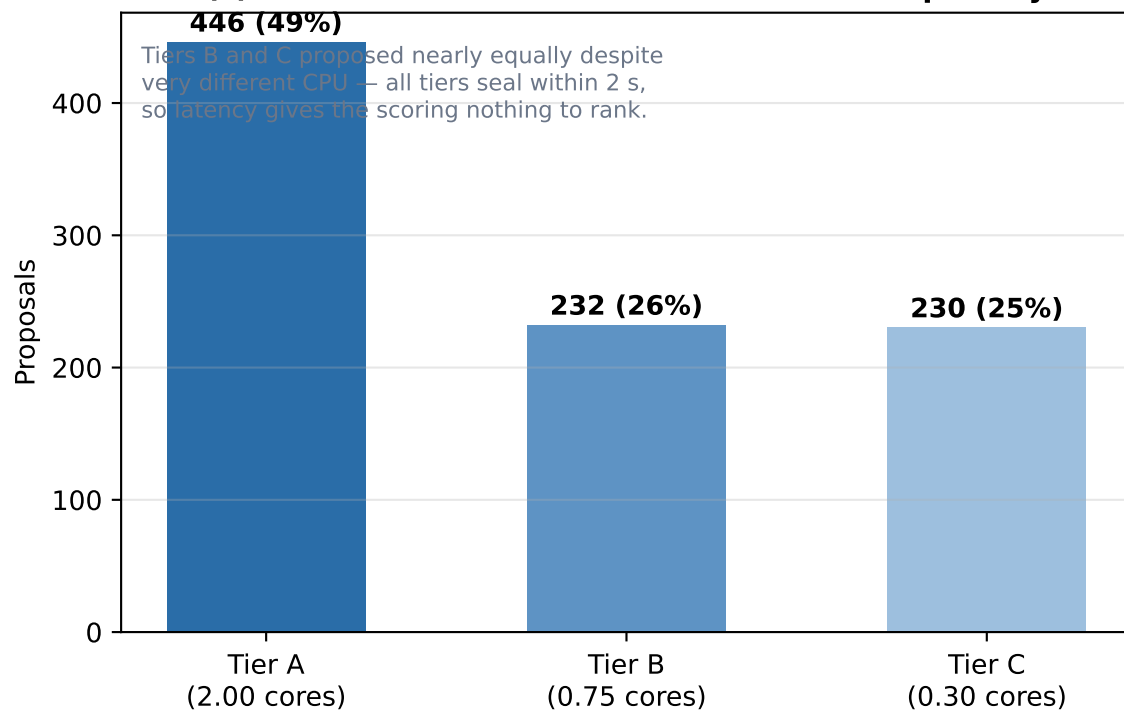

(d) Trade-off 4: more variable timing at low faults

