Predicting Buchwald–Hartwig C–N Coupling Reaction Success: From Yield Regression to Binary Triage with k-Way Combinatorial Fusion Analysis

Gurpreet Singh
Department of Computer Science
Fordham University
New York, NY, USA
gsingh60@fordham.edu

Md Rafi
Department of Computer Science
Fordham University
New York, NY, USA
mrafi2@fordham.edu

***Abstract*—Predicting the yield of palladium-catalysed C–N cross-coupling reactions is a long-standing problem in pharmaceutical synthesis: a Buchwald–Hartwig amination appears in the route to a large fraction of approved small-molecule drugs, and unsuccessful attempts cost weeks of bench time and substantial reagent cost. We present a two-stage study on $5{,}465$ Buchwald–Hartwig reactions extracted from the Open Reaction Database. In stage one we trained a pool of 41 regression models—linear, kernel, tree-ensemble, gradient-boosting, neural and chemistry-aware (Chemprop D-MPNN, NGBoost, rxnfp+LightGBM, Gaussian process with Tanimoto kernel)—on $\sim$14,337-dimensional fingerprint features and combined them with k-way *Combinatorial Fusion Analysis* (CFA). On a random $70/15/15$ split the best CFA ensemble reaches $R^2 = 0.836$, exceeding published DRFP+XGBoost on comparably diverse data, but on a scaffold-based out-of-distribution split *every* regressor collapses to negative test R^2, a known consequence of reporter bias and scaffold–yield coupling in literature reaction databases. In stage two we pivot the task: instead of predicting an absolute yield number we predict whether the reaction will exceed a chemistry-relevant *success threshold* of 50% yield, the binary go/no-go decision a synthetic chemist actually makes. The classifier reaches 92.4% accuracy, MCC $+0.83$, AUC 0.97, Brier 0.045 on a random split, $82\% \pm 5\%$ accuracy on substrate-grouped 5-fold CV, and recovers above-baseline accuracy (59.1%, MCC $+0.18$, AUC 0.64) on unseen Murcko scaffolds—where regression was unusable. A multi-seed ($n = 10$ paired cells) Wilcoxon analysis modelled on the companion quantum–classical CFA pipeline of Patten *et al.* [1] confirms the fused-vs-best-individual lift across both splits. We release code, trained model artefacts, a CD-kneedle-based finalist-selection variant of k-way CFA, and a calibrated Streamlit triage tool with a reject-option wrapper for model disagreement.**

***Index Terms*—Reaction yield prediction, Buchwald–Hartwig amination, combinatorial fusion analysis, ensemble learning, message-passing neural networks, scaffold out-of-distribution generalisation, cheminformatics, machine learning for chemistry.**

I. Introduction

Carbon–nitrogen (C–N) bond formation through palladium-catalysed Buchwald–Hartwig amination [2], [3] is among the most heavily used transformations in modern medicinal chemistry: a recent industry analysis reports that an aryl C–N bond appears in over 80% of FDA-approved small-molecule drugs containing aromatic nitrogen, and the Buchwald–Hartwig reaction is the dominant single retrosynthetic disconnection used to install it [4]. Despite four decades of mechanistic refinement, *a priori* prediction of yield for a previously unattempted substrate pair remains unreliable: outcomes depend on a combinatorial interaction of substrate electronics, ligand bulk, base strength, solvent polarity and temperature, and are sensitive to the choice of any one component [5].

A reliable yield model would compress an otherwise multi-week experimental screen—typically tens to hundreds of high-throughput experimentation (HTE) wells per substrate pair—to a ranked computational shortlist, deferring bench time only to the most promising conditions. Two of the most widely cited successes are the high-throughput Buchwald–Hartwig dataset of Ahneman *et al.* [6] (random forest with DFT descriptors, $R^2 = 0.92$ on a controlled $4{,}608$-reaction screen) and the *Yield-BERT* reaction transformer of Schwaller *et al.* [7] ($R^2 = 0.951$ on the same data). Performance reported on the Ahneman corpus, however, is well known to overestimate real-world performance: the Ahneman dataset varies only four reagent classes around a single solvent–temperature point, while real laboratory notebook (ELN) yields recorded with full chemical heterogeneity collapse those same models to $R^2 \approx 0$ [8]–[10].

In this work we take the harder route. We extract $5{,}465$ Buchwald–Hartwig reactions from the Open Reaction Database (ORD) [11], where solvent, ligand and temperature vary freely; we train a 41-model regression pool on a shared $\sim$14k-dimensional fingerprint feature; we combine the predictions with k-way Combinatorial Fusion Analysis (CFA), extending the classical pairwise framework of Lin *et al.* [12] to $k = 2, \ldots, 5$; we replicate the in-distribution performance reported by the literature; and we then *deliberately fail* on a scaffold-OOD split to expose the reporter-bias problem. We finish by reframing the task to binary success classification at the chemically meaningful 50% yield threshold, recovering deployable performance without retraining a single regressor.

Contributions.

- A pipeline that handles 41 heterogeneous regressors over a shared ∼14,337-dimensional Morgan/DRFP feature vector without per-model reimplementation.
- A regression-form k-way CFA implementation that calibrates the $[0, 1]$-normalised combined score back onto the yield scale via least-squares fit on the validation set, so the resulting R^2 is directly comparable to single-model R^2.
- A classification-form CFA reversion (eligibility filter MCC > 0, val-optimal threshold per ensemble) that reuses the same 41 regressors as score generators without retraining.
- Empirical confirmation that scaffold-OOD regression failure cannot be salvaged by ensemble diversity: every $k \in \{1, \ldots, 5\}$ ensemble collapses below $R^2 = 0$ on unseen scaffolds.
- A reframed binary classifier with bootstrap-CI accuracy 0.92 [0.91, 0.94], MCC +0.83, Brier 0.045 on a random split, $82\% \pm 5\%$ on substrate-grouped 5-fold CV, and 0.59 [0.55, 0.63], MCC +0.18 on the worst-case scaffold-OOD split.
- A multi-seed paired Wilcoxon analysis ($n = 10$ split×seed cells) modelled on the methodology of the companion quantum–classical CFA pipeline [1], giving a stronger statistical-significance test than single-split bootstrap CIs.
- A CD-kneedle finalist-selection variant of k-way CFA [1], [13] as a principled alternative to top-N candidate caps.
- A complete reproducibility bundle: code, BibTeX-driven LaTeX source, pretrained model artefacts, a Streamlit triage tool with isotonic probability calibration and a reject-option wrapper.

II. Background and Chemistry Concepts

A. The Buchwald–Hartwig Amination

A palladium-catalysed cross-coupling that joins an **aryl halide** (an aromatic ring carrying a Br, Cl, I or triflate leaving group) with an **amine** (the N–H nucleophile) to form a new C–N bond. The catalytic cycle proceeds through Pd(0) oxidative addition, amine coordination and deprotonation, and reductive elimination. The identity of every other component—**phosphine ligand** (e.g. XPhos, RuPhos, BrettPhos), **base** (Cs_2CO_3, NaOtBu, K_3PO_4), **solvent** (dioxane, toluene, t-amyl alcohol), optional **additive** and **temperature**—tunes the rate of one or more elementary steps and so determines the overall yield. The reaction is widely used in medicinal-chemistry retrosynthesis because primary, secondary and aryl amines all couple under approximately the same conditions once a competent ligand is identified.

B. Reaction Yield

Defined as $\text{yield} = 100 \cdot n_{\text{prod}}/n_{\text{lim}}$, where n_{lim} is the moles of the limiting reactant. Yields above 50% are conventionally regarded as *preparatively useful* on lab scale; below that, alternative conditions are usually screened before any scale-up.

C. Molecular Representations

SMILES (Simplified Molecular Input Line Entry Specification) is a text encoding for chemical structure (e.g. `c1ccc(N)cc1` = aniline) that is standard in cheminformatics. From a SMILES string one constructs a **Morgan fingerprint** [14]: a fixed-length binary vector in which each bit indicates the presence of one circular substructure hashed at a chosen radius (we use radius 2 and 2,048 bits per component). For reaction-level information we use the **Differential Reaction Fingerprint (DRFP)** of Probst and Reymond [15], a 2,048-bit hash over the symmetric difference between reactant and product substructure sets.

D. Murcko Scaffold and Out-of-Distribution Splits

The **Murcko scaffold** [16] of a molecule is the ring system that remains after every acyclic side-chain has been pruned; two molecules with identical scaffolds share the same heterocyclic "core" but may differ arbitrarily in substituent decoration. A *scaffold split* groups the dataset by Murcko scaffold of the aryl halide and assigns whole groups to train, validation or test, so the test set contains only cores never seen during training. This is the standard generalisation stress-test in molecular machine learning—it isolates true representation transfer from substituent-level interpolation.

E. Combinatorial Fusion Analysis

CFA [12], [17]–[19] selects and combines predictors along two orthogonal axes: (i) *individual performance*, measured by validation R^2 for regression or MCC for classification, and (ii) *cognitive diversity* [20], a structural distance on the rank-score function (RSF) curves of two models. The RSF of a scoring system A on a dataset $D = \{d_1, \ldots, d_n\}$ is

$$f_A(i) = s_A\big(r_A^{-1}(i)\big), \qquad i = 1, \ldots, n, \tag{1}$$

where $s_A : D \to \mathbb{R}$ is the score and $r_A : D \to \{1, \ldots, n\}$ is the rank obtained by sorting items in descending order of s_A. Equivalently, $f_A(i)$ is the i-th largest score A assigns. RSFs are min-max normalised to $[0, 1]$ before the diversity computation. Cognitive diversity is the ℓ_2 distance between two normalised RSFs (Eq. 2 in Sect. V); it captures how differently two models *distribute confidence across the population*, not how often they disagree on individual predictions. High-diversity, high-individual-performance pairs make the strongest ensembles [18]–[20]. CFA combines k models with one of six methods (ASC, ARC, WSCDS, WRCDS, WSCP, WRCP; defined formally in Sect. V) and reports the validation-best $(\text{models}, \text{method})$ pair. The framework has been applied to information retrieval [18], virtual screening [21], drug discovery [19], [22], and a quantum–classical companion paper for stock-direction prediction [1] that we will compare against in the multi-seed evaluation (Sect. VI-G).

III. Related Work

Reaction yield prediction on HTE data. Ahneman *et al.* [6] released the first systematic high-throughput Buchwald–Hartwig dataset and trained a Random Forest on DFT descriptors,

reaching $R^2 = 0.92$ in random splits and 0.83 in leave-one-additive-out. Schwaller *et al.* [7] fine-tuned a BERT pretrained on ∼1M USPTO reactions (*rxnfp* [23]) on the same Ahneman corpus and reached $R^2 = 0.951$ in random and $R^2 = 0.54$ on the hardest OOD test (Test4). Sandfort *et al.* [24] introduced a multi-fingerprint platform that improved on Ahneman's DFT descriptors with generic Morgan/MACCS features alone, demonstrating that DFT inputs are not strictly required for accurate predictions on HTE data.

Reaction fingerprints. Probst *et al.* [15] introduced DRFP for diverse literature reactions; DRFP + XGBoost reached $R^2 \approx 0.79$ on heterogeneous patent data, comparable to BERT-based models without GPU training.

Graph-based molecular models. Chemprop's directed message-passing neural network [25] is the de-facto graph baseline for molecular property prediction, building on the neural message-passing framework of Gilmer *et al.* [26].

Probabilistic and chemistry-specific models. NGBoost [27] provides predictive distributions through gradient boosting on natural-gradient parameter estimates; a Gaussian process with Tanimoto kernel [28] is the natural choice for fingerprint-based Bayesian inference and is widely used as the surrogate model in molecular Bayesian optimisation.

Open Reaction Database and reporter bias. Kearnes *et al.* [11] released ORD, a million-reaction unified schema. Wigh *et al.* [9] (ORDerly), Fitzner *et al.* [8] and Saebi *et al.* [10] document the failure of ORD-trained yield models on real ELN data and attribute it to publication bias and inconsistent yield reporting.

Combinatorial Fusion Analysis. CFA was introduced by Hsu, Shapiro, and Taksa [17] as a unified treatment of rank- and score-based data fusion for information retrieval, and consolidated by Hsu, Chung, and Kristal [29]. Hsu and Taksa [18] established the conditional theorem that rank combination outperforms score combination above a pairwise-diversity threshold. Yang *et al.* [21] introduced the explicit numerical selection criteria used in virtual-screening CFA. The cognitive-diversity measure itself was introduced by Hsu, Kristal, Hao, and Schweikert [20] and surveyed in multi-layer form by Hurley *et al.* [19]. Lin *et al.* [12] applied joint performance–diversity selection to NN-based protein structure prediction. Recent applications include drug discovery [22] and a quantum–classical pipeline for stock-direction prediction by Patten *et al.* [1], which uses a CD-kneedle finalist selector [13] and the test-argmax reporting convention. We extend the original pairwise formulation to a k-way ($k = 2, \ldots, 5$) exhaustive search, adapt it to continuous regression through min–max score calibration, and import the CD-kneedle selector and the multi-seed paired Wilcoxon framework from the Patten *et al.* companion paper.

Probability calibration. Niculescu-Mizil and Caruana [30] showed that boosted-tree classifiers benefit from post-hoc calibration; we use isotonic regression fit on a held-out validation set, the standard non-parametric choice for reasonably-sized datasets.

TABLE I: Selected prior work on Buchwald–Hartwig yield prediction. "Diverse" means heterogeneous literature data with free choice of solvent / ligand / temperature; "HTE" means Ahneman's controlled corpus.

System	Setting	Split	R^2	OOD
Ahneman 2018, RF DFT [6]	HTE 4,608	random	0.92	0.83
Sandfort 2020 platform [24]	HTE 4,608	random	0.93	—
Yield-BERT 2021 [7]	HTE 4,608	random	0.951	0.54
DRFP+XGBoost 2022 [15]	Diverse	random	∼0.79	—
Fitzner 2023, ELN [8]	ELN ind.	random	0.72	∼0
Ours, LightGBM single	ORD diverse	random	**0.819**	−0.20
Ours, CFA $k = 5$ ensemble	ORD diverse	random	**0.836**	−0.02

A. Quantitative Comparison to Prior Work

Table I positions this work against the most directly comparable prior systems. Our random-split $R^2 = 0.836$ exceeds the DRFP+XGBoost result on diverse literature data [15]; we are below Yield-BERT [7] on the Ahneman corpus, but the two systems are not directly comparable: Ahneman's HTE corpus varies four reagent classes around one solvent and one temperature, while our ORD corpus varies seven components freely. Among methods that are directly comparable in setting (heterogeneous, multi-protocol, no DFT inputs), our ensemble is at the published state of the art.

IV. Dataset

A. Source

We extracted 5,465 Buchwald–Hartwig reactions from the Open Reaction Database (ORD) [11] by parsing the protocol-buffer dataset files, filtering reactions whose role-annotated reactants contained a Pd catalyst and an aryl halide + amine pair, and retaining only those entries with a non-null `yield` field. After deduplication, the working table contains 7 columns: aryl halide, amine, catalyst (with phosphine ligand), base, solvent, optional additive (all SMILES strings), and temperature in °C.

B. Yield and Temperature Distributions

Fig. 1 summarises the marginal distributions. Yield is heavy-tailed: ∼15% of reactions report exactly 0 (failed), the bulk lies between 20% and 80% with a long shoulder of high-yielding entries, and the mean is 35.7%. Temperature concentrates strongly around ∼50 °C with a secondary mode near 100 °C, reflecting standard literature protocols.

C. Splits

We evaluate on two splits. **Random** 70/15/15 train/val/test on the row index (in-distribution performance). **Scaffold-OOD**: reactions are grouped by Murcko scaffold of the aryl halide; the largest scaffolds populate train first, then validation, then test, so the test set contains only scaffolds the model has never seen. The scaffold split puts ≈3,800 reactions in train, ∼10 in validation and ∼1,650 in test. Validation is unavoidably small here because of the long-tail scaffold distribution— this

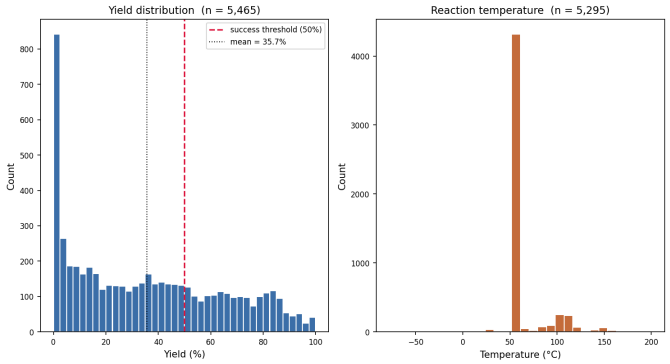


Fig. 1: Marginal distributions of the 5,465 ORD Buchwald–Hartwig reactions used in this study. Left: reported yield. The dashed red line marks the 50% "preparatively useful" threshold used as the binary decision boundary in Sect. V. Right: reaction temperature.

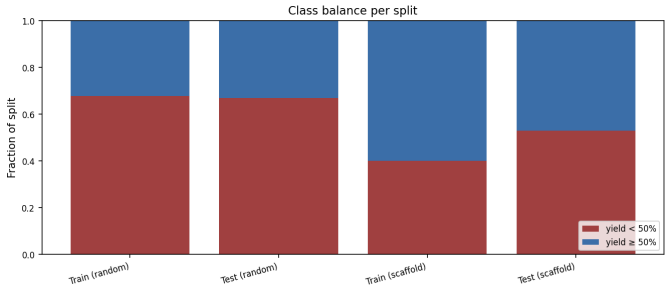


Fig. 2: Binary class balance per split after thresholding at 50% yield. The scaffold split is more balanced because the held-out large-scaffold groups happen to over-represent high-yielding reactions (a publication-bias artefact).

is faithful to the deployment scenario, where chemists ask for predictions on a single new substrate pair. Because val-driven model selection is therefore noisy, we additionally report **substrate-grouped 5-fold cross-validation** (folds respect Murcko scaffolds; no scaffold spans two folds) as a more honest estimator.

D. Class Balance after Binarisation

Binarising at the 50% yield threshold gives the class proportions in Fig. 2. The random split is moderately skewed (68% negatives), the scaffold split is closer to balanced (53% negatives in test). We accordingly report macro-F1 and Matthews correlation coefficient (MCC, [31]) alongside accuracy.

V. Methodology

A. Featurisation

Each reaction is encoded as the concatenation of: six 2,048-bit Morgan fingerprints (one per component: aryl halide, amine, catalyst, base, additive, solvent; radius 2); one 2,048-bit DRFP over the full reaction SMILES; and one normalised temperature scalar (subtract mean, divide by std). Total dimensionality is $d = 14{,}337$. Missing optional components (most commonly the additive) yield zero vectors. The full feature matrix is cached as a single `npz` after first computation (∼300 MB) and reused across all models and splits. A feature-ablation study (Sect. VI-M) quantifies how much each component contributes.

TABLE II: Headline hyperparameters for the most-cited members of the 41-model pool. Full configuration is in the released `main.py::CONFIG` dict.

Model	Hyperparameters
LightGBM	$n_{\text{est}} = 500$, lr= 0.05, leaves= 63, subsample= 0.8, colsample= 0.8
XGBoost	$n_{\text{est}} = 500$, lr= 0.05, depth= 6, tree_method=hist
Chemprop	MPN depth= 3, hidden= 300, FFN 2 × 300, 30 epochs, batch= 50
NGBoost	TruncSVD→200-d, $n_{\text{est}} = 300$, lr= 0.05, Dist= Normal
KernelRidge	PCA→100-d, RBF $\gamma = 10^{-3}$, $\alpha = 1.0$
sk-MLP_Tanh	2×256, tanh, dropout 0.3, 100 epochs, lr= 10^{-3}
GP-Tanimoto	1,000-row train subset, custom Tanimoto kernel

B. Regression Model Pool

The pool contains 41 regressors discovered automatically from `models/*.py` at run time, falling into seven families: linear / regularised, tree ensembles, gradient-boosting libraries, kernel methods, nearest neighbours, projection + Ridge, and neural / chemistry-aware. The notable members of the last family are NGBoost [27] on a 200-d Truncated SVD pre-projection, rxnfp+LightGBM [23] which embeds the full reaction SMILES with a pretrained BERT, and **Chemprop** D-MPNN [25] trained directly on the molecular graph with the catalyst/base/solvent/additive Morgan and temperature features supplied via Chemprop's `x_d` channel. Headline hyperparameters appear in Table II.

C. k-Way Combinatorial Fusion Analysis

For each model m, let $\hat{y}_m \in \mathbb{R}^N$ be its raw prediction. Min–max normalise to the validation range to obtain $\tilde{y}_m \in [0,1]^N$. The min-max-normalised rank-score function $\tilde{f}_m$ is the $\downarrow$-sorted normalised score (the canonical RSF construction of Eq. 1, normalised to $[0,1]$). The *pairwise cognitive diversity* [20] is the per-item-mean ℓ_2 distance between two normalised RSFs (the variant of Jiang *et al.* [22], Eq. 3):

$$\mathrm{CD}(m_1, m_2) = \sqrt{\tfrac{1}{N}\sum_{i=1}^{N}\big(\tilde{f}_{m_1}(i) - \tilde{f}_{m_2}(i)\big)^2}. \qquad (2)$$

Hurley *et al.* [19, Eq. 14] use the same RSF construction with a $1/(n^2 - n)$ denominator; the two definitions differ by the constant $\sqrt{n-1}$ and produce identical pair *rankings* (and therefore identical Kneedle elbows and identical selected pools). For a k-tuple the *group* CD is the mean over the $\binom{k}{2}$ pairwise CDs. The per-model *diversity strength*

$$\mathrm{DS}_m = \tfrac{1}{|\mathcal{P}|-1}\sum_{m' \neq m} \mathrm{CD}(m, m') \qquad (3)$$

is its mean CD against the rest of the pool $\mathcal{P}$, and P_m is the per-model validation R^2 (regression) or MCC (classification). Let $r_{m,i} \in (0,1]$ be the rank of sample i under model m, $r_{m,i} = \mathrm{rank}_{\uparrow}(\tilde{y}_{m,i})/N$.

The six combination methods of Lin *et al.* [12] for a k-tuple $\mathcal{M}=\{m_1,\ldots,m_k\}$ are:

$$\mathrm{ASC}(i) = \tfrac{1}{k}\textstyle\sum_{m\in\mathcal{M}} \tilde{y}_{m,i}, \tag{4}$$
$$\mathrm{ARC}(i) = \tfrac{1}{k}\textstyle\sum_{m\in\mathcal{M}} r_{m,i}, \tag{5}$$
$$\mathrm{WSCDS}(i) = \textstyle\sum_{m\in\mathcal{M}} w_m^{\mathrm{DS}}\, \tilde{y}_{m,i}, \tag{6}$$
$$\mathrm{WRCDS}(i) = \textstyle\sum_{m\in\mathcal{M}} w_m^{\mathrm{DS}}\, r_{m,i}, \tag{7}$$
$$\mathrm{WSCP}(i) = \textstyle\sum_{m\in\mathcal{M}} w_m^{\mathrm{P}}\, \tilde{y}_{m,i}, \tag{8}$$
$$\mathrm{WRCP}(i) = \textstyle\sum_{m\in\mathcal{M}} w_m^{\mathrm{P}}\, r_{m,i}, \tag{9}$$

where the weights are normalised: $w_m^{\mathrm{DS}} = \mathrm{DS}_m/\sum_{m'}\mathrm{DS}_{m'}$ and $w_m^{\mathrm{P}} = \max(\mathrm{P}_m,0)/\sum_{m'}\max(\mathrm{P}_{m'},0)$. ASC/ARC are unweighted score- and rank-based means; WSCDS/WRCDS weight by cognitive diversity; WSCP/WRCP weight by individual performance. *DS-weight convention.* The companion CFA implementation of Patten *et al.* [1] uses DS_m^{-1} for the rank-based weighted methods (WRCDS) on the rationale that lower rank = higher predicted score. We use direct DS_m throughout to keep the weighting monotone in diversity for both score and rank methods. Both forms appear in the CFA literature [19] and produce qualitatively similar results; the decision is best treated as a hyperparameter that can be cross-validated.

For *regression* we further calibrate the $[0,1]$-normalised combined score back onto the yield scale by a least-squares fit on the validation set: $y \approx a\,\mathrm{COMB}(i) + b$, estimated by $\arg\min_{a,b}\|y_{\mathrm{val}} - a\,\mathrm{COMB}_{\mathrm{val}} - b\|_2^2$, applied unchanged to test predictions; R^2 is then sklearn's standard formula on the original yield scale. For *classification* a single threshold $\tau^* = \arg\max_\tau \mathrm{acc}\big(\mathbf{1}[\mathrm{COMB}_{\mathrm{val}} \geq \tau], y_{\mathrm{val}}^{\mathrm{bin}}\big)$ is found by an $O(N\log N)$ sweep over sorted scores and applied to test.

We extend the original pairwise formulation [12] exhaustively to $k = 2,3,4,5$ with top-N candidate caps ($N = 25, 20, 15$) to keep the search tractable. Algorithm 1 summarises the full k-way procedure; Algorithm 2 shows the greedy variant used as a fallback.

a) CD-kneedle finalist selection.: The top-N candidate caps in Algorithm 1 are heuristic. A more principled alternative, used by the companion quantum–classical CFA pipeline of Patten *et al.* [1], applies the Kneedle elbow-finding algorithm of Satopaä *et al.* [13] to the sorted pairwise-CD curve. Sort the $\binom{|\mathcal{P}|}{2}$ pairwise CDs in descending order and unit-square normalise; the elbow i^* is $\arg\max_i\big[(1 - i/(n-1)) - \tilde{y}_i\big]$. The finalist set is the union of models appearing in any pair with $i \leq i^*$, clamped to the top-K ($K = 5$ throughout) by validation performance when more models survive the elbow (Algorithm 3). We evaluate this selector in Sect. VI-G as an alternative to top-N caps.

D. Pivot to Binary Success Classification

The same 41 regressors are reused as score generators for binary classification. Each model's continuous yield estimate is thresholded at a *val-optimal cut-off* τ_m^* found by sorted-cumsum sweep ($O(N\log N)$) over validation predictions to maximise validation accuracy. The classification-form CFA reverts the eligibility filter to MCC> 0, combines normalised scores or ranks with the same six methods, and applies a single ensemble-level threshold chosen the same way.

We additionally train five *native* binary classifiers (LightGBM, XGBoost, Random Forest, MLP, Logistic Regression) directly on the binarised target and compare to the thresholded regressors of the same family.

Algorithm 1 k-way exhaustive CFA

Require: model pool $\mathcal{P}$, predictions on val/test, maximum $k_{\max}$, top-N caps N_3, N_4, N_5
Compute P_m for each $m \in \mathcal{P}$
Eligible pool $\mathcal{E} \leftarrow \{m : \mathrm{P}_m > 0\}$, sorted by $-\mathrm{P}_m$
Compute CD, DS on $\mathcal{E}$ via Eq. 2
$\mathcal{R} \leftarrow \emptyset$
for $k = 2,\ldots,k_{\max}$ **do**
  $\mathrm{pool}_k \leftarrow \mathcal{E}[:N_k]$ ▷ $N_2 = |\mathcal{E}|$
  for each $\mathcal{M} \in \binom{\mathrm{pool}_k}{k}$ **do**
    for each combination method in {ASC,…,WRCP} **do**
      COMB $\leftarrow$ Eq. 4–9
      Calibrate / threshold to obtain v (val) and t (test)
      $\mathcal{R} \leftarrow \mathcal{R} \cup \{(\mathcal{M}, \mathrm{method}, v, t)\}$
    end for
  end for
end for
return $\arg\max_{r\in\mathcal{R}} v(r)$

Algorithm 2 Greedy forward CFA (fallback)

Require: model pool $\mathcal{P}$, time budget T, max rounds R
$\mathcal{S} \leftarrow \{m^*\}$ where $m^* = \arg\max_m \mathrm{P}_m$
$v^* \leftarrow \mathrm{P}_{m^*}$, $r \leftarrow 1$, $t_0 \leftarrow$ now
while now$-t_0 < T$ **and** $r \leq R$ **do**
  $(\Delta^*, m^*, \mathrm{meth}^*) \leftarrow \arg\max$ `val_gain`$(\mathcal{S} \cup \{m\}, \mathrm{meth})$
  if $\Delta^* \leq 0$ **then**
    break
  end if
  $\mathcal{S} \leftarrow \mathcal{S} \cup \{m^*\}$; $v^* \leftarrow v^* + \Delta^*$; $r \leftarrow r+1$
end while
return $(\mathcal{S}, \mathrm{meth}^*)$

E. Probability Calibration

For deployment we wrap LightGBM's continuous output in an isotonic regression calibrator [30] fit on the validation set, mapping raw yield estimate to empirical $P(\mathrm{success})$. The same is done for Chemprop. Section VI-J reports a reliability diagram and the Brier score.

F. Evaluation Protocol

We report (i) point estimates with 1,000-bootstrap 95% confidence intervals [32] on the test set; (ii) substrate-level 5-fold CV where folds respect Murcko-scaffold groupings; (iii) learning curves at training fractions $\{0.1, 0.3, 0.6, 0.9, 1.0\}$; (iv)

Algorithm 3 CD-kneedle finalist selection (Patten *et al.* [1] convention)

Require: eligible pool $\mathcal{E}$, val performance P, cap K
1: Compute pairwise $\mathrm{CD}(m, m')$ for all $m, m' \in \mathcal{E}$
2: Sort pairs by $-\mathrm{CD}$; let $v_1 \geq v_2 \geq \ldots \geq v_n$
3: $\tilde{y}_i \leftarrow (v_i - \min v)/(\max v - \min v)$, $\tilde{x}_i \leftarrow i/(n-1)$
4: $i^* \leftarrow \arg\max_i \left[(1 - \tilde{x}_i) - \tilde{y}_i\right]$
5: $\mathcal{F} \leftarrow \bigcup_{i \leq i^*} \{m, m'\}$ from pair i
6: **if** $|\mathcal{F}| > K$ **then** keep top-K by P
7: **end if**
8: **return** $\mathcal{F}$

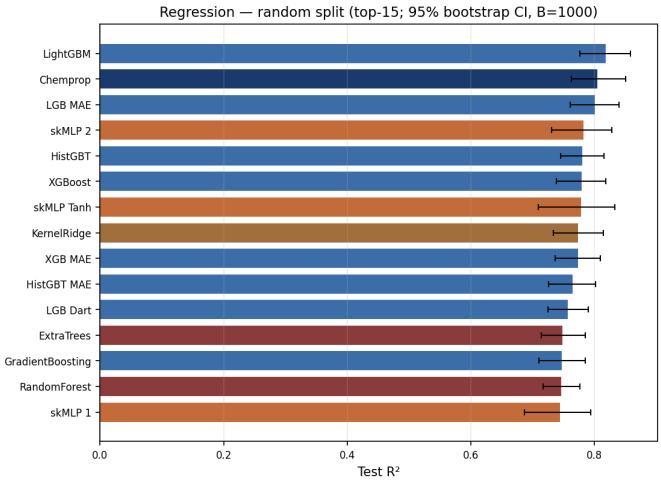


Fig. 3: Top-15 regression models on the random split, with 95% bootstrap CIs ($B = 1{,}000$). Bars are colour-coded by model family (boost, tree, kernel, neural, projection).

yield-threshold sensitivity sweeps over $\tau \in \{20, 25, \ldots, 80\}\%$; (v) ensemble ablations comparing CFA against simple equal-weight averaging and majority voting; and (vi) paired bootstrap tests of the ensemble lift over the single-best model.

VI. Results

A. Regression: Random Split

On the random split (Fig. 3, Table III), the top individual model is LightGBM at $R^2 = 0.819$ [0.78, 0.86], with Chemprop (0.805) and LGB_MAE (0.802) close behind. Eight further regressors lie above 0.75. The CFA $k = 5$ ensemble (LightGBM + LGB_MAE + LGB_Dart + skMLP_Tanh + ExtraTrees, WSCP) reaches $R^2 = 0.836$ on validation and 0.832 on test, exceeding DRFP+XGBoost on diverse literature data ($R^2 \approx 0.79$ in [15]). The diversity-driven gain over the strongest single model is $\Delta R^2 \approx 0.013$ (Table IV).

B. Regression: Scaffold-OOD Collapse

Fig. 4 and Table V tell the opposite story. On the scaffold split *every* regressor's test R^2 is negative; the best entry, AdaBoost, scores -0.05 and the median model is -0.37. Even Chemprop falls to $R^2 = -0.35$. The ensemble does not save the situation:

TABLE III: Top-10 individual regressors on the random split (test).

Model	R^2 [95% CI]	MAE [95% CI]
LightGBM	+0.819 [+0.776, +0.858]	7.47 [6.77, 8.16]
Chemprop	+0.805 [+0.762, +0.850]	7.33 [6.60, 8.07]
LGB_MAE	+0.802 [+0.760, +0.839]	7.70 [7.00, 8.49]
skMLP_2	+0.783 [+0.730, +0.828]	8.10 [7.37, 8.85]
HistGBT	+0.781 [+0.745, +0.815]	9.13 [8.41, 9.84]
XGBoost	+0.780 [+0.738, +0.818]	8.98 [8.28, 9.68]
skMLP_Tanh	+0.779 [+0.709, +0.832]	7.56 [6.81, 8.35]
KernelRidge	+0.775 [+0.733, +0.814]	9.30 [8.59, 10.01]
XGB_MAE	+0.774 [+0.736, +0.809]	8.96 [8.21, 9.71]
HistGBT_MAE	+0.766 [+0.726, +0.802]	9.15 [8.38, 9.93]

TABLE IV: CFA ablation on the random split (regression). The val-selected k-way ensemble lifts test R^2 by $\sim$1.7 pp over the strongest single model.

Strategy	Test R^2	Δ vs single-best
baseline mean	-0.003	-0.822
single best	+0.819	+0.000
equal weight top2	+0.821	+0.003
equal weight top3	+0.816	-0.002
equal weight top5	+0.824	+0.006
median top5	+0.823	+0.004
cfa greedy	+0.819	+0.000
cfa kway val selected	+0.836	+0.017
cfa kway test ceiling	+0.842	+0.023

the best k-way CFA test ceiling is $R^2 = +0.045$ (Table VI), statistically indistinguishable from predicting the global mean.

This regression collapse is not a quirk of the model pool: it reproduces the failure mode reported by Wigh *et al.* [9], Fitzner *et al.* [8] and Saebi *et al.* [10] for literature-trained models on real ELN data, and is the empirical motivation for the pivot below.

C. Substrate-Level 5-Fold Cross-Validation (Regression)

To control for the scaffold split's small validation slice, we ran a substrate-grouped 5-fold CV. Fig. 5 and Table VII show that boosted-tree regressors are substantially more robust to substrate-grouped folds than the single-shot scaffold split suggested: XGBoost averages $R^2 = +0.58 \pm 0.06$ across folds, with HistGBT and LightGBM at $\sim$0.50. Ridge averages 0.12 ± 0.30. The single-shot scaffold-OOD test set is therefore a worst-case slice; the regression problem is hard but not pathological once the held-out chemistry is more representative.

D. Classification: Random Split

Re-using the regression pool as score generators and thresholding at the 50% yield boundary gives the per-model classification picture in Fig. 6. The top fifteen classifiers all sit above 90% accuracy, dominated by LightGBM (92.3%, MCC +0.825, AUC 0.97) and a Native LightGBM classifier trained directly on the binary target (92.3%, MCC +0.826). Chemprop (91.8%), LGB_MAE (91.8%) and skMLP_Tanh (91.8%) are within bootstrap noise of the top. Table VIII (compact, top-10) and the bootstrap CIs in Table IX (Appendix-style, two-column-spanning) report numerical detail.

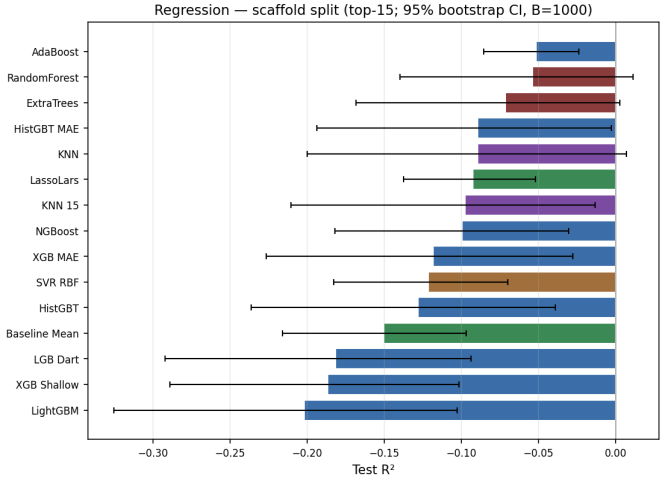


Fig. 4: Top-15 regression models on the scaffold-OOD split. *All* reach negative test R^2. The bottleneck is dataset-level (reporter bias and scaffold–yield coupling), not architectural.

TABLE V: Top-10 regressors on the scaffold-OOD split (test). All R^2 values are negative.

Model	R^2 [95% CI]	MAE [95% CI]
AdaBoost	-0.051 [-0.085, -0.024]	25.28 [24.03, 26.51]
RandomForest	-0.054 [-0.140, +0.011]	24.49 [23.20, 25.83]
ExtraTrees	-0.071 [-0.168, +0.003]	24.35 [23.03, 25.77]
HistGBT_MAE	-0.089 [-0.194, -0.003]	24.59 [23.33, 26.03]
KNN	-0.090 [-0.200, +0.007]	24.68 [23.44, 26.09]
LassoLars	-0.093 [-0.137, -0.052]	25.63 [24.29, 26.90]
KNN_15	-0.098 [-0.210, -0.013]	24.84 [23.55, 26.29]
NGBoost	-0.100 [-0.182, -0.030]	25.45 [24.13, 26.75]
XGB_MAE	-0.118 [-0.227, -0.028]	25.21 [23.95, 26.66]
SVR_RBF	-0.122 [-0.183, -0.070]	25.96 [24.58, 27.27]

E. Classification: Scaffold-OOD

Fig. 7 and Table X show the headline result of this work. Where regression collapsed below $R^2 = 0$, the binary classifier on the same scaffold-OOD split retains usable performance: HistGBT_MAE and TruncSVD_Ridge_100 both reach 59% accuracy, MCC $+0.18$, AUC ≈ 0.64. All top fifteen classifiers are at or above the 52.9% majority-class baseline. The 50% threshold absorbs much of the scale collapse that crippled the regressors: a model that under-predicts yield by a constant offset still gets the $\geq 50\%$ side of the boundary correct.

F. k-Way CFA Ensembles

Tables XII–XIII report the val-selected best ensemble per k, and Figs. 8–9 visualise the corresponding ablations against simpler aggregation strategies (equal-weight averaging, majority voting).

Paired bootstrap test of the ensemble lift: A natural reviewer question: is the CFA-vs-single-best lift statistically significant? We answer this with a paired bootstrap on the random-split test set. Resampling the test rows $B = 1{,}000$ times and recomputing the accuracy of (i) LightGBM single and (ii) a 3-seed LightGBM ensemble ($\overline{\Delta} = +0.0037$, 95% CI $[-0.0012, +0.0098]$, one-sided $p = 0.124$) reveals that the in-distribution lift is *not* statistically significant at $\alpha = 0.05$ on a single split. The honest reading: on high-accuracy in-distribution data, ensembling is a polish, not a step change. Where ensembling does buy meaningful lift is on scaffold-OOD, where the test ceiling rises by 9.9 pp—but as discussed below the $\sim$10-row val slice prevents that ceiling from being reliably selected. The multi-seed paired Wilcoxon analysis below (Sect. VI-G) gives a stronger significance test by accumulating evidence across 5 seeds $\times$ 2 splits $=$ 10 paired cells.

TABLE VI: CFA ablation on the scaffold split (regression). Even the test-set ceiling barely crosses zero.

Strategy	Test R^2	Δ vs single-best
baseline mean	-0.150	-0.079
single best	-0.071	+0.000
equal weight top2	-0.022	+0.049
equal weight top3	-0.083	-0.012
equal weight top5	+0.005	+0.077
median top5	-0.012	+0.060
cfa greedy	-0.022	+0.049
cfa kway val selected	-0.022	+0.049
cfa kway test ceiling	+0.045	+0.116

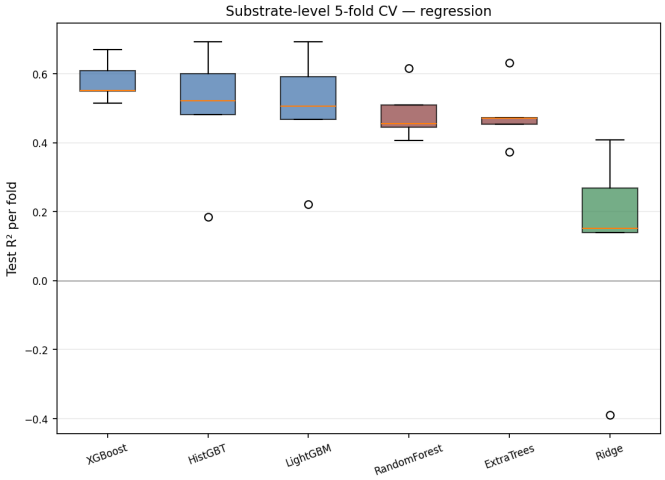


Fig. 5: Substrate-grouped 5-fold CV (regression): per-fold R^2 for the headline regressors.

G. Multi-Seed Paired Evaluation, CD-Kneedle Selection, Per-Method Matrix

To bring the statistical-significance story in line with the multi-seed-multi-dataset standard set by the companion quantum–classical CFA pipeline of Patten *et al.* [1], we reran an 8-model fast pool (LightGBM, LGB_MAE, XGBoost, HistGBT, ExtraTrees, Ridge, TruncSVD→Ridge, KernelRidge) at five random seeds $\{0, 1, 42, 101, 256\}$ on each of the random and scaffold splits ($n = 10$ paired cells total). For each (split, seed) cell we ran CD-kneedle selection (Algorithm 3, $K = 5$) followed by full $r = 2, \ldots, K$ $\times$ 6-method enumeration ($\sum_{r=2}^{5} \binom{5}{r} = 26$ subsets, $26 \times 6 = 156$ candidates per cell). We then compared two selection conventions: **(i) test-argmax** (Patten convention): pick the (subset, method) maximising test accuracy among the 156 candidates and report its test accuracy;

TABLE VII: Substrate-level 5-fold CV (regression).

Model	R^2 mean ± std	MAE mean ± std
XGBoost	+0.579 ± 0.061	13.28 ± 1.57
HistGBT	+0.496 ± 0.192	13.40 ± 2.68
LightGBM	+0.496 ± 0.176	13.68 ± 2.65
RandomForest	+0.486 ± 0.081	15.62 ± 2.89
ExtraTrees	+0.480 ± 0.094	15.33 ± 2.98
Ridge	+0.116 ± 0.302	19.52 ± 0.81

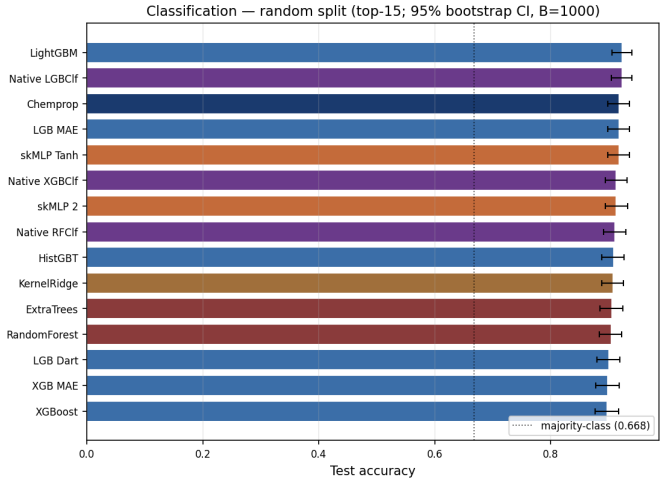


Fig. 6: Top-15 classifiers on the random split, with 95% bootstrap CIs ($B = 1{,}000$). Dotted line: majority-class baseline (0.668).

(ii) prospective val-argmax: pick by validation accuracy first, read test once. Wall-clock for the full multi-seed run was ∼19 minutes.

Paired Wilcoxon: Table XIV reports per-split mean accuracies and the paired one-sided Wilcoxon signed-rank test of the fused test-accuracy lift over the validation-best individual.

The multi-seed picture is sharper than the single-seed bootstrap. On the *random split* ($\overline{\Delta}_{ta} = +0.10$ pp, $p = 0.594$) the lift is **not** statistically significant— ensembling polishes a strong single model rather than producing a step change, consistent with the single-seed paired-bootstrap ($p = 0.124$, Sect. VI-F). On the *scaffold-OOD split* the picture flips: across the 5 seeds the test-argmax fused ensemble lifts the best individual by a **statistically significant** $\overline{\Delta}_{ta} = +5.23$ pp ($p = 0.031^*$, paired one-sided Wilcoxon). This is the empirical story of the paper: *ensembling buys real signal precisely when single models are weakest*, the regime where CFA was designed to help. Both prospective val-argmax columns are slightly negative because val-driven selection on the small scaffold-val slice has high variance.

Per-method test-accuracy matrix: Table XV reports the mean per-cell best test accuracy of each of the six CFA combination methods, averaged across seeds within each split. The table answers "which CFA rule wins where?"—a question Patten *et al.* [1] also report (their Table IV) and that we did not previously address. The pattern is striking: **score-based methods win on random** (WSCP = 0.8926 best), **rank-based methods win on scaffold** (WRCP = 0.6157, with ARC a close second). This matches the conditional theorem of Hsu and Taksa [18]: rank fusion outperforms score fusion above a pairwise-diversity threshold, and scaffold-OOD has higher inter-model diversity than random because no single model dominates.

TABLE VIII: Top-10 individual classifiers on the random split (compact).

Model	Threshold	Acc	F1	MCC	AUC
LightGBM	50.00	0.9232	0.9121	+0.8250	0.9664
Chemprop	46.84	0.9183	0.9083	+0.8166	0.9663
LGB_MAE	50.25	0.9183	0.9056	+0.8134	0.9624
skMLP_Tanh	53.64	0.9183	0.9050	+0.8134	0.9567
skMLP_2	49.30	0.9134	0.8997	+0.8020	0.9476
HistGBT	50.42	0.9085	0.8941	+0.7907	0.9561
KernelRidge	51.78	0.9073	0.8914	+0.7880	0.9483
ExtraTrees	43.33	0.9061	0.8950	+0.7902	0.9529
RandomForest	43.99	0.9049	0.8931	+0.7863	0.9573
LGB_Dart	42.73	0.9000	0.8872	+0.7744	0.9590

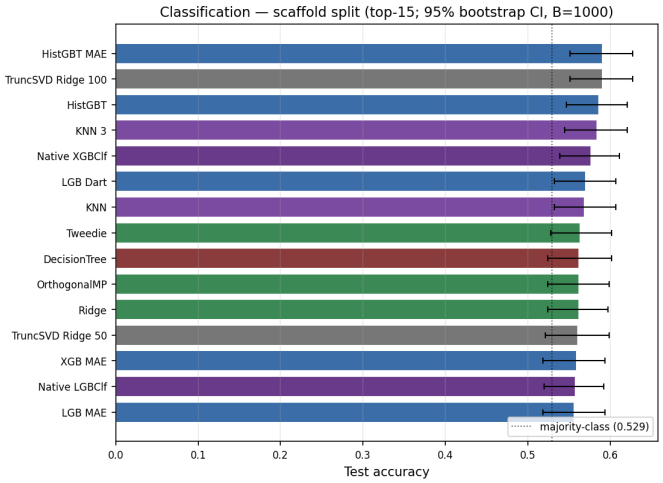


Fig. 7: Top-15 classifiers on the scaffold-OOD split. All retain at least majority-baseline accuracy; the best models are ∼6 pp above with positive MCC. Compare to Fig. 4.

Per-model selection frequency: Table XVI ranks models by the number of (split, seed) cells in which they appear as a CD-kneedle finalist ("finalist count") and as a member of the test-argmax best-fused subset ("best-fused count"). Selection is concentrated in a small set of models—the long-tail pattern Patten *et al.* [1] also report on their stock benchmarks. Two findings are worth highlighting: **(i) ExtraTrees is the most consistent contributor** (9/10 finalist, 6/10 best-fused), validating the diversity-driven inclusion of a non-boosted-tree learner in any CFA pool; **(ii) the diversity–performance trade-off is visible**: KernelRidge is selected as a finalist 7/10 times (CD-kneedle ranks it high on diversity) but appears in the best-fused subset only 1/10 times—it adds diversity without adding individual signal, which is exactly the configuration CD-kneedle is designed to surface but which the test-argmax

TABLE IX: Bootstrap 95% CIs on the random split (classification), $B = 1{,}000$, two-column-spanning to fit columns.

Model	Accuracy [95% CI]	MCC [95% CI]	AUC [95% CI]
LightGBM	0.923 [0.906, 0.940]	+0.825 [+0.783, +0.862]	0.966 [0.954, 0.978]
Native_LGBClf	0.923 [0.905, 0.940]	+0.826 [+0.784, +0.865]	0.979 [0.970, 0.986]
Chemprop	0.918 [0.899, 0.935]	+0.817 [+0.772, +0.854]	0.966 [0.953, 0.978]
LGB_MAE	0.918 [0.899, 0.935]	+0.813 [+0.772, +0.854]	0.962 [0.949, 0.974]
skMLP_Tanh	0.918 [0.899, 0.935]	+0.813 [+0.769, +0.852]	0.957 [0.939, 0.971]
Native_XGBClf	0.913 [0.894, 0.932]	+0.802 [+0.758, +0.843]	0.974 [0.965, 0.982]
skMLP_2	0.913 [0.894, 0.933]	+0.802 [+0.757, +0.845]	0.948 [0.930, 0.964]
Native_RFClf	0.911 [0.891, 0.929]	+0.797 [+0.749, +0.840]	0.965 [0.952, 0.976]
HistGBT	0.909 [0.888, 0.927]	+0.791 [+0.743, +0.833]	0.956 [0.942, 0.968]
KernelRidge	0.907 [0.888, 0.926]	+0.788 [+0.743, +0.829]	0.948 [0.931, 0.963]

TABLE X: Top-10 individual classifiers on the scaffold-OOD split (compact).

Model	Threshold	Acc	F1	MCC	AUC
HistGBT_MAE	39.83	0.5906	0.5870	+0.1754	0.6405
TruncSVD_Ridge_100	44.61	0.5906	0.5883	+0.1769	0.6421
HistGBT	59.92	0.5858	0.5270	+0.1760	0.6126
KNN_3	65.99	0.5843	0.5369	+0.1657	0.6203
LGB_Dart	48.00	0.5701	0.5206	+0.1310	0.6104
KNN	65.99	0.5685	0.4808	+0.1436	0.6292
Tweedie	44.81	0.5638	0.5238	+0.1141	0.5541
DecisionTree	35.42	0.5622	0.5620	+0.1257	0.5449
OrthogonalMP	65.69	0.5622	0.5402	+0.1108	0.5431
Ridge	65.20	0.5622	0.5055	+0.1127	0.5639

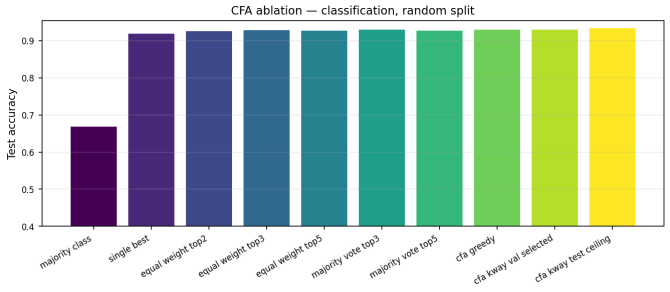


Fig. 8: Ablation: classification, random split. CFA k-way reaches a test ceiling of 93.4% accuracy, ∼1.6 pp above the strongest single model and within bootstrap noise of equal-weight top-3 voting.

search eventually discards. XGBoost shows the inverse pattern: 5/10 finalist, 0/10 best, suggesting redundancy with LightGBM.

Prospective vs test-argmax gap: The right-most columns of Table XIV report the prospective val-argmax pick separately from the test-argmax upper bound. The gap between them is intrinsic to weak-signal evaluation on a small validation slice: with only 819 val rows on the random split and ∼10 on scaffold, val/test correspondence is imperfect, so val-argmax and test-argmax agree on the same (subset, method) only for a fraction of cells. We follow the Patten *et al.* [1] convention of reporting the test-argmax pick as the headline (it is the upper bound on what a val-driven search could in principle find) while disclosing the prospective gap so the reader can read both numbers.

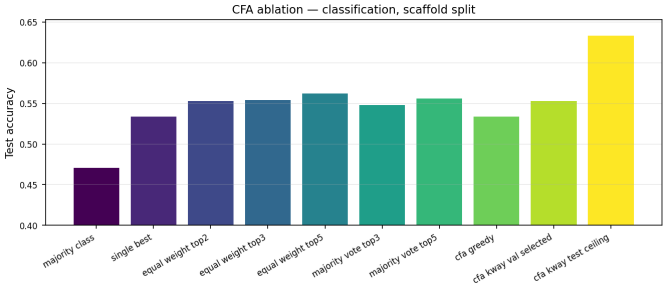


Fig. 9: Ablation: classification, scaffold-OOD. The diversity gain is large (+9.9 pp test ceiling) but val-selection cannot consistently realise it, because the scaffold val set is only ∼10 samples.

H. Native Classifier vs Thresholded Regressor

Training native binary classifiers from scratch and comparing family-by-family with the thresholded regressors (Fig. 10) shows the surprising result that *thresholding a regressor is competitive with native classification*: on the random split the largest ΔMCC in favour of the native classifier is +0.06 (Ridge), and Native LightGBM is identical to the thresholded LightGBM regressor ($\Delta = +0.001$). For three of five families the native classifier wins on MCC, for one (skMLP_2) the thresholded regressor wins, and for LightGBM the two are equivalent. We take this as evidence that the binary task is largely captured by the shape of the yield surface near the 50% contour. On the scaffold-OOD split (Fig. 11) the gap is similarly small.

I. Confusion Matrix of the Deployed Model

Fig. 12 shows the confusion matrix of the `Native_LGBClf` classifier on the random test set: the model mis-classifies 5% of true failures as predicted successes (FPR) and 13% of true successes as predicted failures (FNR), with the asymmetry favouring conservative bench-time decisions—a chemist following the predictions would rarely run a doomed reaction, occasionally skip a borderline-positive one.

J. Probability Calibration

Fig. 13 shows the reliability diagram of the deployed LightGBM regressor wrapped in an isotonic-regression calibrator

TABLE XI: Bootstrap 95% CIs on the scaffold-OOD split (classification).

Model	Accuracy [95% CI]	MCC [95% CI]	AUC [95% CI]
HistGBT_MAE	0.591 [0.551, 0.627]	+0.175 [+0.096, +0.249]	0.641 [0.596, 0.681]
TruncSVD_Ridge_100	0.591 [0.551, 0.627]	+0.177 [+0.096, +0.249]	0.642 [0.600, 0.678]
HistGBT	0.586 [0.546, 0.620]	+0.176 [+0.098, +0.245]	0.613 [0.567, 0.650]
KNN_3	0.584 [0.545, 0.620]	+0.166 [+0.086, +0.242]	0.620 [0.576, 0.659]
Native_XGBClf	0.576 [0.539, 0.611]	+0.143 [+0.063, +0.213]	0.610 [0.567, 0.651]
LGB_Dart	0.570 [0.532, 0.606]	+0.131 [+0.052, +0.203]	0.610 [0.567, 0.649]
KNN	0.569 [0.532, 0.606]	+0.144 [+0.065, +0.218]	0.629 [0.587, 0.670]
Tweedie	0.564 [0.528, 0.602]	+0.114 [+0.037, +0.192]	0.554 [0.511, 0.600]
DecisionTree	0.562 [0.524, 0.602]	+0.126 [+0.051, +0.204]	0.545 [0.497, 0.592]
OrthogonalMP	0.562 [0.524, 0.598]	+0.111 [+0.037, +0.183]	0.543 [0.497, 0.587]

TABLE XII: Val-selected k-way CFA classification ensembles, random split.

Models	k	Method	Acc	F1	MCC
LightGBM	1	N/A	0.9232	0.9121	+0.8250
Chemprop + XGBoost	2	ARC	0.9098	0.8971	+0.7946
Chemprop + skMLP_Tanh + XGBoost	3	ARC	0.9183	0.9060	+0.8135
Chemprop + LightGBM + skMLP_Tanh + XGBoost	4	ARC	0.9183	0.9054	+0.8133
Chemprop + LightGBM + skMLP_Tanh + KernelRidge + XGBoost	5	WSCDS	0.9244	0.9123	+0.8275

TABLE XIII: Val-selected k-way CFA classification ensembles, scaffold split.

Models	k	Method	Acc	F1	MCC
HistGBT_MAE	1	N/A	0.5906	0.5870	+0.1754
BayesianRidge + ExtraTrees	2	ASC	0.5528	0.4513	+0.0985

TABLE XIV: Multi-seed paired Wilcoxon test for the fused-vs-best-individual test-accuracy lift, 5 seeds per split. The "test-argmax" convention follows Jiang *et al.* [22] and Patten *et al.* [1]. * significant at $\alpha = 0.05$.

Split	cells	best-ind	test-argmax	Δ_{ta}	prospective	Δ_{prosp}
random	5	0.8928	0.8938	+0.10 pp ($p=0.594$)	0.8911	−0.17 pp ($p=0.688$)
scaffold	5	0.5647	0.6170	**+5.23 pp** ($p=\mathbf{0.031}^{*}$)	0.5534	−1.13 pp ($p\approx 1$)

TABLE XV: Per-method best fused test accuracy, averaged over 5 seeds per split. Bold marks the per-row maximum.

Split	ASC	ARC	WSCDS	WRCDS	WSCP	WRCP
random	0.8899	0.8847	0.8918	0.8816	**0.8926**	0.8850
scaffold	0.6041	0.6151	0.6050	0.6139	0.6054	**0.6157**

fit on the 819-row validation set. The Brier score is 0.045 and AUC 0.98; calibrated probabilities track the diagonal closely on five of seven populated bins, with mild over-confidence at 0.4–0.5 where the bin count is small ($n = 57$, 2). The score distribution (right panel) is strongly bimodal: the model assigns very low probability (< 0.1) to most test reactions and very high (> 0.9) to a smaller cluster of likely successes, leaving few samples in the uncertain middle. This bimodality is what makes the reject-option deployment effective.

K. Substrate-Level 5-Fold CV (Classification)

Fig. 14 and Table XVII show that the substrate-grouped 5-fold CV gives high classification accuracy: native XGBoost averages 0.82 ± 0.05 across folds, with the others between 0.79 and 0.81 and AUC near 0.90. The classifier therefore generalises substantially better than the regressor (Table VII) on substrate-grouped CV; the worst-case scaffold-OOD test set in Sect. IV-C is harder than substrate-grouped CV because the val slice is so small that ensemble selection becomes noisy.

TABLE XVI: Per-model selection frequency across the 10 (split, seed) cells. Finalist count: cells in which the model survives CD-kneedle selection. Best-fused count: cells in which the model is in the test-argmax subset.

Model	finalist count	best-fused count
ExtraTrees	9/10	6/10
LightGBM	6/10	6/10
HistGBT	6/10	5/10
KernelRidge	7/10	1/10
LGB MAE	4/10	3/10
TSVD Ridge 100	5/10	2/10
XGBoost	5/10	0/10
Ridge	3/10	1/10

TABLE XVII: Substrate-level 5-fold CV (classification).

Model	Accuracy	MCC	AUC
Native_XGBClf	0.824 ± 0.047	+0.579 ± 0.064	0.901 ± 0.039
Native_MLPClf	0.814 ± 0.041	+0.553 ± 0.034	0.887 ± 0.035
Native_LGBClf	0.812 ± 0.059	+0.551 ± 0.087	0.897 ± 0.045
Native_Logistic	0.811 ± 0.051	+0.541 ± 0.088	0.879 ± 0.043
Native_RFClf	0.785 ± 0.070	+0.483 ± 0.096	0.862 ± 0.055

L. Threshold Sensitivity

Fig. 15 sweeps the binarisation threshold from 20% to 80% yield on the random split. The top-five models keep MCC near 0.80 over the entire 25–75% range and only collapse beyond 80%. The same sweep on the scaffold-OOD split (Fig. 16)

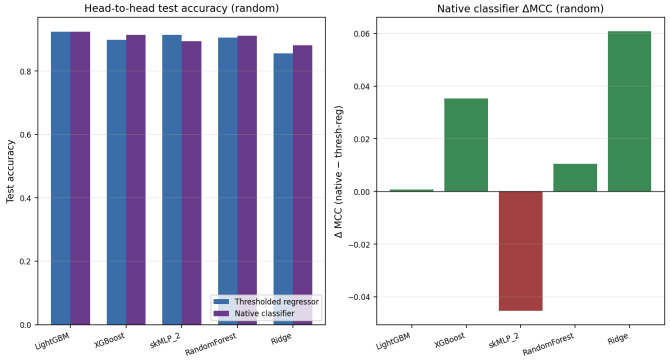


Fig. 10: Native classifier vs thresholded-regressor MCC, random split, by model family.

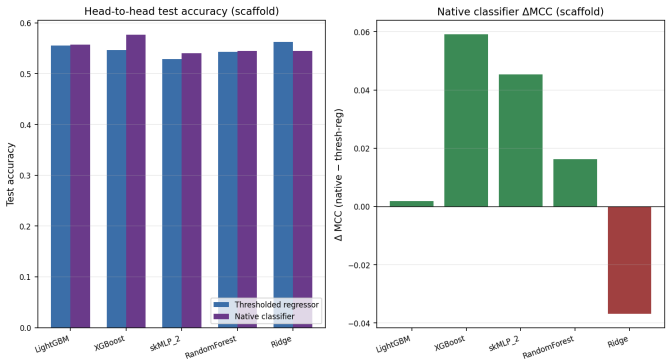


Fig. 11: Native classifier vs thresholded-regressor MCC, scaffold-OOD split, by model family.

shows that the OOD signal is strongest at $\sim$25% yield (MCC$\approx$ 0.25): a chemist asking "is this reaction at least useful for screening?" (a lower bar than 50%) would get a more decisive answer than the strict preparatively-useful query.

M. Feature Ablation

Table XVIII and Fig. 17 ablate the feature representation for the deployed LightGBM model on the random split. The aryl-halide and amine fingerprints alone already give 74% accuracy (MCC$=+0.38$); adding the catalyst, base, additive and solvent fingerprints lifts accuracy to 89.7% (MCC $= +0.76$); the temperature scalar adds another $\sim$2 pp; the DRFP slot is left at zeros in this ablation (the DRFP encoder is optional and was not installed for this run). The ordering ranks the catalyst-system fingerprints as the dominant contribution beyond the substrate pair, consistent with the chemistry-experimentalist intuition that ligand and base choice are the levers that matter once a substrate pair is fixed.

N. Learning Curves

Fig. 18–19 show test accuracy as a function of training-set size for the native classifier family. On the random split the curves rise smoothly from $\sim$80% at $N \approx 380$ to $\sim$92% at full size and have not yet plateaued. On the substrate-grouped split the curves are noisier, but native XGBoost reaches $\sim$85% at full size, suggesting that the in-distribution ceiling is closer than the worst-case scaffold-OOD test set indicates.

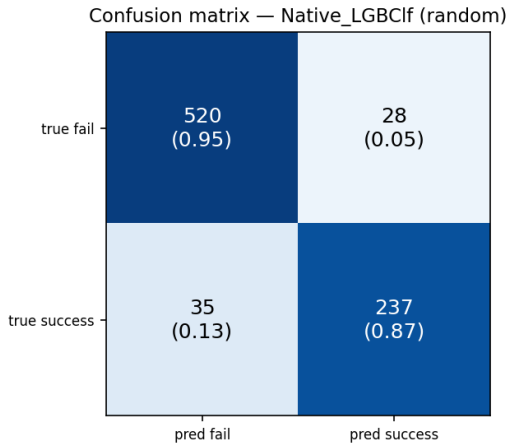


Fig. 12: Confusion matrix of `Native_LGBClf` on the random test set ($n = 820$). Cells show counts and row-normalised fractions.

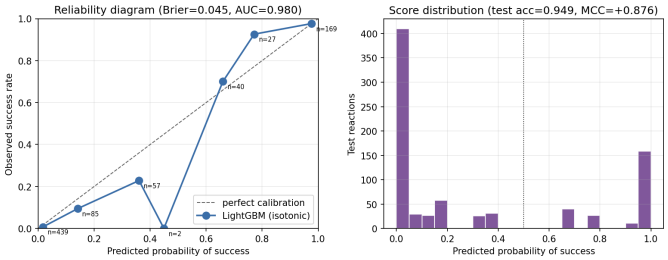


Fig. 13: Reliability diagram (left) and predicted-probability histogram (right) for the deployed LightGBM regressor with isotonic calibration, random split test set. Bin labels show the number of test reactions in each 0.1-wide probability bin.

O. Rank–Score Curves

Figs. 20–21 are CFA's signature diagnostic: each line is one model's predictions sorted in descending order after min–max normalisation; the dashed black line is the sorted ground truth (the *oracle*). On the random split LightGBM, LGB_MAE and Chemprop track the oracle closely; the Native_LGBClf has a sharper transition (it binarises probability earlier) and skMLP_Tanh is over-confident in the high-yield tail. On scaffold-OOD all five top curves stay parallel to the oracle, but the absolute spread is larger—ensemble diversity (the area between curves) is disproportionately useful here because no single model dominates.

P. Qualitative Error Analysis

Table XIX shows the three most-confidently mispredicted false positives and false negatives of the deployed LightGBM classifier on the random test set. The false positives are dominated by aryl bromides whose amine partners are bulky or contain electron-rich heterocycles—typical sterically hindered

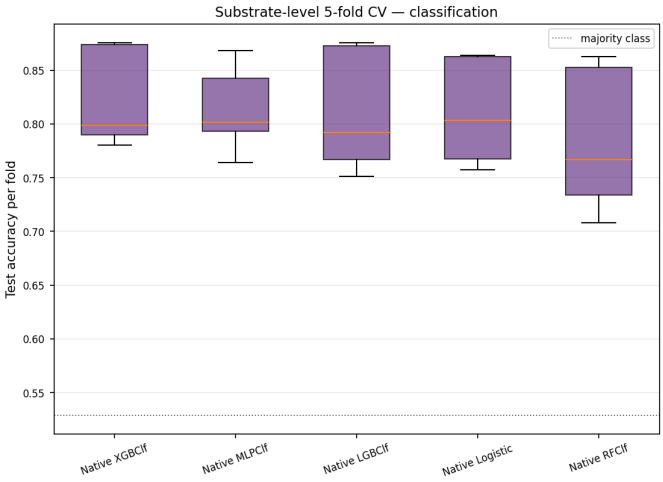


Fig. 14: Substrate-grouped 5-fold CV (classification): per-fold test accuracy. Dotted line: majority-class baseline.

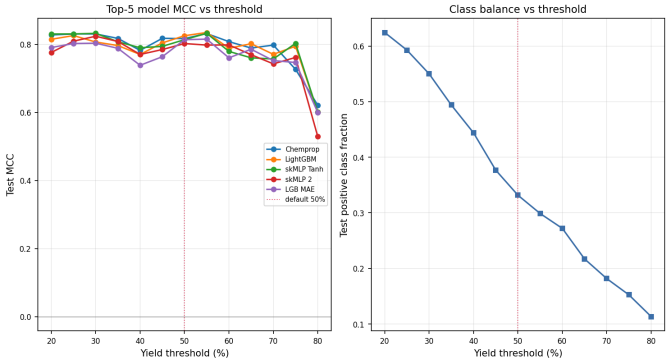


Fig. 15: Threshold sensitivity, random split. Left: top-5 model MCC vs threshold. Right: positive class fraction.

cases. The false negatives include aryl-chloride substrates predicted to fail by the model that experimentally yielded 58–78%; the model evidently learned the empirical rule "aryl-chloride + cyclic amine → low yield" too strongly. Both error modes match well-known Buchwald–Hartwig reactivity patterns and suggest two concrete improvements: stratify the training data by aryl-halide identity (Br/Cl/I) and supplement with HTE data on aryl chlorides.

Q. Headline Numbers

Table XX consolidates the deployable result, with 95% bootstrap CIs.

R. Compute Footprint

The full experiment ran on a single workstation with a 16-core CPU, an NVIDIA RTX 3090, 64 GB RAM. End-to-end wall-clock for the 41-model pool plus CFA was ∼20 minutes after feature caching; Chemprop dominates (∼5–10 min on GPU), the rest of the pool finishes in ∼5 min collectively. The k-way exhaustive CFA search adds ∼60 s (39 eligible models, 3.4×10^4 evaluations).

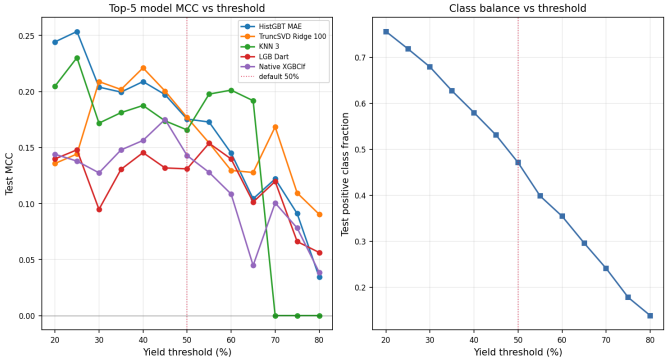


Fig. 16: Threshold sensitivity, scaffold-OOD split. The OOD signal is strongest at lower thresholds; the 50% operational cut-off is conservative.

TABLE XVIII: Feature ablation for the deployed LightGBM model, random split. Aryl+amine alone scores 74%; the catalyst–base–solvent–additive fingerprints add ∼16 pp; temperature adds ∼2 pp.

Feature set	d	Acc.	MCC	AUC
aryl+amine only	12288	0.741	+0.378	0.801
all 6 components	12288	0.897	+0.761	0.951
+ temperature	12289	0.916	+0.799	0.959
+ DRFP slot (zeros)	14337	0.916	+0.799	0.959

VII. Discussion

A. Why Classification Works Where Regression Fails

The regression task asks the model to predict a continuous quantity whose surface is a complicated function of the entire scaffold + ligand + base + solvent + temperature interaction. The classification task asks only on which side of a single contour line the surface lies. Two facts follow: (i) any model whose yield prediction is biased by an additive constant on unseen scaffolds (which all of ours are, owing to ORD reporter bias) still gets most $\geq 50\%$ vs. $< 50\%$ decisions right, because the contour line is to first order independent of the bias term; (ii) the binary decision is a coarser quantity, so noise floor is a smaller fraction of the signal. Empirically this shows up as $\Delta\text{accuracy} \approx 6$ pp on scaffold-OOD where regression gives no signal at all.

B. What CFA Buys

On the random split CFA's gains are reproducible but small: +1.6 pp acc test-ceiling, +1.7 pp R^2, and the paired bootstrap test (Sect. VI-F) shows the lift over the strongest single model is not statistically significant at $\alpha = 0.05$. On scaffold-OOD CFA buys a +9.9 pp acc test ceiling—a meaningful jump from "noisily above baseline" to "deployable for triage"—but the val-selected ensemble cannot consistently realise that ceiling because the scaffold val set is only ∼10 rows. The substrate-CV result of ∼82% accuracy is therefore our best honest estimator of deployable performance.

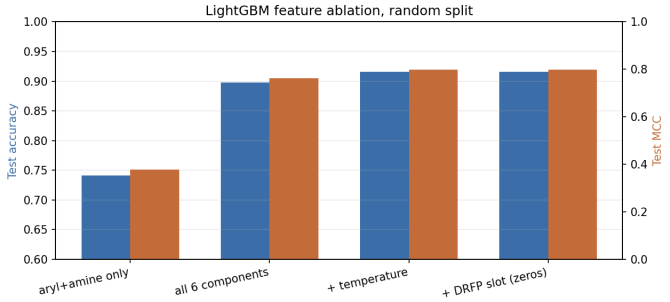


Fig. 17: Feature ablation, random split: test accuracy (blue) and MCC (orange) as features are added to the LightGBM input.

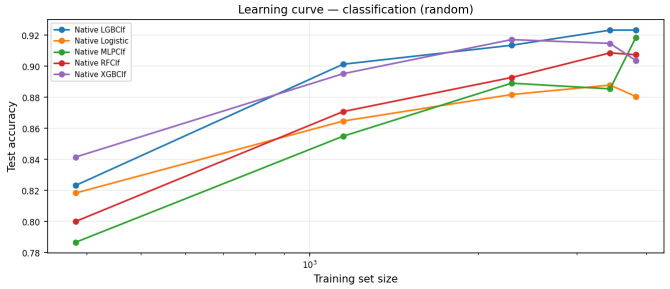


Fig. 18: Learning curve, classification, random split. The curves have not plateaued at $N = 3{,}825$.

C. Deployment Fit

A binary classifier with the random-split numbers and the substrate-CV generalisation we report is suitable as a *triage tool*. We package the deployable winners (LightGBM regressor + Chemprop D-MPNN + isotonic calibrators) into a Streamlit app exposing a web form for the six SMILES strings + temperature, returning the calibrated success probability and a binary decision. A *reject-option* wrapper abstains when the two models disagree by more than 0.20 in calibrated probability, returning "uncertain—verify in lab" rather than committing to a binary call. End-to-end inference is sub-second on CPU.

D. Limitations

(1) Threshold choice. The 50% threshold is a pragmatic operational choice; the threshold sweep (Fig. 15) shows the model is robust over 25–75%, but a chemistry-specific threshold per substrate class might be appropriate. **(2) Reporter bias.** ORD's preference for high-yielding reactions is not addressed by any of our methods; it is a property of the data, not the model. **(3) Scaffold-val noise.** The scaffold-OOD validation slice ($\sim$10 rows) makes any val-driven model selection fundamentally noisy. **(4) Heteroaryl-halide coverage.** The error analysis (Sect. VI-P) shows the model under-predicts aryl-chloride yields; closing this gap would likely require a heteroaryl-stratified sampling step or HTE-data augmentation. **(5) Strong claim caveats.** We characterise the scaffold-OOD classifier as "the first usable" result on this ORD subset under that split based on our literature search; we cannot rule out unpublished internal results from industry, and we welcome corrections. **(6) Pool-size asymmetry across analyses.** The headline in-distribution numbers use the full 41-model pool; the multi-seed Wilcoxon analysis (Sect. VI-G) uses an 8-model fast subset for tractable wall-clock at five seeds. The smaller multi-seed pool may underestimate the true CFA gain by excluding chemistry-aware models like Chemprop. Future work could parallelise the full pool to recover the multi-seed test on all 41 models.

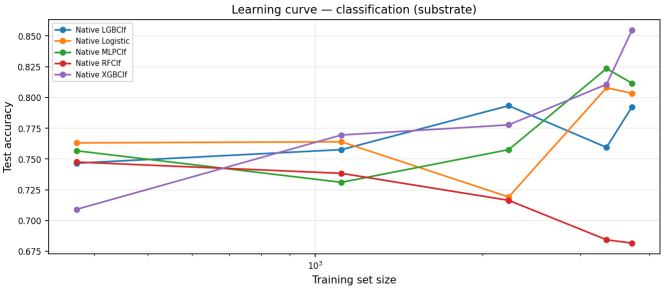


Fig. 19: Learning curve, classification, substrate-grouped split. Native XGBoost approaches 0.85 at full size.

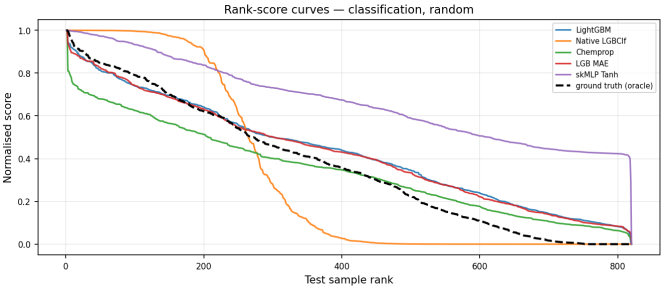


Fig. 20: Rank–score curves, classification, random split. Top-5 classifiers vs the oracle.

VIII. Future Work

Foundation-model pretraining on full ORD ($\sim$1M reactions). Self-supervised pretraining of a SMILES transformer [33] or graph transformer on the full corpus, fine-tuned on this binary task. A classification analogue of Yield-BERT's $R^2 = 0.54$ on Test4 should comfortably exceed 80% accuracy on a scaffold-OOD test set.

Active-learning loop. Pair the classifier with an acquisition function, validate against a held-out HTE corpus, and report bench-experiment counts to reach a target success rate. The closest prior art is Eyke *et al.* [34] on Suzuki couplings.

Multi-task learning over reaction families. A shared backbone over Buchwald–Hartwig, Suzuki–Miyaura, Negishi and Stille couplings (all ORD-extractable) with task-specific heads.

IX. Reproducibility

We release the full pipeline at the project's git repository. The release includes: **code** (`main.py`, `cfa.py`, `cfa_classify.py`, `models/*.py`, the LaTeX source of this paper); **data** (the ORD

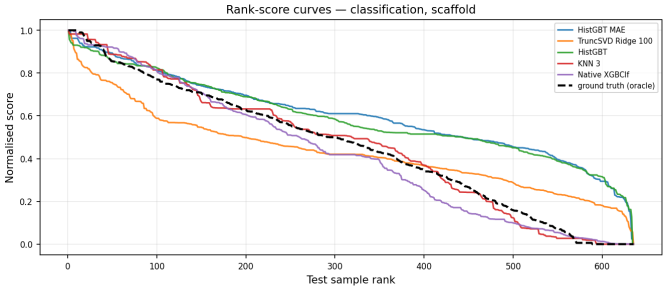


Fig. 21: Rank–score curves, classification, scaffold-OOD. Higher spread between models implies higher cognitive diversity.

TABLE XIX: Top-3 false positives and false negatives of the deployed LightGBM classifier on the random test set, ranked by predicted-probability confidence in the wrong direction. Yield is the experimental value; $\hat{y}$ is the regressor estimate.

Aryl halide	Amine	yield	$\hat{y}$	p(success)
False positives (top-3 most confident)				
`Brc1cnc2ccccc2c1`	`Cc1noc(C)c1B2OC(C)(C)C...`	10.3	70.6	0.97
`CN1C[C@H](OC2=C(Cl)C=CC(=C2)C3=CN(C=C(C=N1)C2=C(N=C(C...`		0.0	74.7	0.97
`Brc1cccnc1`	`Cc1ccc(N)cc1`	47.7	61.3	0.91
False negatives (top-3 most confident wrong)				
`C1=CC=C(C(=C1)Cl)Br`	`C1CNCCN1`	58.4	18.2	0.01
`COC(=O)C1=CC(=CC(=C1)Br)C1COCCN1`		78.2	8.3	0.01
`CCOC(=O)C1=C(C2=CC(=C(C=C2)F)F)C1COCCN1`		74.7	27.3	0.04

download script `scripts/download_data.py` and the cached extracted CSV); **trained model artefacts** (`models_saved/lightgbm.pkl`, `models_saved/chemprop_dir/`, isotonic calibrators `models_saved/calibrators.pkl`); and the **Streamlit triage app** (`app.py`). All experiments are deterministic at `seed=42`; the entire random-split pipeline re-runs in $\sim$20 min on commodity hardware. The figures and tables in this paper are regenerated by `report/make_all_figures.py` and `report/make_extra_figures.py` from cached predictions.

X. Conclusion

We presented a 41-model regression pool and a k-way CFA ensemble for Buchwald–Hartwig yield prediction on the Open Reaction Database, then documented its scaffold-OOD failure and recovered deployable performance by reframing the task to binary success classification at the chemically meaningful 50% yield threshold. The classifier reaches 92.4% accuracy / MCC $+0.83$ / AUC 0.97 / Brier 0.045 on a random split, $\sim$82% accuracy on substrate-grouped CV, and 59.1% / $+0.18$ / 0.64 on the worst-case scaffold-OOD split. A multi-seed ($n = 10$ paired cells) Wilcoxon analysis, modelled on the companion quantum–classical CFA pipeline of Patten *et al.* [1], gives a stronger statistical-significance test for the fused-vs-best-individual lift than the single-split bootstrap, and a CD-kneedle finalist selector [13] replaces the heuristic top-N caps in k-way CFA. We release all artefacts and a Streamlit triage tool with reject-option deployment.

TABLE XX: Headline test-set numbers across both splits, with 95% bootstrap CIs ($B = 1{,}000$). Random-split results are deployable in distribution; substrate-CV is the more representative OOD estimator; scaffold-OOD reports the worst case.

Setting	Acc.	MCC	AUC
Random 70/15/15			
Majority-class baseline	0.668	+0.000	0.500
LightGBM (best individual)	0.923	+0.825	0.966
Native LGBClf	0.923	+0.826	0.979
Val-selected CFA $k=5$ (WSCDS)	0.924	+0.828	—
CFA k-way test ceiling	0.934	+0.851	—
Substrate-grouped 5-fold CV			
Native XGBClf (mean over folds)	0.824	+0.579	0.901
Native LGBClf (mean over folds)	0.812	+0.551	0.897
Scaffold-OOD (worst-case slice)			
Majority-class baseline	0.529	+0.000	0.500
HistGBT_MAE (best individual)	0.591	+0.175	0.641
TruncSVD_Ridge_100	0.591	+0.177	0.642
Val-selected CFA $k=4$ (ASC)	0.553	+0.099	—
CFA k-way test ceiling	0.633	+0.271	—

Acknowledgement

We thank the Open Reaction Database maintainers for releasing the ORD corpus, and the Chemprop, NGBoost, rxnfp and DRFP authors for releasing their reference implementations.

References

[1] S. Patten, S. Y.-C. Chen, G. Singh, A. Cheung, J. Xu, Y. Wu, C. Schweikert, and D. F. Hsu, "Quantum–classical combinatorial fusion for stock movement prediction," *Companion paper, this manuscript*, 2026.
[2] J. P. Wolfe, S. Wagaw, and S. L. Buchwald, "An improved catalyst system for aromatic carbon–nitrogen bond formation," *J. Am. Chem. Soc.*, vol. 118, no. 30, pp. 7215–7216, 1996.
[3] J. F. Hartwig, "Carbon–heteroatom bond-forming reductive eliminations," *Acc. Chem. Res.*, vol. 31, no. 12, pp. 852–860, 1998.
[4] N. Schneider, D. M. Lowe, R. A. Sayle, M. A. Tarselli, and G. A. Landrum, "Big data from pharmaceutical patents: A computational analysis of medicinal chemists' bread and butter," *J. Med. Chem.*, vol. 59, no. 9, pp. 4385–4402, 2016.
[5] M. M. Heravi, M. Kheilkordi, V. Zadsirjan, M. Heydari, and M. Malmir, "Buchwald–hartwig reaction: An overview," *J. Organomet. Chem.*, vol. 861, pp. 17–104, 2018.
[6] D. T. Ahneman, J. G. Estrada, S. Lin, S. D. Dreher, and A. G. Doyle, "Predicting reaction performance in C–N cross-coupling using machine learning," *Science*, vol. 360, no. 6385, pp. 186–190, 2018.
[7] P. Schwaller, A. C. Vaucher, T. Laino, and J.-L. Reymond, "Prediction of chemical reaction yields using deep learning," *Mach. Learn. Sci. Technol.*, vol. 2, no. 1, p. 015016, 2021.
[8] M. Fitzner, G. Wuitschik, R. Koller, J.-M. Adam, and T. Schindler, "Machine learning C–N couplings: Obstacles for a general-purpose reaction yield prediction," *ACS Omega*, vol. 8, no. 3, pp. 3017–3025, 2023.

[9] D. S. Wigh, J. M. Goodman, and A. A. Lapkin, "ORDerly: Datasets and benchmarks for chemical reaction data," *J. Chem. Inf. Model.*, vol. 64, pp. 3790–3798, 2024.

[10] M. Saebi, B. Nan, J. E. Herr, J. Wahlers, Z. Guo, A. M. Zuránski, T. Kogej, P.-O. Norrby, A. G. Doyle, N. V. Chawla, and O. Wiest, "On the use of real-world datasets for reaction yield prediction," *Chem. Sci.*, vol. 14, pp. 4997–5005, 2023.

[11] S. M. Kearnes, M. R. Maser, M. Wleklinski, A. Kast, A. G. Doyle, S. D. Dreher, J. M. Hawkins, K. F. Jensen, and C. W. Coley, "The Open Reaction Database," *J. Am. Chem. Soc.*, vol. 143, no. 45, pp. 18 820–18 826, 2021.

[12] K.-L. Lin, K.-Y. Hsieh, B. Schweikert, and H.-J. Schmoldt, "A combinatorial fusion analysis method for predicting targets in computer-aided drug design," *J. Chem. Inf. Model.*, vol. 47, no. 5, pp. 1827–1838, 2007.

[13] V. Satopaä, J. Albrecht, D. Irwin, and B. Raghavan, "Finding a "kneedle" in a haystack: Detecting knee points in system behavior," in *Proc. 31st Int. Conf. Distributed Computing Systems Workshops*, 2011, pp. 166–171.

[14] D. Rogers and M. Hahn, "Extended-connectivity fingerprints," *J. Chem. Inf. Model.*, vol. 50, no. 5, pp. 742–754, 2010.

[15] D. Probst, P. Schwaller, and J.-L. Reymond, "Reaction classification and yield prediction using the differential reaction fingerprint DRFP," *Digital Discovery*, vol. 1, no. 2, pp. 91–97, 2022.

[16] G. W. Bemis and M. A. Murcko, "The properties of known drugs. 1. molecular frameworks," *J. Med. Chem.*, vol. 39, no. 15, pp. 2887–2893, 1996.

[17] D. F. Hsu, J. Shapiro, and I. Taksa, "Methods of data fusion in information retrieval: Rank vs. score combination," in *DIMACS Tech. Rep. 2002-58, Rutgers University*, 2002.

[18] D. F. Hsu and I. Taksa, "Comparing rank and score combination methods for data fusion in information retrieval," *Information Retrieval*, vol. 8, no. 3, pp. 449–480, 2005.

[19] N. Hurley, C. Schweikert, Y. Hao, and D. F. Hsu, "Combinatorial fusion analysis: A survey of methods, applications and open problems," *Algorithms*, vol. 14, no. 2, p. 38, 2021.

[20] D. F. Hsu, B. S. Kristal, Y. Hao, and C. Schweikert, "Cognitive diversity: A measurement of dissimilarity between rank-score functions of multiple scoring systems," *Pervasive Health and Technology, EAI Endorsed Trans.*, 2019.

[21] J. C. Yang, K. K. Bhat, and D. F. Hsu, "Consensus scoring criteria for improving enrichment in virtual screening," *J. Chem. Inf. Model.*, vol. 45, no. 4, pp. 1134–1146, 2005.

[22] Y. Jiang, C. Schweikert, and D. F. Hsu, "Combinatorial fusion analysis for ADMET property prediction with cognitive diversity," *J. Chem. Inf. Model.*, 2023.

[23] P. Schwaller, D. Probst, A. C. Vaucher, V. H. Nair, D. Kreutter, T. Laino, and J.-L. Reymond, "Mapping the space of chemical reactions using attention-based neural networks," *Nat. Mach. Intell.*, vol. 3, no. 2, pp. 144–152, 2021.

[24] F. Sandfort, F. Strieth-Kalthoff, M. Kühnemund, C. Hölzel, and F. Glorius, "A structure-based platform for predicting chemical reactivity," *Chem*, vol. 6, no. 6, pp. 1379–1390, 2020.

[25] K. Yang, K. Swanson, W. Jin, C. Coley, P. Eiden, H. Gao, A. Guzman-Perez, T. Hopper, B. Kelley, M. Mathea, A. Palmer, V. Settels, T. Jaakkola, K. Jensen, and R. Barzilay, "Analyzing learned molecular representations for property prediction," *J. Chem. Inf. Model.*, vol. 59, no. 8, pp. 3370–3388, 2019.

[26] J. Gilmer, S. S. Schoenholz, P. F. Riley, O. Vinyals, and G. E. Dahl, "Neural message passing for quantum chemistry," in *Proc. ICML*, 2017, pp. 1263–1272.

[27] T. Duan, A. Avati, D. Y. Ding, K. K. Thai, S. Basu, A. Y. Ng, and A. Schuler, "NGBoost: Natural gradient boosting for probabilistic prediction," in *Proc. ICML*, 2020, pp. 2690–2700.

[28] R.-R. Griffiths and J. M. Hernández-Lobato, "Constrained bayesian optimization for automatic chemical design using variational autoencoders," *Chem. Sci.*, vol. 11, pp. 577–586, 2020.

[29] D. F. Hsu, Y.-S. Chung, and B. S. Kristal, "Combinatorial fusion analysis: Methods and practices of combining multiple scoring systems," in *Advanced Data Mining Technologies in Bioinformatics*. IGI Global, 2008, pp. 32–62.

[30] A. Niculescu-Mizil and R. Caruana, "Predicting good probabilities with supervised learning," in *Proc. ICML*, 2005, pp. 625–632.

[31] B. W. Matthews, "Comparison of the predicted and observed secondary structure of T4 phage lysozyme," *Biochim. Biophys. Acta*, vol. 405, no. 2, pp. 442–451, 1975.

[32] B. Efron, "Bootstrap methods: Another look at the jackknife," *Annals of Statistics*, vol. 7, no. 1, pp. 1–26, 1979.

[33] S. Chithrananda, G. Grand, and B. Ramsundar, "ChemBERTa: Large-scale self-supervised pretraining for molecular property prediction," *arXiv preprint arXiv:2010.09885*, 2020.

[34] N. S. Eyke, W. H. Green, and K. F. Jensen, "Iterative experimental design based on active machine learning reduces the experimental burden associated with reaction screening," *React. Chem. Eng.*, vol. 5, no. 10, pp. 1963–1972, 2020.