Blue alliance auto paths

BIOBUZZ 2026-27, Mechanical Mages. Values taken from the code on 2026-11-12.

```
Match autos (Driver Station group LM1):
    BlueAutoLM1                Shoot preloads, corner wall intake, far shot, top flower, far shot, park.
    BlueLM12xFlowerAuto        Same as AutoLM1, but the side flower replaces the corner wall intake.
    BlueTagAutoLM1             AutoLM1 plus a Limelight tag check after the preloads that picks route A or B.
    BlueTag2xFlowerAutoLM1     LM12xFlower plus the same tag check after the preloads.
    BlueFarWallAutoLM1         Wait at the far wall for our cell to tip, shoot 4, park.
    BluePreloadParkAutoLM1     Shoot the 4 preloads from the start, then park.


Field frame: inches, x from the red wall (0) to the blue wall (144), y from the audience side (0)
to the far side (144). Heading 0 = toward the blue wall, counterclockwise positive; heading is the
direction of the robot's FRONT (intake). The shooter is on the back.
Blue routes are the red routes rotated 180 degrees around the field center (72, 72).

Shared settings: shot speed 1530 ticks/s (FarWall uses the distance model - 50), fire feedforward
390 on the first shot and 290 after (boost only for the first 0.5 s), launcher voltage compensation on,
transfer turns slowly backward (-0.1) between shots after the first shot.

Other autos (no field map): SimpleMoveAutoLM1 (drive 12 in backward), SquareTestAutoLM1 (5 in strafe
square), PedroTest (Rishabh's single test path), and the old timed StarterBot autos (group StarterBot).
```

BlueAutoLM1

Shoot preloads, corner wall intake, far shot, top flower, far shot, park.

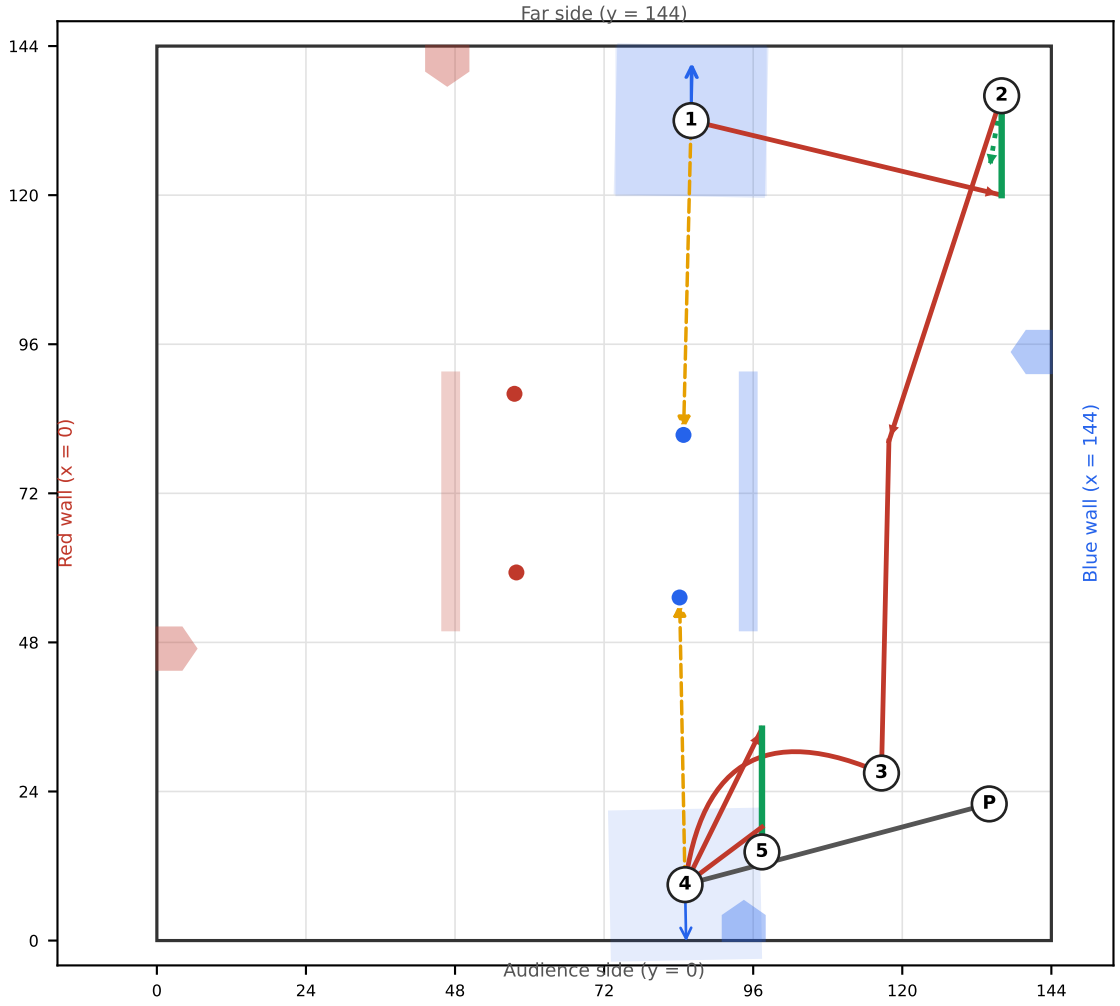

1. Start at (86.0, 132.0), heading 90, front against the far wall. Turn in place to 90 deg (shooter at our far-side cell) and shoot the 4 preloads at 1530 ticks/s (first-shot feedforward 390).

2. Corner wall intake: line up at (136.0, 120.0), push front-first into the corner at (136.0, 136.0), back out to (134.0, 124.0) and push again (2 pushes, 0.85 s each), intake on.

3. Up our wall, shooter first: (117.9, 80.4) (no stop) -> (116.6, 27.0), then curve (bend (89.0, 39.0)) to the far shot spot (85.0, 9.0).

4. Shot 2: turn so the shooter faces our audience-side cell (-89 deg), shoot (1 s min spin-up).

5. Top flower: drive to (97.4, 34.1), lower flower servo (1 s), drive in to (97.4, 14.3), slow push 2 in at 0.3, intake 1.75 s, back out 6 in to (97.4, 18.3), lift servo.


6. Back to (85.0, 9.0) and shoot again (shot 3).

P. Park: straight to (134.0, 22.0) (no turn).

Drive
Intake (thick) / back out (dotted)
Shot direction
Tag route B
Park

BlueLM12xFlowerAuto

Same as AutoLM1, but the side flower replaces the corner wall intake.

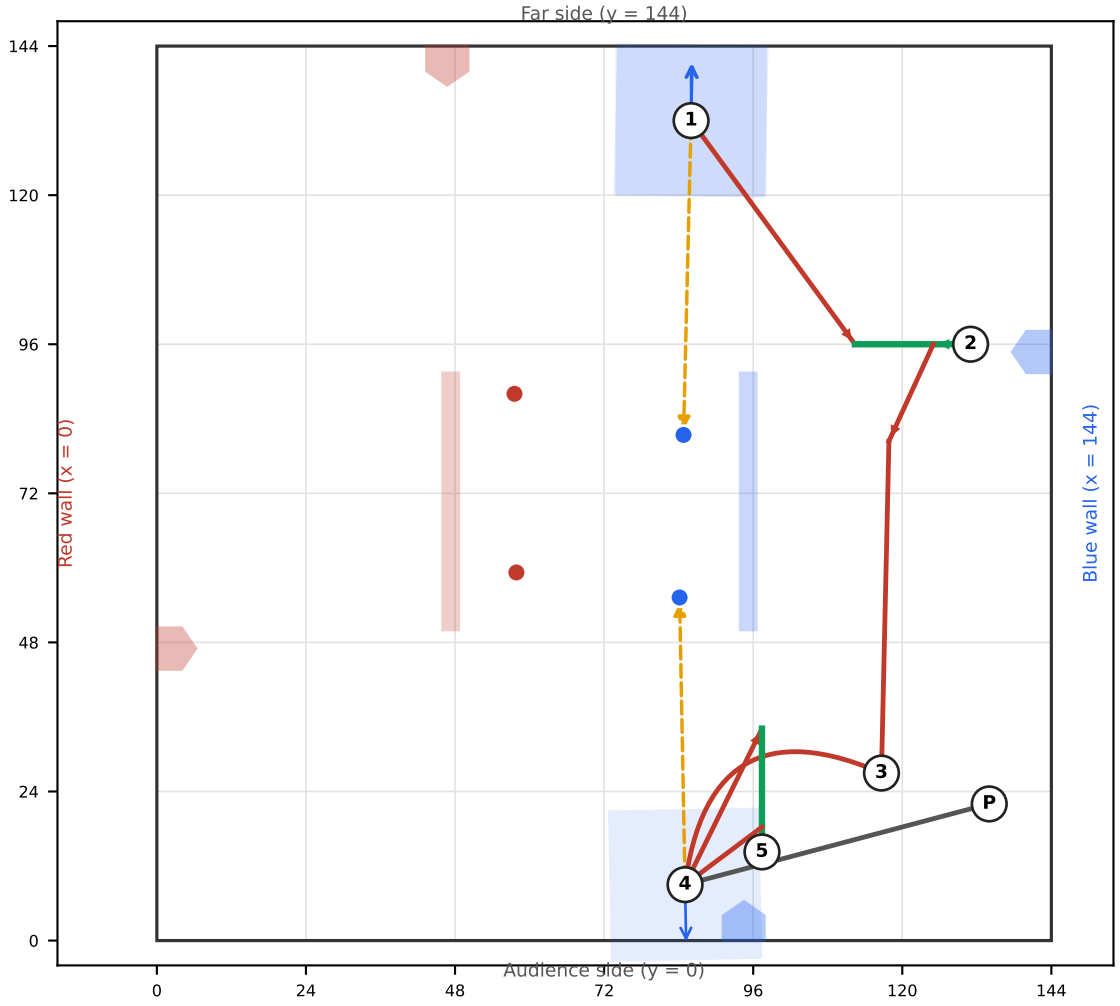

1. Start at (86.0, 132.0), heading 90, front against the far wall. Turn in place to 90 deg (shooter at our far-side cell) and shoot the 4 preloads at 1530 ticks/s (first-shot feedforward 390).

2. Side flower: drive to (112.4, 96.0) facing the blue wall, lower flower servo (1 s), drive in to (131.0, 96.0), slow push 2 in at 0.3 power, intake 1.75 s, back out 8 in to (125.0, 96.0), lift servo.

3. Up our wall, shooter first: (117.9, 80.4) (no stop) -> (116.6, 27.0), then curve (bend (89.0, 39.0)) to the far shot spot (85.0, 9.0).

4. Shot 2: turn so the shooter faces our audience-side cell (-89 deg), shoot (1 s min spin-up).

5. Top flower: drive to (97.4, 34.1), lower flower servo (1 s), drive in to (97.4, 14.3), slow push 2 in at 0.3, intake 1.75 s, back out 6 in to (97.4, 18.3), lift servo.


6. Back to (85.0, 9.0) and shoot again (shot 3).

P. Park: straight to (134.0, 22.0) (no turn).

Drive | Intake (thick) / back out (dotted) | Shot direction | Tag route B | Park

BlueTagAutoLM1

AutoLM1 plus a Limelight tag check after the preloads that picks route A or B.

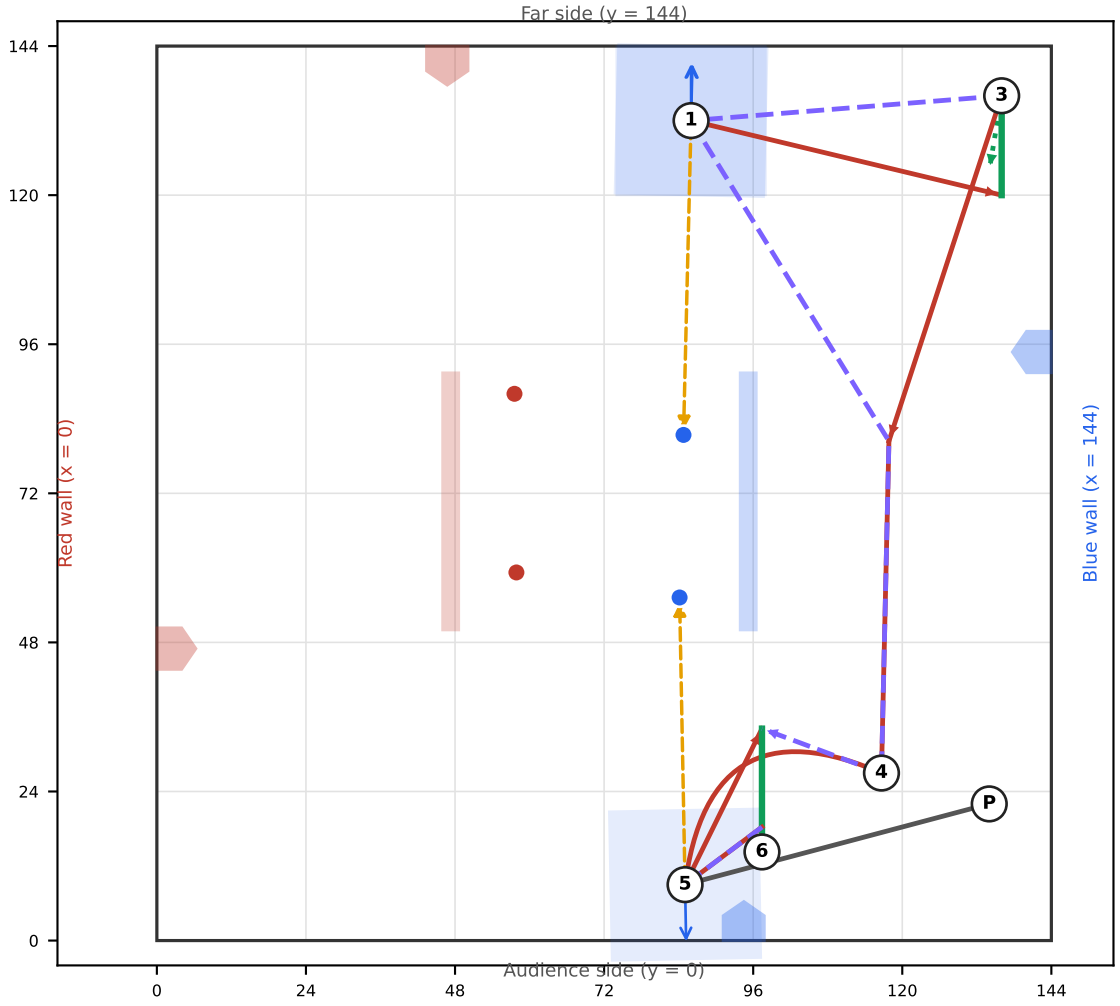

1. Start at (86.0, 132.0), heading 90, front against the far wall. Turn in place to 90 deg (shooter at our far-side cell) and shoot the 4 preloads at 1530 ticks/s (first-shot feedforward 390).

2. Tag check (3 s): stay aimed and watch our near cell's tags with the Limelight (tags 42-45). Tags GONE -> route A. Tags STILL THERE all 3 s -> route B.

Route A (solid):

3. Corner wall intake: line up at (136.0, 120.0), push front-first into the corner at (136.0, 136.0), back out to (134.0, 124.0) and push again (2 pushes, 0.85 s each), intake on.

4. Up our wall, shooter first: (117.9, 80.4) (no stop) -> (116.6, 27.0), then curve (bend (89.0, 39.0)) to the far shot spot (85.0, 9.0).

5. Shot 2: turn so the shooter faces our audience-side cell (-89 deg), shoot (1 s min spin-up).

6. Top flower: drive to (97.4, 34.1), lower flower servo (1 s), drive in to (97.4, 14.3), slow push 2 in at 0.3, intake 1.75 s, back out 6 in to (97.4, 18.3), lift servo.


7. Back to (85.0, 9.0) and shoot again (shot 3).

P. Park: straight to (134.0, 22.0) (no turn).

Route B (purple dashed): same first intake -> back to start (86.0, 132.0) -> shoot the same cell again -> up our wall (117.9, 80.4), (116.6, 27.0) -> top flower (same steps) -> far shot spot (85.0, 9.0), shoot -> park (134.0, 22.0). Time checks: under 13 s left skips the 2nd start shot, under 18 s skips the top flower (it parks instead, up our wall).

BlueTag2xFlowerAutoLM1

LM12xFlower plus the same tag check after the preloads.

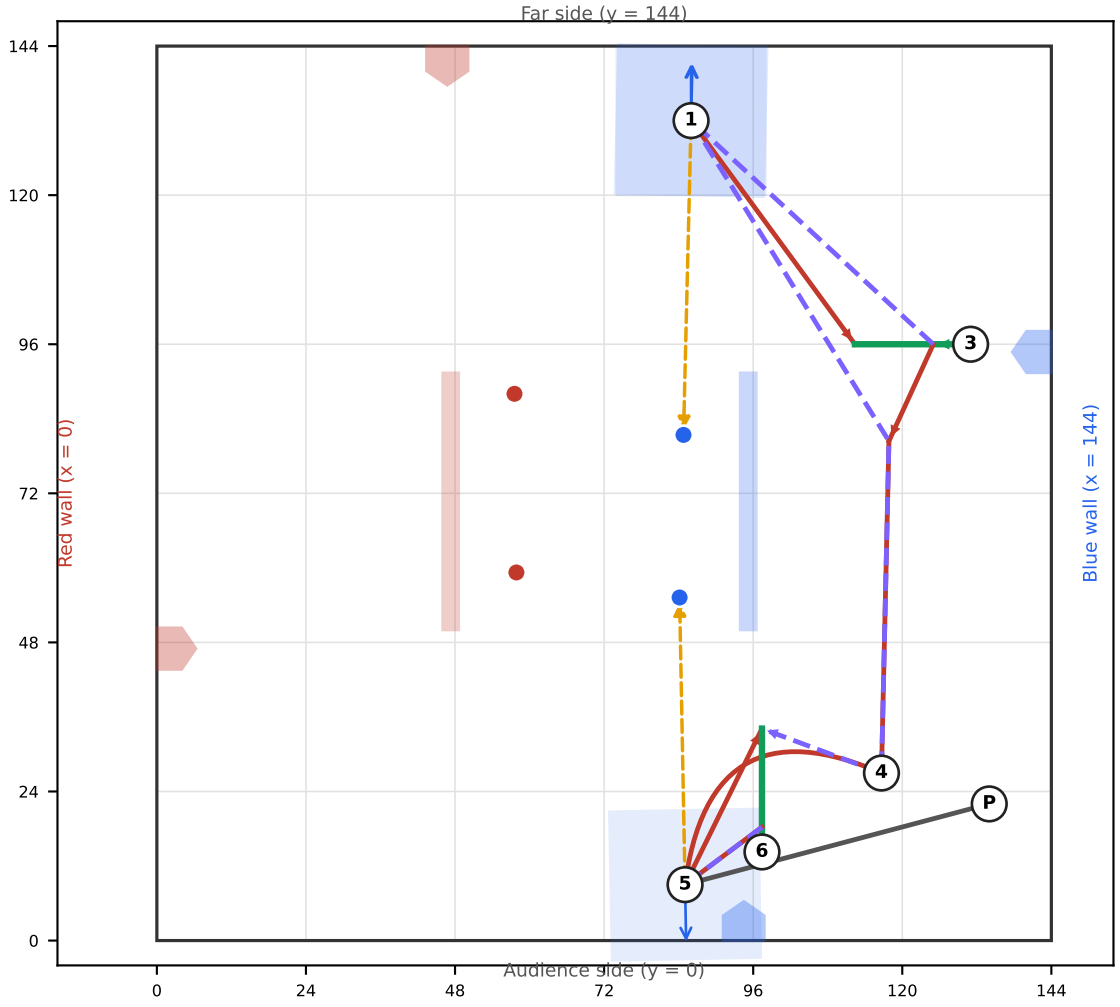

1. Start at (86.0, 132.0), heading 90, front against the far wall. Turn in place to 90 deg (shooter at our far-side cell) and shoot the 4 preloads at 1530 ticks/s (first-shot feedforward 390).

2. Tag check (3 s): stay aimed and watch our near cell's tags with the Limelight (tags 42-45). Tags GONE -> route A. Tags STILL THERE all 3 s -> route B.

Route A (solid):

3. Side flower: drive to (112.4, 96.0) facing the blue wall, lower flower servo (1 s), drive in to (131.0, 96.0), slow push 2 in at 0.3 power, intake 1.75 s, back out 8 in to (125.0, 96.0), lift servo.

4. Up our wall, shooter first: (117.9, 80.4) (no stop) -> (116.6, 27.0), then curve (bend (89.0, 39.0)) to the far shot spot (85.0, 9.0).

5. Shot 2: turn so the shooter faces our audience-side cell (-89 deg), shoot (1 s min spin-up).

6. Top flower: drive to (97.4, 34.1), lower flower servo (1 s), drive in to (97.4, 14.3), slow push 2 in at 0.3, intake 1.75 s, back out 6 in to (97.4, 18.3), lift servo.

7. Back to (85.0, 9.0) and shoot again (shot 3).


P. Park: straight to (134.0, 22.0) (no turn).

Route B (purple dashed): same first intake -> back to start (86.0, 132.0) -> shoot the same cell again -> up our wall (117.9, 80.4), (116.6, 27.0) -> top flower (same steps) -> far shot spot (85.0, 9.0), shoot -> park (134.0, 22.0). Time checks: under 13 s left skips the 2nd start shot, under 18 s skips the top flower (it parks instead, up our wall).

Drive — Intake (thick) / back out (dotted) — Shot direction — Tag route B — Park

BlueFarWallAutoLM1

Wait at the far wall for our cell to tip, shoot 4, park.

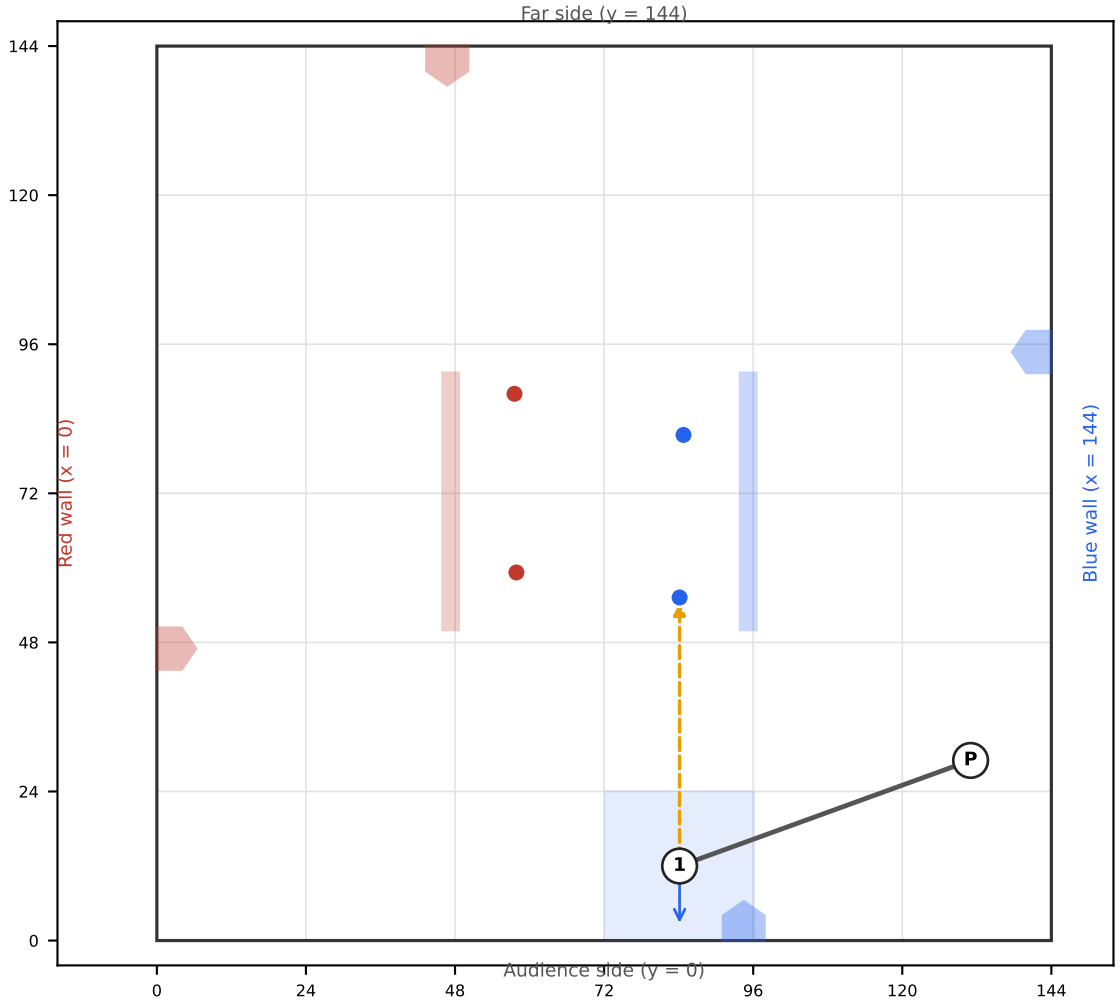

1. Start with the front flat against the audience wall at (84.2, 12.0) (heading -90), centered on our audience-side cell, shooter facing the hive. Flywheel spins up (speed model - 50).


2. Wait for the cell to tip: as soon as the Limelight sees its tags (38-41), wait 3 s, then shoot all 4 without moving. No tags by 18 s: shoot anyway.

P. Park: drive to (131.0, 29.0).

Drive Intake (thick) / back out (dotted) Shot direction Tag route B Park

BluePreloadParkAutoLM1

Shoot the 4 preloads from the start, then park.

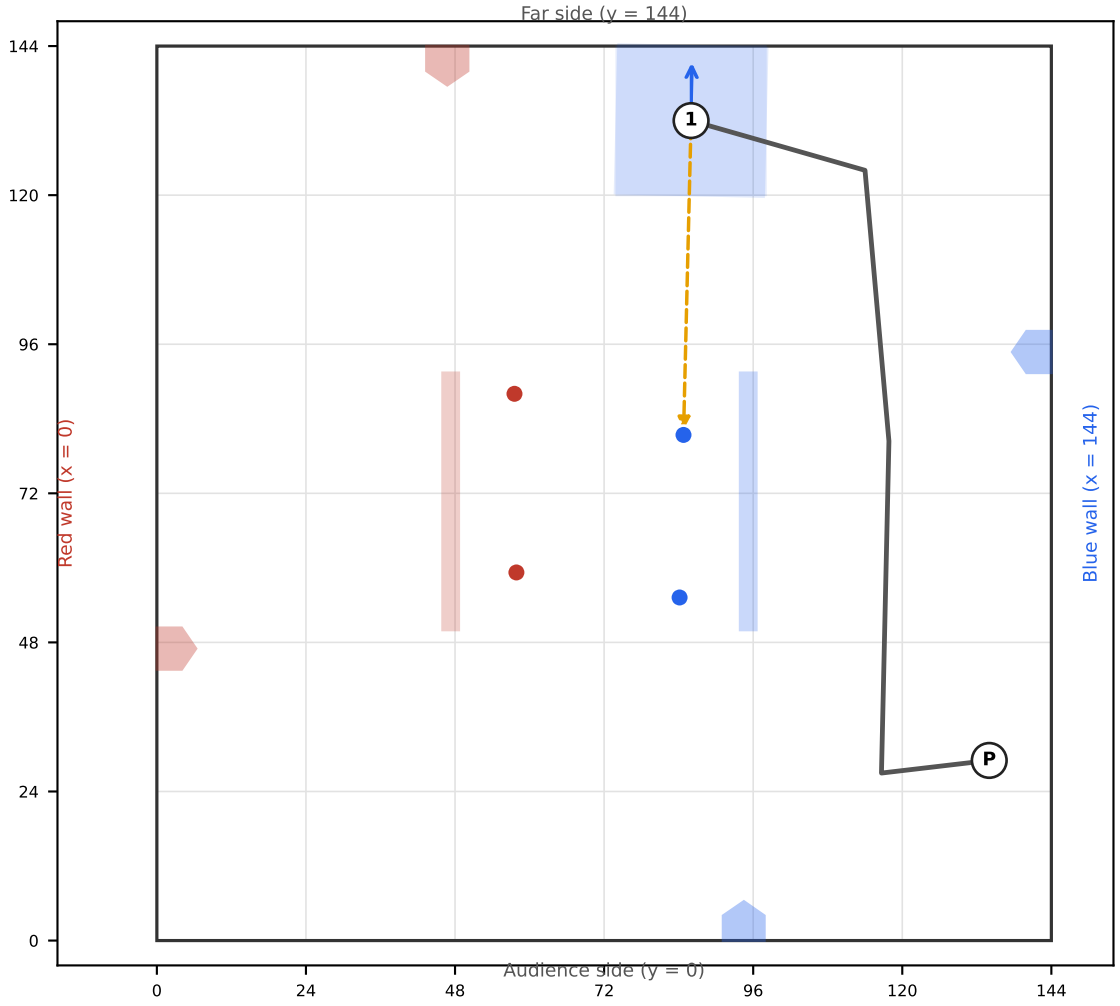

1. Start at (86.0, 132.0), heading 90, front against the far wall. Turn in place to 90 deg (shooter at our far-side cell) and shoot the 4 preloads at 1530 ticks/s (first-shot feedforward 390).

P. Park, shooter first (heading 90): (114.0, 124.0) -> (117.9, 80.4) -> (116.6, 27.0) -> (134.0, 29.0).

Drive
Intake (thick) / back out (dotted)
Shot direction
Tag route B
Park