


# Kais Saied — spatial clusters

local Moran's I, delegation level · Benjamini-Hochberg  $q = 0.05$

- LISA class
- high in a high neighbourhood — HH (0)
  - low in a low neighbourhood — LL (8)
  - high in a low neighbourhood — HL (0)
  - not significant (256)

264 mapped units

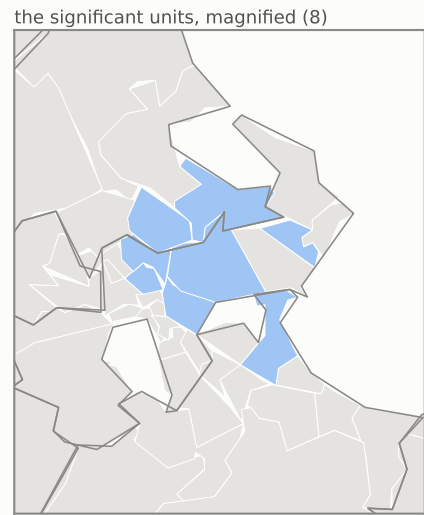

global Moran's I = +0.555 ( $p < 0.0001$ , 9,999 permutations, pseudo  $z = +14.3$ ). The map localises that: a class is assigned only where the unit's own neighbourhood is more extreme than 9,999 random neighbourhoods drawn from the same values, after Benjamini-Hochberg correction across all 264 units (threshold actually applied:  $p \leq 0.0008$ ). Uncorrected, 59 units reach  $p \leq 0.05$  — which is what an uncorrected LISA map would shade, and at 264 tests about 13 of those are expected by chance alone. Empirical-Bayes standardising the rate, so a small unit's noisy share is not read as geography, reclassifies 0 unit(s). Source: ISIE procès-verbaux, 9,419 certified stations · boundaries OCHA/HDX COD-AB (CC BY-IGO) · queen contiguity from shared boundary vertices