


Turnout, smoothed

vote-weighted kernel estimate · imada centroids

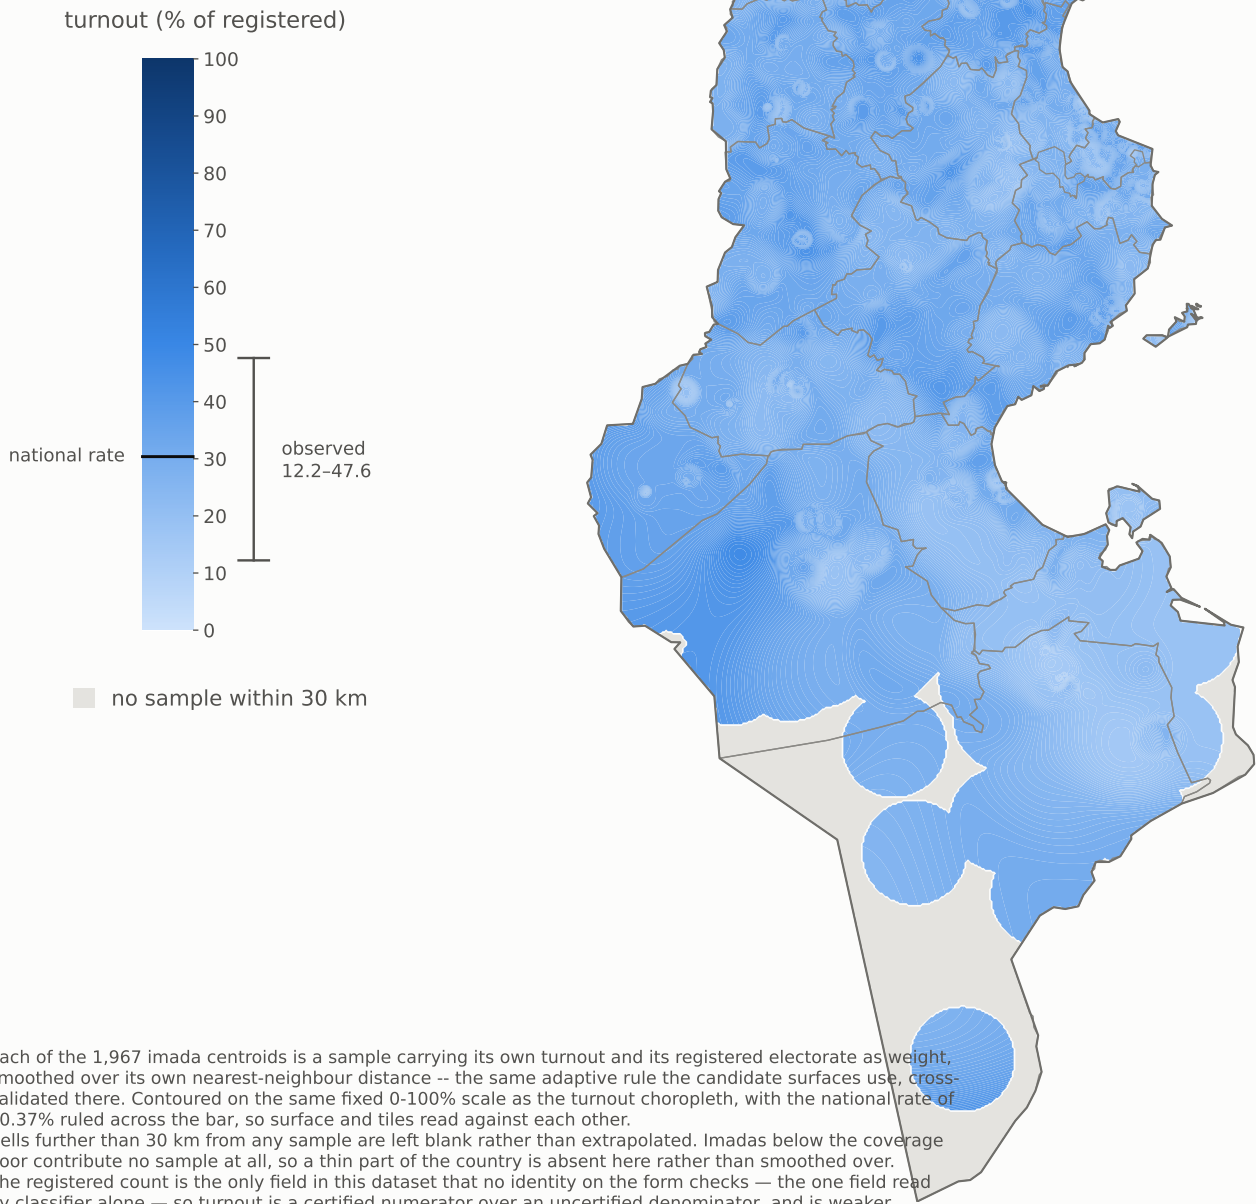

Each of the 1,967 imada centroids is a sample carrying its own turnout and its registered electorate as weight, smoothed over its own nearest-neighbour distance -- the same adaptive rule the candidate surfaces use, cross-validated there. Contoured on the same fixed 0-100% scale as the turnout choropleth, with the national rate of 30.37% ruled across the bar, so surface and tiles read against each other.

Cells further than 30 km from any sample are left blank rather than extrapolated. Imadas below the coverage floor contribute no sample at all, so a thin part of the country is absent here rather than smoothed over.

The registered count is the only field in this dataset that no identity on the form checks — the one field read by classifier alone — so turnout is a certified numerator over an uncertified denominator, and is weaker evidence than any candidate figure mapped elsewhere in this directory.

Source: ISIE procès-verbaux · boundaries OCHA/HDX COD-AB (CC BY-IGO) · turnout is voters over registered, on the stations where both figures survived the read